BYTE®

the small systems journal

MAY 1981 Vol. 6, No. 5
$2.50 in USA/$2.95 in Canada

A McGraw-Hill Publication

SOFTWARE PIRACY

YOUR CHOICE-smart either way

- Over 140 software driven functions
- 82 x 24 or 82 x 20 screen format — software selectable
- High resolution 7 x 12 matrix characters — P-31 green phosphor
- Upper/lower case character set — plus graphics character set
- 56-key alphanumeric keyboard — plus 12-key cursor, numeric pad
- Internal editing functions — insert, delete, scroll, roll, slide, etc.
- Parallel printer I/O port
- 50 to 38,400 baud operation — programmable
- Cursor type, cursor position, print control characters, protected fields, shift inversion, dual intensity and many other features

8212 — twelve-inch diagonal screen or **8209** — nine-inch diagonal screen

SOUTHWEST TECHNICAL PRODUCTS CORPORATION
219 W. RHAPSODY
SAN ANTONIO, TEXAS 78216
(512) 344-0241

Circle 382 on inquiry card.

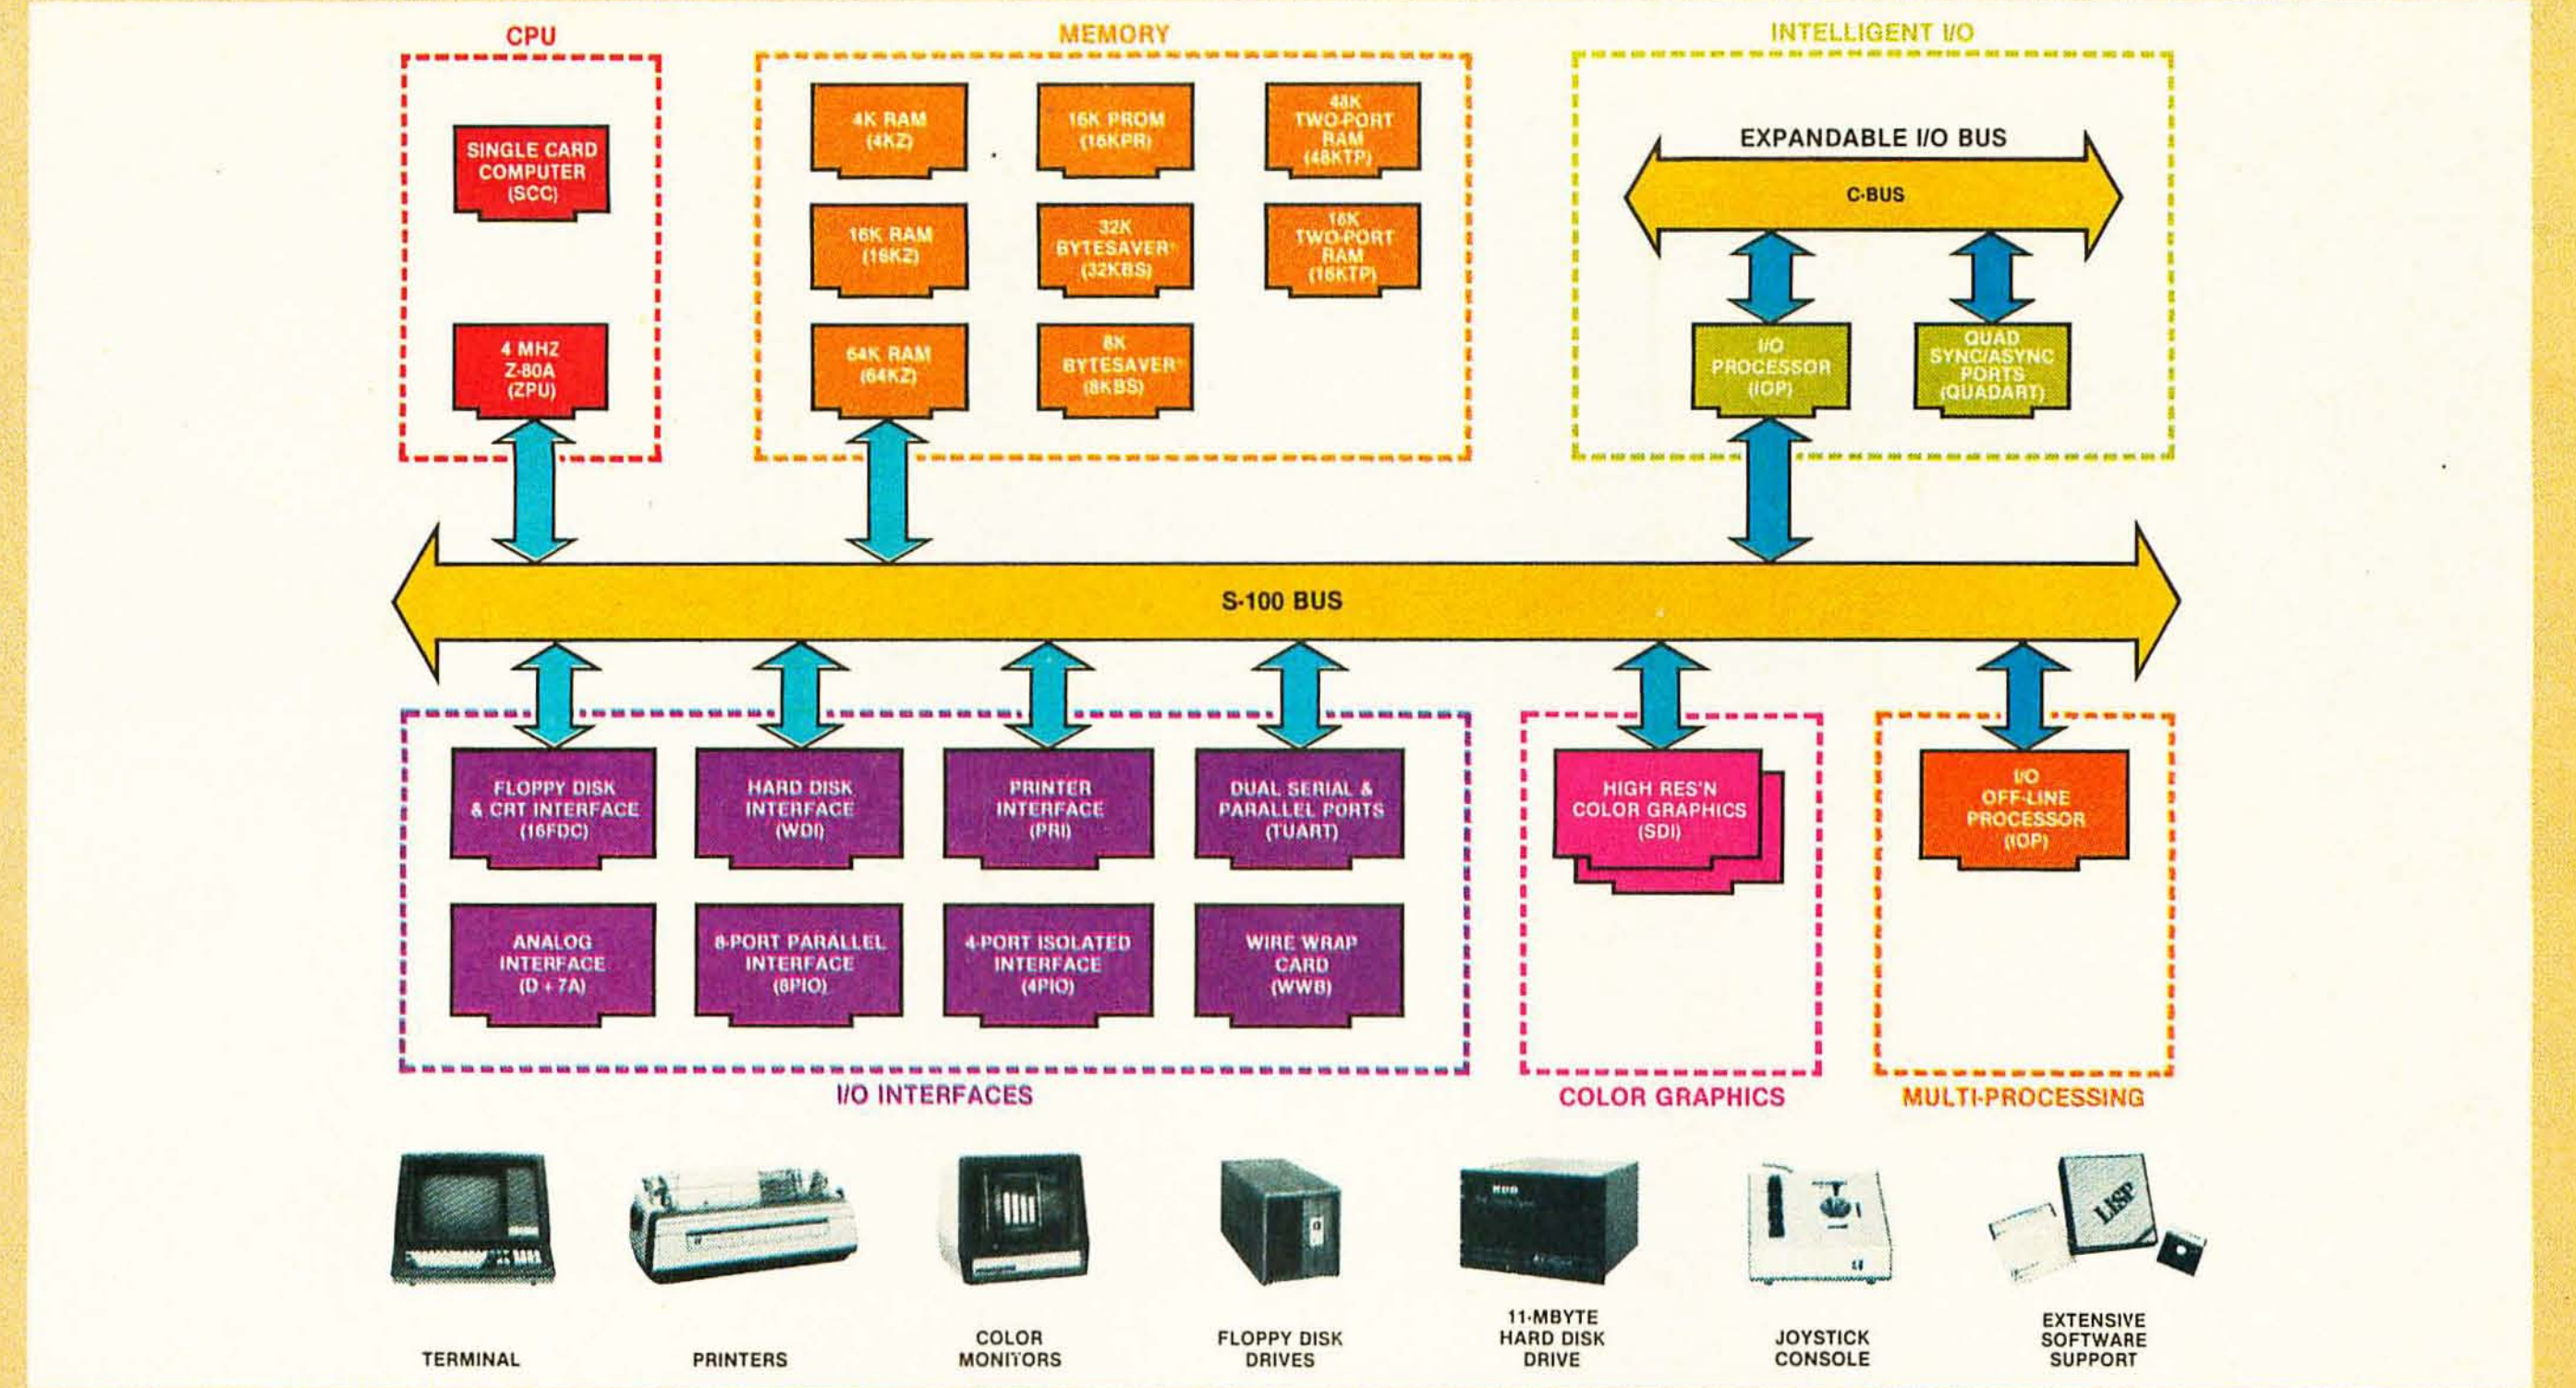

What Cromemco computer card capability can do for you

The above diagram shows in a functional way one of the most complete lines of computer cards in the industry.

Look it over carefully. It could be well worth your while.

These are all cards that plug into our S-100 bus microcomputers.

You can also assemble them into a custom system in convenient Cromemco card cages.

MULTI-PROCESSING AND INTELLIGENT I/O

The range of capabilities and versatility you can draw upon is enormous.

In processors, for example, you have a choice of CPU's including our extremely useful new I/O Processor. This can be used as a satellite processor to do off-line processing, multi-processing, and to form intelligent I/O. It opens the door to a whole new group of applications and tasks. Ask us about it.

HIGH RESOLUTION COLOR GRAPHICS

Again, you can have beautiful high-resolution color graphics with our color graphics interface. You can select from over 4000 colors and have a picture with a resolution at least equal to quality broadcast-TV pictures.



You have an unprecedented selection of memory including our unusual 48K and 16K **two-port** RAMs which allow high-speed color graphics.

LOTS OF STORAGE

These days you often want lots of disk storage. So you can select from our disk controller card which will operate our 5″ and 8″ floppy disk drives (up to 1.2 megabytes). Or select our WDI interface to operate our 11-megabyte hard disk drives.

POWERFUL SOFTWARE AND PERIPHERAL SUPPORT

There's much more yet you can do with our cards. And, of course, there's an easy way to put them to work in our 8-, 12-, and 21-slot card cages. Our PS8 power supply makes it simple to get the system into operation.

Finally, Cromemco offers you the strongest software support in the industry with languages like FORTRAN, C, COBOL, ASSEMBLER, LISP, BASIC and others. There is also a wide choice from independent vendors.

To top it all off, you can draw from a substantial array of peripherals: terminals, printers, color monitors and disk drives.

CONTACT YOUR CROMEMCO REP

There is even more capability than we're able to describe here.

Contact your Cromemco rep now and get this capability working for you.

CROMEMCO COMPUTER CARDS

- **PROCESSORS** — 4 MHz Z-80 A CPU, single card computer, I/O processor • **MEMORY** — up to 64K including special 48K and 16K two-port RAMS and our very well known BYTESAVERS® with PROM programming capability • **HIGH RESOLUTION COLOR GRAPHICS** — our SDI offers up to 754 x 482 pixel resolution. • **GENERAL PURPOSE INTERFACES** —QUADART four-channel serial communications, TU-ART two-channel parallel and two-channel serial, 8PIO 8-port parallel, 4PIO 4-port isolated parallel, D+7A 7-channel D/A and A/D converter, printer interface, floppy disk controller with RS-232 interface and system diagnostics, wire-wrap and extender cards for your development work.

Cromemco ™
incorporated
280 BERNARDO AVE., MOUNTAIN VIEW, CA 94040 • (415) 964-7400
Tomorrow's computers today

Circle 105 on inquiry card.

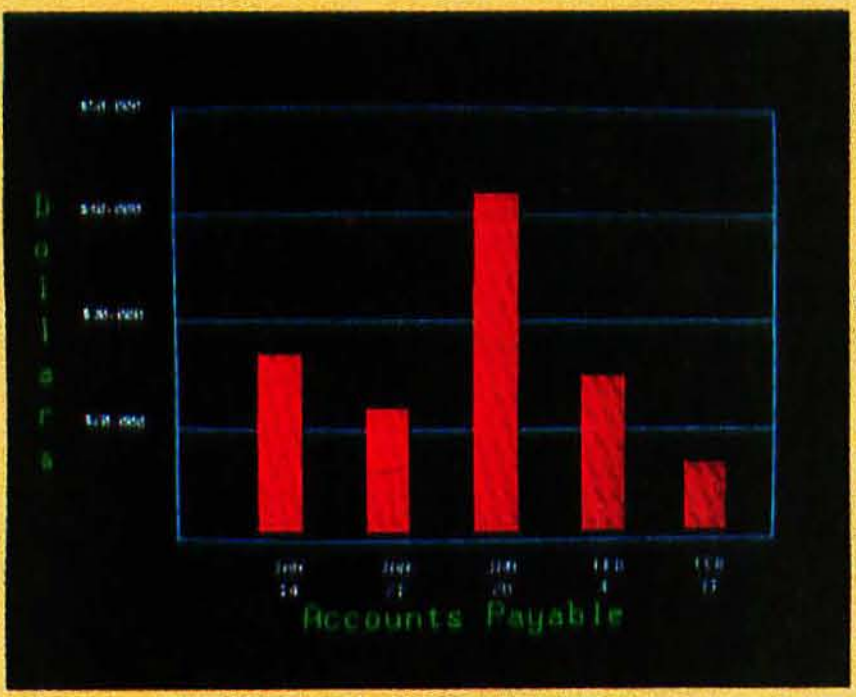

Management Information Display

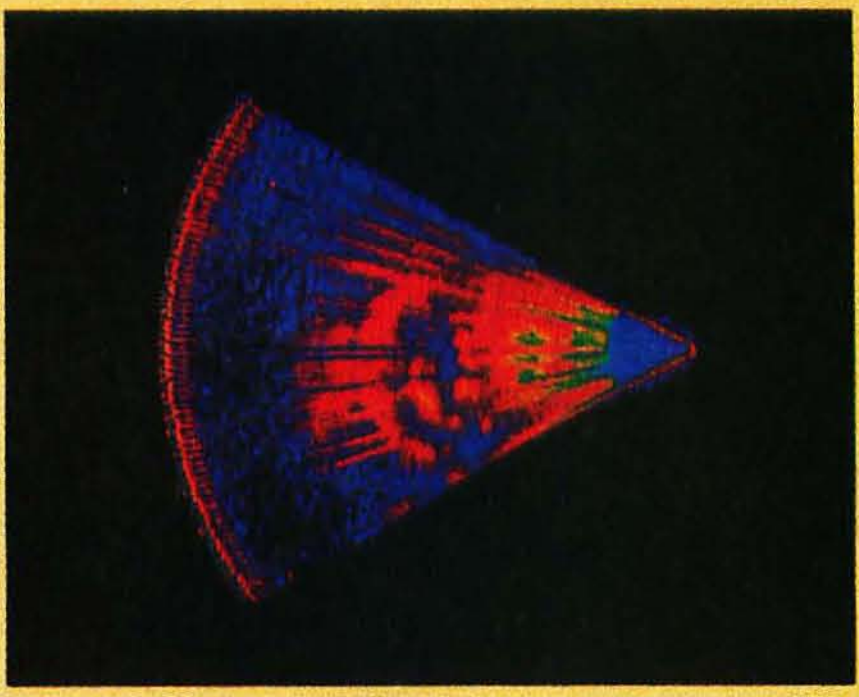

Ultrasonic heart sector scan

High-resolution display with alphanumerics

Get the professional color display that has BASIC/FORTRAN simplicity

LOW-PRICED, TOO

Here's a color display that has everything: professional-level resolution, enormous color range, easy software, NTSC conformance, and low price.

Basically, this new Cromemco Model SDI* is a two-board interface that plugs into any Cromemco computer.

The SDI then maps computer display memory content onto a convenient color monitor to give high-quality, high-resolution displays (756 H x 482 V pixels).

When we say the SDI results in a high-quality professional display, we mean **you can't get higher resolution than this system offers in an** NTSC-conforming display.

The resolution surpasses that of a color TV picture.

BASIC/FORTRAN programming

Besides its high resolution and low price, the new SDI lets you control with optional Cromemco software packages that use simple BASIC- and FORTRAN-like commands.

Pick any of 16 colors (from a 4096-color palette) with instructions like DEFCLR (c, R, G, B). Or obtain a circle of specified size, location, and color with XCIRC (x, y, r, c).

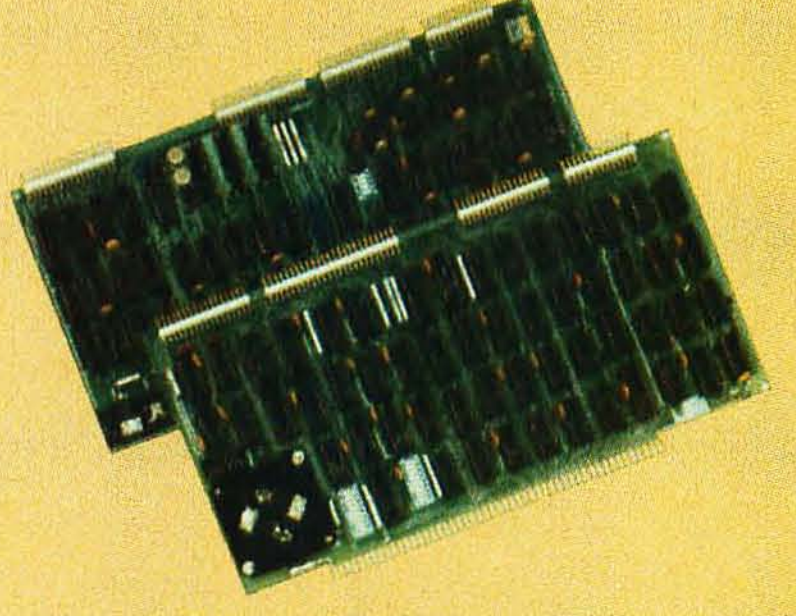

Model SDI High-Resolution Color Graphics Interface

HIGH RESOLUTION

The SDI's high resolution gives a professional-quality display that strictly meets NTSC requirements. You get 756 pixels on every visible line of the NTSC standard display of 482 image lines. Vertical line spacing is 1 pixel.

To achieve the high-quality display, a separate output signal is produced for each of the three component colors (red, green, blue). This yields a sharper image than is possible using an NTSC-composite video signal and color TV set. Full image quality is readily realized with our high-quality RGB Monitor or any conventional red/green/blue monitor common in TV work.

Model SDI plugs into Z-2H 11-megabyte hard disk computer or any Cromemco computer

DISPLAY MEMORY

Along with the SDI we also offer an optional fast and novel **two-port** memory that gives independent high-speed access to the computer memory. The two-port memory stores one full display, permitting fast computer operation even during display.

CONTACT YOUR REP NOW

The Model SDI has been used in scientific work, engineering, business, TV, color graphics, and other areas. It's a good example of how Cromemco keeps computers in the field up to date, since it turns any Cromemco computer into an up-to-date color display computer.

The SDI has still more features that you should be informed about. So contact your Cromemco representative now and see all that the SDI will do for you.

---

*U.S. Pat. No. 4121283

Cromemco
incorporated
280 BERNARDO AVE., MOUNTAIN VIEW, CA 94043 • (415) 964-7400
Tomorrow's computers today

Circle 105 on inquiry card.

In The Queue

Volume 6, Number 5 May 1981

Features

Reviews

Nucleus

BYTE


Page 36



Page 46



Page 66



Page 106

Editor in Chief
Christopher Morgan

Managing Editor
Mark Haas

Technical Editors
Gregg Williams, Senior Editor;
Richard S Shuford; Curtis P Feigel;
Harold Nelson; Stan Miastkowski;
Kevin Cohan; Charles Freiberg,
New Products Editor;
Steve Ciarcia, Mark Dahmke,
Consulting Editors;
Jon Swanson, Draftsman

Copy Editors
Richard Friedman, Chief; Faith Hanson;
Warren Williamson; Anthony J Lockwood;
Ann Graves

Assistants
Faith Ferry; Debe Wheeler;
Karen A Cilley

Production
Nancy Estle, Director; Christine Dixon,
Asst Director; Wai Chiu Li;
Deborah Porter; Jonathan M Graves;
Patrice Scribner; Sherry McCarthy,
Chief Typographer; Debi Fredericks;
Donna Sweeney; Valerie Horn

Advertising
Thomas Harvey, Director; Marion Gagnon;
Barbara J Greene; Rob Hannings

Circulation
Gregory Spitzfaden, Manager;
Andrew Jackson, Asst Manager;
Agnes E Perry; Barbara Varnum;
Louise Menegus; Bill Watson;
Dealer Sales: Melanie Bertoni

Marketing
Jill E Callihan, Special Projects;
Laura Hanson

Controller's Office
Daniel Rodrigues, Controller; Mary E Fluhr,
Asst Controller; Karen Burgess; Jeanne Cilley;
Mary Beth Ireland

Traffic
N Scott Gagnon; Robert A Fiske

Receptionist
Jacqueline Earnshaw

Publishers
Virginia Londoner; Gordon R Williamson;
John E Hayes, Associate Publisher;
Cheryl A Hurd, Publisher's Assistant

Officers of McGraw-Hill Publications Company: Paul F McPherson, President; Executive Vice Presidents: James E Boddorf, Gene W Simpson; Group Vice President: Daniel A McMillan; Senior Vice President-Editorial: Ralph R Schulz; Vice Presidents: Kemp Anderson, Business Systems Development; Robert B Doll, Circulation; James E Hackett, Controller; Eric B Herr, Planning and Development; H John Sweger, Marketing.

Officers of the Corporation: Harold W McGraw Jr, President, Chief Executive Officer and Chairman of the Board; Robert F Landes, Senior Vice President and Secretary; Ralph J Webb, Treasurer.

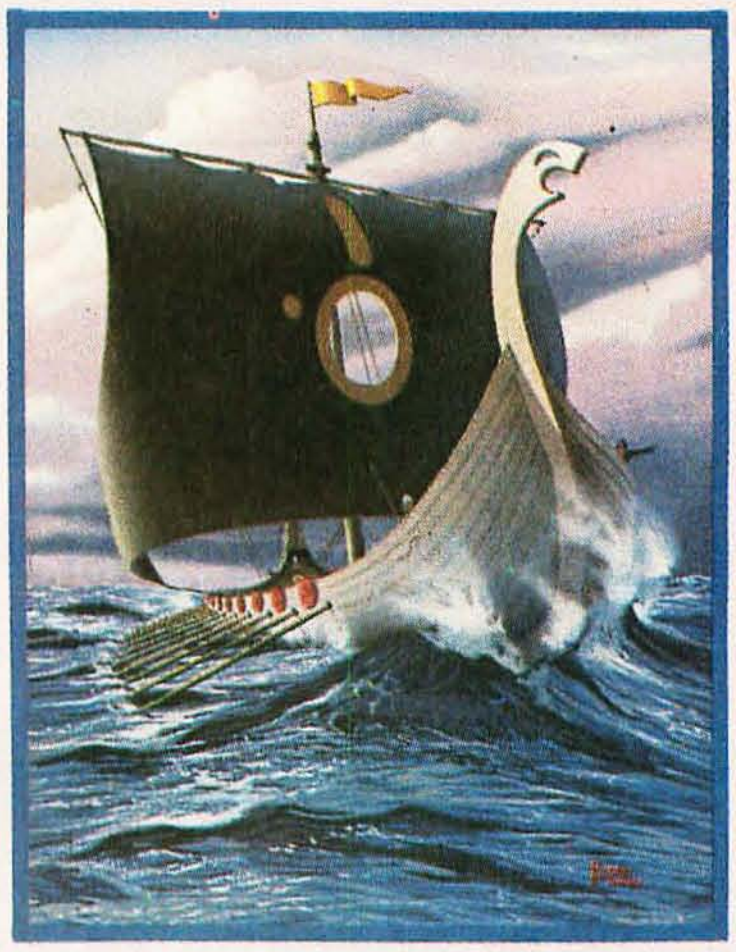

In This Issue

Did you know that the Vikings were notorious pirates? In Robert Tinney's striking cover painting, executed from an original design by Jonathan Graves, the floppy disk is the "sail" that powers the underhanded business of software piracy. Included are several articles on the legal aspects of protecting software from unscrupulous pirates: Chris Morgan's editorial, "How Can We Stop Software Piracy?" (page 6); Christopher Kern's "Washington Tackles the Software Problem" (page 128), and Stephen A Becker's "Legal Protection for Computer Hardware and Software" (page 140).

Other noteworthy articles in this issue include in-depth examinations of the Extended Color BASIC for the TRS-80 Color Computer, the new Commodore VIC microcomputer, and the Epson MX-70 and MX-80 printers. And this issue begins a new occasional feature on microcomputer video games called "BYTE's Arcade."

BYTE is published monthly by BYTE Publications Inc, 70 Main St, Peterborough NH 03458, phone (603) 924-9281, a wholly-owned subsidiary of McGraw-Hill, Inc. Address subscriptions, change of address, USPS Form 3579, and fulfillment questions to BYTE Subscriptions, POB 590, Martinsville NJ 08836. Controlled circulation postage paid at Waseca, Minnesota 56093 - USPS Publication No. 528890 (ISSN 0360-5280). Canadian second class registration number 9321. Subscriptions are $19 for one year, $34 for two years, and $49 for three years in the USA and its possessions. In Canada and Mexico, $21 for one year, $38 for two years, $55 for three years. $43 for one year air delivery to Europe. $35 surface delivery elsewhere. Air delivery to selected areas at additional rates upon request. Single copy price is $2.50 in the USA and its possessions, $2.95 in Canada and Mexico, $4.00 in Europe, and $4.50 elsewhere. Foreign subscriptions and sales should be remitted in United States funds drawn on a US bank. Printed in United States of America.

Address all editorial correspondence to the editor at BYTE, POB 372, Hancock NH 03449. Unacceptable manuscripts will be returned if accompanied by sufficient first class postage. Not responsible for lost manuscripts or photos. Opinions expressed by the authors are not necessarily those of BYTE.

BYTE® is available in microform from University Microfilms International, 300 N Zeeb Rd, Dept PR, Ann Arbor MI 48106 USA or 18 Bedford Row, Dept PR, London WC1R 4EJ England.

Subscription WATS Line: (800) 258-5485
Office hours: Mon-Thur 8:30 AM - 4:30 PM, Friday 8:30 AM - Noon, Eastern Time

NATIONAL ADVERTISING SALES REPRESENTATIVES:

NORTHEAST (617) 444-3946
Hajar Associates
280 Hillside Ave
Needham Heights MA 02194

MIDWEST (312) 966-0160
Hajar Associates
5225 Old Orchard Dr
Skokie IL 60076

MID ATLANTIC (212) 682-5844
Hajar Associates
521 Fifth Ave
New York NY 10017

NORTHWEST (415) 964-0706
Hajar Associates
1000 Elwell Ct, Suite 227
Palo Alto CA 94303

SOUTHWEST (714) 540-3554
Hajar Associates
3303 Harbor Blvd
Suite K-4
Costa Mesa CA 92626

SOUTHEAST (305) 886-7210
Hajar Associates
1220 Prairie Lane
Apopka FL 32703

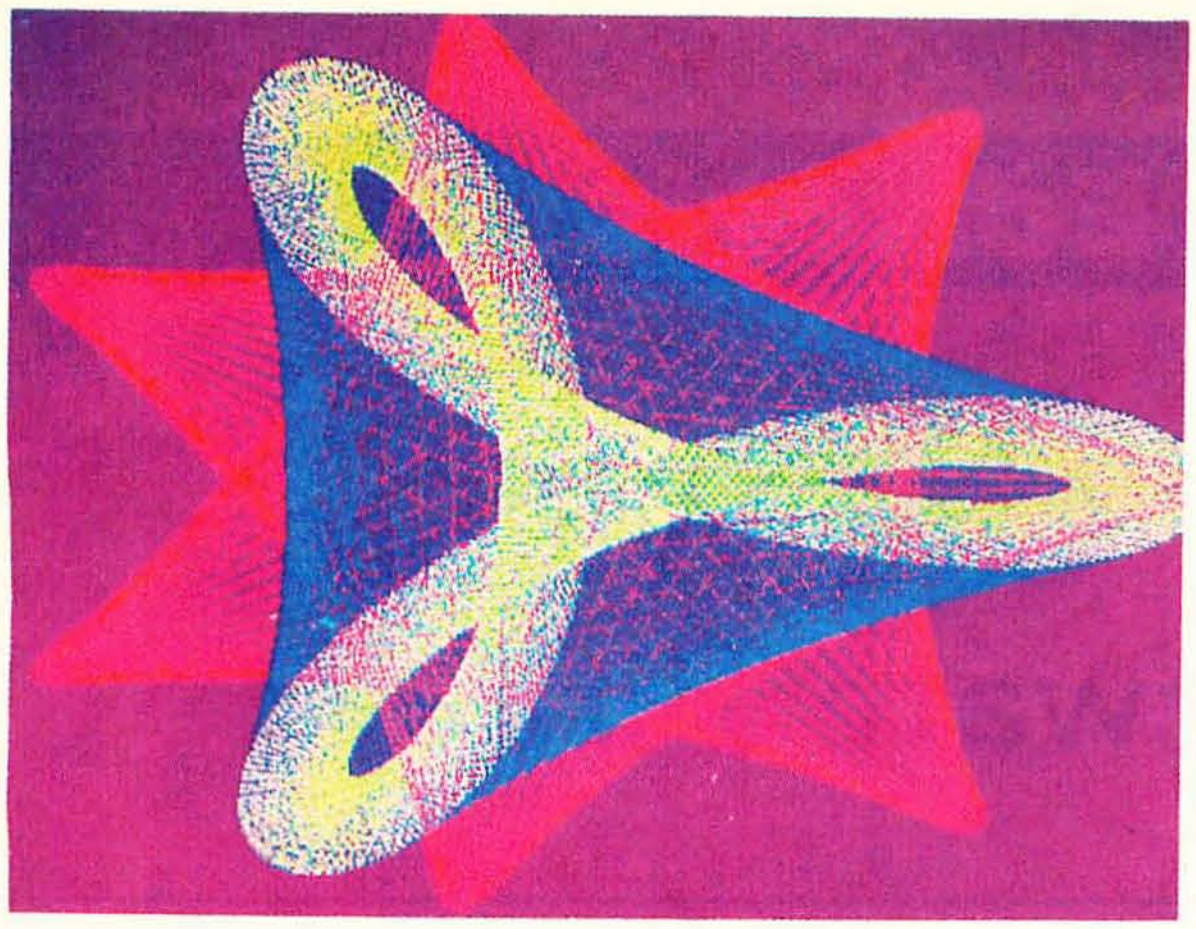

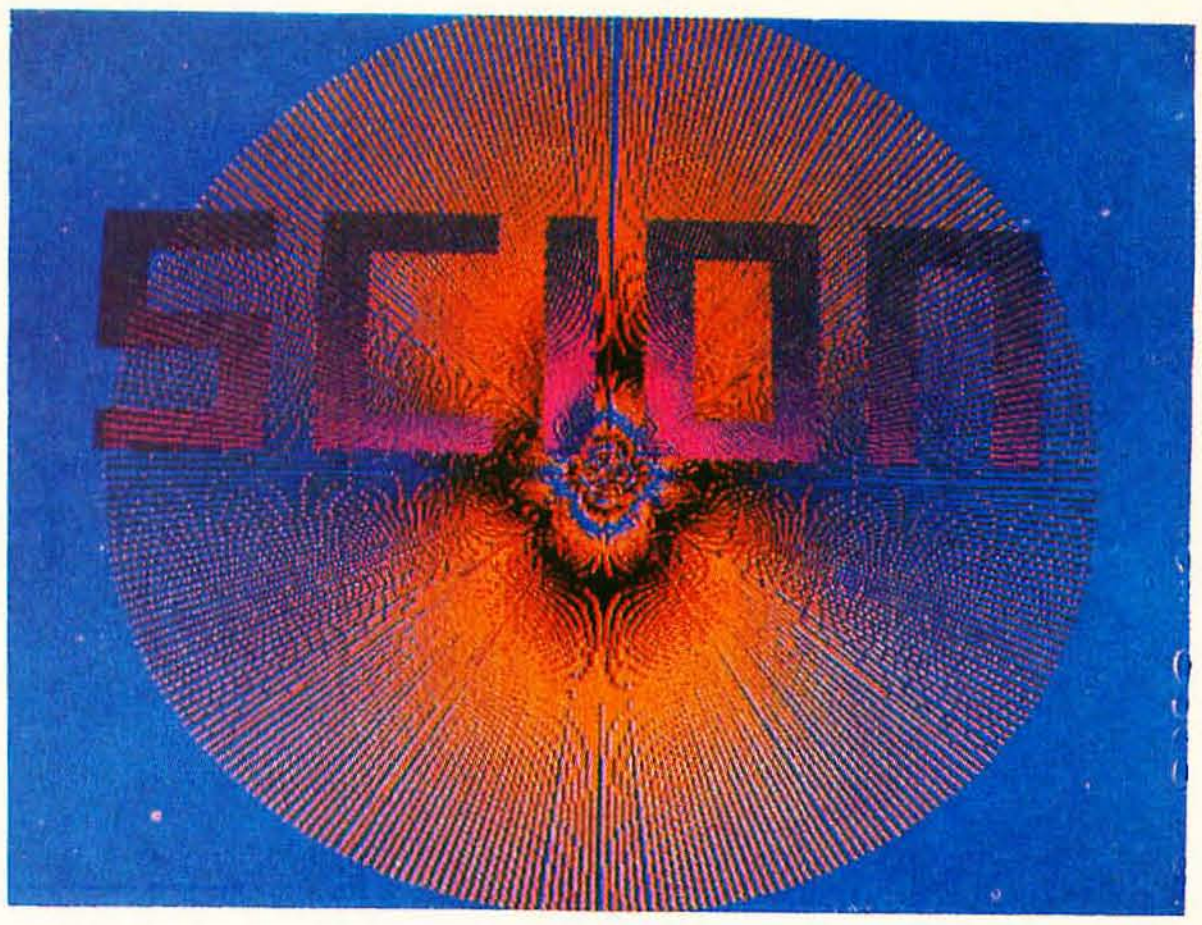

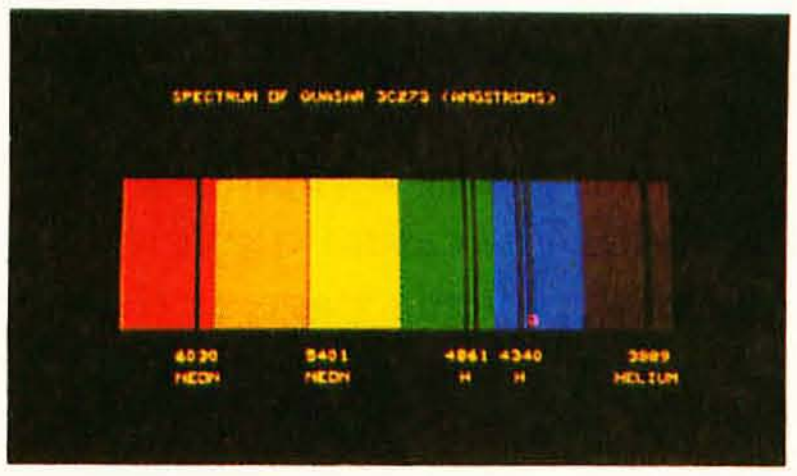

"...stands well above other S-100 graphics displays in its price and performance range."
BYTE, Product Review

"...better monochromatic ...display...."
ELECTRONIC DESIGN,
1981 Technology Forecast

MICROANGELO

HIGH RESOLUTION GRAPHICS SINGLE BOARD COMPUTER

512 x 480 resolution black and white **and** vivid color displays

RS-170 composite or direct drive output

Local or external sync generation

4 Mhz Z80 microprocessor

60 hertz real-time clock

8 level interrupt tie-in

IEEE S100 bus compatible

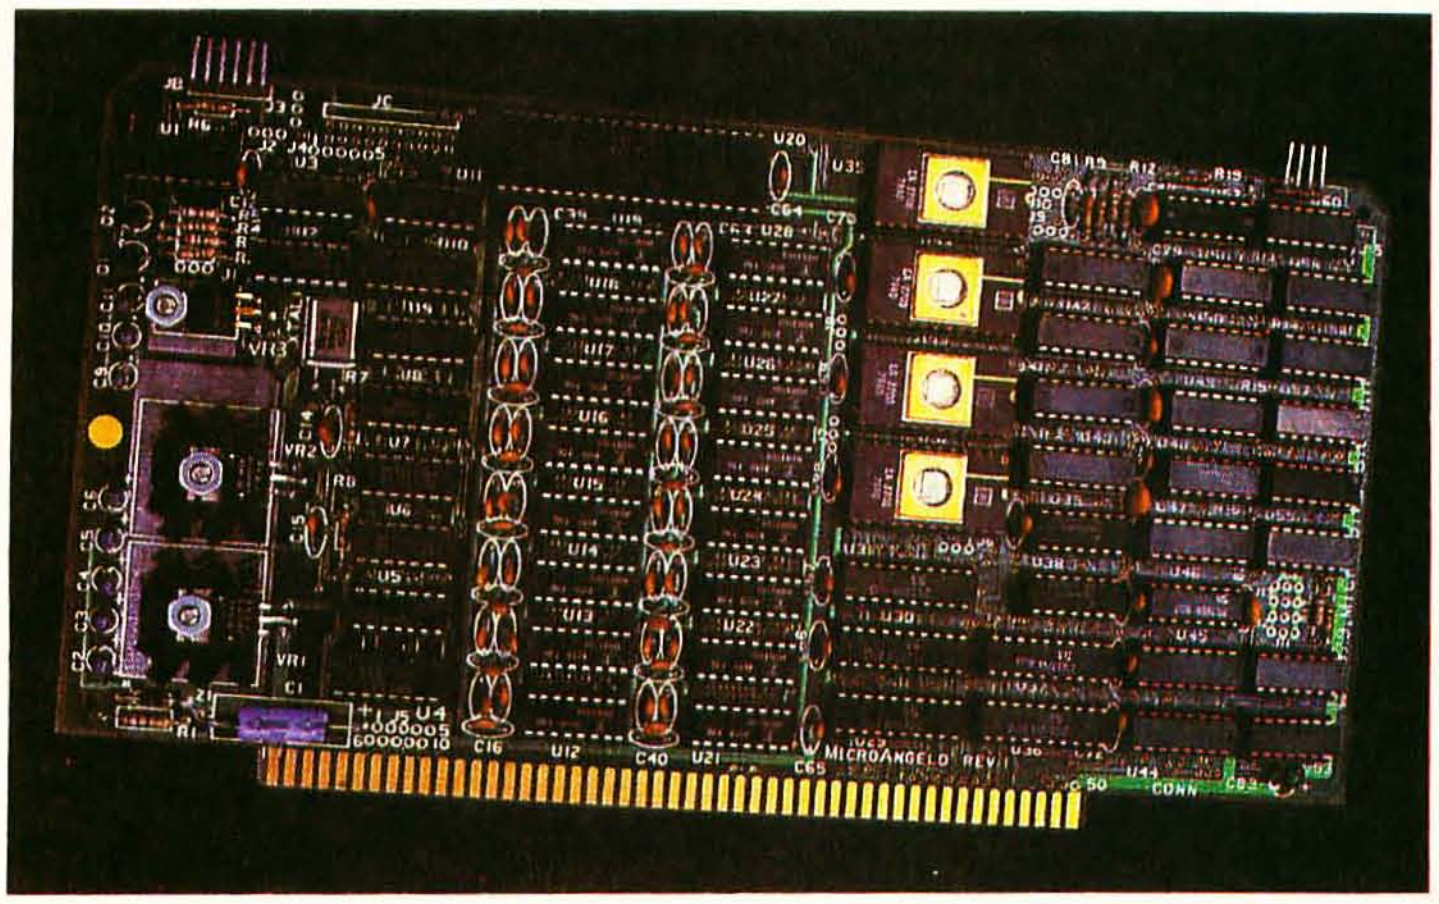

Light pen interface

Time multiplexed refresh

4K resident Screenware™ Pak I operating system

32K RAM isolated from host address space

High speed communications over parallel bus ports

Screenware™ Pak I

A 4K byte operating system resident in PROM on MicroAngelo™. Pak I emulates an 85 character by 40 line graphics terminal and provides over 40 graphics commands. Provisions exist for user defined character sets and directly callable user extensions to Screenware™ Pak I.

Screenware™ Pak II

An optional software superset of Pak I which adds circle generation, polygon flood, programmable split screen for separate graphics and terminal I/O, relative coordinates, faster vector and character plotting, a macro facility, full UCSD Pascal compatibility, and more.

And now...COLOR!!

The new MicroAngelo™ Palette board treats from 2 to 8 MicroAngelos as "bit planes" at a full 512 x 480 resolution. Up to 256 colors may be chosen from 16.8 million through the programmable color lookup table. Overlays, bit plane precedence, fade-in, fade-out, gray levels, blinking bit plane, and a highly visual color editor are standard.

SCION

8455-D Tyco Road • Vienna, Virginia 22180 • TWX: 710-831-9087 • (703) 827-0888

Circle 358 on inquiry card.

Editorial

How Can We Stop Software Piracy?

Chris Morgan, Editor in Chief

Software piracy is rapidly becoming a major problem in the personal computer field. The casual copying of programs by computer hobbyists, although not at the epidemic stage, is frighteningly commonplace. Many people fail to see (or prefer not to see) that the practice is not just illegal—it's *unethical.*

But what about making backup copies of important software? What happens if your small business' direct-mail program "dies"? Without a backup, a businessman's only recourse is to return the disk to the manufacturer and hope it won't take longer than a few weeks to get a replacement. Manufacturers understand the problem, and have designed some floppy-disk-based programs that allow the user to make one backup copy. After this, software "jamming" information is automatically added to the original floppy disk to theoretically prevent additional illegal copies. In practice, though, enterprising software experts can crack the protection mechanisms and make copies at will.

The industry is faced with a dilemma: how does the manufacturer serve the customer's legitimate need to make backup copies, while protecting his expensive software investment? There are two possibilities: put the would-be software pirate at a disadvantage if he makes an illegal copy, or, better still, make it virtually impossible for the pirate to make a copy.

The Persuasion Route

Let me make a not-too-perfect analogy between the software industry and the record industry. When tape recorder sales began to increase during the early 1970s, record industry executives predicted that record sales would plummet because of private off-the-air taping. But, in fact, record sales climbed steadily throughout the decade. Why? My opinion is that when people think of a recording, they think of the entire package: the album artwork, the liner notes—in short, there is more to a recording than the sound coming from a pair of loudspeakers. In much the same vein, there is more to a piece of software than the object code: there is the documentation, for instance.

The need to make a copy of the documentation is an additional nuisance for the software pirate. It costs money to make photocopies. Then there's the registration card: legitimate owners of software are often put on mailing lists to receive updates to their programs as well as information about new programs from the manufacturer. A cheap and effective way for manufacturers to fight the pirate is to creatively exploit the latter idea. At the risk of overgeneralization, computer-science people tend to be obsessive-compulsive in their psychological makeup, ie: they hate to miss out on any details about a product they buy—especially a piece of software!

I mentioned earlier that this was a less-than-perfect analogy. The problem is that a $9.95 recording is one thing—a $600 program is quite another. The above-mentioned tactics might help the manufacturer of a $30 or $50 piece of software, but temptation becomes powerful indeed when the price tag reaches three or four figures.

Editorial continued on page 10

Introducing the COLOR CONNECTION™

Plug A TRS-80* Color Computer into the World of System-50™ Computing.

Now you can expand Tandy's exciting new TRS-80* Color Computer using proven System-50 products. Expansion possibilities are limitless. And expansion is easy. Plug one end of the COLOR CONNECTION into the Program Pak* connector of the Color Computer. Plug the other end into a System-50 bus motherboard. Now add the functions you want, selecting from an inventory of standard modules manufactured by competent, long-established firms — from the inventory of solid performers, like **Percom Data Company.**

Mini-disk storage — today!

Available off-the-shelf for your extended system is Percom's field-proven LFD mini-disk system. The first choice of knowledgeable 680X computerists since 1977, Percom LFD mini-disk systems come complete, ready to plug in and run. File storage capacities range from 102 Kbytes for a one-drive LFD-400™ system to almost 0.6 Mbyte for a three-drive LFD-800™ system.

Get serious!

For serious computing like word processing add the Percom ELECTRIC WINDOW™. This memory-mapped video display card features instant display updating, software-defined full display formatting — up to 80 characters by 24 lines, an extendable character generator that generates fully-formed upper and lower case characters, and more. The ELECTRIC WINDOW provides either composite or separate sync-video output, and interfaces a standard black-&-white video display monitor.

Beyond 16K

Another option is incremental memory expansion. Add 8-, 16- or 24-Kbytes of static RAM with our M24SS card; 16-, 32- or 48-Kbytes of dynamic RAM with our M48DSS card. The COLOR CONNECTION prevents contention between internal computer memory and external memory.

System Requirements

The COLOR CONNECTION interfaces a TRS-80* Color Computer to a System-50 bus motherboard. Power for the COLOR CONNECTION is obtained from the computer. Power for the extended bus cards must be provided by an external source, such as Percom's System-50 Power Supply. The COLOR CONNECTION provides for disabling the computer internal memory at 8-Kbyte boundaries to prevent contention with external memory.

The COLOR CONNECTION. $99.95

Quality Percom products are available at Percom dealers nationwide. Call toll-free, 1-800-527-1592, for the address of your nearest dealer, or to order direct from Percom.

The right motherboard

Fast mini-disk storage, full-format alphanumerics and memory add-on are obvious expansion possibilities. The optional Percom System-50 Motherboard allows you to consider the less obvious. This seven-slot motherboard not only can be self-extended, but also can be extended with our 30-pin I/O motherboard. The richness of readily available peripheral interface cards provides an uncommon degree of expansion flexibility.

The System-50 (SS-50) bus community. With a TRS-80* Color Computer and the COLOR CONNECTION, it's your world. Enjoy!

PERCOM

PERCOM DATA COMPANY, INC.
211 N. KIRBY GARLAND, TEXAS 75042
(214) 272-3421

Circle 321 on inquiry card.

PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
PRICES DO NOT INCLUDE SHIPPING AND HANDLING.

™ trademark of Percom Data Company, Inc.
* trademark of Tandy Radio Shack Corporation which has no relationship to Percom Data Company.

A simple algorithm

We work with the serious systems integrator ... on terms that make sense to you. That means giving you a set of products which expand your limits, not reduce them.

We manufacture the most complete family of high quality IEEE/696 S-100 mainframes on the market. Choices include three mainframes in rack-mount or table-top packages with complete board sets, to serve as the building blocks for your 8 or 16 bit system. We also provide other options ranging from complete floppy disk systems right up to our proven Pascal development system.

The ∫ factor: one source.

No matter which option you choose, you get the benefit of working with completely integrated products ... fully assembled and tested ... under one warranty and one price structure ... leaving you free to concentrate on value-added application development and sales.

Choose from mainframe options...

Select from three packaging options: Rack-mount, table-top or front panel models. All three feature our 20 slot S-100 motherboard with 25 amp power supply and are delivered fully assembled and tested with our Series II™ board sets. Any board configuration you choose works with any DPS-1 version, allowing you to vary your package offering, or develop on one version and market another.

- Front Panel model — a powerful development and diagnostic tool for Z-80[†] systems, which can be used for prototyping, servicing, debugging, and software or hardware development. Use its features to set breakpoints, trigger scopes, single step, slow step and more.
- Front Panelless desk top model—a lower cost option for OEM or other turnkey operations which do not require the extra capability of our Front Panel.
- Rack Mount version — features a heavy gauge frame designed to fit into standard 19" racks. CVT power supply for brown out immunity is standard.

---

[*] In Calculus, a fundamental statement in the definition of limit; interpreted here to imply: "For your integration problem, Intersystems has a solution."

[†] Registered trademark of Zilog, Inc.

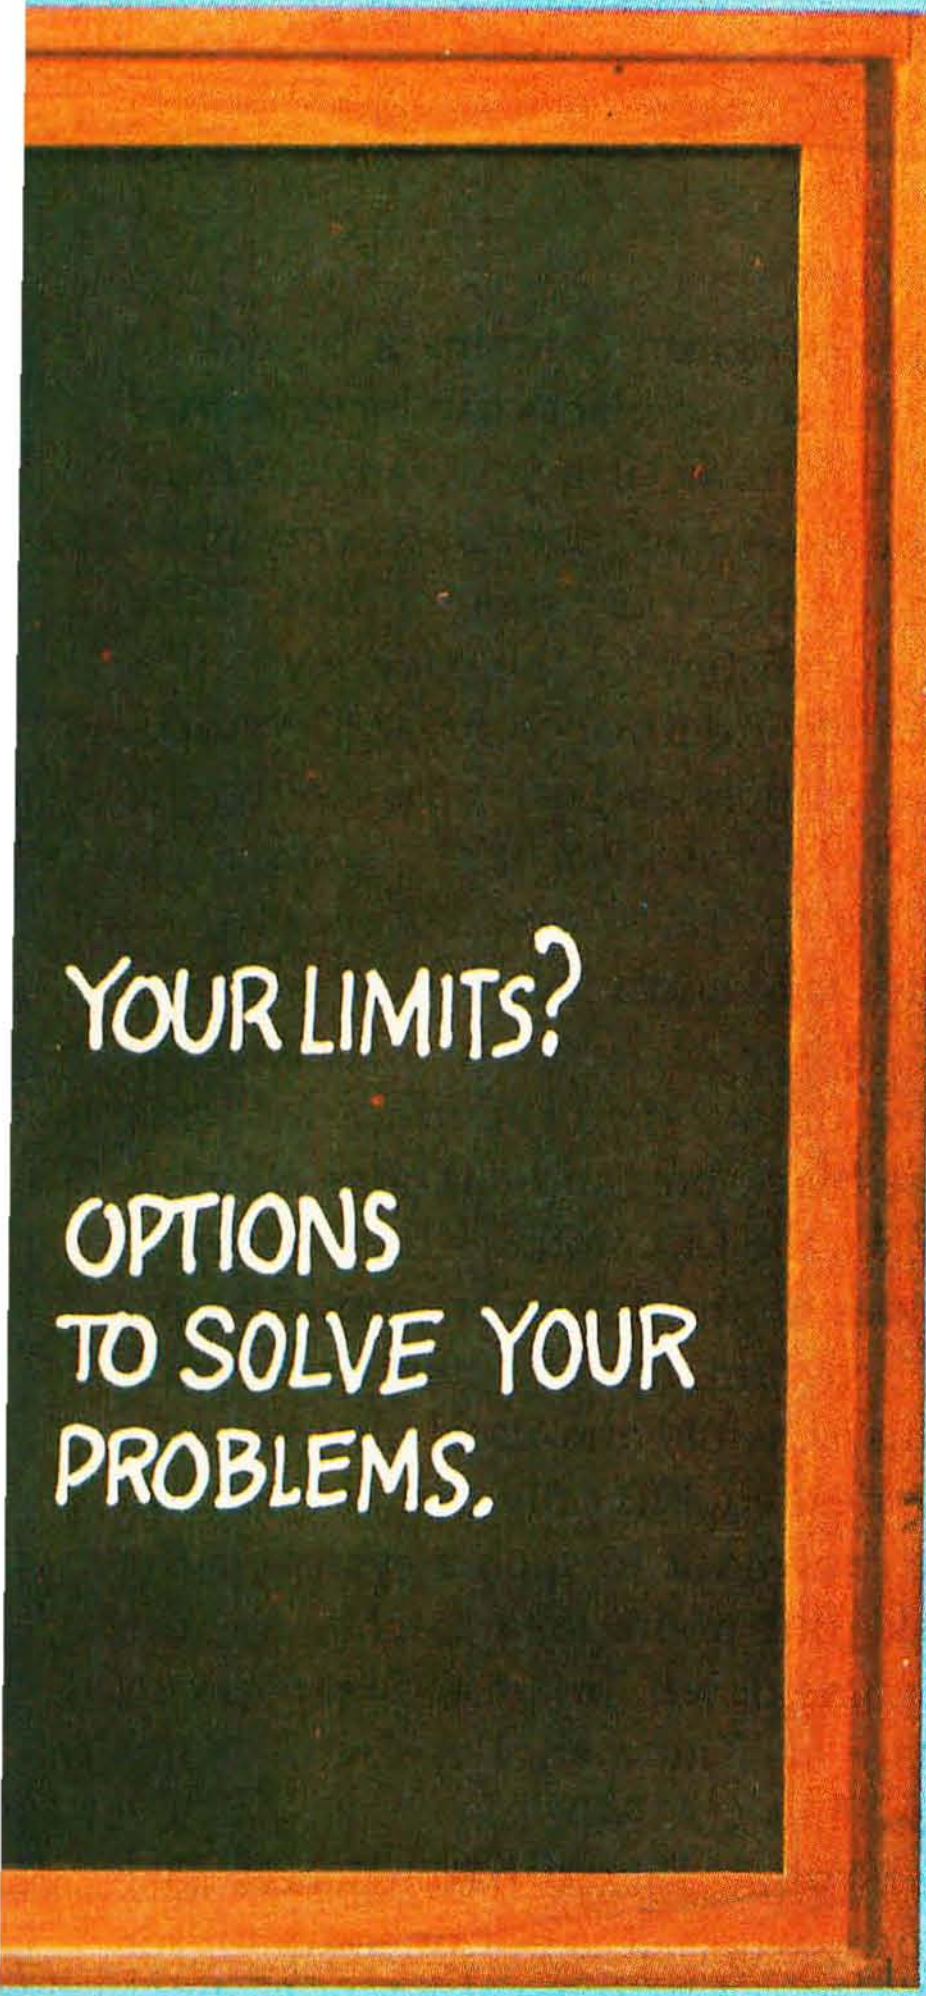

Board level options . . .

Intersystems mainframe packages, equipped with Series II boards, are operational in both 8 and 16 bit settings and support extended addressing in both I/O and memory space, recognizing 16 bit I/O addresses and 24 bit memory addresses. Just look at these individual features:

- MPU-80—uses a Z-80, 8 vectored interrupt lines and two 4K windows to address up to 1 Megabyte of RAM without bank select.
- 64KDR—sophisticated refresh circuitry allows unlimited DMA and absolutely reliable operation without wait states.
- 6 SI/O — six individually software-controllable serial I/O ports with optional interrupts. Each can run RS 232 at up to 19,200 BAUD, as can our VI/O board.
- VI/O—has two serial ports; two 8-bit parallel output and two 8-bit parallel input ports plus 8 individually controllable command lines and 16 levels of vectored interrupts.
- FDC II—can DMA up to a full track into 16 Megabytes of memory. Optionally generates interrupts and handles up to four 8" floppies.
- MPU-8000 — available with the non-segmented Z-8002†, which directly addresses 64K, or the segmented Z-8001†, which can directly address 8 Megabytes.

Extended systems options . . .

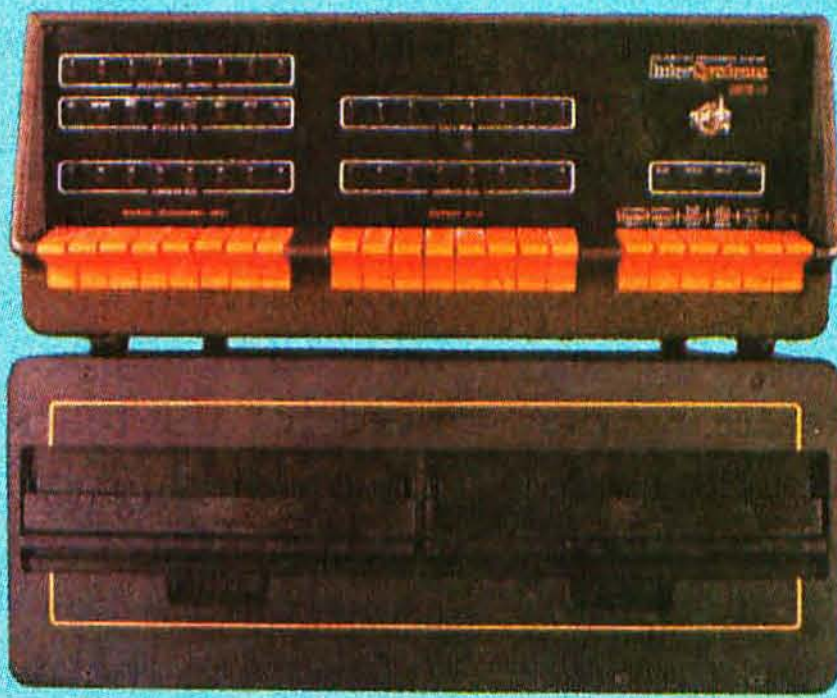

Interfacing disk drives is not a trivial matter, so when your objectives and resources dictate you spend your energy elsewhere, use our resources to perform the service for you. We can add our disk drive package to any Z-80 or Z-8000 configuration we provide . . . again, fully assembled and tested and covered under one warranty.

Or our complete Pascal Development System.

We use it for our own hardware and software development. It includes either table-top mainframe, two 8" floppy disks, 128K RAM, CP/M#, and Intersystems Pascal/Z™ compiler and Cache BIOS™.

THIS SYSTEM IS FAST! Why? Because our ultra-fast Cache BIOS automatically buffers whole tracks, eliminating most disk accesses. This delivers up to three times the throughput of any other floppy-based system we know and is equal to many small hard disk systems.

The system is versatile, too. SET program allows you to change many BIOS parameters and specify control characters to enable special features such as diagnostic output to trace program execution. It can also provide remote I/O to link your system to almost any other computer, large or small.

And it's reliable. The Cache BIOS System runs continuous memory tests when idle, and verifies with a Read after Write and Read after Read.

And the system also includes our Pascal/Z, a true native compiler producing ROMable and Re-entrant code. It features a minimum of extensions chosen for the development of your scientific and business applications. And it's compatible with our native code Pascal for Z-8000, providing a graceful upward path to 16 bit applications. So what you write now is right later.

One choice you won't have to make . . .

We don't believe you should ever have to sacrifice good technical support to find a good product. We'll back you to the hilt with services like free technical consultation, board-swapping, diagnostic packages, and documentation that gives you all you need to integrate, operate and maintain your system . . . right down to schematics of the boards.

Your solution should be clear.

Whether you're integrating for scientific, governmental or commercial applications, Intersystems can provide a Delta for your Epsilon.

Talk to us today.

Ithaca Intersystems Inc.,
Dept. B
1650 Hanshaw Road,
P.O. Box 91
Ithaca, NY 14850

Phone
(607) 257-0190



InterSystems™
Ithaca Intersystems Inc.

Micros for bigger ideas.

Circle 206 on inquiry card.

#Registered trademark of Digital Research

™Trademark of Ithaca Intersystems, Inc.

Technological Measures

The ultimate answer is to make it so difficult and costly for the pirate to make copies that the problem goes away. A good first step is to put teeth into software protection laws. The revised copyright act of 1976 had a major impact on phonograph record pirates because of the much more stringent penalties for convicted offenders. You may have noticed the Ⓟ sign on commercial records and tapes: it's an indication that they're protected by the new law. (For further legal background, including information on the latest Supreme Court decisions, see "Washington Tackles the Software Problem," page 128, and "Legal Protection for Computer Hardware and Software," page 140.)

We come next to the most intriguing weapon in our arsenal: hardware "locks" on the software. The concept of the *I.D. ROM* is a recent development now being used, among other places, in conjunction with a program called RCS/Micro Modeller, developed in England by Intelligence (UK) Limited. The program allows a person to use an Apple II computer to create financial planning models and high-resolution color displays featuring pie charts, histograms, and so on. A novel feature of the program is its "electronic slide show" capability: a hand-held control, similar to a slide projector control, plugs into one of the paddle ports of the Apple and allows the user to cycle through an electronic "slide show" on the video screen. Built into the control is a special ROM containing an identification number that is duplicated on the program floppy disk. The program periodically checks for the presence of the I.D. ROM. If it's not found, the program crashes.

This technique puts one more stumbling block in the way of the pirate, and it does not add appreciably to the total cost of the software (the I.D. ROM costs about $20). Alas, there are some experts in Europe who have cracked the code of another I.D. ROM used in conjunction with a program called Wordcraft, which is being distributed by Commodore in England. So the technique, while making it much more difficult to copy software, is not the ultimate answer. Still, I welcome this type of innovative approach to a mind-boggling problem. Readers interested in further information about the RCS/Micro Modeller program (not yet available in the United States) should contact David Low, ACT (Microsoft) Ltd, 5/6 Vicarage Rd, Edgbaston, Birmingham B15 3ES England.

Two of the most promising solutions to the software protection problem come from West Coast inventor Marc Kaufman. He has filed a patent for an "execute-only ROM," a new type of read-only memory which produces a sequence of executable code in the normal manner, but prohibits the user from randomly accessing memory addresses. As Kaufman explains, the user begins execution of the program at a known address. A "secret" executive routine, built into the ROM, contains a table of the legal next steps for every given step in the program. Only those steps listed in the table can be accessed by the user. For example, if the program contains a branch to one of two places, *only* those two places can be examined by the programmer at that time. If a program contains enough branches, it would take an inordinate amount of time for the user to run through every permutation of the program to get a complete listing of the code, even if a computer did the searching. Kaufman is presently working with both hardware vendors and users to develop the idea. An unreadable EPROM is also in the works, enabling the do-it-yourselfer to create secure programs.

Kaufman's second idea is to add a "black box" to a personal computer. Every piece of software would come with a magnetic key (or other type of hard-to-duplicate key) that plugs into the black box and contains a coded I.D. number that matches the I.D. number on the floppy disk. The program resides on the disk in encrypted form. In order to decode the program, the key must be plugged into the box. With this scheme, the user can make as many backup copies as desired, but only one of them can be used at a time. The drawback to such a system is the need for the black box. But if the idea catches on, the price would probably come down. Interested readers can contact Marc Kaufman at Kaufman Research, 14100 Donelson Pl, Los Altos Hills CA 94022.

Stopping the pirate is vital. Piracy has reached near epidemic levels in Europe, where it is not uncommon for an entire computer club numbering in the hundreds to line up their computers and make hundreds of copies of programs from United States manufacturers for the use of the entire club! Then there is the phenomenon of the "software library." Some of them are legitimate, but all too many cavalierly offer copies of programs to their members at a fraction of the retail cost.

Illegitimate copies of programs threaten the fabric of personal computing. The software innovators in our field must be compensated fairly for their work, or we will no longer see the high-quality programs that currently grace the marketplace.

I welcome comments from readers about this all-important issue, and would like to begin a dialog featuring your comments. Please send your thoughts to: Software Protection, c/o BYTE Publications Inc, POB 372, Hancock NH 03449. ■

Articles Policy

BYTE is continually seeking quality manuscripts written by individuals who are applying personal computer systems, designing such systems, or who have knowledge which will prove useful to our readers. For a more formal description of procedures and requirements, potential authors should send a large (9 by 12 inch, 30.5 by 22.8 cm), self-addressed envelope, with 28 cents US postage affixed, to BYTE Author's Guide, 70 Main St, Peterborough NH 03458.

Articles which are accepted are purchased with a rate of up to $50 per magazine page, based on technical quality and suitability for BYTE's readership. Each month, the authors of the two leading articles in the reader poll (BYTE's Ongoing Monitor Box or "BOMB") are presented with bonus checks of $100 and $50. Unsolicited materials should be accompanied by full name and address, as well as return postage.

Circle 385 on inquiry card. →

Apple* I/O Interfaces. SSM Spells Success Three Ways.

SSM helps you get the most from your Apple II* computer. Choose from three general purpose interface boards. With flexibility and prices that translate to big savings. Now, and when you upgrade.

Serial (ASIO™). Our ASIO gives you a full-duplex RS-232 interface. Plus jumper-selectable rates from 110 to 9600 baud. You also get software control, three handshaking lines and two output plugs—so you can connect your Apple to a modem or to a terminal/printer without modifying the cable.

Parallel (APIO™). For parallel interfaces, our APIO offers two 8-bit bidirectional ports. We also include additional interrupt and handshaking lines, plus software control of the interface configuration and data direction. Cables for Centronics and other printers are optional.

Or Both (AIO™). Choose our tried and proven AIO when you need a sometimes-serial or a sometimes-parallel operation. This single-board solution packs a lot of performance for the price. Thousands are now being used. It even lets you operate both ways—simultaneously—under Pascal, or with special drivers.

All three boards feature powerful firmware so you don't have to write software to use them. The ASIO and AIO include cables.

Whether you're an OEM or end-user, we can supply virtually any quantity you need. Quickly. Even in kit form. For the latest word on these, see your local computer dealer. Or call us today. You may also want to look into our cost-effective A488™ board which converts your Apple II into an IEEE-488 controller.

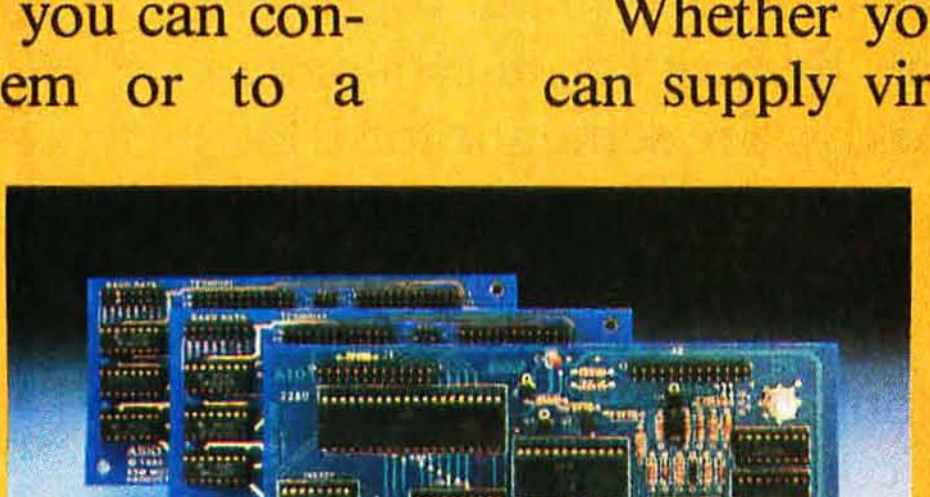

SSM Microcomputer Products, Inc., 2190 Paragon Drive, San Jose, CA 95131. (408) 946-7400. (TWX 910-338-2077. Telex 171171.)

SSM Microcomputer Products, Inc.

*Apple and Apple II are trademarks of Apple Computers Inc. ASIO, APIO, AIO and A488 are trademarks of SSM Microcomputer Products, Inc.

Letters

Educational Dialog

As a junior-high-school teacher with several years of experience, I want to call into question some of the underlying assumptions in Seymour Papert's "New Cultures from New Technologies." (See the September 1980 BYTE, page 230.)

Mr Papert seems to believe that children and child-initiated explorations are inherently good and, conversely, that parents, teachers, schools, and their limits and expectations are inherently bad. Also, he seems to believe that all learning can and should be as swift, natural, accurate, and frustration-free as the learning of spoken language, and that learning by rote or rite is without meaning and is harmful to the child.

To the first supposition, I can only reply that there is a time and place to be child-centered, and a time and place to be goal-directed. To the second supposition, language acquisition has little to do with other types of learning—it is a highly specific capability that is "hard-wired" into the brain from birth. Finally, rote and rite learning are common elements in spontaneous children's play, to say nothing of adult culture.

Piagetian learning is at best an unfortunate choice of words on Mr Papert's part, because Piaget did not focus on learning at all. He studied the cognitive processes in children that depended on maturation, not learning, and were indeed highly resistant to any learning experiences he was able to devise. His great contribution to education was to point out that there *are* thresholds and there *are* ceilings to what an immature mind can learn. The insight-oriented "new math" failed in public education for this reason: its proponents were asking grade-school children to perform abstract reasoning, which Piaget terms *formal operations*, before they were ready to do so.

Anyone wishing to teach young children to program computers, regardless of formal language instruction, had better remember a few things: Piagetian formal operations begin in adolescence. It is not safe to assume that a preadolescent is doing what you think he is doing, in the way you think he is doing it, or for the reason you think he is doing it. You ignore Piaget at your own peril.

In summation, no single development is going to revolutionize education, because it is a "soft" field—too many factors are operating already. The computer probably will be the biggest thing ever to hit the field, but not for the reasons Papert thinks.

Charles Heckel
1624 Hillcrest
Glendale CA 91202

Seymour Papert Replies:

I agree with Mr Heckel that one ignores Piaget at one's peril. I have tried not to ignore him. I spent about 5 years working in his center for Genetic Epistemology in Geneva, Switzerland. In my book Mindstorms: Children, Computers and Powerful Ideas, *I argue that our work on Logo is in the spirit of Piaget's* theory *even if it seems to contradict some of his empirical* findings.

I grant that children in many countries have been found to follow a fixed pattern of intellectual development. I grant that psychologists have failed when they tried to change this pattern of development by exposing children to a few hours of special treatment under laboratory conditions. But, I argue in Mindstorms *that the penetration of computers into the lives of children (indeed into the whole culture) will exert a much more massive influence on intellectual development than any experiments in the past. I suggest that it is* possible *that these more massive influences will have correspondingly massive* effects. *I don't see how any of Piaget's experiments could conceivably be held to exclude this possibility.*

In addition to these general issues, there is one specific point of Piagetian interpretation on which I must express disagreement with Mr Heckel. Piaget certainly did not believe, as Mr Heckel asserts, that the acquisition of language "has little to do with" other types of learning or that it is "hard-wired." This sounds more like Noam Chomsky's position against which Piaget argued with increasing vigor in the last years of his life.

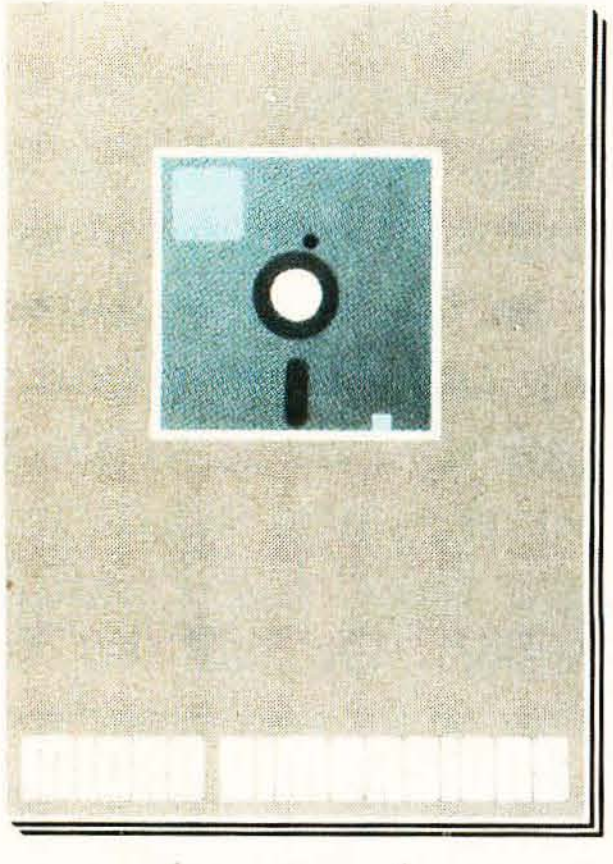

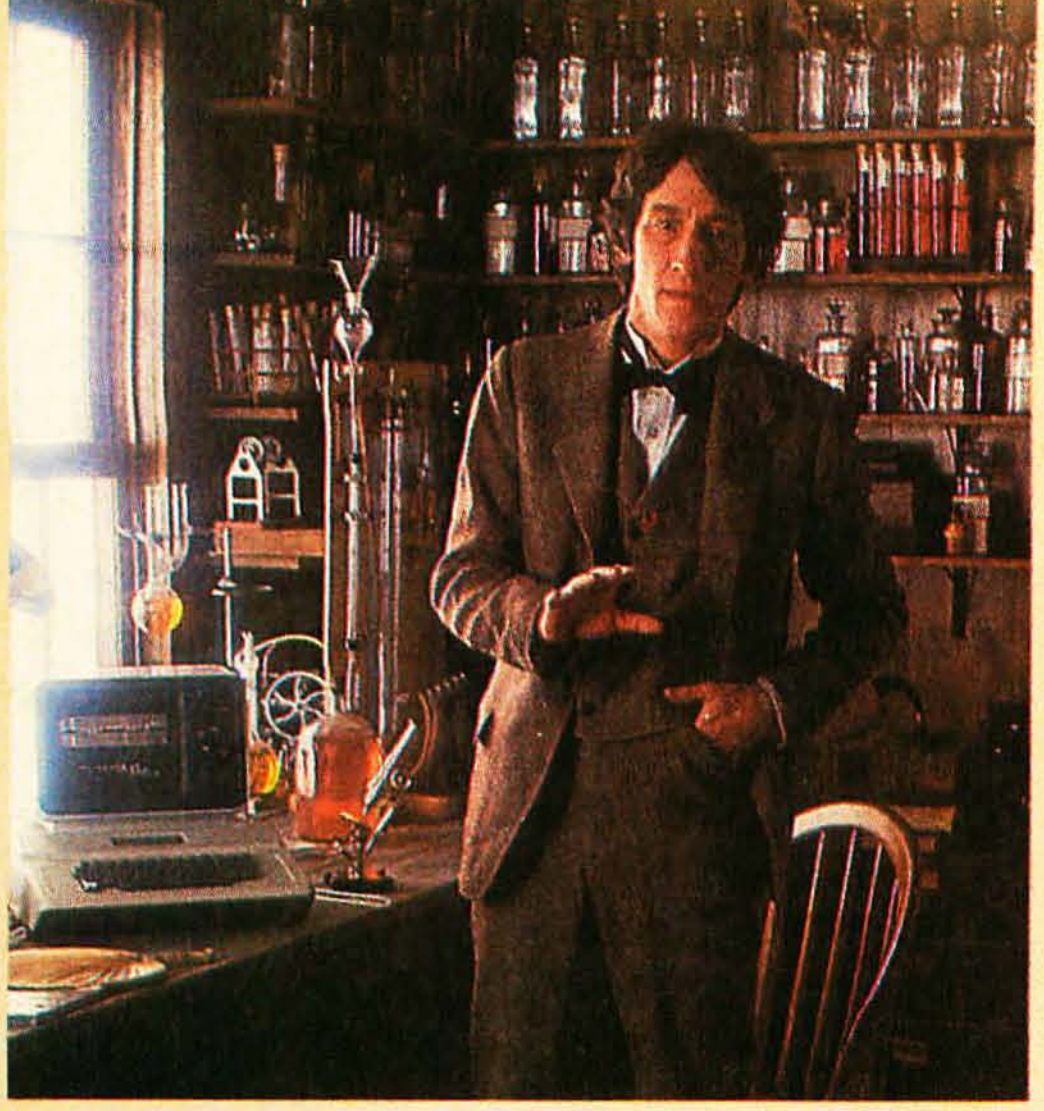


apple ///
apple II

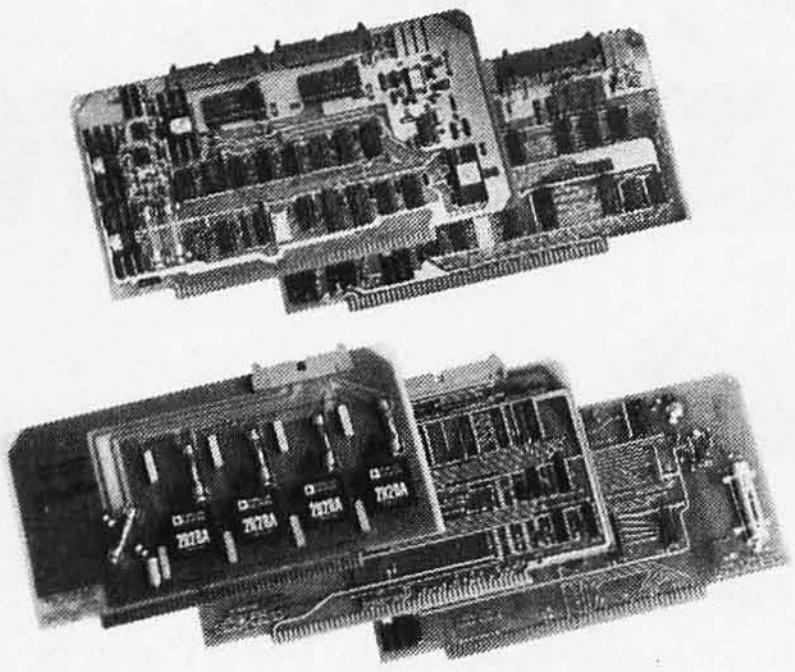

Ada Manual Available

The reference manual for the Ada programming language, July 1980 version, is now available from the Government Printing Office. The supply in the Defense Department's DARPA office (referred to in "BYTELINES," January 1981 BYTE, page 200) is now exhausted. Requests should be sent to:

Superintendent of Documents
US Government Printing Office
Washington DC 20402

Order number: 008-000-00354-8

Cost: $5.50 per copy.

I learned this when I requested information from DARPA about the manual.

Mike Robinson
Rt 4, Box 70
Ringgold GA 30736

Hard Disk to Buy

I was quite amused to read that manufacturers are unable to understand why small hard disks aren't selling as expected. (See "Winchester 8-inch Drives Off to Slow Start," December 1980 "BYTELINES," page 214.) Perhaps the reason could be the typical $5000 to $8000 price tag—more than a little difficult to justify to your wife, mother, girlfriend....

Besides the normal budgetary problems, I have no way to interface a hard disk to my Heath H-8 computer, either in hardware or software. Another problem is that most hard disks are not removable. Imagine the added utility of a drive using an 8- or 14-inch cartridge, holding about 20 megabytes, costing $2000, and removable (so you can take it to your friend's house). Come to think of it, that's a good description of a DEC (Digital Equipment Corporation) RK05 cartridge disk-pack drive.

John F Priebe
4804 Mt Airy Rd
Sylvania OH 43560

Plot: North by Northwest

I found John Beetem's article "Vector Graphics for Raster Displays" enjoyable. (See the October 1980 BYTE, page 286.) But, when I read R H Rae's letter, I had to respond. (See "Intercepting Raster," January 1981 BYTE, page 14.) Beetem's vector-generator routine works beautifully for its intended purpose. But Rae's alternative suggests that there are those who could profit from a little "compuservation" (running faster on fewer bytes).

The routine I use to drive my Houston Instrument Hiplot plotter is a modification of the one that appears in Hiplot brochures (it is actually Algorithm 162 by Fred G Stockton; *Collected Algorithms from ACM*, 1963). I offer it in a minimal BASIC as Houston Instrument did. It assumes that the PRINT statement goes to the Hiplot, which ignores all characters except "p" thru "w," and "y" and "z." "p" means move the pen one increment (0.005 inch) north, "q" northeast, "r" east, and so on to "w" meaning northwest.

```
10 A$="rqvwpsvupqpwtstu"
20 INPUT X,Y
30 PRINT"z":REM PEN DOWN
     COMMAND
40 GOSUB 100
50 PRINT"y":REM PEN UP
     COMMAND
60 GOTO 20
70 REM *** VECTOR GENERATOR
     SUBROUTINE ***
80 REM THIS SUBROUTINE DRAWS
     THE BEST STRAIGHT
90 REM LINE FOR A COORDINATE
     CHANGE OF (X) AND (Y)
100 I=1: IF X<0 THEN X=-X: I=3
110 IF Y<0 THEN Y=-Y: I=I+4
120 IF X<Y THEN T=X: X=Y: Y=T:
     I=I+8
130 E=-X/2: C=0
140 IF C>X-.5 THEN RETURN
150 E=E+Y: IF E>0 THEN E=E-X:
     PRINT MID$(A$,I+1,1):
     GOTO 170
160 PRINT MID$(A$,I,1)
170 C=C+1: GOTO 140
```

This routine is marvelous; no multiplications and only an avoidable right shift in line 130 (the entire routine, including the array and double-precision variable storage, requires less than 130 bytes of 8080 code).

The byte miser in me demanded that I understand this routine. When I found its logic as simple as the routine, I couldn't resist configuring it for screen graphics and animation, turning a printer into a plotter, and tackling the awesome task of massaging my plotter into a super printer.

If it is not too late, Mr Rae, you might consider using Stockton's algorithm for your commercial graphics product.

William A McWorter Jr
Mathematics Department
Ohio State University
Columbus OH 43210

SUPERBRAIN QD™
VS.
SUPERBRAIN™
the two top microcomputer contenders

When you decide to buy a microcomputer system, it usually gets down to one model versus another. Will it be the SuperBrain from Intertec... or one of those other models from Intertec's competitors? Well, there's really not much of a choice in the price/performance competition. The SuperBrain wins hands down! And it's a pretty tough contender if reliability, factory support and nationwide service are important to you. So what do you do? Choose our SuperBrain just because you know it's best? Or keep waiting for someone to announce something better?

WAIT NO LONGER...

It wasn't enough that our SuperBrain had such standard features as twin double-density disk drives with nearly 350,000 bytes of disk storage. A full 64K of dynamic RAM. A CP/M* Disk Operating System which assures compatibility to literally hundreds of application packages. A crisp, 12" non-glare screen with a full 24 line by 80 column display. A full-featured ASCII keyboard with a separate keypad and individual cursor control keys. Twin RS232 serial ports for fast and easy connection to a modem or a printer. Plus, dual Z80 processors which operate at 4 megahertz to insure lightning-fast program execution. No, it wasn't enough. So we changed it. We made it even better!

ANNOUNCING SUPERBRAIN QD...

Our new QD model boasts all the features of our phenomenally popular SuperBrain with the addition of double-sided disk drives. So, for only a modest increase in price, you can order your next SuperBrain with more than twice the disk storage. But, best of all, you can field upgrade the disk capacity of either model to a whopping 10 megabytes! Now how's that for a choice?

HOW DID WE DO IT?

The secret of SuperBrain QD's incredible disk storage lies within our new double-density, double-sided disk drives. Nearly 750,000 bytes of data can be formatted on two specially designed 5¼" drives. More than enough to tackle almost any serious small business application. Plus, SuperBrain QD's 64K of dynamic RAM will handle even your most complicated programming tasks.

Of course, if you really need megabytes instead of kilobytes, just add our 10 megabyte CompuStar™ Disk Storage System. It connects in seconds and gives you the capability to expand your system into a powerful multi-user network with up to 255 CompuStar terminals. You can add users one at a time as you need them. So no matter how much your needs expand, your original investment in computer hardware is always protected.

BUT IS IT RELIABLE?

Our best salesmen are our present customers. Not only have SuperBrain and QD users been impressed with the inherent reliability of the systems, they tell us that no other microcomputers available offer such a unique modular design concept. Just about the only service tool required is a common screwdriver. But of course if you'd rather let us do the service, our total commitment to product and customer support, with service outlets in most major cities, will guarantee your satisfaction for many years to come.

The CompuStar™ Disk Storage System
... Connects in seconds to either model.

THE DECISION IS YOURS...

Whether your next microcomputer is the SuperBrain or our QD model, you'll be purchasing what is becoming one of the world's most popular microcomputer systems. And regardless of which model you choose, you'll probably never outgrow it because you can keep expanding it.

Call or write us today for more information on our full line of microcomputer systems. Ask for our "SuperBrain Buyer's Guide" and read why so many customers like yourself have made the SuperBrain and the SuperBrain QD their top two choices for performance, value and reliability.

INTERTEC
DATA
SYSTEMS®

2300 Broad River Rd., Columbia, S.C., 29210
(803) 798-9100 TWX: 810-666-2115

---

*Registered trademark of Digital Research, Inc.

BYTE's BOMBworks

My December 1980 BYTE did not include the usual Reader's Service and BOMB cards, so here are my December BOMB votes.

My vote for the *best article of the year* is Grady Booch's Micrograph series. (See "Micrograph, Part 1: Developing an Instruction Set for a Raster-Scan Display," November 1980 BYTE, page 64; "Part 2: Video-Display Processor," December 1980 BYTE, page 120; and "Part 3: Software and Operation," January 1981 BYTE, page 238.) I eagerly awaited my January BYTE for the concluding part.

Mr Booch's design was good, but the hardware could have been upgraded for better performance. According to my calculations for the color chip, the Z80 microprocessor is active only 12% of the time with the hardware configuration shown. The Motorola spec sheets give a better hardware implementation: isolate the display memory from the processor memory when the display circuitry is accessing display memory. Such an approach would allow fuller utilization of the Z80, as well as remove response-time problems from the interface to the host computer (ie: lost time when the Z80 is locked out by the display). All in all, Mr Booch's articles were *excellent*!

I had a different opinion of the competing serials on graphics. Alan Grogono's "Graphic Color Slides" articles gave no insight into the more general problem of graphics. (See the November and December 1980 BYTEs, pages 126 and 96, respectively.) Allen Watson's "A Simplified Theory of Video Graphics" presented little if any new information on either hardware or software. (See the November and December 1980 BYTEs, pages 180 and 142, respectively.) He might as well have referred to some of the many articles and books on the television signals (eg: the *TV Typewriter Cookbook* or some such). I rate both of these articles *poor*.

On a more positive note, I enjoyed all of the game reviews and would like to see more for other software packages. These, however, would rate only a *good*, with the exceptions of "On the Road to Adventure"; "Odyssey: The Compleat Apventure"; and "Zork and the Future of Computerized Fantasy Simulations." I rate all of these *excellent*. (See the December 1980 BYTE, pages 158, 90, and 172, respectively.) I'd also place Steve Ciarcia's "Computerized Testing" in that category. (See December 1980 BYTE, page 44.)

Hook a Winner*

$129

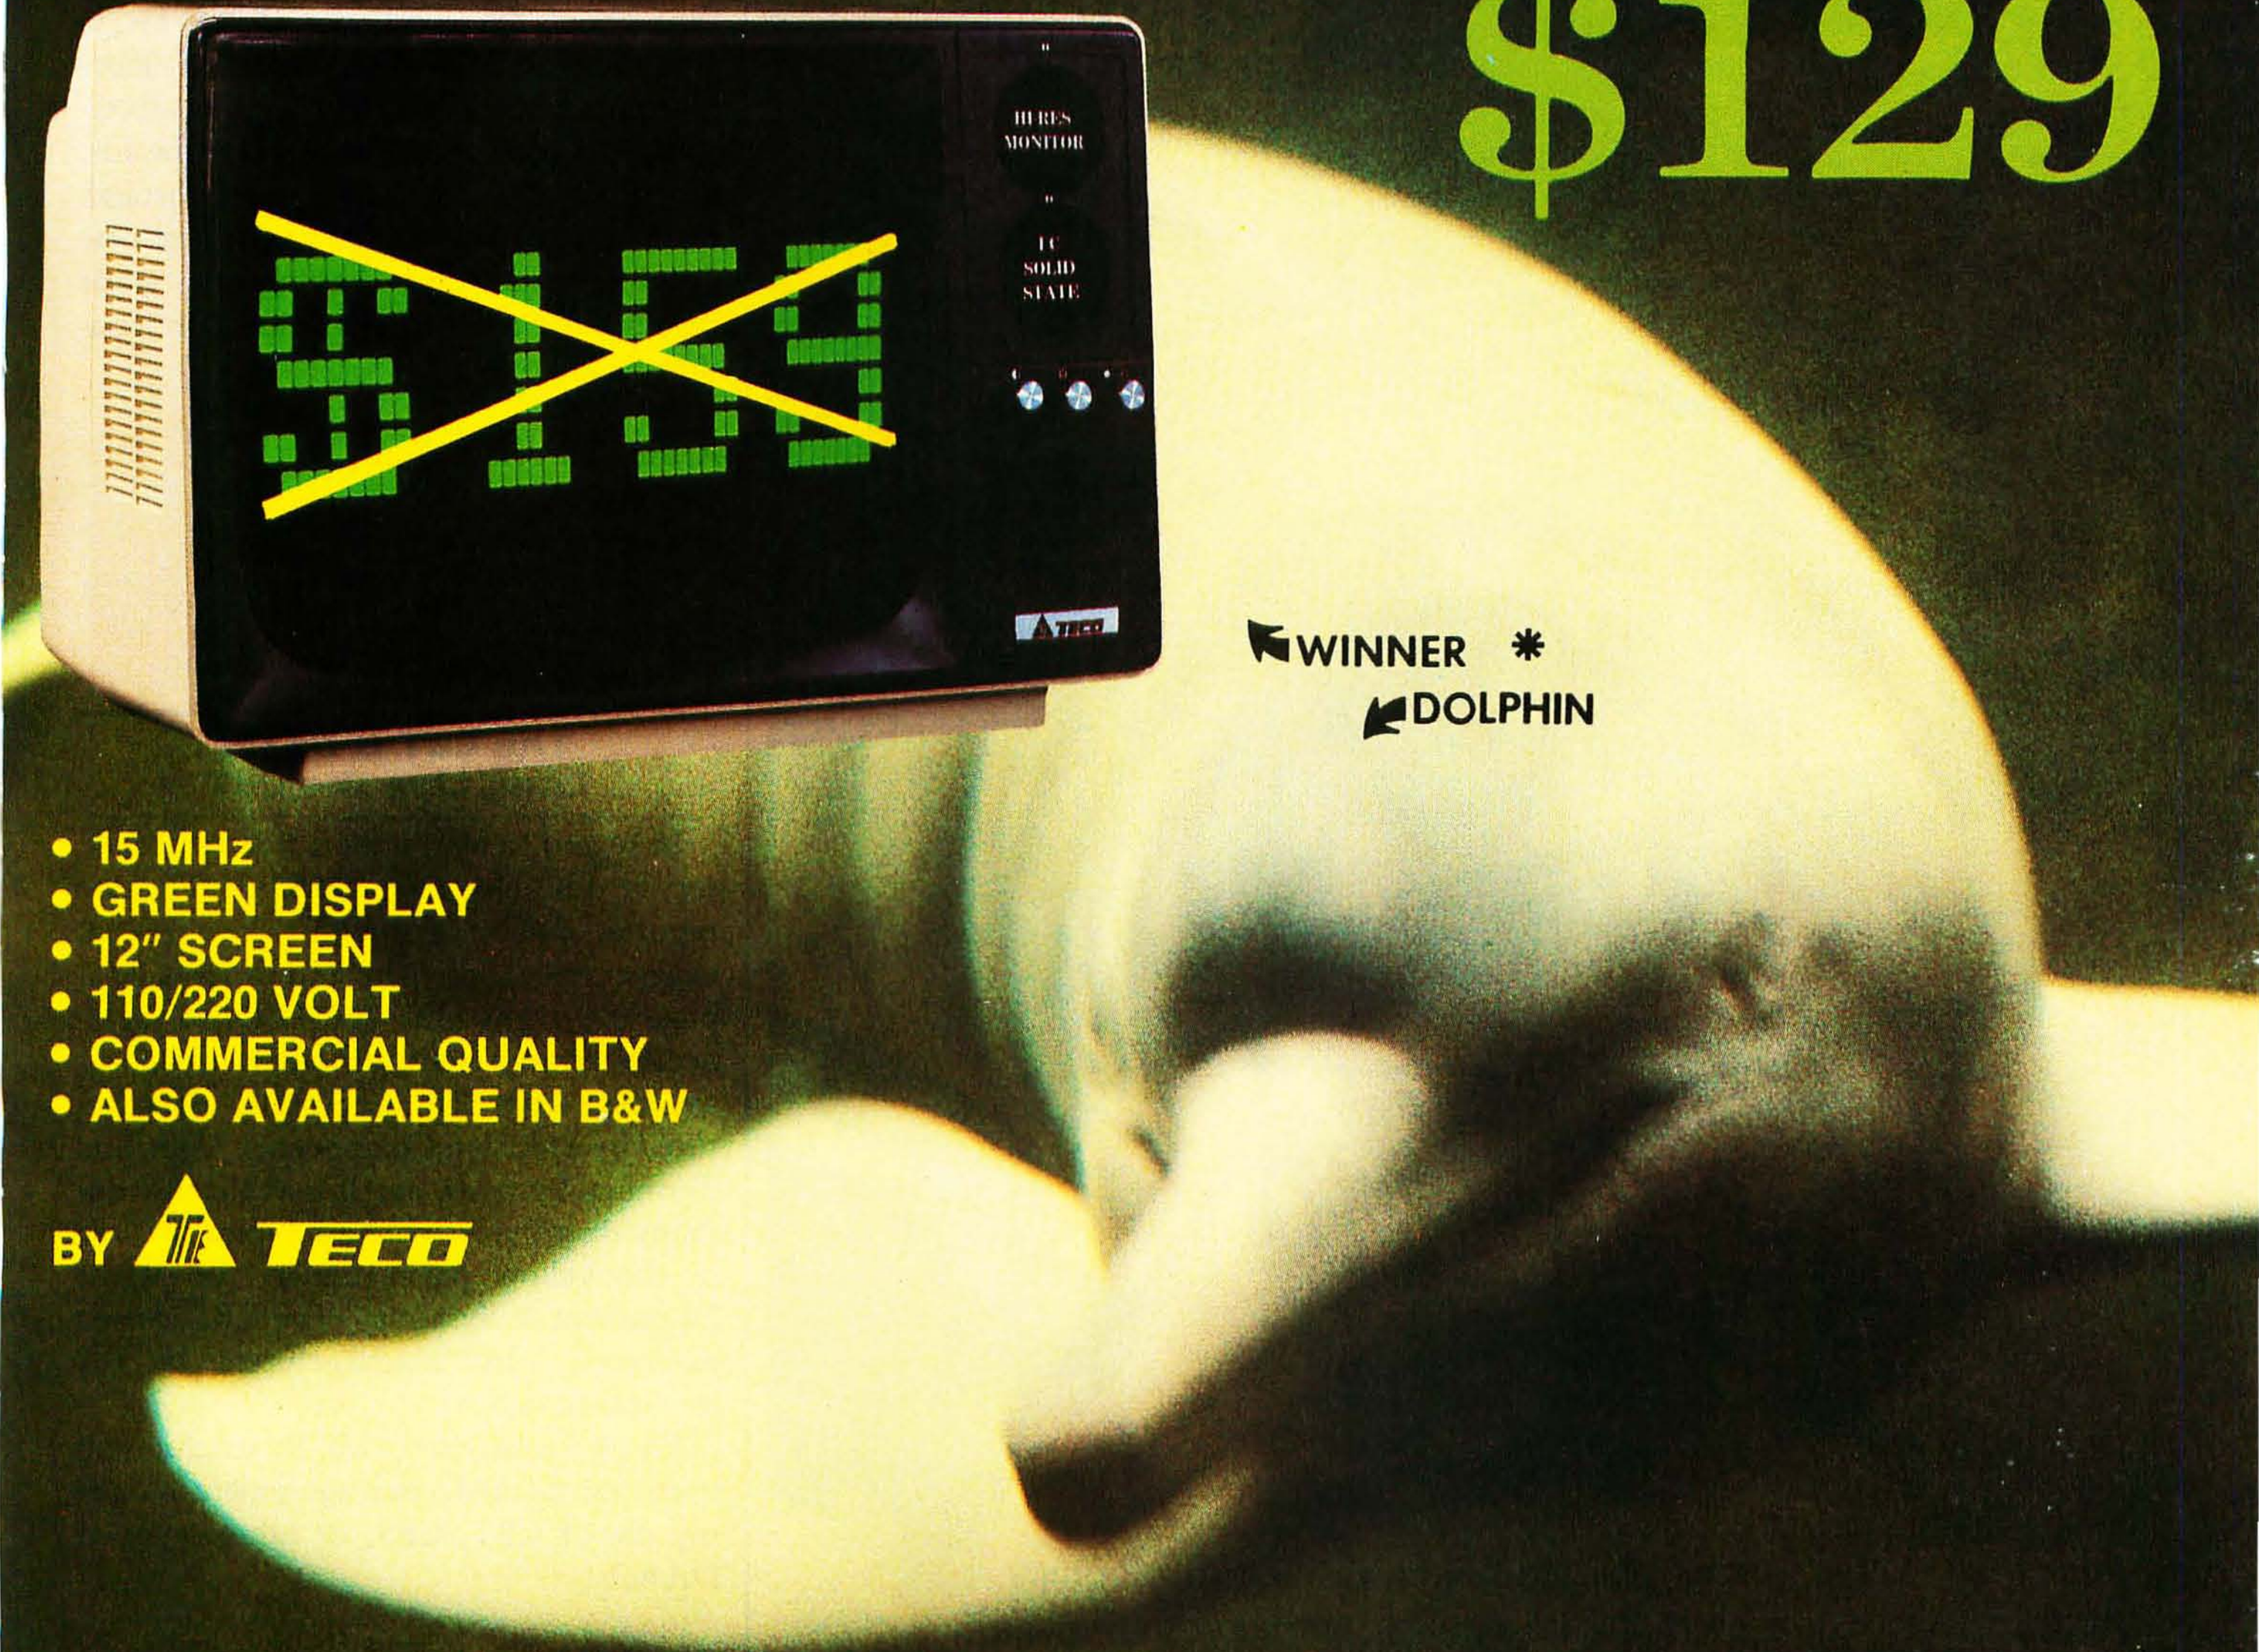

- 15 MHz
- GREEN DISPLAY
- 12″ SCREEN
- 110/220 VOLT
- COMMERCIAL QUALITY
- ALSO AVAILABLE IN B&W

BY TECO

OEM's!
Call and ask about
our low cost custom fit
smart printers.

Rep Territories available — Dealer inquiries invited
Visit us at the Chicago Show, May 31-June 3 in Booth No. 3045

data ed

Data-Ed
Subsidiary of UDO Corp.

18 Bridge Street
Salem, NH 03079

603-893-2047
TWX 710-366-0502

Data-Ed
18 Bridge Street
Salem, NH 03079
603-893-2047 (collect)
TWX 710-366-0502 (UDOENG SEML)

☐ Please send me ONE TM-12G MONITOR at the low introductory price of $129.00 plus $2.75 shipping.
(OFFER LIMITED TO ONE MONITOR PER CUSTOMER)

☐ Please send more information about your low cost custom fit smart printers.

Name________________________________

Address______________________________

City, State, Zip________________________

☐ Check or Money Order enclosed
☐ C.O.D. Orders Accepted.
☐ Bill my-☐ VISA-☐ Mastercharge

Card No. ________________

Exp. Date________ Bank No. ________

Signature________________

(Sale Price good only in Continental U.S.A.)

VISA

master charge
THE INTERBANK CARD

(Offer good through 7/1/81)

I want to compliment BYTE's Production Director, Nancy Estle, on the layout of BYTE. BYTE articles generally manage to stay in one piece, rather than starting in the front and continuing piecemeal throughout the remainder of the magazine. I would like to see even more segregation between articles and advertising, however. I do not object to the ads, in fact I conscientiously read through them, hoping that I won't miss any new developments. But having to wade through the ads to find article continuations is annoying.

Arthur Throckmorton
5657 S Oak St
Littleton CO 80127

The CBT Is Dead: Long Live the CBT

In regard to Mr James R Boatright's letter in the December 1980 BYTE, the reported demise of the CBT is somewhat exaggerated. (See "The End of the CBT," page 300.) The CBT-1001D DAA (data-access arrangement), though no longer available from Bell, is currently manufactured by Precision Components, Elgin, and Terminal Systems, etc. It is available from many distributors who are typically listed in the yellow pages under "Telephone Equipment & Systems." The CBT is used extensively by manufacturers in the medical-data field.

Please be advised, Mr Boatright, you need not discard your equipment requiring use of CBT, CBS, or other types of DAA.

Carl E Osborne Jr
President
O & J Electronics Inc
4027 Knight Arnold Rd, Suite 105
Memphis TN 38118

More on HP-41C

Congratulations to BYTE and to Bruce D Carbrey for the excellent article on the HP-41C "calcuputer." (See "A Pocket Computer? Sizing up the HP-41C," December 1980 BYTE, page 244.) With a few enhancements, I used the "CODEBREAKER" demonstration-game program over the holidays with my grandchildren. It is a fine example of the capability of the HP-41C.

Circle 274 on inquiry card. ⟶

Mountain Computer put it all together for you.

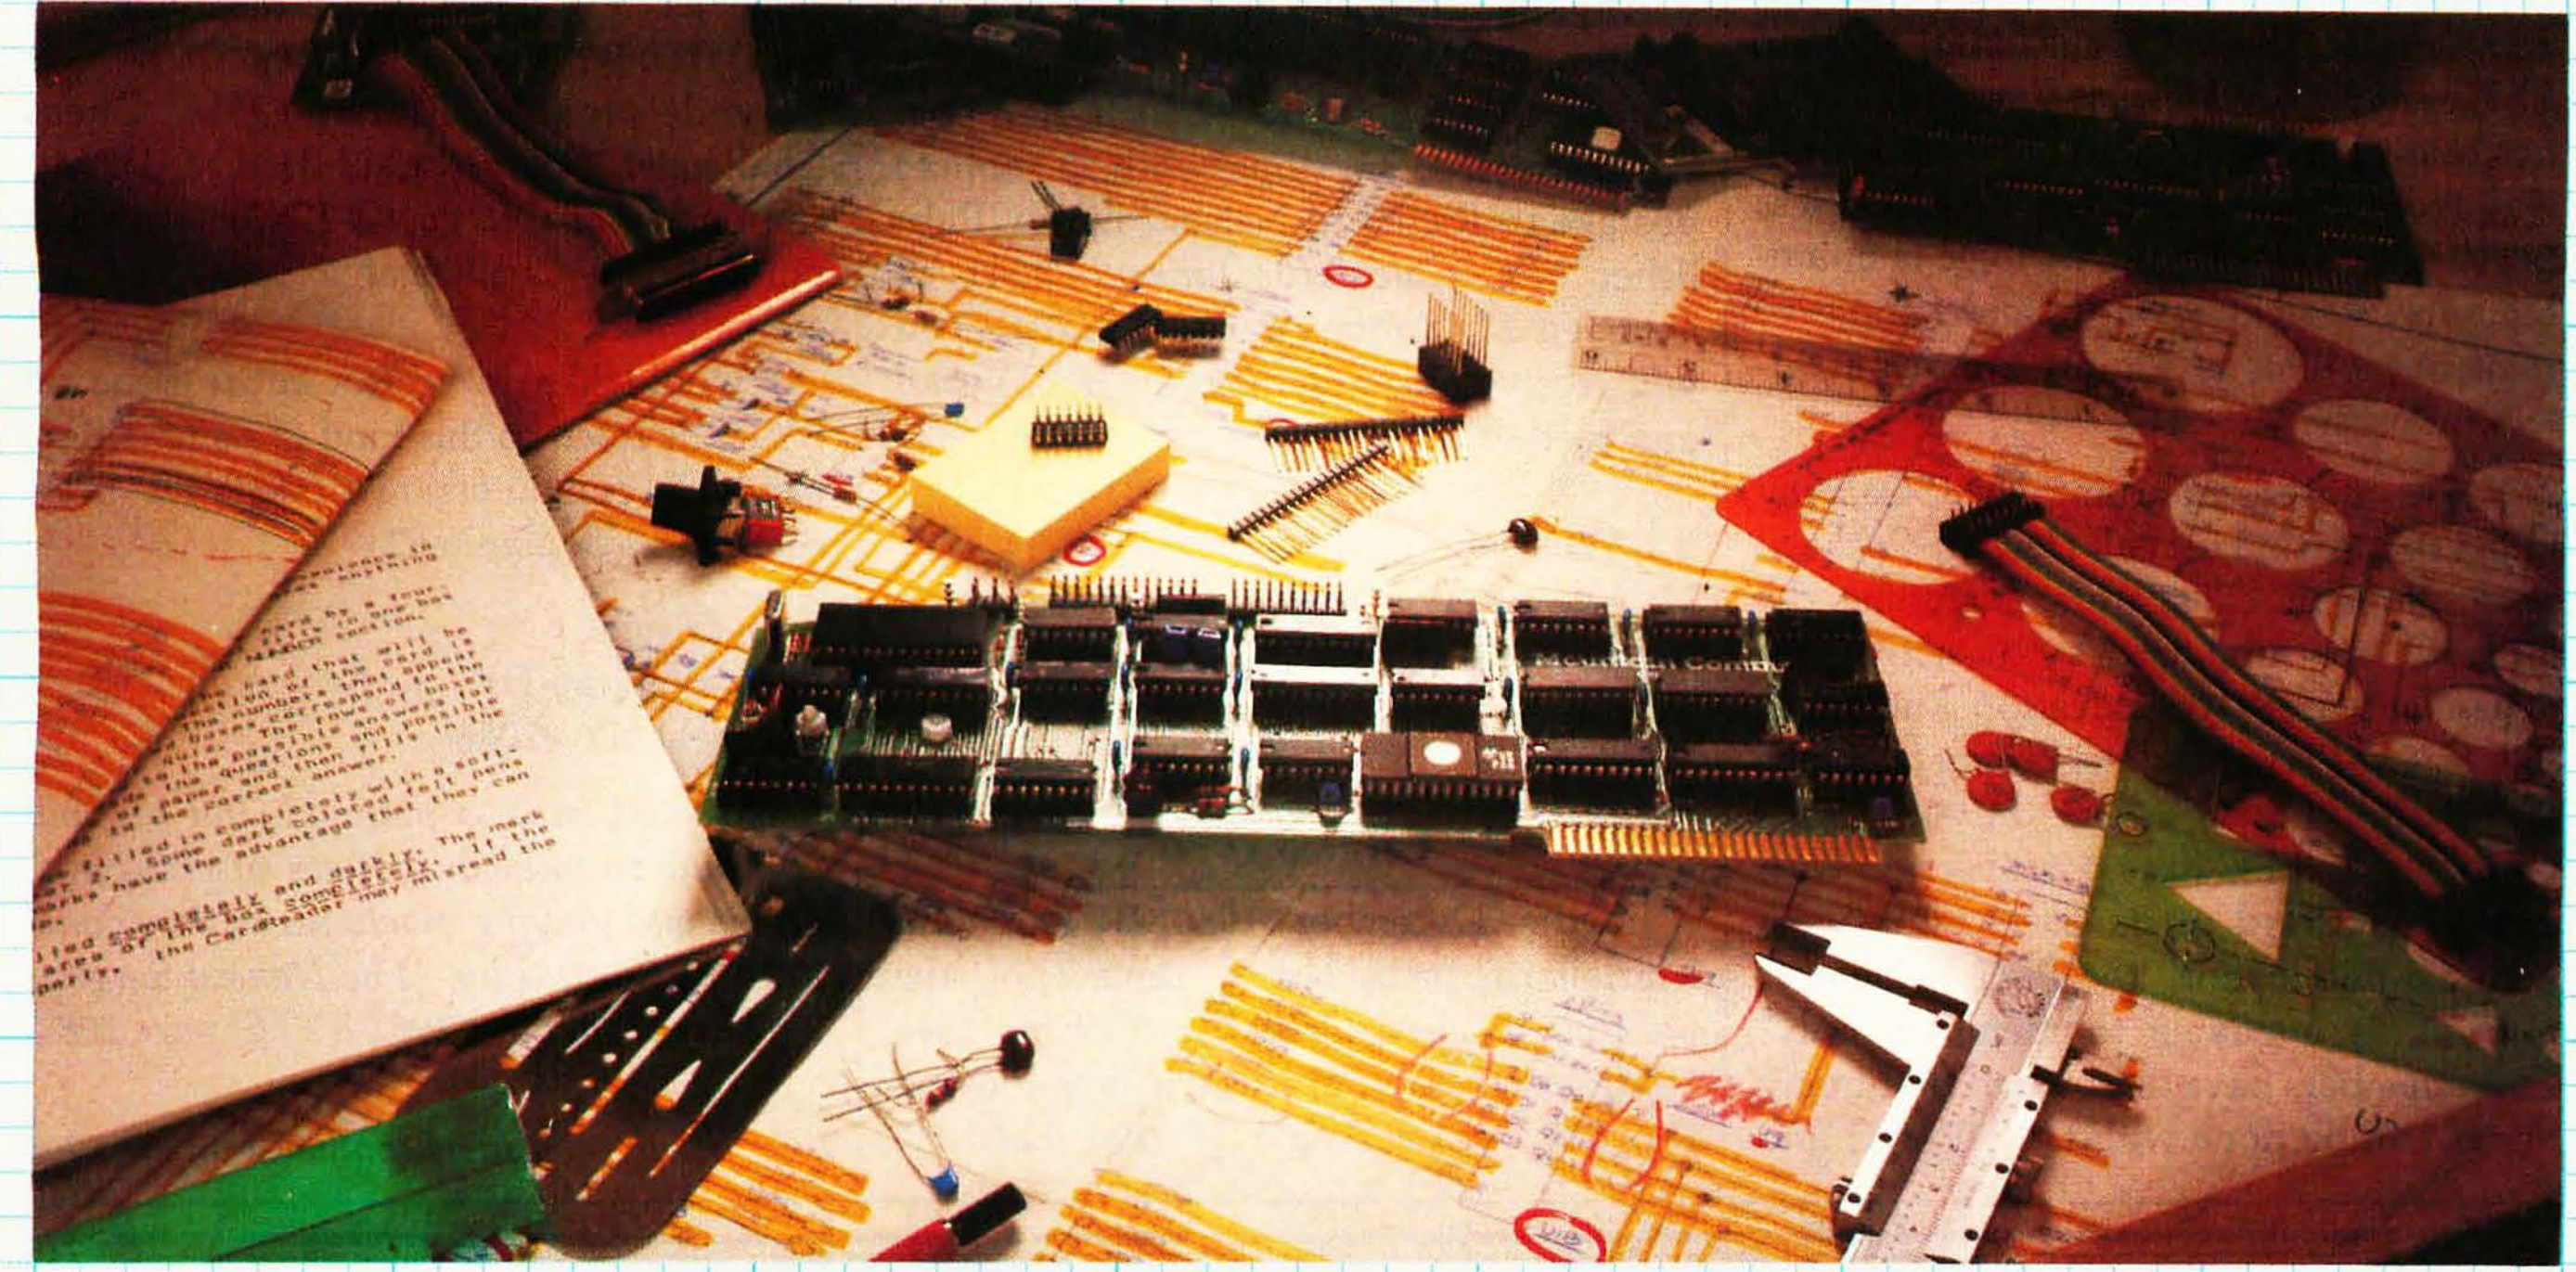

The CPS MultiFunction Card

Three cards in one! The Mountain Computer CPS MultiFunction Card provides all the capabilities of a serial interface, parallel output interface and real-time clock/calendar—all on one card—occupying only one slot in your Apple II®. Serial and Parallel output may be used simultaneously from CPS. CPS is configured from a set-up program on diskette which sets the parameters (such as baud rate, etc.) for all functions contained on the card and is stored in CMOS RAM on the card. Once you have configured your card, you need never set it up again. You may also change parameters from the keyboard with control commands. All function set-ups stored on-board are battery powered for up to two years. "Phantom slot" capability permits assigning each of the functions of CPS to different slots in your Apple without the card actually being in those slots! For example, insert CPS in slot #4 and set it up so that is simulates a parallel interface in slot #1 and a clock in slot #7 and leave the serial port assigned to slot #4. CPS's on-board intelligence lets it function in a wide variety of configurations, thereby providing software compatibility with most existing programs. "We've put it all together for you"—for these reasons and many more! *Drop by your Apple dealer and see for yourself how our CPS MultiFunction Card can expand the capabilities of your Apple and save you a great deal of money as well!*

Calendar/Clock

- One second to 99 years
- Battery backed-up (2 years)
- Two AA standard alkaline batteries for back-up (provided)
- Compatible with MCI Apple Clock™ time access programs

Parallel Output

- Features auto-line feed, Apple tabbing, line length, delay after carriage return, lower to upper case conversion
- Centronics standard—reconfigurable to other standards
- Status bit handshaking

Serial Interface

- Features auto-line feed, transparent terminal mode, Apple tabbing, line length, delay after carriage return, local echo of output characters, simultaneous serial/parallel output, lower to upper case conversion, discarding of extraneous LFs from serial input
- Uses the powerful 2651 serial PCI chip
- 16 selectable internal baud rates—50 to 19.2Kbaud
- Half/Full duplex terminal operation
- I/O interface conforms to RS-232C
- Asynchronous/Synchronous operation

Mountain Computer
INCORPORATED

300 El Pueblo Scotts Valley, CA 95066
(408) 438-6650 TWX: 910 598-4504

™Apple Clock was the trademark of Mountain Computer Inc.

®Apple and Apple II are registered trademarks of Apple Computer Inc.

But just as any program or product can be improved, so can any article. It is most unfortunate that Mr Carbrey failed to mention two important aspects of the HP-41C:

1. The HP-41C continues the use of RPN (reverse Polish notation) logic. Since my first experience with RPN in the 1960s on a Friden CRT desk-top calculator (it used RPN well before Hewlett-Packard), there has been no question that RPN is the *only* way to go. Not just because it may use less keystrokes, but because its logic is unambiguous, straightforward, and simple to remember. This is a most important attribute of the HP-41C!

2. Even more important, Mr Carbrey failed to mention that all Hewlett-Packard programmable calculators, including the HP-41C, are supported by an active, independent user's organization known as the PPC—Personal Programmers Club. (Formerly known as the HP-65 User's Group.) The PPC has no connection with Hewlett-Packard or its Users Library. A periodic publication, the *PPC Calculator Journal,* is available to members only. Club members have discovered that many things can be done with the HP-41C and its predecessors. Although some of these capabilities are not "supported" by Hewlett-Packard, their use can greatly improve almost any program. The club is currently designing a custom ROM (read-only memory) to make these features available to its members.

Anyone seriously using the HP-41C should join the PPC. To get further information, send a 9- by 12-inch stamped, self-addressed envelope with 2 ounces postage to Richard J Nelson, Editor/Publisher *PPC Calculator Journal,* 2541 W Camden Pl, Santa Ana CA 92704. You will receive a sample issue of the *Journal* and further membership information.

B F Wheeler
22 Wilkins Ave
Haddonfield NJ 08033

Chessmate

In the December 1980 BYTE, John Martellaro presented a review of the Sargon II chess-playing program. (See "Sargon II, An Improved Chess-Playing Program for the Apple II," page 114.) He states that it is the first chess program he has seen that sets a trap. He also says that it is the strongest chess program money can buy—dedicated chess-playing devices included. Does this include the Chess Challenger 7 by Fidelity Electronics?

My Chess Challenger 7 on level 7 (tournament level) played exactly the same game as Sargon II, including the trap, through step 12. At step 12, Sargon played Nc3-d5 (N/B3-Q5); Chess Challenger 7 played Qd2-d1 (Q-Q1). My response was Qf6-g6 (Q-KN3), at which point Chess Challenger 7 conceded the game.

I would like to see an entire issue of BYTE devoted to this kind of competition between computers. Does BYTE have such an issue planned?

Tom Disque
Rt 7, Waldrap Dr
Mayfield KY 42066

No such issue is planned, but we will continue to publish reviews of chess programs and playing machines as they come in to us (hint). (See "The Newest Sargon: 2.5" in the January 1981 BYTE, page 208.)

Letters continued on page 268

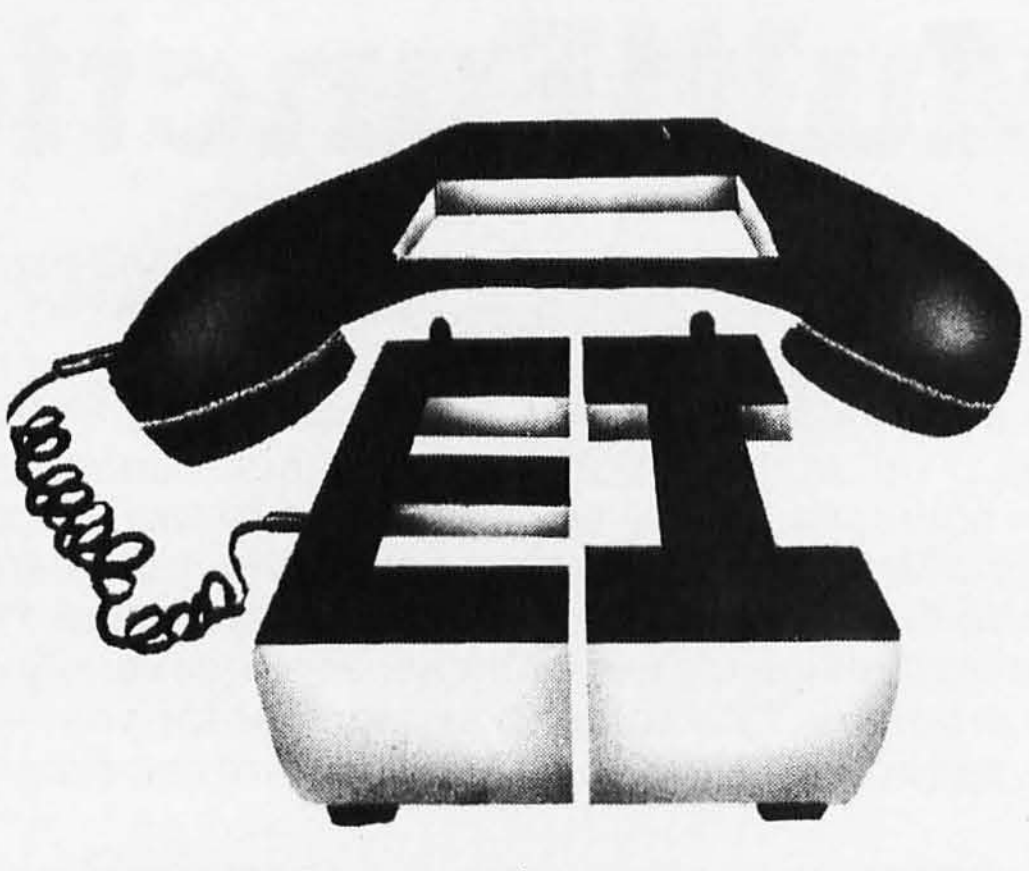

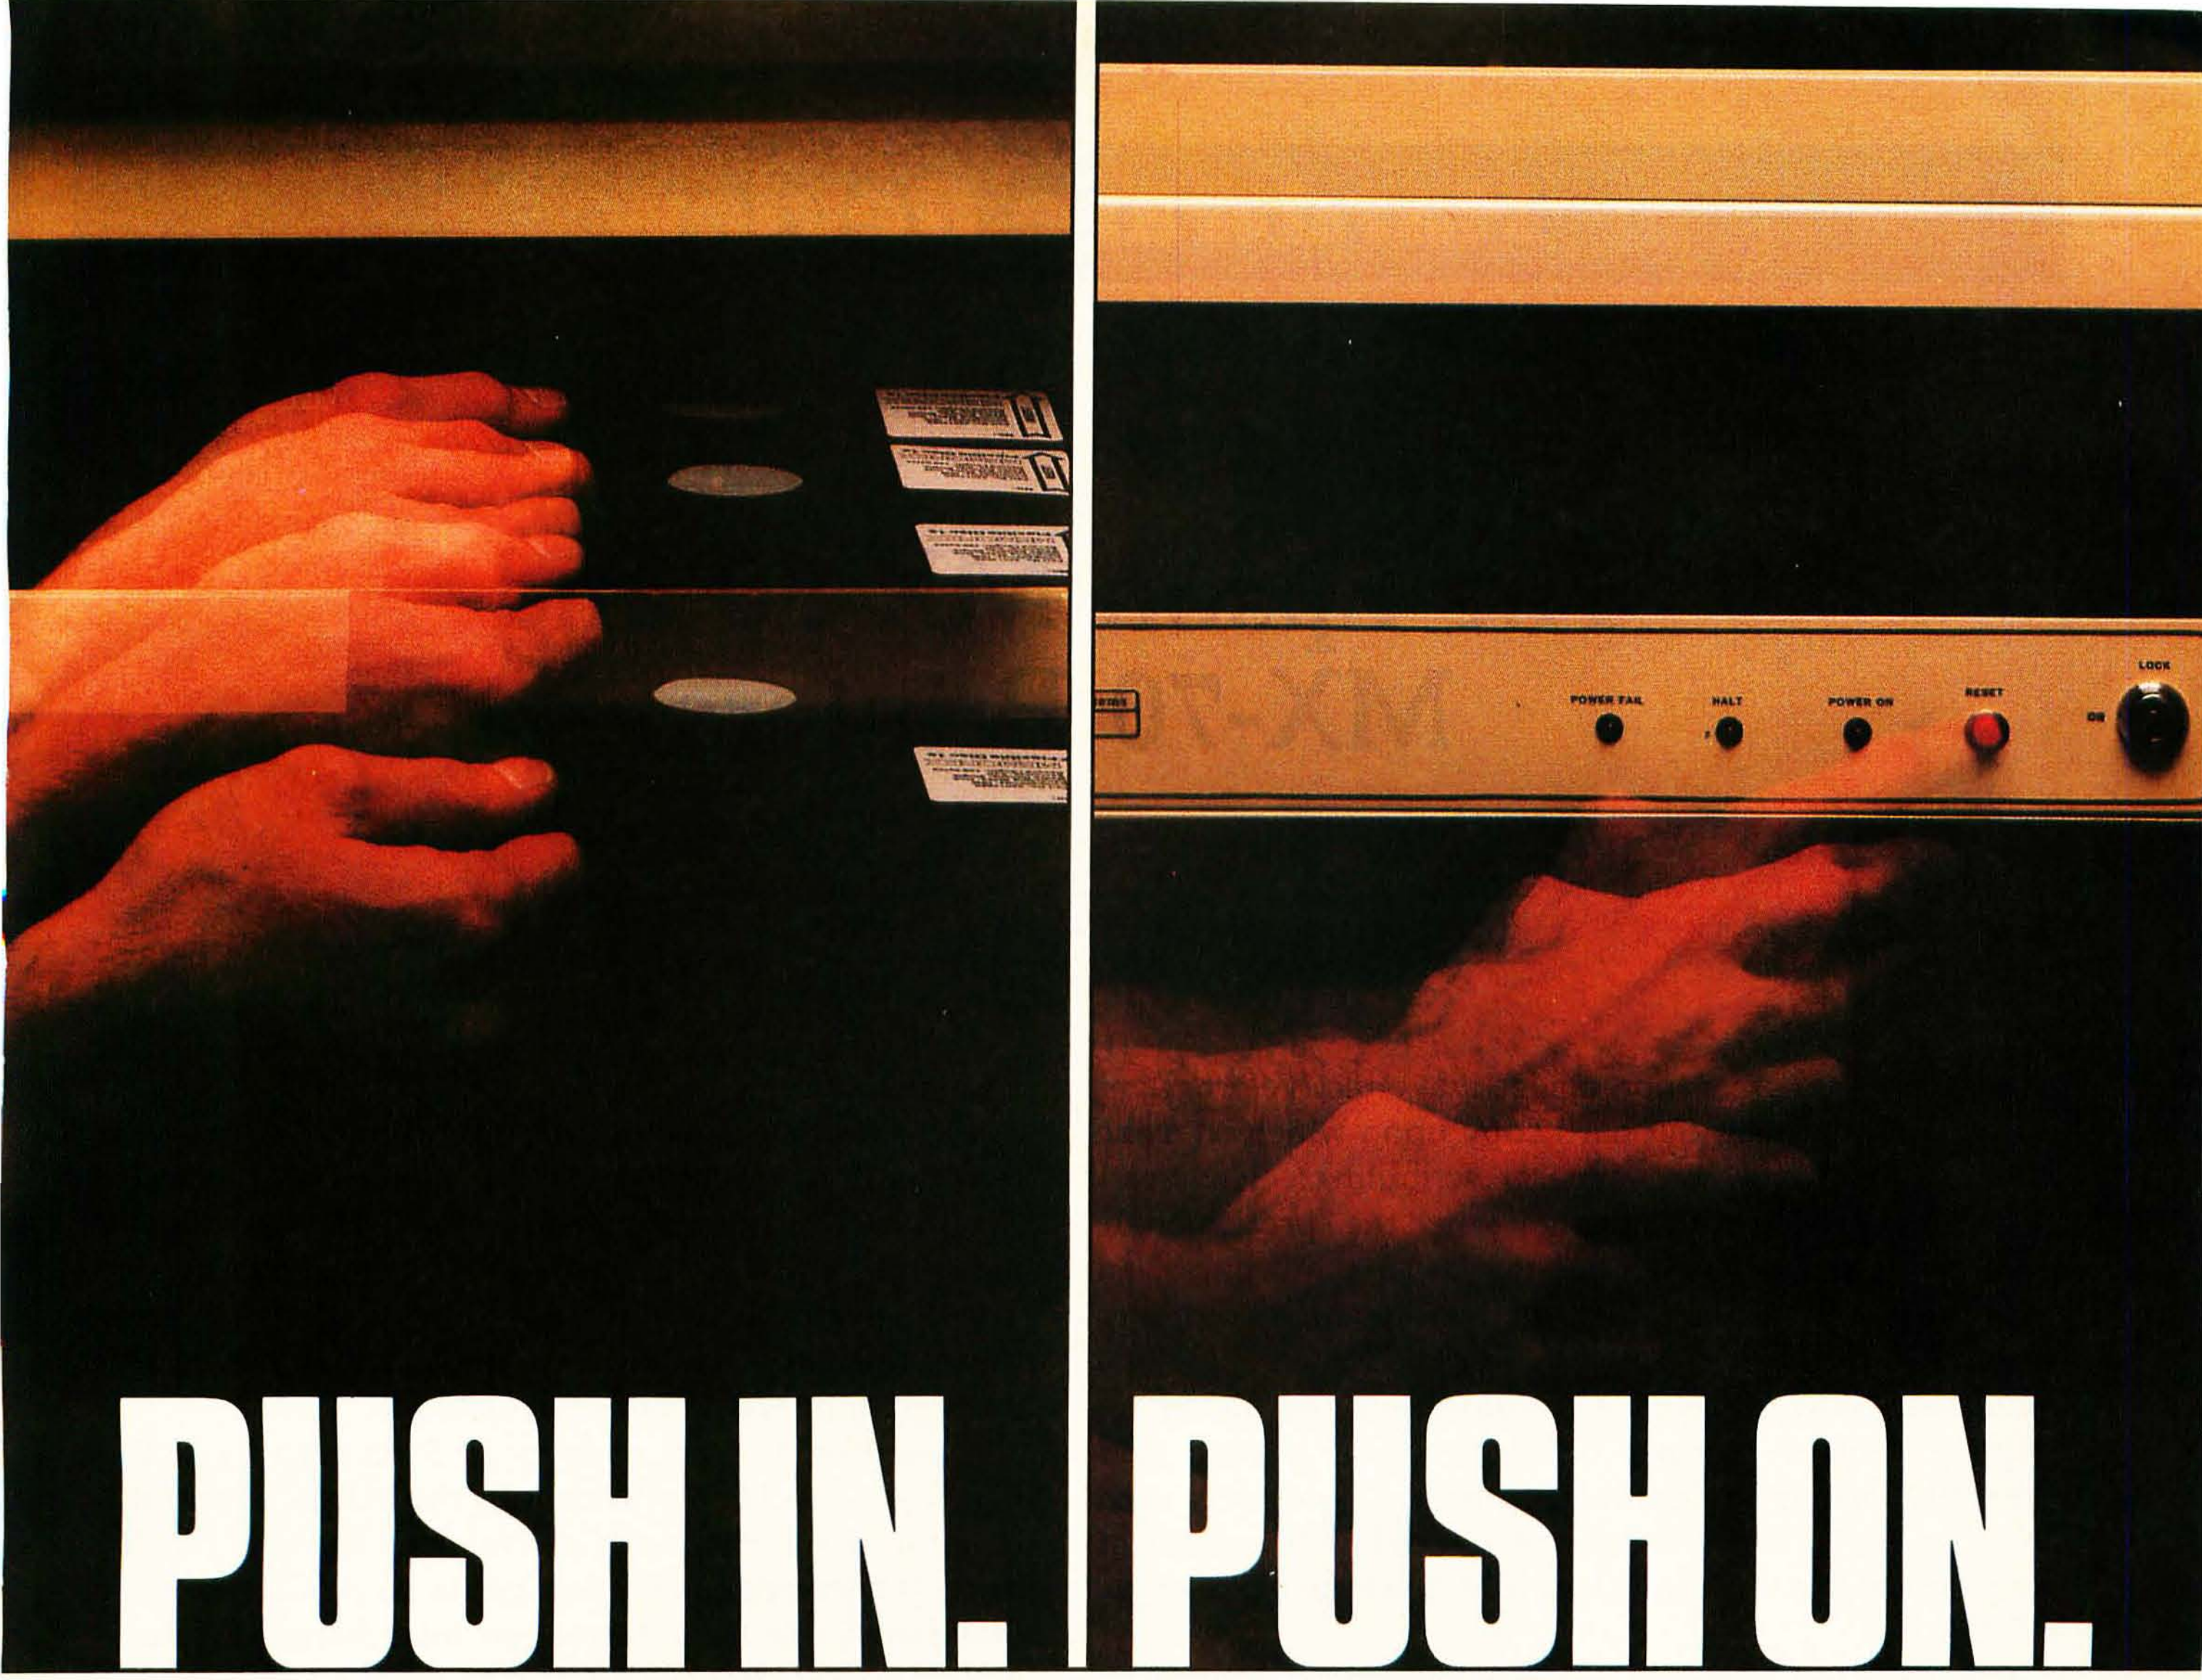

MAKING MINIS OUT OF MICROS.

Here's the system builder's solution for successful computers and applications. Push in the CCS component. **Push in** the operating software. And **push on** with your application. CCS systems and components are designed to go together quickly, and to keep running reliably, with a proven return rate of less than 1%.

And you get performance. The systems deliver hardware vectored interrupts and the capability to interleave DMA data transfers with rates as high as two megabytes per second, plus bank select memory of up to 512K bytes. This 8-bit system provides single user, multiuser, and multitasking capability with ample speed to prevent operator waiting or loss of incoming real-time data.

The systems are available with CP/M or MP/M operating systems. For real-time or multiuser applications, the CCS OASIS real-time multitasking operating system supports re-entrant programs and relocatable code modules, with facilities for task-to-task communication, file protection, time-of-day bookkeeping, spooling, task overlay, dynamic memory management, ISAM file structures and device-independent I/O. CCS OASIS includes debug, text editing, linkage, and file sort utilities; the system supports a host of existing languages, applications, and utilities from a range of vendors.

Powerful computer systems you can configure to your demanding requirements quickly, and with confidence. Choose from a variety of systems. Expand with CCS board-level modules for memory, disk control, high-speed arithmetic, and I/O, plus subsystems for floppy and hard disk storage.

If you sell, install, or use computer systems, you should know more about the CCS product line. **We've got a lot more to tell. Tear out and return the coupon for more information. Or call.**

○ Please have a sales representative call me.
○ Please send more information on CCS Systems and Expansion Modules.

Name
Company
Address
City/State/Zip
Phone: ( )

California Computer Systems
250 Caribbean Drive
Sunnyvale, CA 94086
(408) 734-5811

CP/M and MP/M are trademarks of Digital Research. OASIS is a trademark of Phase One Systems.

Circle 58 on inquiry card.

The Epson MX-80 and MX-70 Printers

Kevin Cohan, Technical Editor

Small system users soon realize that effective programming is difficult without hard copy upon which to make notes, corrections, and general scribblings. However, realization often turns to dismay when the "professional" quality printer carries a price tag larger than that of an otherwise complete popular disk-based microcomputer system. In the past, inexpensive printers (when available) have been slow, unreliable, inconvenient (eg: many require expensive thermal or electrostatic paper), and generally lacking in desirable features. Those users with less than $1000 to spend have been faced with a choice of such a printer or a refurbished IBM Selectric or Teletype ASR33.

Epson Inc has aimed its two new low-priced dot-matrix printers, the MX-80 and the MX-70, squarely at this under-$1000 market (see photo 1). Both have features normally found only in professional printers that are priced accordingly. (Active in the computer printer business in Japan for over fifteen years, Epson has also supplied print heads and mechanisms for such well-known printer manufacturers as Anadex.)

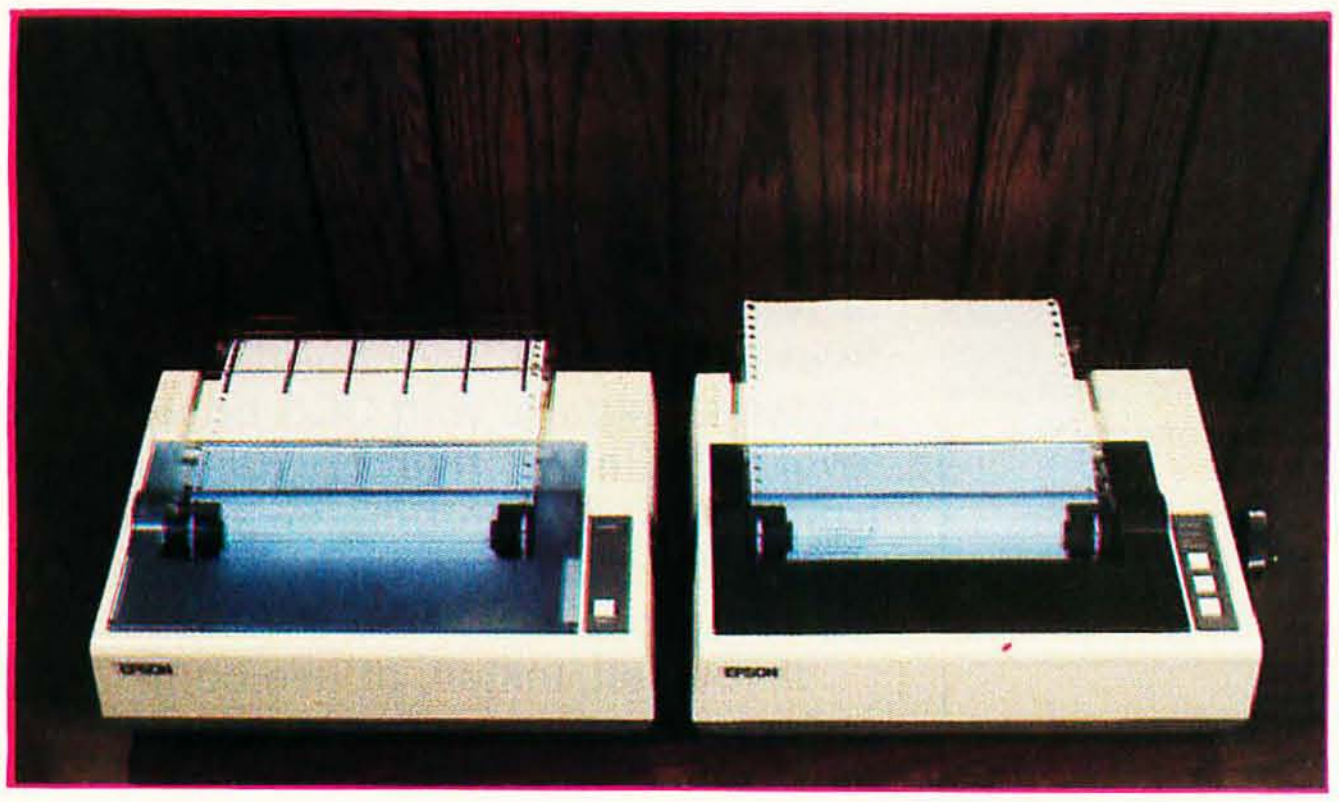

Photo 1: *The Epson MX-70 and MX-80 printers. The MX-70 (left) is a prototype of the final version which has a tan rather than a cream body.*

The MX-80

The more expensive MX-80 printer has so many features that a complete learner's manual accompanies the instruction manual. This manual (written by David A Lien and published for Epson by Compusoft) guides the user through basic setup procedures and also describes the less obvious capabilities of the MX-80: it can do much more than provide hard-copy listings!

Measuring 37.4 cm wide by 30.5 cm deep by 10.7 cm high (14⁷⁄₁₀ by 12 by 4⅕ inches), the MX-80 is not much larger in size than a stack of five or six issues of BYTE. It has a 9-wire print head that prints 96 ASCII (American Standard Code for Information Interchange) characters with lowercase descenders and 64 graphics characters on a 9 by 9 dot matrix, as shown in listing 1. The print head has an estimated life of over 50,000,000 characters, and it can be easily replaced. Print speed is 80 cps (characters per second) bidirectionally, and a long-life print ribbon is contained in an easily removable cartridge.

External features (shown in photo 2) include a metal paper-guide rack, manual paper-advance knob, power switch, Centronics-type 36-pin cable connector, three control pushbuttons, and four green indicator LEDs (light-emitting diodes). In addition, the MX-80 has a tractor-feed paper mechanism and can use three-ply paper (original and two carbon copies). The On-Line pushbutton toggles the printer between on- and off-line modes. The FF (form feed) and LF (line feed) pushbuttons, functional only when the printer is off-line, advance the paper by one form (ie: page length) and one line, respectively. The distance that the paper advances may be changed under software control.

The four LEDs indicate Power, Printer Ready, No Paper, and On-Line. A software-controllable buzzer is located inside the printer case and is activated by a reed switch on the paper guide when the printer runs out of paper. A self-test mode may be activated by turning the printer on while depressing the LF pushbutton; in this mode, all characters provided by internal software are

Circle 260 on inquiry card. ⟶

WHY THE MICROSOFT RAMCARD™ MAKES OUR SOFTCARD™ AN EVEN BETTER IDEA.

Memory — you never seem to have quite enough of it.

But if you're one of the thousands of Apple owners using the SoftCard, there's an economical new way to expand your memory dramatically.

16K ON A PLUG-IN CARD.

Microsoft's new RAMCard simply plugs into your Apple II,® and adds 16k bytes of dependable, buffered read/write storage.

Together with the SoftCard, the RAMCard gives you a 56k CP/M® system that's big enough to take on all kinds of chores that would never fit before (until now, the only way to get this much memory was to have an Apple Language Card installed).

GREAT SOFTWARE: YOURS, OURS, OR THEIRS.

With the RAMCard and SoftCard, you can tackle large-scale business and scientific computing with our COBOL and FORTRAN languages. Or greatly increase the capability of CP/M applications like the Peachtree Software accounting systems. VisiCalc™ and other Apple software packages can take advantage of RAMCard too.

And RAMCard gives you the extra capacity to develop advanced programs of your own, using the SoftCard and CP/M. *Even with the RAMCard in place, you can still access your ROM BASIC and monitor routines.*

JOIN THE SOFTCARD FAMILY.

The RAMCard is just the latest addition to the SoftCard family — a comprehensive system of hardware and software that can make your Apple more versatile and powerful than you ever imagined.

Your Microsoft dealer has all the exciting details. Visit him soon, and discover a great idea that keeps getting better.

Microsoft Consumer
Products, 400 108th Ave. N.E.,
Suite 200, Bellevue, WA 98004.
(206) 454-1315.

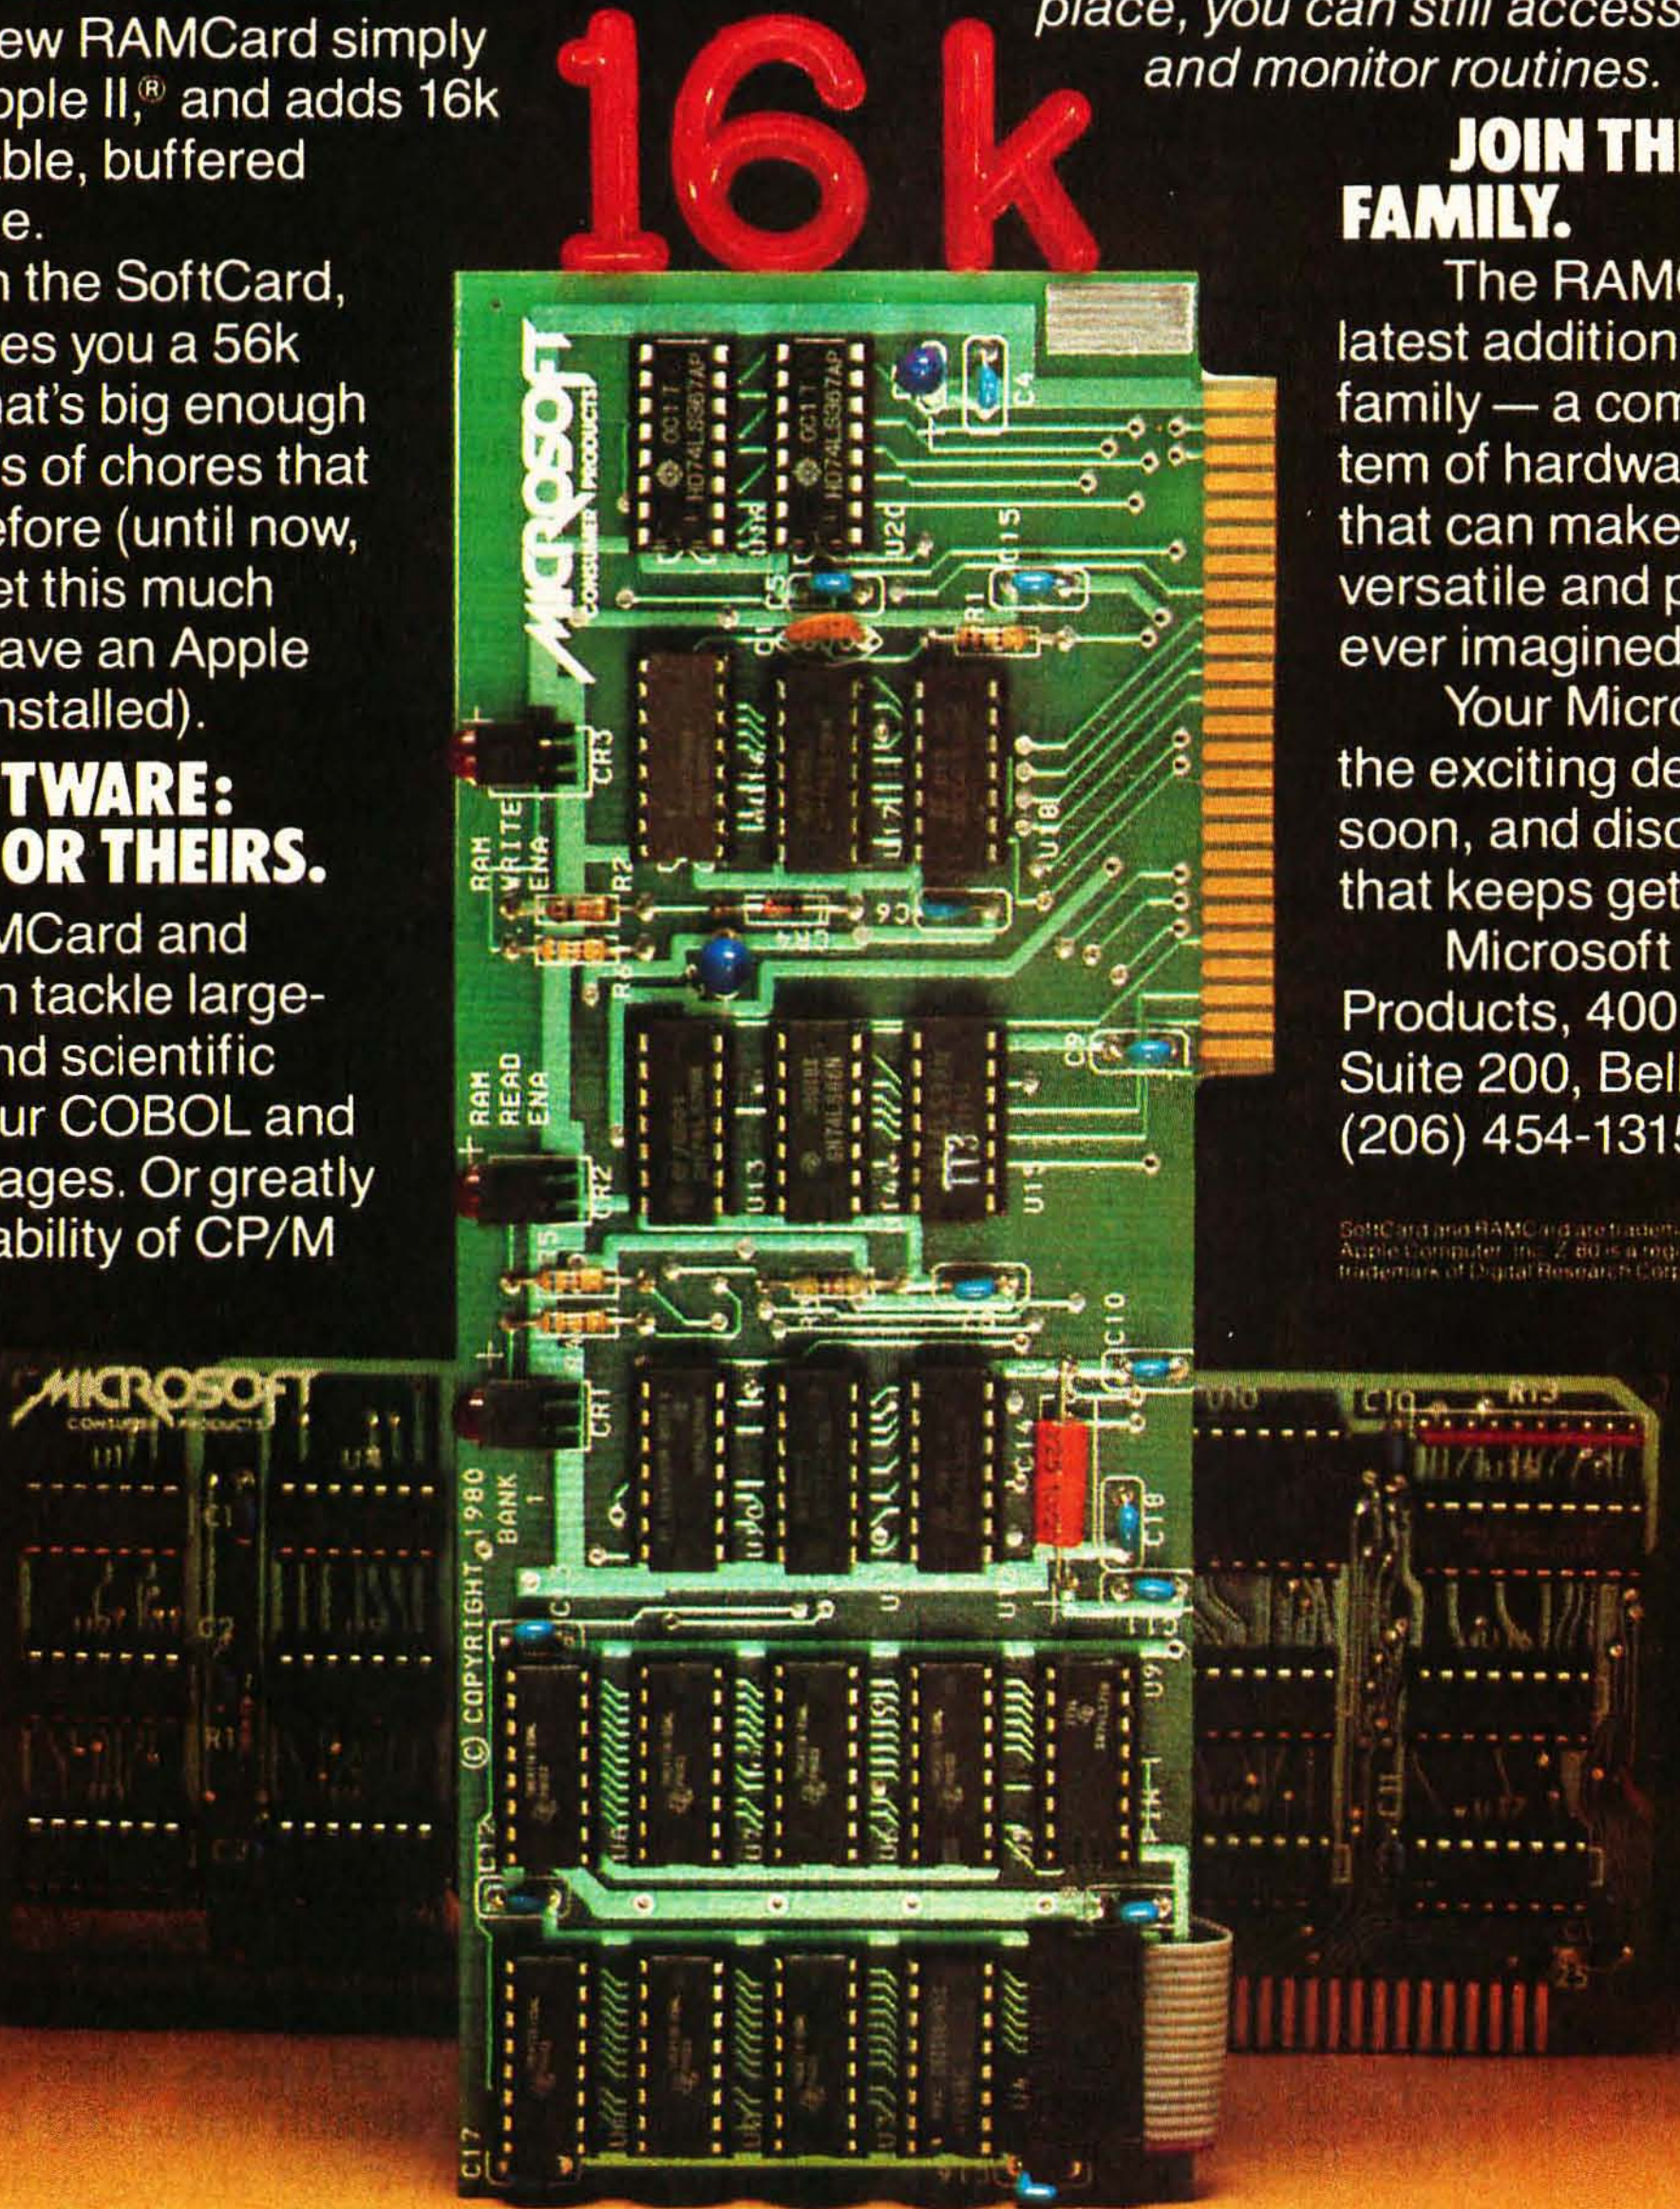

MICROSOFT

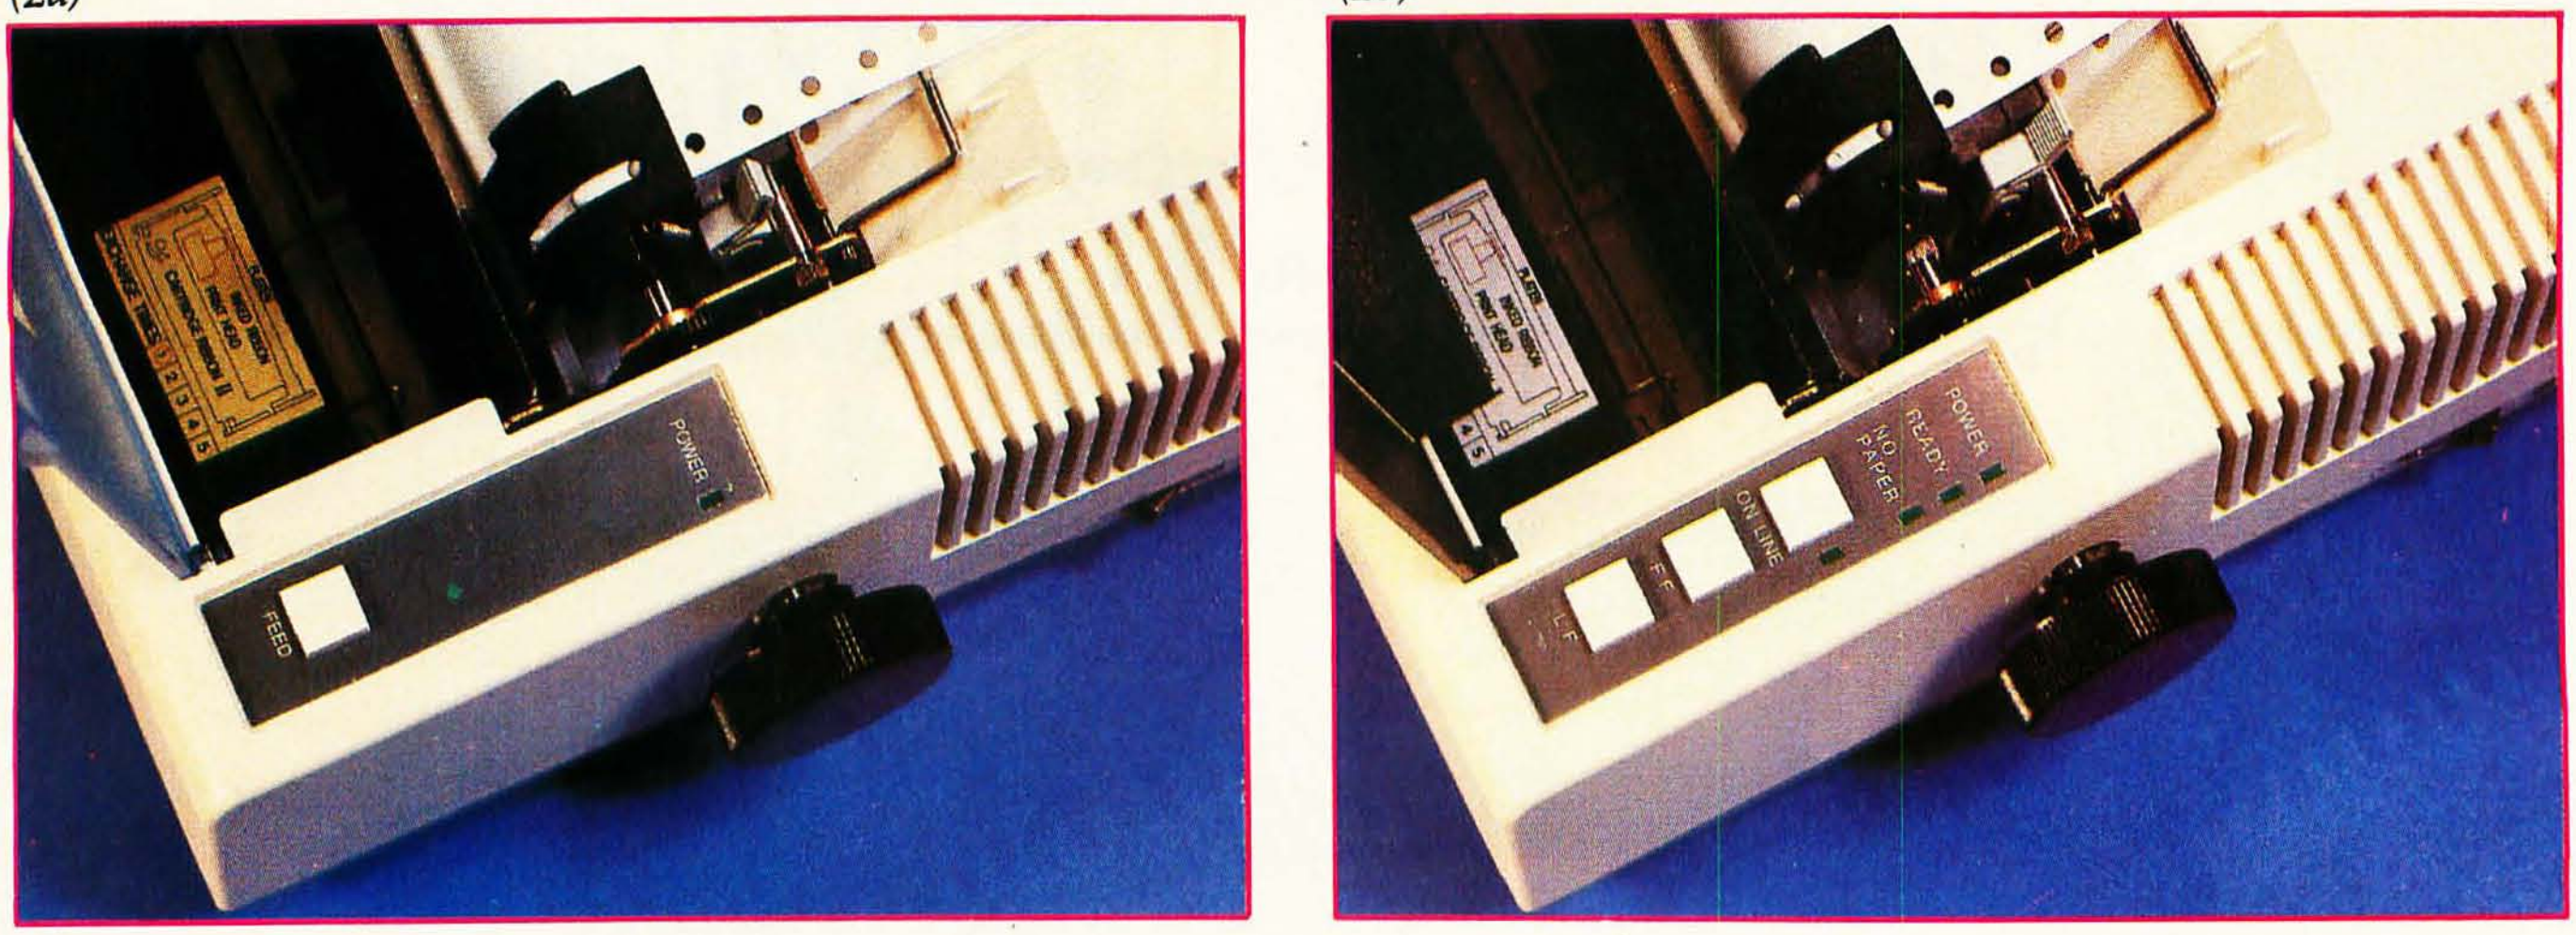

(2a)

(2b)

Photo 2: *Control panels for the Epson MX-70 and MX-80 printers. Photo 2a shows the FEED (paper feed) button and the green Power LED (light-emitting diode) on the MX-70. Photo 2b shows the control panel of the MX-80, which has Power, Ready, No Paper, and On-Line LEDs, and On-Line, FF (form feed), and LF (line feed) buttons.*

repeatedly printed out to test the operation of the print head, ribbon guide, and motor mechanisms.

Internally, the MX-80 is a truly intelligent printer that incorporates its own microprocessor: an Intel 8049 single-chip 8-bit processor with 2 K bytes of masked ROM (read-only memory), 128 bytes of programmable memory, and twenty-seven I/O (input/output) lines. This microprocessor coordinates the internal logic and controls the two precision stepper motors. One motor moves the print head, while the other advances the paper. The microprocessor is aware of the position of the print head at any given moment and actively seeks the shortest means of travel to the next print position. This feature, in combination with the bidirectional printing capability, constitutes the logical-seeking function, which increases the effective printing speed and minimizes head-travel time to reduce head wear.

Several options may be selected via two internal DIP (dual in-line pin) switches; these include auto line-feed, a full TRS-80 graphics set or a Japanese Katakana character set, and special characters for the US, England, Germany, and France (see listing 2). This last feature allows the printing of umlauts, accented letters, and other characters that are generally unavailable on personal computer printers.

Under software control, the user may select one of three print densities: 2, 4, or 6.5 characters per centimeter (5, 10, or 16.5 characters per inch), which results in 40, 80, or 132 characters on a line. Line spacing (ie: the distance the paper advances when a line-feed code is transmitted) has a default value of 0.423 cm ($\frac{1}{6}$ inch), but it may be set from 0.035 cm ($\frac{1}{72}$ inch) to 3.00 cm ($1\frac{13}{72}$ inch) in increments of 0.035 cm ($\frac{1}{72}$ inch)—the distance between two wires on the print head. This presents some interesting possibilities.

The number of lines per form defaults to sixty-six but may be set at any whole number less than that. The user may specify up to sixty-four vertical tabs per form and up to 112 horizontal tabs per line. An emphasized character

At a Glance

Name
Epson MX-80

Use
Dot-matrix impact printer

Manufacturer
Epson America Inc
23844 Hawthorne Blvd
Torrence CA 90505
(213) 378-2200

Dimensions
37.4 cm wide by 30.5 cm deep by 10.7 cm high ($14\frac{7}{10}$ by 12 by $4\frac{1}{5}$ inches)

Price
$645

Features
Prints 96 ASCII and 64 graphics characters in a 9 by 9 dot matrix (lowercase letters have descenders); 80 cps bidirectional print speed with end-of-line seeking function (increases average print speed); tractor-feed paper mechanism; prints TRS-80 graphics, Japanese Katakana set, special characters for the US, England, France, and Germany; prints an original and up to two carbon copies; programmable tabs; replaceable print head; and a long-life ribbon cartridge

Additional Hardware
Interface card needed for Apple II

Documentation
MX-80 User's Manual by David A Lien, 22 by 28 cm ($8\frac{1}{2}$ by 11 inches), about 100 pages

Options
TRS-80 cable (about $25); Apple II interface card with cable (about $110); IEEE-488 or serial interface (about $65 each); serial interface with 2 K-byte buffer (about $150); 960 dot-per-line graphics option (about $100)

Circle 158 on inquiry card. →

TRANSFER YOUR DATA

INTO

HARDCACHE™

THE HARDCACHE SUBSYSTEM:

- ✦ 30 Megabytes (Formatted) Winchester Disk
  Average access time 48 milliseconds
- ✦ Cartridge tape drive provides:
  Complete backup in under 10 minutes
  File save/reload
  Software distribution
- ✦ S-100 Bus Intelligent Interface Card
  DMA or programmed I/O data transfer
  Disk throughput optimizer
  Bootstrap ROM - switch selectable
  Time of day clock - battery powered
- ✦ Compatible with
  CROMEMCO
  VECTOR GRAPHICS
  NORTH STAR and other
  S-100 based computer systems
- ✦ Installs on any CP/M or
  MP/M system*

*CP/M and MP/M are registered trademarks of Digital Research

EXECUTIVE SYSTEMS, INC.
15300 Ventura Boulevard
Sherman Oaks, California 91403
(213) 990-3457

Listing 1: *ASCII character set as printed on the Epson MX-80 (figure 1a) and the MX-70 (figure 1b) low-cost printers. Note the lack of descenders on lowercase letters in the MX-70 example.*

1a



```
  ! " # $ % & ' ( ) * + , - . / 0 1 2 3 4 5 6 7 8 9 : ; < = > ? @ A B C D E F G
H I J K L M N O P Q R S T U V W X Y Z [ \ ] ^ _ ` a b c d e f g h i j k l m n o
p q r s t u v w x y z { | } ~
```

1b



```
  ! " # $ % & ' ( ) * + , - . / 0 1 2 3 4 5 6 7 8 9 : ; < = > ? @ A B C D E F G
H I J K L M N O P Q R S T U V W X Y Z [ \ ] ^ _ ` a b c d e f g h i j k l m n o
p q r s t u v w x y z { | } ~
```

Listing 2: *The MX-80 has several user-selectable font options, including graphics characters that are TRS-80 compatible (2a), Japanese Katakana (2b), and special characters for the US, England, France, and Germany (2c).*

2a



2b



```
  ｡ ｢ ｣ ､ ･ ｦ ｧ ｨ ｩ ｪ ｫ ｬ ｭ ｮ ｯ ｰ ｱ ｲ ｳ ｴ ｵ ｶ ｷ ｸ ｹ ｺ ｻ ｼ ｽ ｾ ｿ ﾀ ﾁ ﾂ ﾃ ﾄ ﾅ ﾆ ﾇ
ﾈ ﾉ ﾊ ﾋ ﾌ ﾍ ﾎ ﾏ ﾐ ﾑ ﾒ ﾓ ﾔ ﾕ ﾖ ﾗ ﾘ ﾙ ﾚ ﾛ ﾜ ﾝ ﾞ ﾟ
```

2c

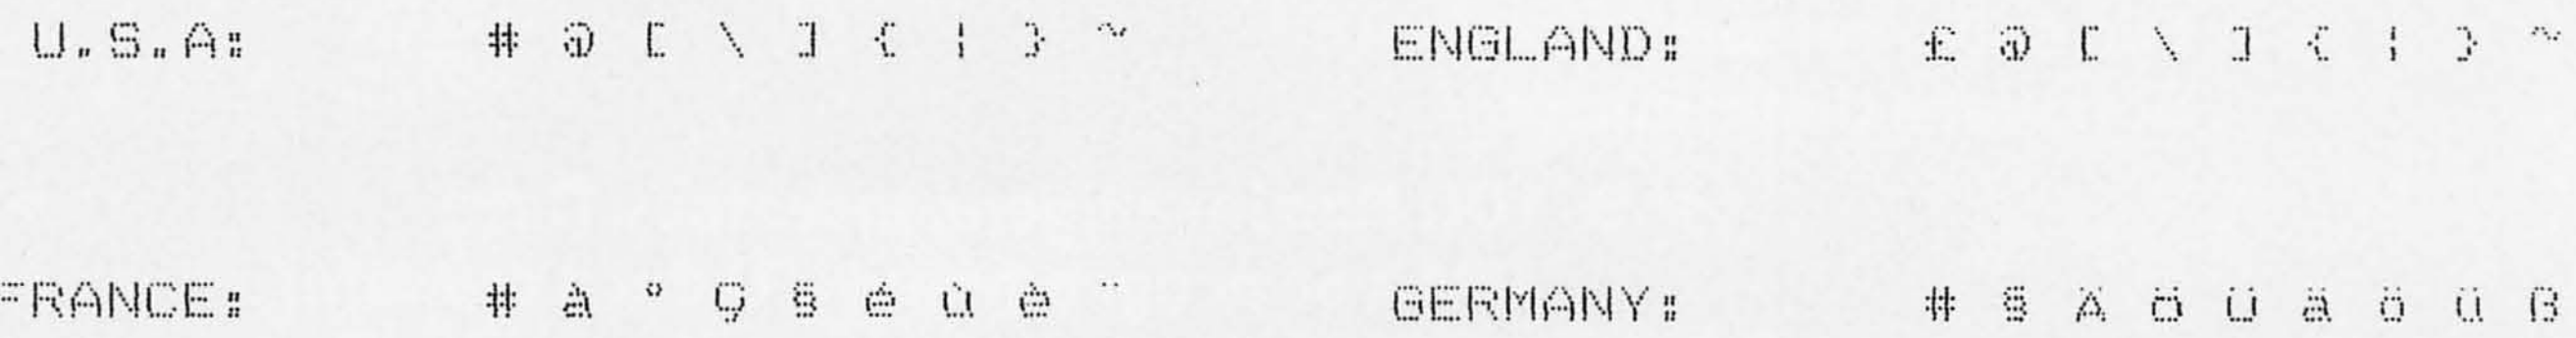

```
U.S.A:     # @ [ \ ] { | } ~          ENGLAND:    £ @ [ \ ] { | } ~


FRANCE:    # à ° ç § é ù è ¨          GERMANY:    # § Ä Ö Ü ä ö ü ß
```

---

mode (where each character is overprinted a second time) and a boldface mode (where the paper is advanced 0.0118 cm [1/216 inch] before overprinting) are also available (see listing 3). The printer slows to 40 cps in these special modes.

For a cost of about $650, this is more printer for the money than any other available.

The MX-70

Similar in appearance to the MX-80, but with fewer features, the MX-70 is available for about $200 less (suggested retail price, $449). A 7-wire print head produces characters on a 7 by 5 dot matrix at a rate of 80 cps, but the unit does not offer the bidirectional logical-seeking capabilities of the MX-80. The MX-70 has only one green LED for power indication and only one general paper-advance (line feed that repeats if held down) pushbutton. The MX-70 uses the same self-test mode as the MX-80.

Internal jumpers select one of two character sets and auto-line-feed on or off. The MX-70 may be ordered with either the Japan/USA or the England/Germany special character set in ROM. The user may software-select 40 or 80 characters per line, or a high-resolution graphics mode where binary bit images are directly printed on a 480 by 7 dot per line matrix (ie: the user can print any combination of dots within this graphics density). Line spacing may be from 0.035 cm to 3.00 cm ($\frac{1}{72}$ inch to $1\frac{13}{72}$ inch). The ability to advance the paper by the distance between two wires on the print head, combined with the high-resolution graphics mode, gives the user an effective resolution of 480 by 792 dots per standard form. The actual form length may be set from 0.424 cm to 51.2 cm ($\frac{1}{6}$ inch to $20\frac{1}{6}$ inch).

If it seems strange that the MX-70 offers bit-map graphics and the MX-80 doesn't, it will be no surprise for you to learn that by the time this article is printed, Epson will be offering a retrofit option on the MX-80. For about $100, this option will give the MX-80 bit-mapped graphics at either 480 or 960 dots per line: the latter density is twice that of the MX-70.

In this age of runaway inflation...

Look what $795* will buy

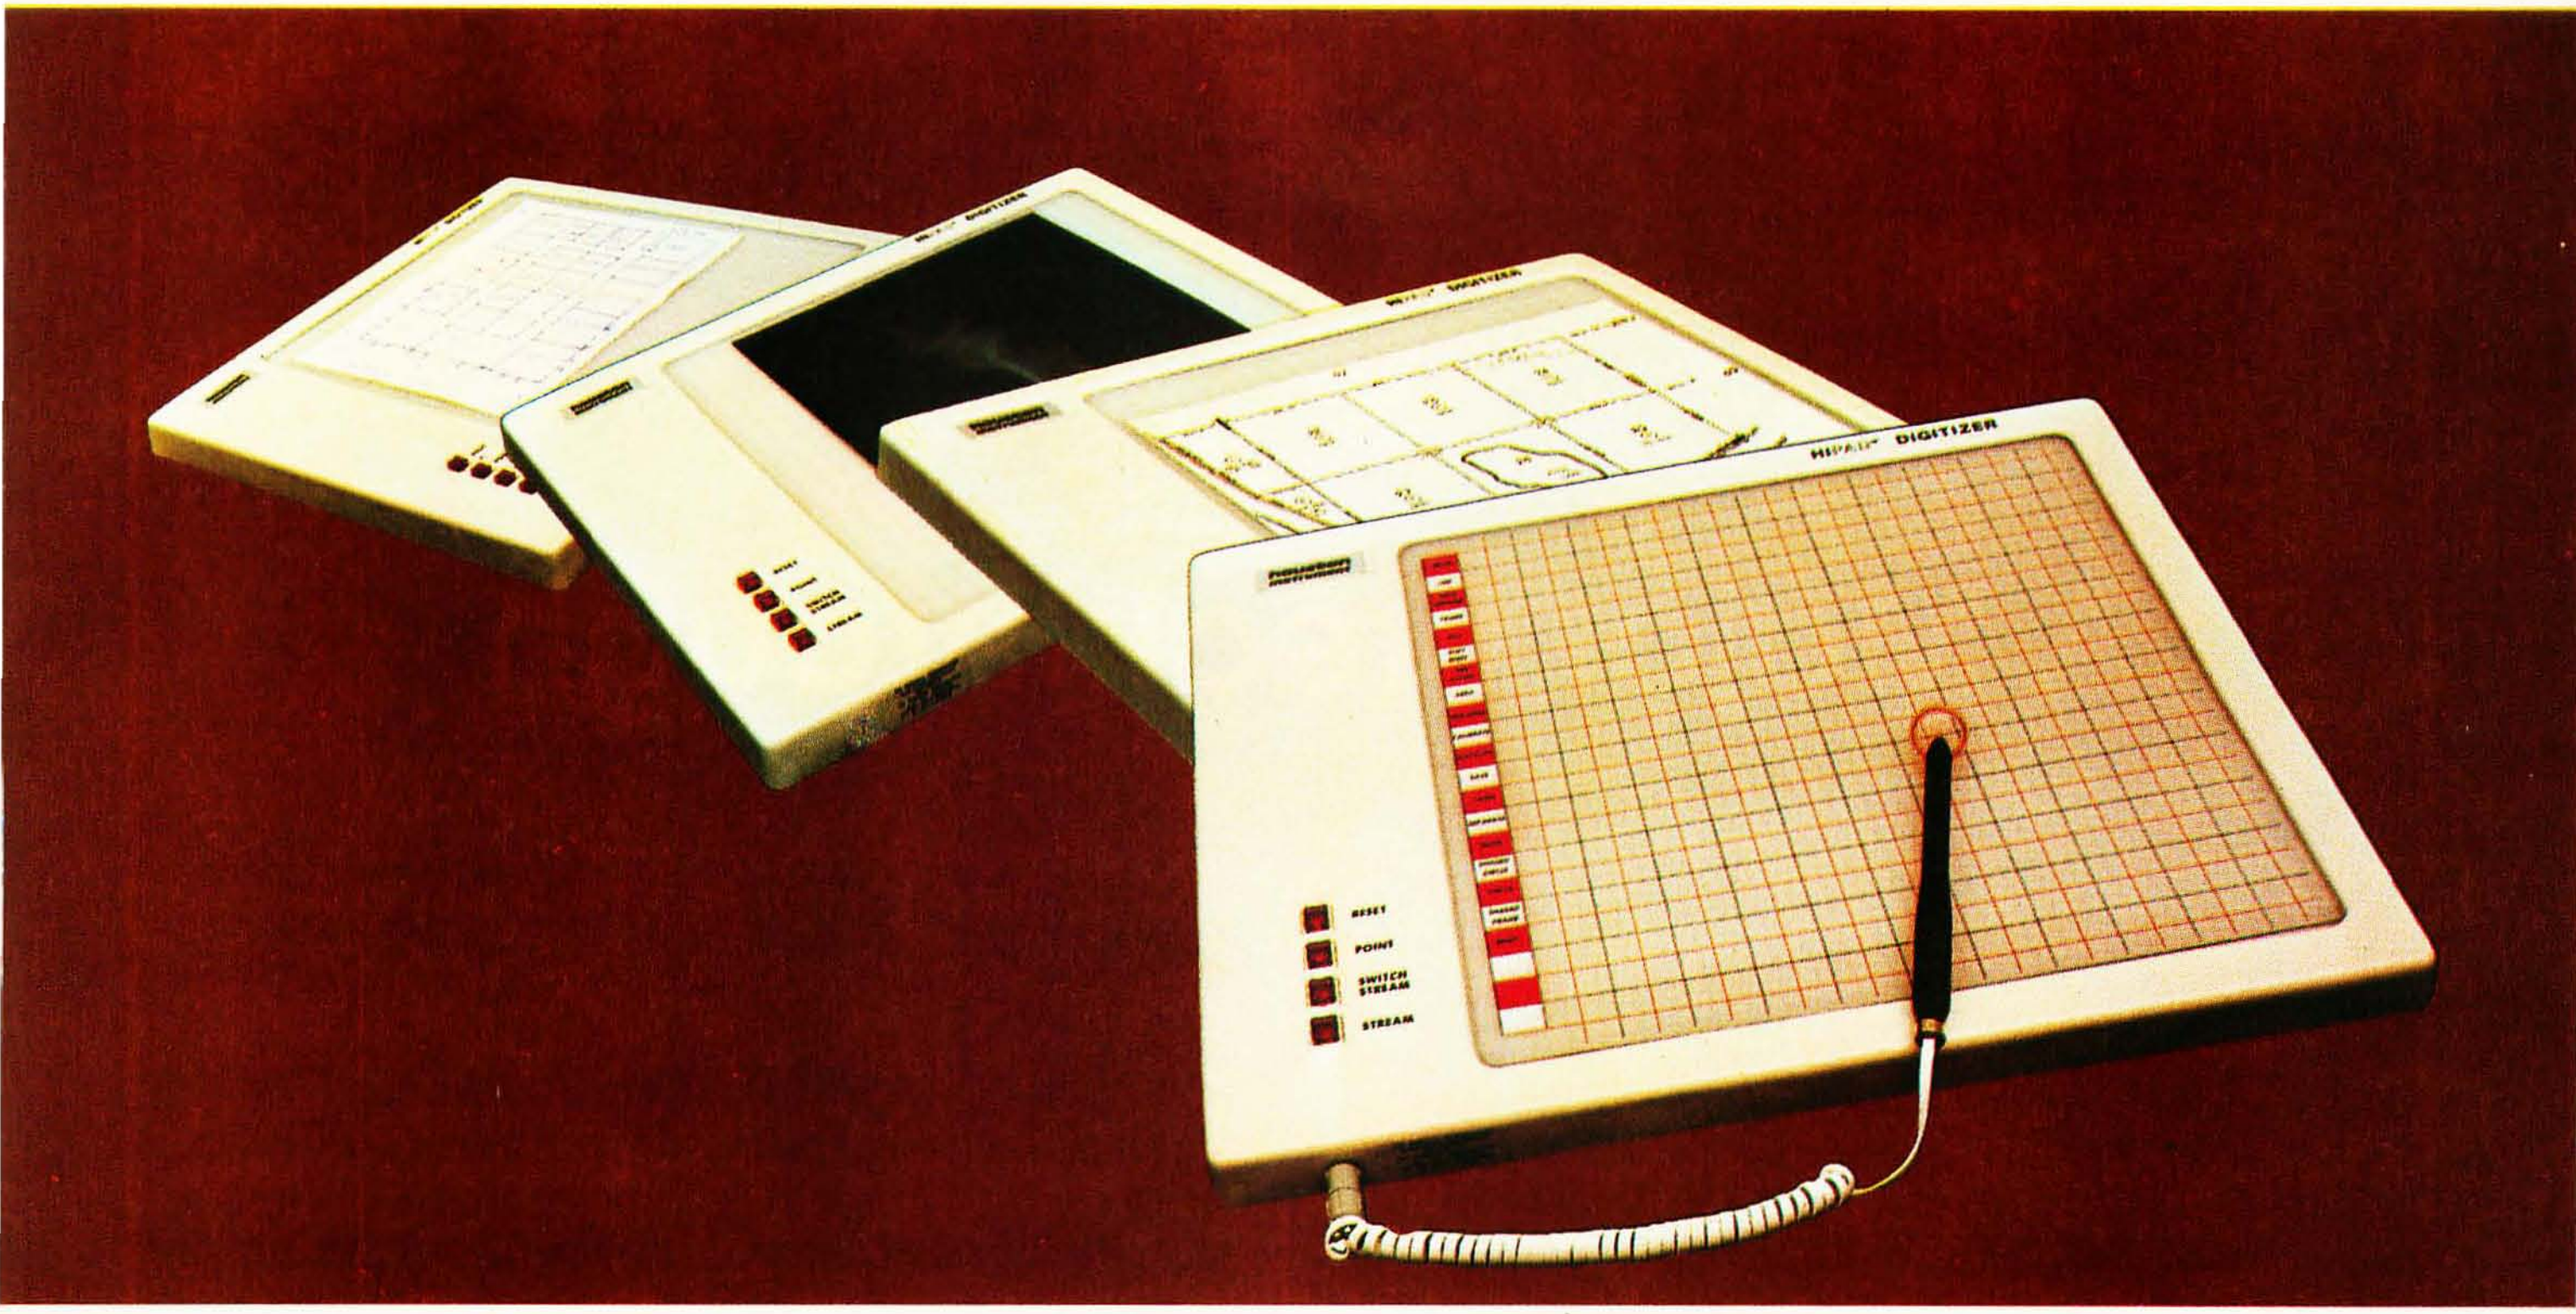

The HIPAD™ digitizer

The ideal input device for the small system user.

Available with stylus or optional cursor.



Available with optional display.

Inexpensive input to your computer

The HIPAD™ digitizer can be used for both converting graphic information into digital values and as a menu. Utilizing either the stylus or the optional cursor, the operator can input graphic data into the computer by locating individual points on the digtizers 11″ × 11″ (28cm × 28cm) active area. In the "stream mode" a continuance of placements of coordinate pairs may be input.

Not a kit, the HIPAD™ comes complete with both RS-232C and parallel interfaces and has its own built-in power source. The origin is completely relocatable so coordinates may be positive or negative for a true reference value and oversized material may be input by simply resetting the origin.

Accurate positional information, free form sketches, even keyboard simulation

All can be entered using the multi-faceted HIPAD™ digitizer. Its capabilities and low price make the UL listed HIPAD™ a natural selection over keyboard entry, inaccurate joysticks, or expensive approximating light pens. It's perfect for inputting isometric drawings, schematics, X-rays, architectural drawings, business graphs, and many other forms of graphic information, as well as creating your own graphics.

Use it with Apple II™, TRS-80 Level II™, PET™ or other popular computers

The HIPAD's™ built-in RS-232C and parallel 8 bit interfaces make it all possible. (For Apple II order DT-11A, for TRS-80 or PET order DT-11). Furthermore, you get English or metric scaling, data format (Binary/BCD/ASCII), selectable baud rates, and resolution of either .005″ or .01″.

For complete information contact Houston Instrument, One Houston Square, Austin, Texas 78753. (512)837-2820. For rush literature requests, outside Texas call toll free 1-800-531-5205. For technical information ask for operator #5. In Europe contact Houston Instrument, Rochesterlaan 6, 8240 Gistel, Belgium. Telephone 059/27-74-45.

TM HIPAD is a trademark of Houston Instrument
TRS-80 is a trademark of Tandy Corporation
APPLE is a trademark of Apple Computer Inc.
PET is a trademark of Commodore Business Machines, Inc.

houston instrument
GRAPHICS DIVISION OF
BAUSCH & LOMB

Circle 186 for literature
Circle 187 to have representative call

Visit us at NCC-Booth 911

*U.S. Suggested retail price

ANNOUNCING

A Major Breakthrough

The SYSTEM 2800

The System 2800 is the next logical step in the continuing line of innovative products from the Systems Group.

Unbeatable S-100 Memory Boards
First was the development of the DMB6400 series of S-100 Memory boards featuring the innovative Bank Select switching technique. This enables users to software select up to four totally independent memory banks per board.

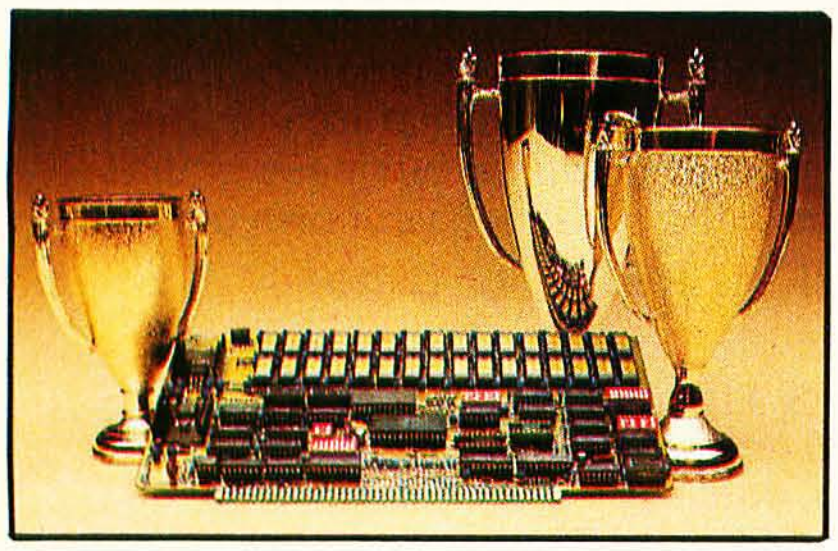

The 2nd Generation
Then came the 2nd Generation of IEEE S-100 COMPATIBLE Z80 PROCESSORS, FLOPPY DISK CONTROLLERS and SERIAL I/O BOARDS. Each has been designed for single user, multi-user or network operating systems such as CP/M®, MP/M™, CP/Net™ and OASIS™.



The Next Logical Step ...
We challenged our design team to create an innovative yet competitive system utilizing our existing line of field proven, dependable S-100 boards. The result: a highly reliable, quality built, state of the art microcomputer that gives you the cost/performance edge you need to be a leader in your field.

The System 2800 comes with a choice of operating systems: CP/M with an enhanced CBIOS for single user systems and either MP/M or OASIS for multi-user, multi-tasking systems. MP/M is available with either a standard or

CP/M MP/M and CP/Net are trademarks of Digital Research
OASIS is a trademark of Phase One Systems

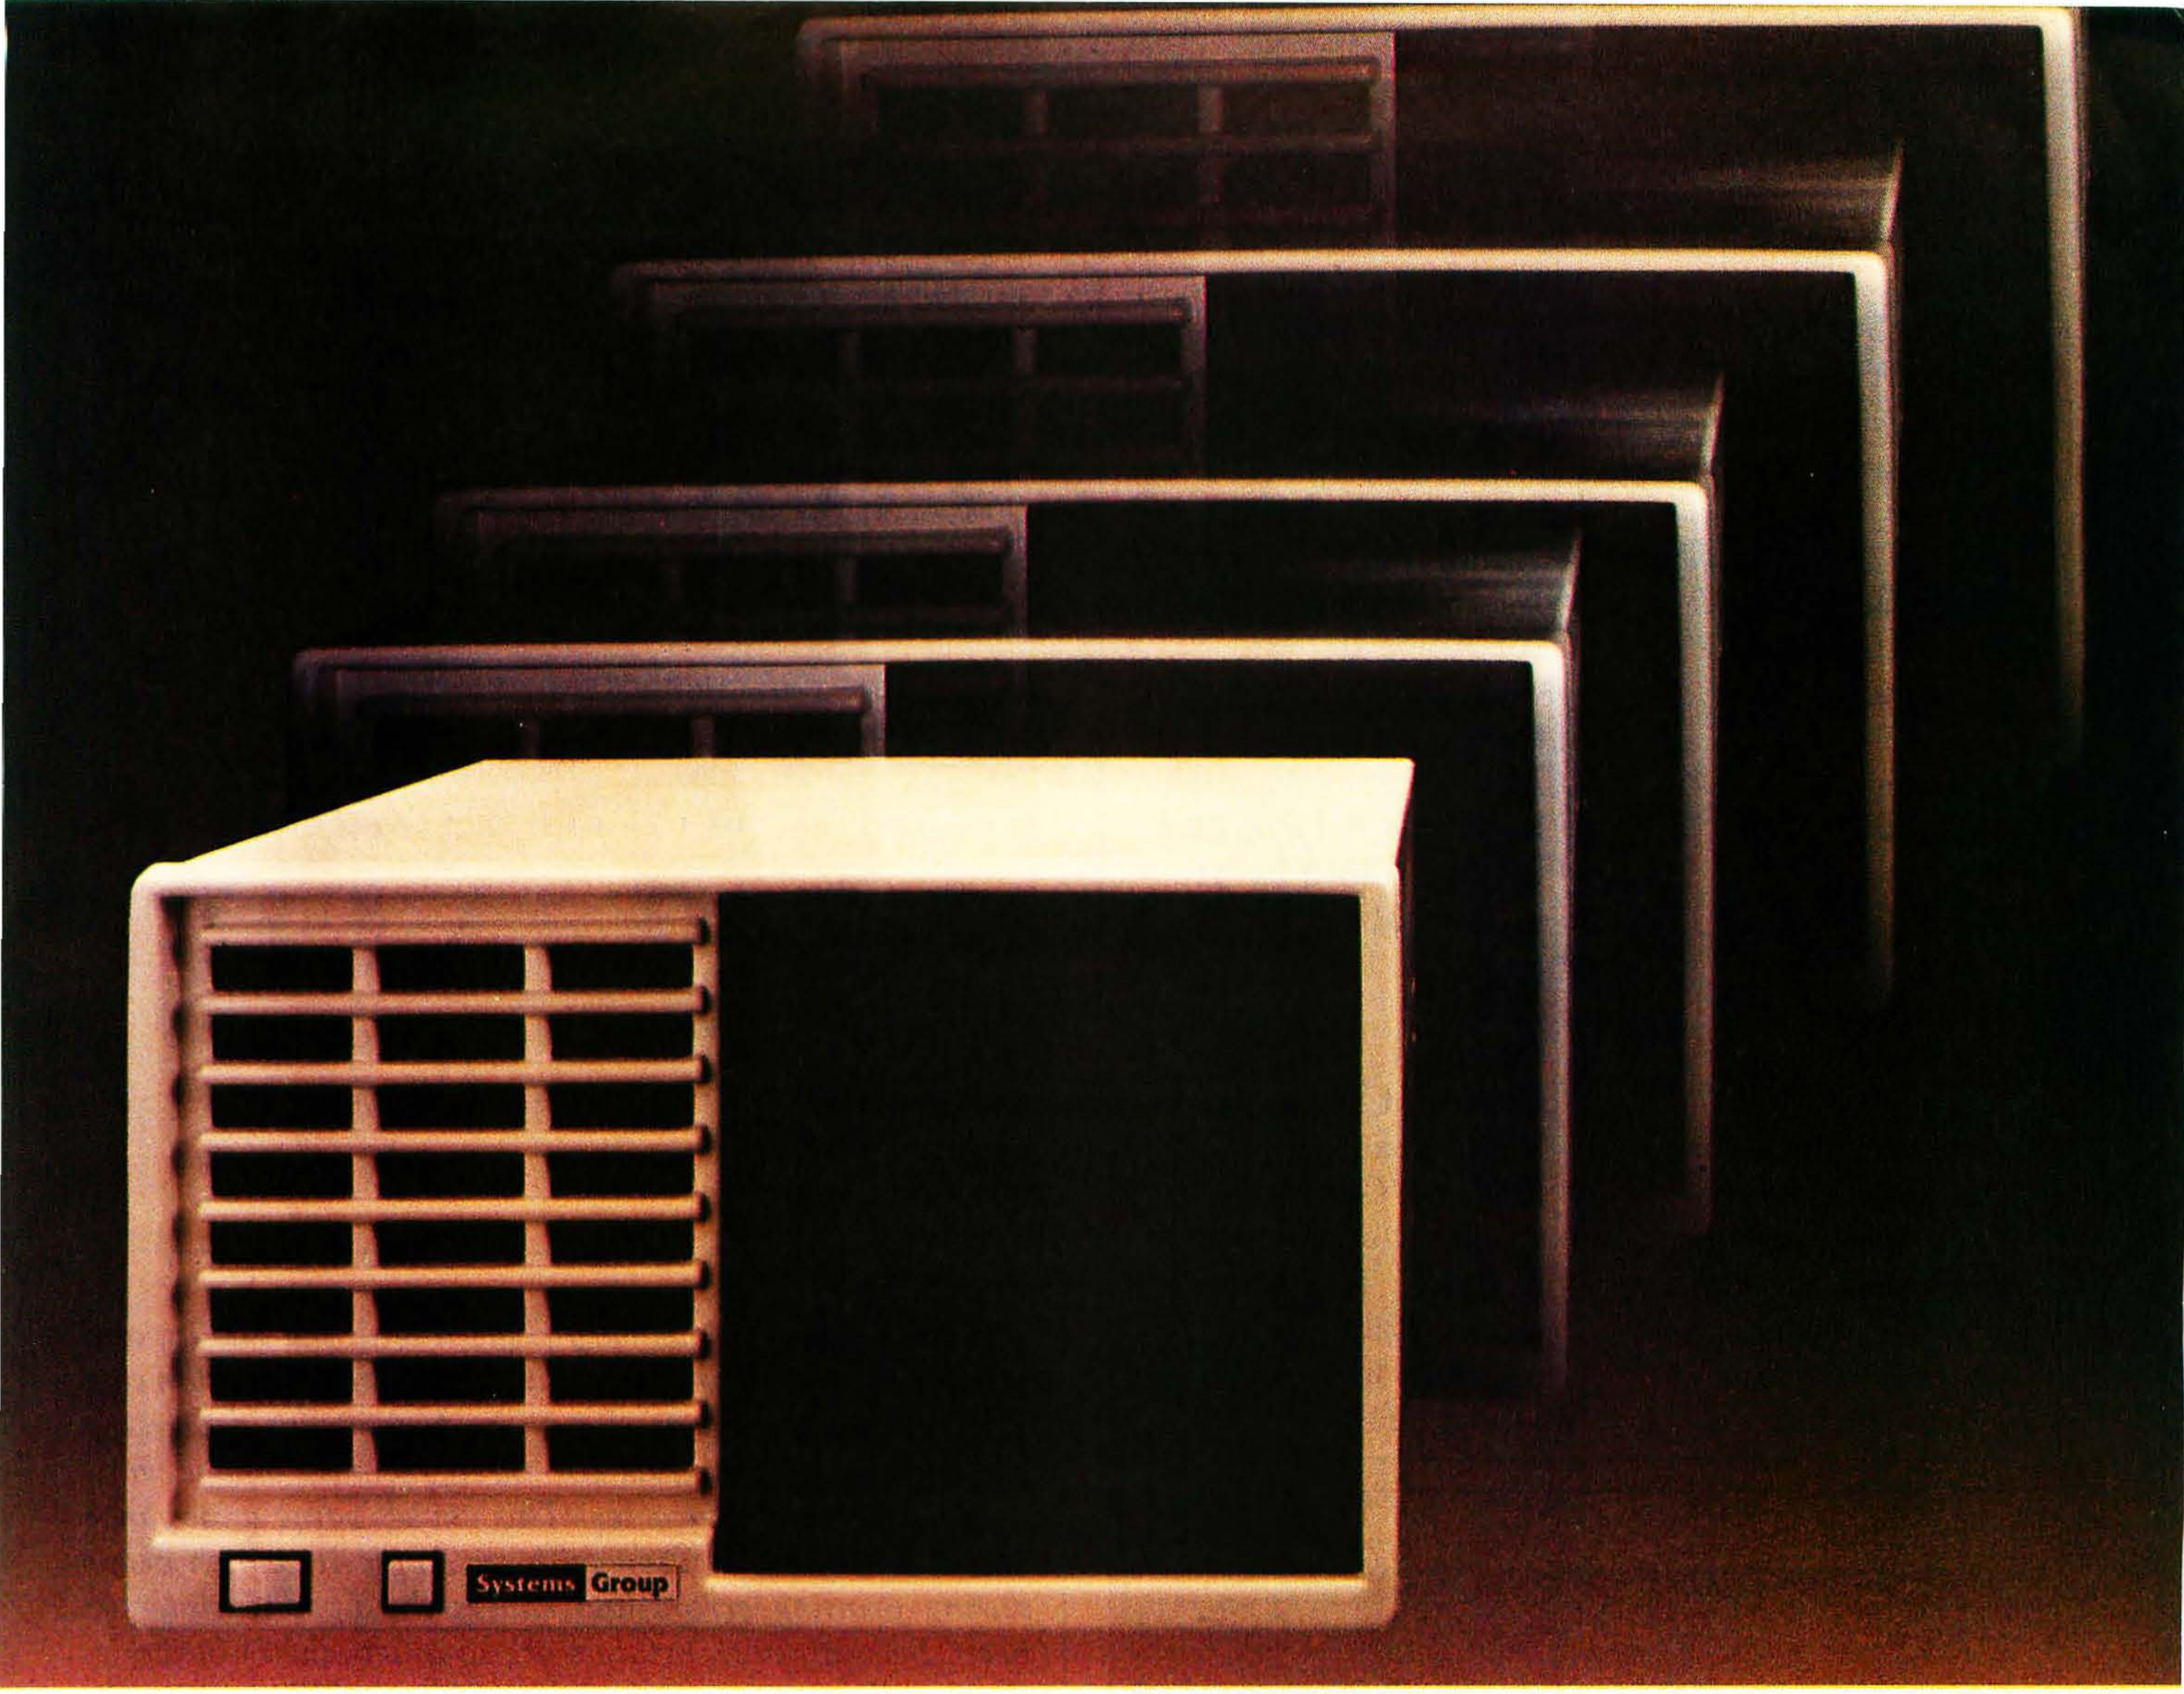

enhanced XIOS. The CP/M based System 2800 provides improved diagnostic reporting capability and increased sector sizes of 1024 bytes yielding disk performance throughput increases up to 400% over standard unblocked systems.

The enhanced multi-user, multi-tasking MP/M based System 2800 provides the same advanced features as CP/M. In addition, this interrupt driven implementation can offer performance throughput increases up to 2000% thru extensive disk buffering for applications requiring a large number of disk accesses.

Also available is the OASIS operating system with ISAM files, automatic record locking and multiple-user print spooling.

All operating systems are available in either floppy or hard disk configurations. The disk drive selection includes single or double sided, double density 8-inch floppies with up to 2.52 megabytes of formatted storage per system, expandable to 5.04 megabytes, and an 8-inch 10 megabyte winchester hard disk.

Cost Effective Reliability

Dealers, OEM's and System Integrators share many common needs. Not the least of these is dependable products. That's why we back our System 2800 with our established reputation for high quality products, superior support, prompt and courteous service, and a one-year warranty.

Take the next logical step. See your nearest computer dealer, or contact us for the complete story on our S-100 family of board products and enhanced systems.

Systems Group

A Division of MEASUREMENT systems & controls
incorporated

1601 Orangewood Ave.
Orange, Calif. USA 92668
(714) 633-4460 TWX/TELEX: 678 401 TAB IRIN

For International Sales Inquiries contact: SIGMA INTERNATIONAL, INC., P.O. Box 1118, Scottsdale, AZ 85252 USA (602) 994-3435 / Telex 165 745 Sigma

See us at booth 5001, NCC show, Chicago, May 4-7, 1981.

At a Glance

Name
Epson MX-70

Use
Dot-matrix impact printer

Manufacturer
See "At a Glance" box for Epson MX-80

Dimensions
Same as MX-80

Price
$449

Features
Prints 96 ASCII characters in a 5 by 7 dot matrix; 80 cps print speed; tractor-feed paper mechanism; prints an original and up to two carbon copies; includes a high-resolution graphics mode, replaceable print head, and long-life ribbon cartridge

Additional Hardware
Interface card needed for Apple II

Documentation
MX-70 User's Manual by David A Lien, 22 by 28 cm (8½ by 11 inches), about 80 pages

Options
Choice of either USA/Japan or England/Germany special character sets in ROM; TRS-80 cable (about $25); Apple II interface with cable (about $110)

Listing 3: *The MX-80 features five various character modes (figure 3a), several of which may be combined to produce different effects. The MX-70 has only two character modes (figure 3b), but has a high-resolution graphics mode (not shown) as a standard feature.*

3a

```
STANDARD CHARACTERS

BOLDFACE CHARACTERS

DOUBLE STRIKE CHARACTERS

COMPRESSED CHARACTERS

D O U B L E   W I D T H   C H A R A C T E R S
```

3b

```
REGULAR CHARACTERS

E X P A N D E D   C H A R A C T E R S
```

[**Editor's note:** *I was very pleased with the quality and reliability of both printers, but would like to mention two very small complaints. First, the MX-80 has a piercing alarm tone that sounds for three seconds whenever it receives a "bell" character. This causes some annoyance when the printer is used with an Apple II, which beeps during printing errors and causes the Epson printer to beep. Second, both printers are so quiet when not working (hardly a criticism) and the power-on LED is so small, that it is easy to overlook these indications and leave the printers on overnight....* **GW**]

Interfacing

Both the MX-80 and MX-70 printers communicate through an 8-bit parallel port that is available on a 36-pin Centronics-type cable connector. Some computers require a special interface in order to use the Epson printers, but all necessary interface components are available from Epson Inc. TRS-80 owners may use the standard Radio Shack printer cable, but due to a slight difference in connections, only the official Epson cable allows the separation of the carriage return and line feed characters. This permits the user to underline and overstrike characters, a capability that is not possible with the Radio Shack cable. Apple users will be glad to know that Epson is marketing a special interface card with cable that will plug directly into a peripheral slot in their computer. However, due to a peculiarity of the Apple's video memory, the Apple interface card will not transmit ASCII codes greater than decimal 127, thus preventing use of the MX-80 graphics set. [*Computer Corner of New Jersey, 439 Route 23, Pompton Plains NJ 07444, telephone (201) 835-7080, modifies either the Ep-*

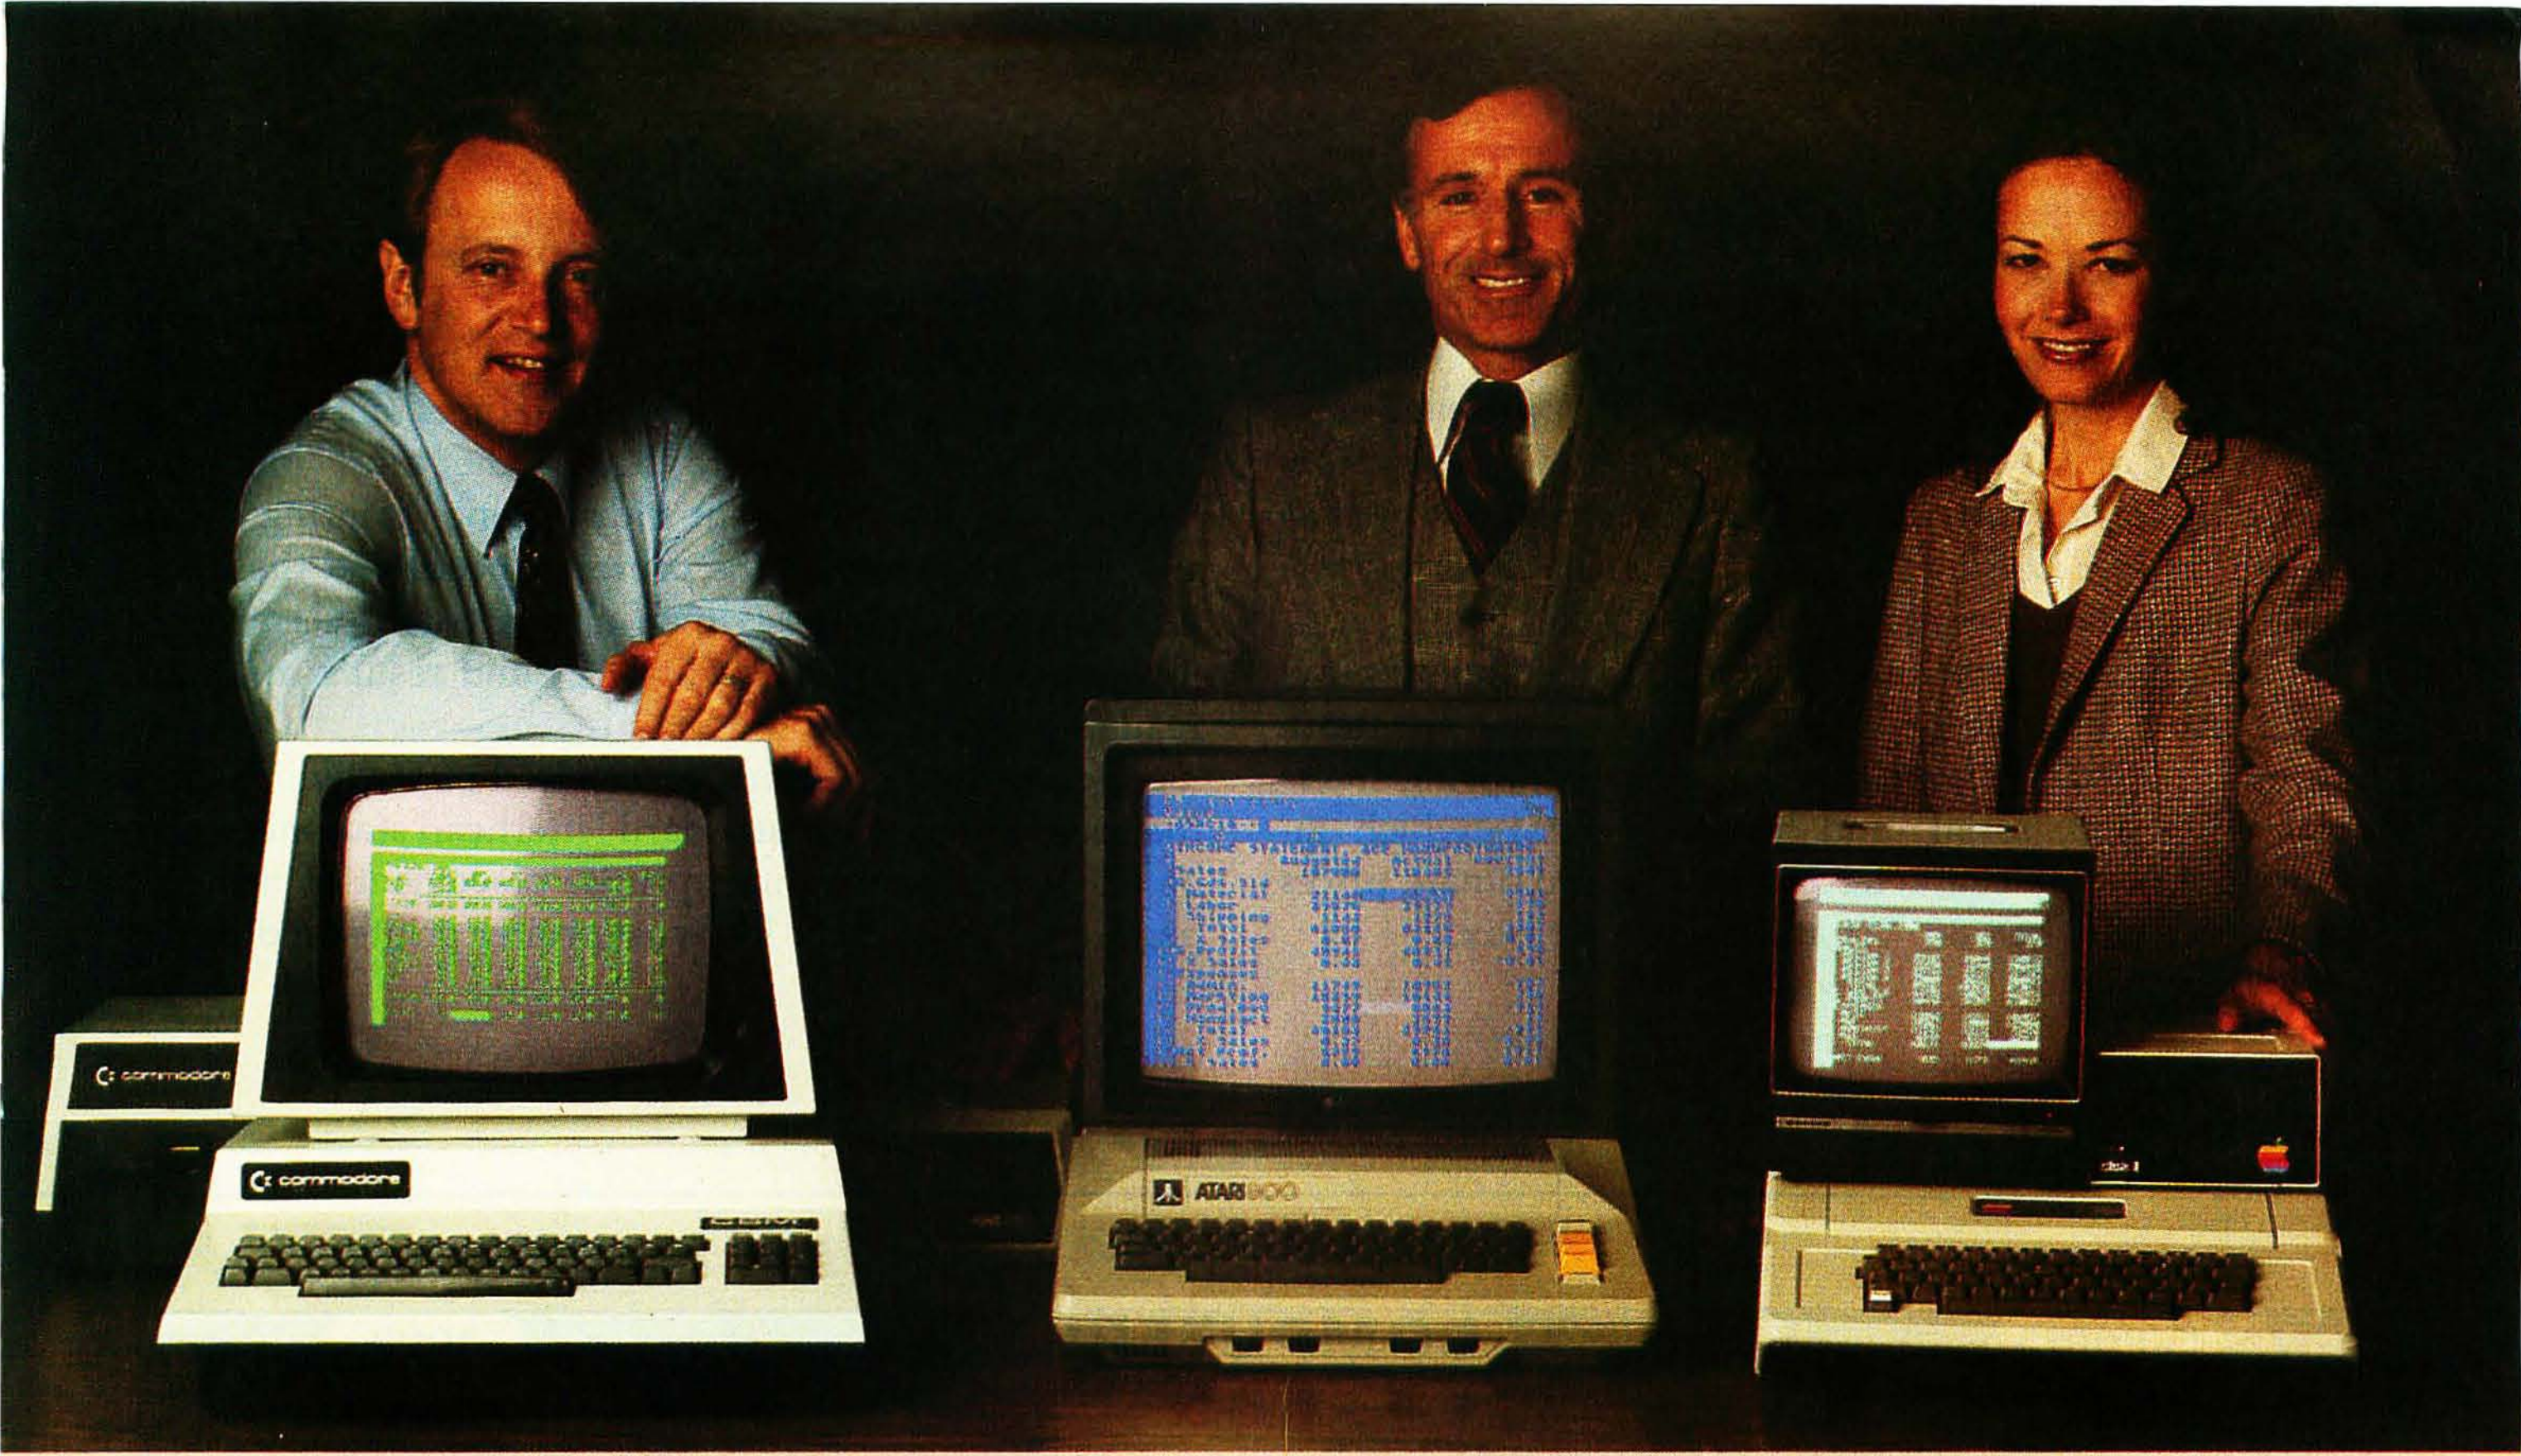

Time & Money. Commodore®, Atari® & Apple® users get more with VisiCalc™ software.

A financial VP in Massachusetts is cutting the time it takes to prepare month-end reports from three days to three hours.

A California company is replacing most of its time-share computer service with a personal computer and VisiCalc, saving at least $30,000 the first year.

Thousands of other personal computer users are also sold on how VisiCalc is increasing their productivity. Besides saving time and money, they're simplifying their work and getting more information that helps them make better decisions. A typical user reaction comes from a New York dentist:

"VisiCalc has become an integral part of my business."

VisiCalc displays an "electronic worksheet" that automatically calculates nearly any number problem in finance, business management, marketing, sales, engineering and other areas. The huge worksheet is like a blank ledger sheet or matrix. You input problems by typing in titles, headings and your numbers. Where you need calculations, type in simple formulas (+,–,×,÷) or insert built-in functions such as net present value and averaging. As quickly as you type it in, VisiCalc calculates and displays the results.

"I am extremely impressed with VisiCalc's capability, flexibility and orderly presentation of instructions."

So writes the director of a New York corporation. He appreciates VisiCalc's powerful recalculation feature. Change any number in your model and instantly all numbers affected by that change are recalculated and new results are displayed. You can ask "What if . . .?," analyzing more alternatives and forecasting more outcomes. It really increases your decision-making batting average!

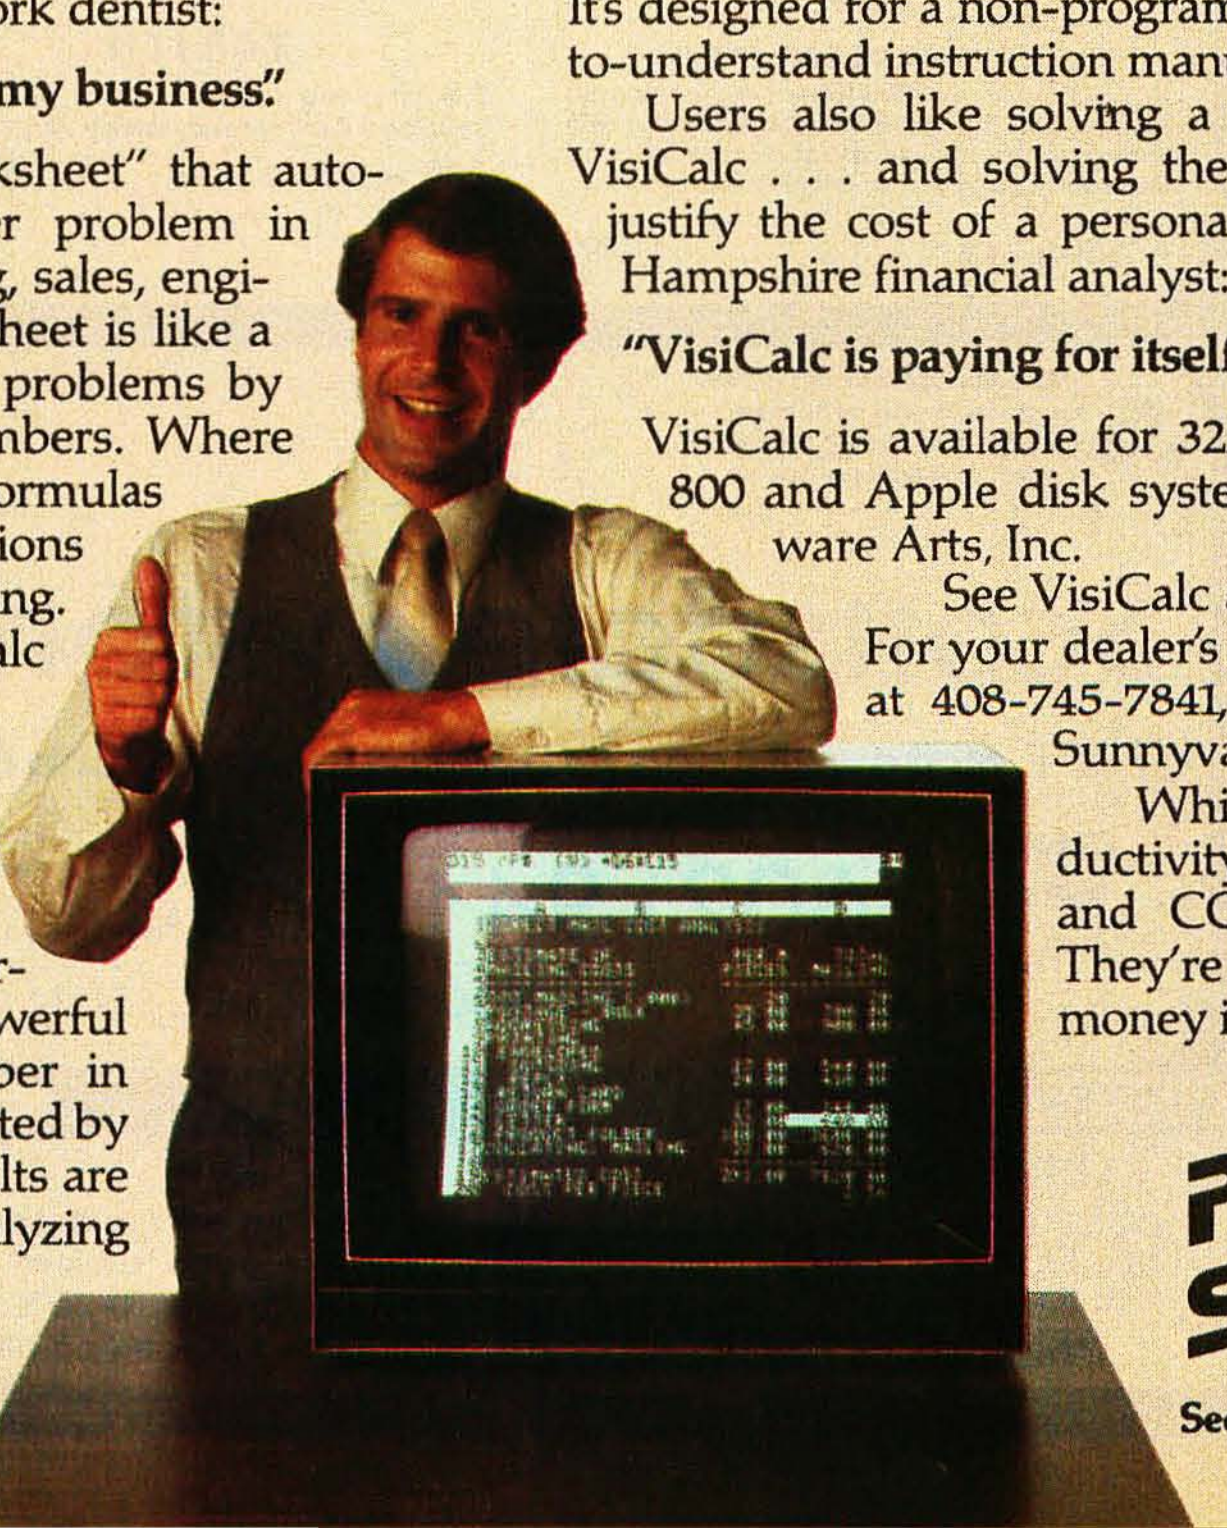

When you finish, you can print a copy of the worksheet just as it appears on the screen and/or save it on diskette.

"I like VisiCalc's ease of use."

That response comes from a Utah businessman using VisiCalc for production forecasts, financial report ratio analysis and job cost estimating. Ease of use is VisiCalc's best-liked feature. It's designed for a non-programmer, and has an extensive, easy-to-understand instruction manual.

Users also like solving a wide variety of problems with VisiCalc . . . and solving them their way. VisiCalc can even justify the cost of a personal computer, according to a New Hampshire financial analyst:

"VisiCalc is paying for itself over and over."

VisiCalc is available for 32k Commodore PET/CBM, Atari 800 and Apple disk systems. VisiCalc is written by Software Arts, Inc.

See VisiCalc at your Personal Software dealer. For your dealer's name, call Personal Software Inc. at 408-745-7841, or write 1330 Bordeaux Drive, Sunnyvale, CA 94086.

While there, see our other Productivity Series software: Desktop Plan and CCA Data Management System. They're like time on your hands and money in the bank.

PERSONAL SOFTWARE

See us in Chicago at NCC, booth 881

Commodore is a registered trademark of Commodore Business Machines Inc., Atari is a registered trademark of Atari Inc., Apple is a registered trademark of Apple Computer Inc.

Circle 325 on inquiry card.

*son or the Apple parallel interface cards to allow access to the graphics characters on the MX-80 printer. The modification is simple—the data-bit-7 line to the printer (the line that controls the highest bit of the 8-bit interface) is isolated from the interface board and connected via a wire to one of the annunciator output bits coming from the Apple II game socket. A POKE statement can then toggle this line, causing the MX-80 to print either normal ASCII characters or Epson graphics....*GW]

In addition to the standard TRS-80 cable and Apple II board/cable interfaces, which are available for both printers, the MX-80 will also have the following interfaces: IEEE-488, serial, and buffered serial (which includes a 2 K-byte character buffer). Approximate prices are given in the MX-80 "At a Glance" text box.

Conclusions

- The Epson MX-80, at $645, and the MX-70, at $449, both represent an unprecedented level of performance for the price. Although the low price of the MX-70 is particularly attractive, the added features of the MX-80 make it worth the extra $200. The most important features are the intelligent bidirectional printing (which significantly increases the printing speed) and the 9 by 9 dot matrix for letters (which allows true descenders on lowercase letters like "y" and "g" and results in a more readable text).
- Both printers require tractor-feed paper, which limits the user's choices (eg: standard letterhead stationery can't be used), but also assures precise placement of text on a page. And what other low-cost printer prints on ordinary

COMPUTERS

IMPORTS

EPSON MX-80
Price Breakthrough - Call!

Okidata M-80	$417
Okidata M-82	$617
Okidata M-83	$919

NORTHSTAR
Burned and tested - backed by fast warranty service. Find out why our prices, availability and service make us the #1 source for the #1 S-100 system. Free games disc.

HRZ-II 64K DD	$2595
HRZ-II 64K Quad	$2995
HRZ-II 32K DD	$2339
HRZ-II 32K Quad	$2689

ATARI

800 W/16K	$744

ADDS

The new leader! Detachable keyboard, extra port, 3 function keys, numeric keypad, 24x80, RS-232, built and backed by ADDS.

ADDS Viewpoint	$589

PAPER TIGERS

445G	$749
460G	$1119

ALTOS

NOW MORE FOR LESS
ACS-8000-15 has 208K RAM, 1 Mg. on floppys, 6 serial and 2 parallel ports. Upgrade w/Winchester hard-disk drives and tape back-up. Multi-user at single user prices.

ACS8000-15	$4795

ZENITH
The all-in-one computer that's backed by your local Zenith/Heath service center.

Z89 w/48K 2 SIO's	$2149

TELEVIDEO

912C	$729
920C	$759
950	$949

CENTRONICS

737-P	$695
Atari-825	$695

We participate in arbitration for business and customers through the Better Business Bureau of Maricopa County.

Scottsdale Systems

6730 E. McDowell Road #103, Scottsdale, Arizona 85257
Open 8-5 Mon.-Fri.
VISA (602) 941-5856 MasterCard
(We Export) TWX 910-950-0082 (IMEC SCOT)

TERMINALS

Soroc IQ 120	$729
Soroc IQ 135	$799
Hazeltine 1421	$779
Zenith Z-19	$789
ADM-31	$1095

MORE PRINTERS

HIGH SPEED		LETTER QUALITY*	
Anadex 9500/9501	$1295	Diablo 630	$2289
Data South DS-180	$1395	NEC 5510	$2689
TI 810 Basic	$1495	NEC 5520	$2945

(*Prices include Tractors)

ORDERING

Mail-Order Only
2% cash discount included / charge cards add 2%. Prices subject to change, product subject to availability. Arizona residents add 5%. F.O.B. Scottsdale. 0-20% restocking fee for returned merchandise. Warranties included on all products.

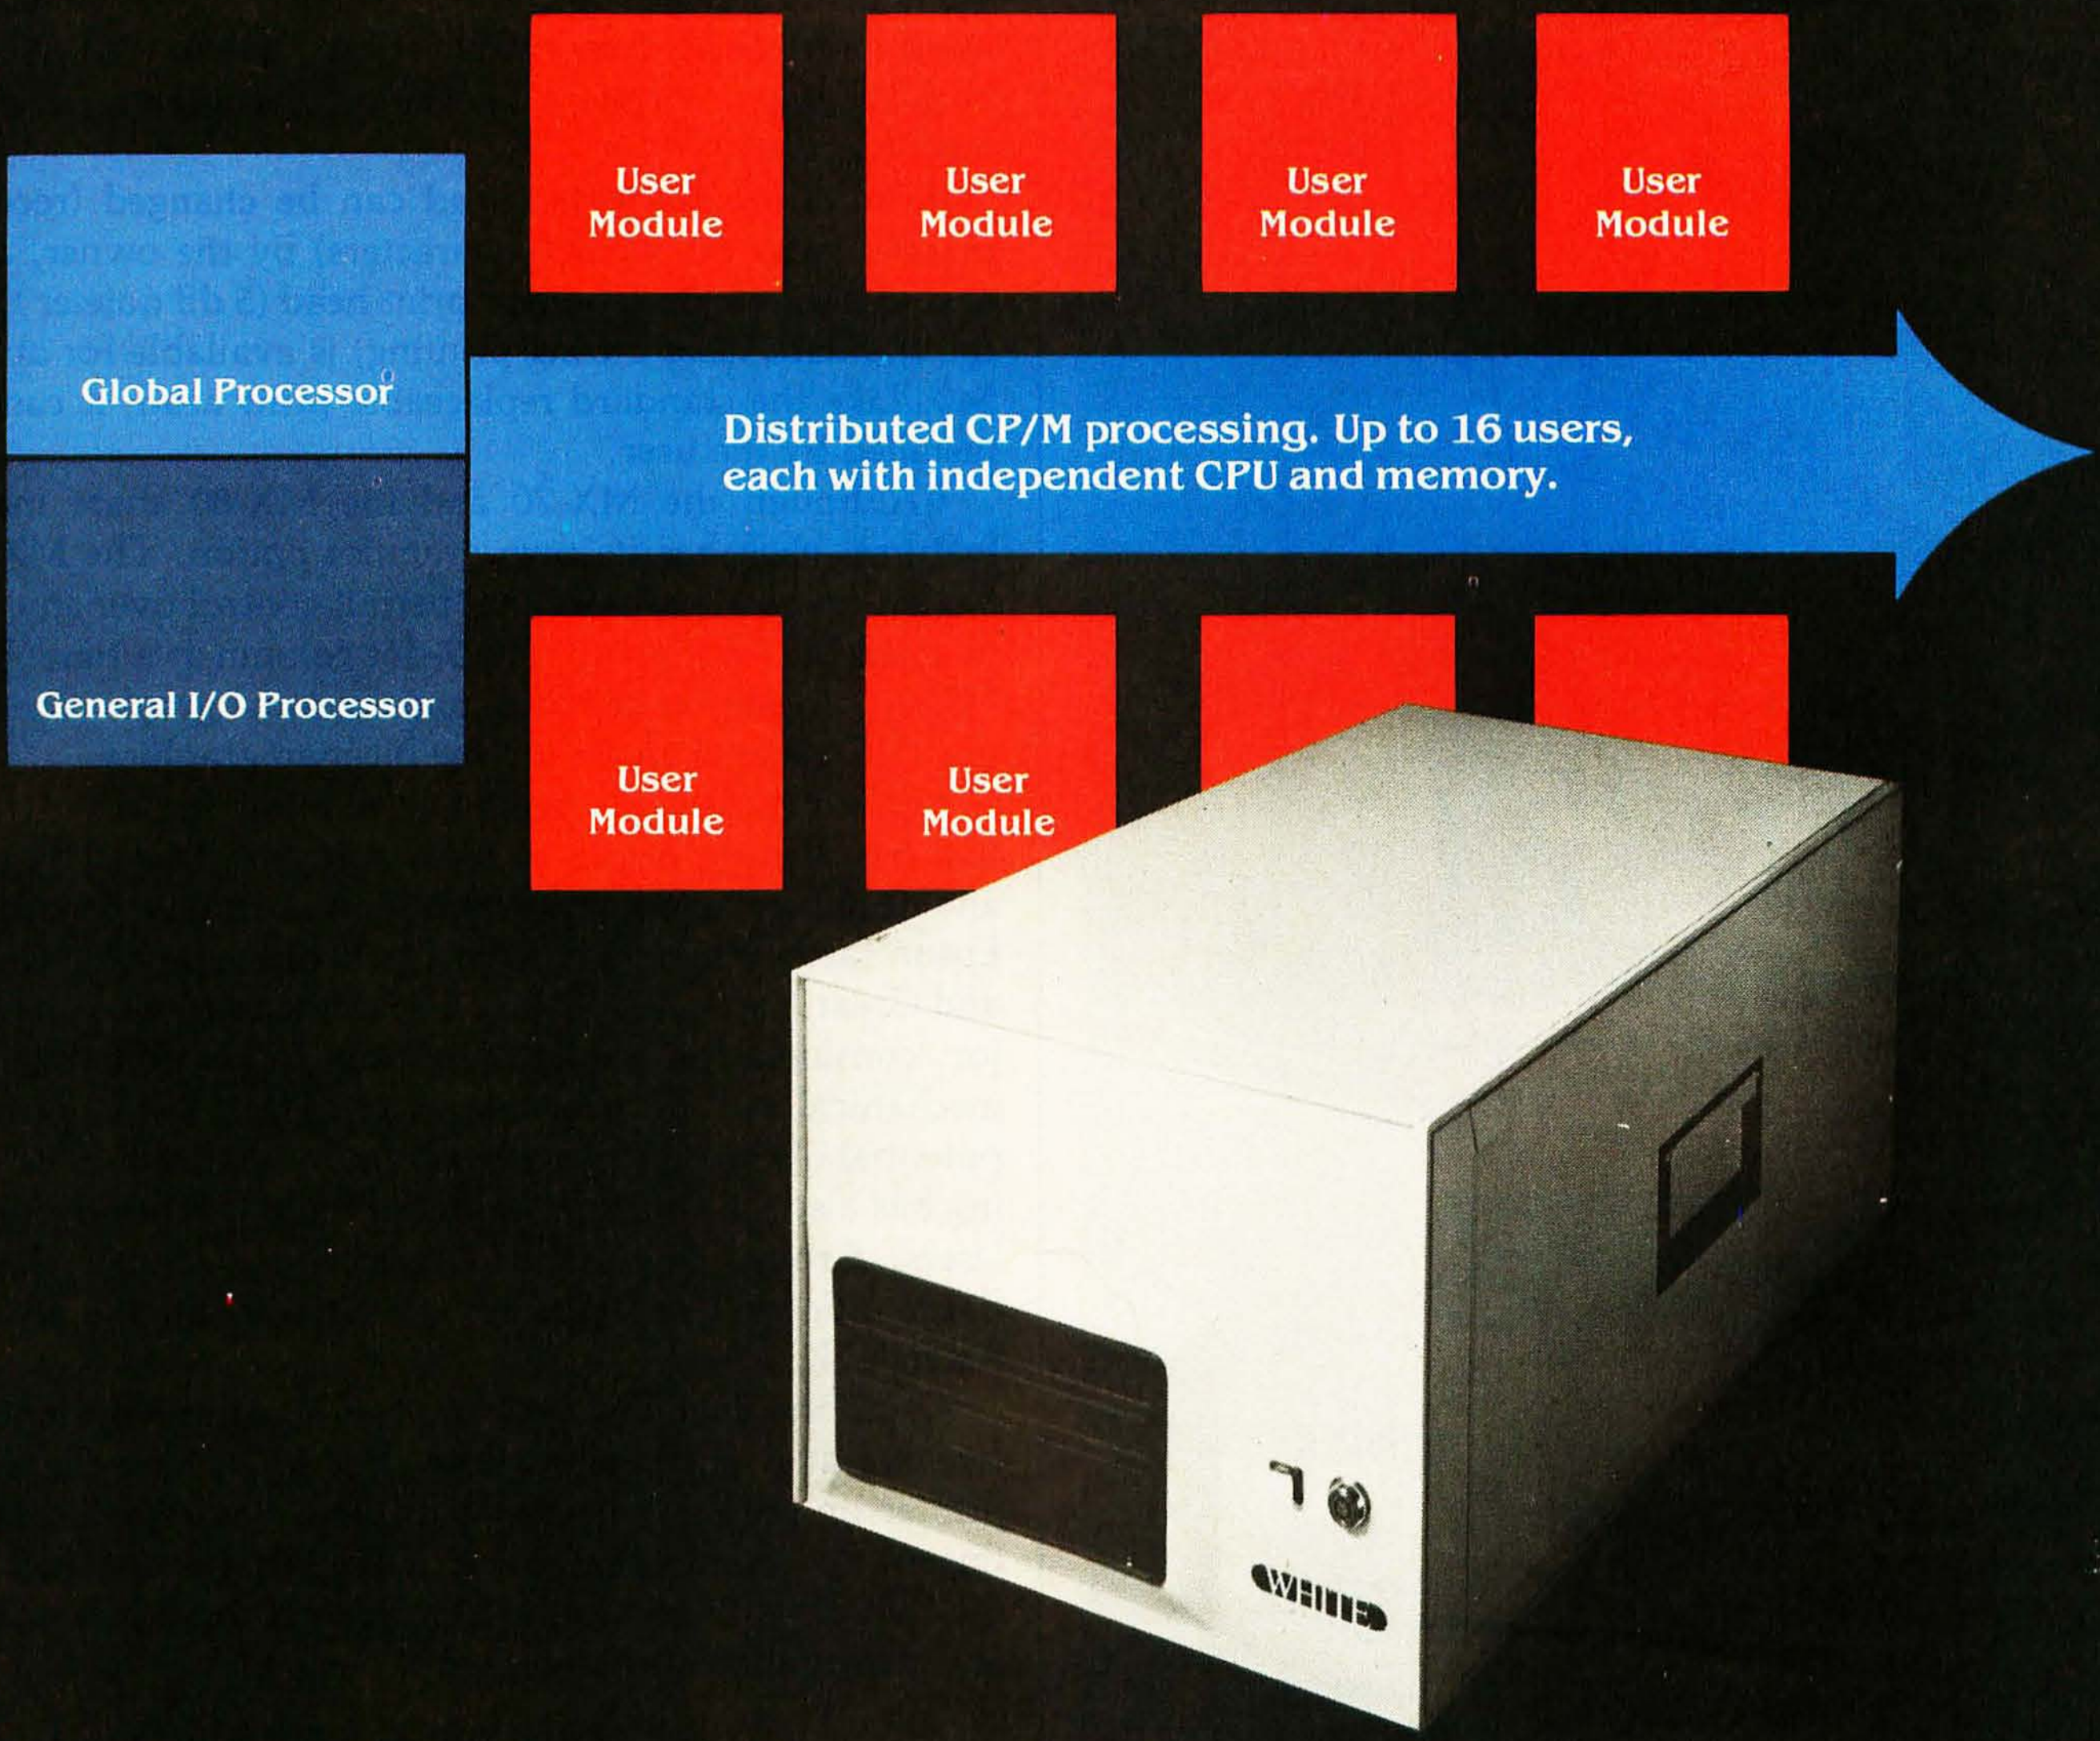
User Module
User Module
User Module
User Module
Global Processor
Distributed CP/M processing. Up to 16 users, each with independent CPU and memory.
General I/O Processor
User Module
User Module
WHITE

paper (as opposed to thermal or electrostatic) and produces an original as well as up to two carbon copies by using multiple-ply paper? This ability, due to the fact that both are impact printers, is of particular interest to small business users.

In addition, the print head can be changed (recommended after 50,000,000 characters) by the owner, at a cost of about $30. A quieter print head (5 dB quieter than the standard head during printing) is available for about $40. Like the standard replaceable print head; it can be installed by the user.

- Although the MX-70 and the MX-80 share many features, each has its own graphics option. The MX-70 has bit-mapped graphics that permit control over any dot in a 480 by 7 dot array, one 7-dot column at a time. The MX-80, on the other hand, has the same graphics set as the TRS-80, and an option for bit-map graphics.
- Epson America is beginning to enter the US market and has already begun to train many of its distributors and dealers to act as authorized service centers. The three Epson factory centers, located in Dallas, San Francisco, and Great Neck, New York, also provide service—a major consideration when investing in a unit that is mechanical as well as electronic in nature. (The unusual potential of these machines to do more than simple printing has also led to the founding of an independent Epson Users' Group. For more information, contact Frank Barden, Epson Users' Group, c/o 1017 Trollingwood Ln, Raleigh NC 27604.)
- Both the Epson MX-80 and MX-70 offer a variety of features at a price well below that of any comparable printer on the market. These features, the reputation of Epson, and the thorough engineering that is apparent in the two units, allow me to recommend these printers to any personal computer owner.■

TRS-80* Model I Computer Owners . . .



Double-density storage. It's really here!

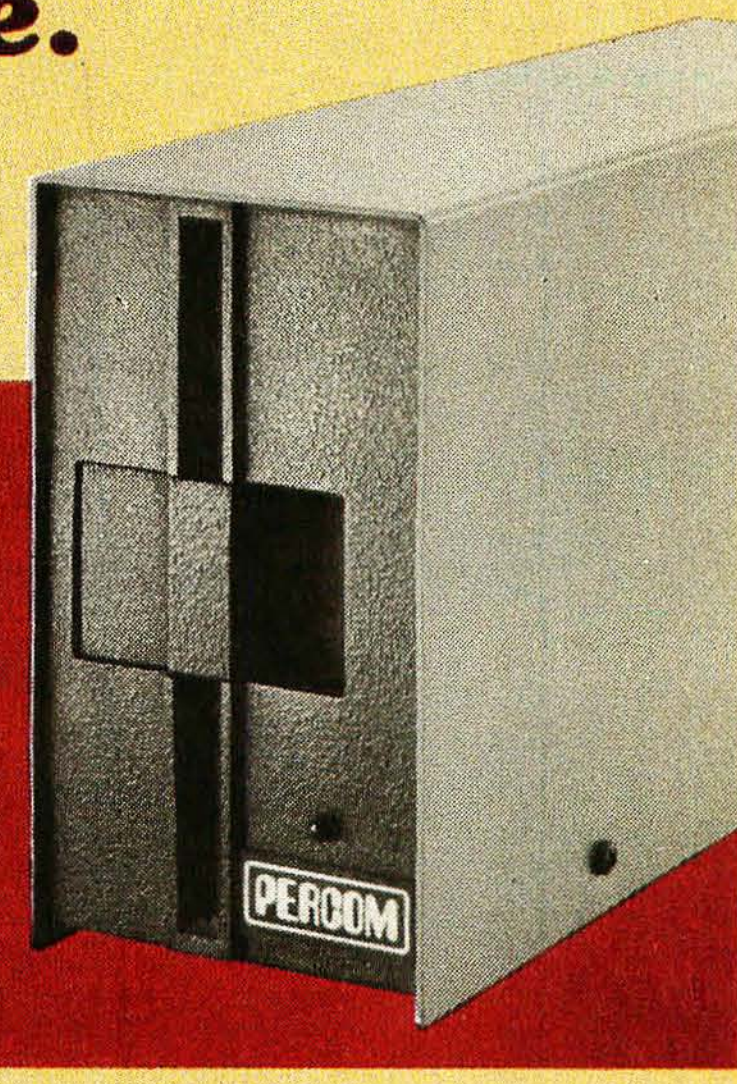

Here at Percom. And your authorized Percom dealers.

And double-density storage is here in a big way. Because now you can choose from *three different levels* of mini-disk systems — all *double-density rated.*

And get the storage that precisely meets your application needs.

Not to mention the service and quality that's made Percom the industry leader.

Although rated for double-density operation, all levels of Percom drives *work equally well in single-density* applications.

You can operate these drives in ordinary single-density format using TRSDOS*, Percom OS-80™ or any other single-density operating system.

Or, you can add a Percom DOUBLER™ to your Tandy Expansion Interface and store data and programs in *either* single- or double-density format.

Under double-density operation, you can store as much as *350 Kbytes* of formatted data — depending on the drive model — on one side of a five-inch minidiskette. That's *four times* the capacity of standard 35-track Model I minidisks, almost 100 Kbytes *more than* the capacity of the *eight-inch* IBM 3740 format!

Available in 1-, 2- and 3-drive configurations in all three model lines, Percom *burned-in, fully-tested* drives start at only $399.

TFD-40™ Drives



TFD-40 Drives store 180 Kbytes (double-density) or 102 Kbytes (single-density) of **formatted** data on one side of a 40-track minidiskette. Although economically priced, TFD-40 drives receive the same full Percom quality control measures as TFD-100 and TFD-200 drives.

TFD-100™ Drives



TFD-100 drives are "flippy" drives. You store twice the data per minidiskette by using both sides of the disk. TFD-100 drives store 180 Kbytes (double-density) or 102 Kbytes (single-density) **per side.** Under double-density operation, you can store a 70-page document on one minidiskette.

TFD-200™ Drives



TFD-200 drives store 350 Kbytes (double-density) or 197 Kbytes (single-density) on one side of a minidiskette. By comparison, 3740-formatted eight-inch disks store only 256 Kbytes. Enormous on-line storage capacity in a 5" drive, plus proven Percom reliability. That's what you get in a TFD-200.



The DOUBLER™ — This proprietary adapter for the TRS-80* Model I computer packs approximately twice the data on a disk track.

Depending on the type of drive, you can store up to four times as much data — 350 Kbytes — on one side of a minidiskette as you can store using a Tandy standard Model I computer drive.

Easy to install, the DOUBLER merely plugs into the disk controller chip socket of your Expansion Interface. No rewiring. No trace cutting.

And because the DOUBLER reads, writes and formats *either* single- or double-density disks, you can continue to run all of your single-density software, then switch to double-density operation at any convenient time.

Included with the PC card adapter is a TRSDOS*-compatible double-density disk operating system, called DBLDOS™, plus a CONVERT utility that converts files and programs from single- to double-density or double- to single-density format.

Each DOUBLER also includes an on-card high-performance *data separator circuit* which ensures reliable disk read operation.

The DOUBLER works with standard 35-, 40-, 77- and 80-track drives rated for double-density operation.

Note. Opening the Expansion Interface to install the DOUBLER may void Tandy's limited 90-day warranty.

Free software patch with drive purchase. This software patch, called PATCH PAK,™ upgrades TRSDOS* for single-density operation with improved 40- and 77-track drives.

Quality Percom products are available at authorized dealers. Call *toll free 1-800-527-1592* for the address of your nearest dealer or to order directly from Percom. In Canada call 519-824-7041.

Prices and specifications subject to change without notice.

™ trademark of Percom Data Company, Inc.

nark of Tandy Radio Shack Corporation which has no relationship to Percom Data Company.

PERCOM

PERCOM DATA COMPANY, INC.
211 N. KIRBY • GARLAND TX • 75042
(214) 272-3421

Circle 322 on inquiry card.

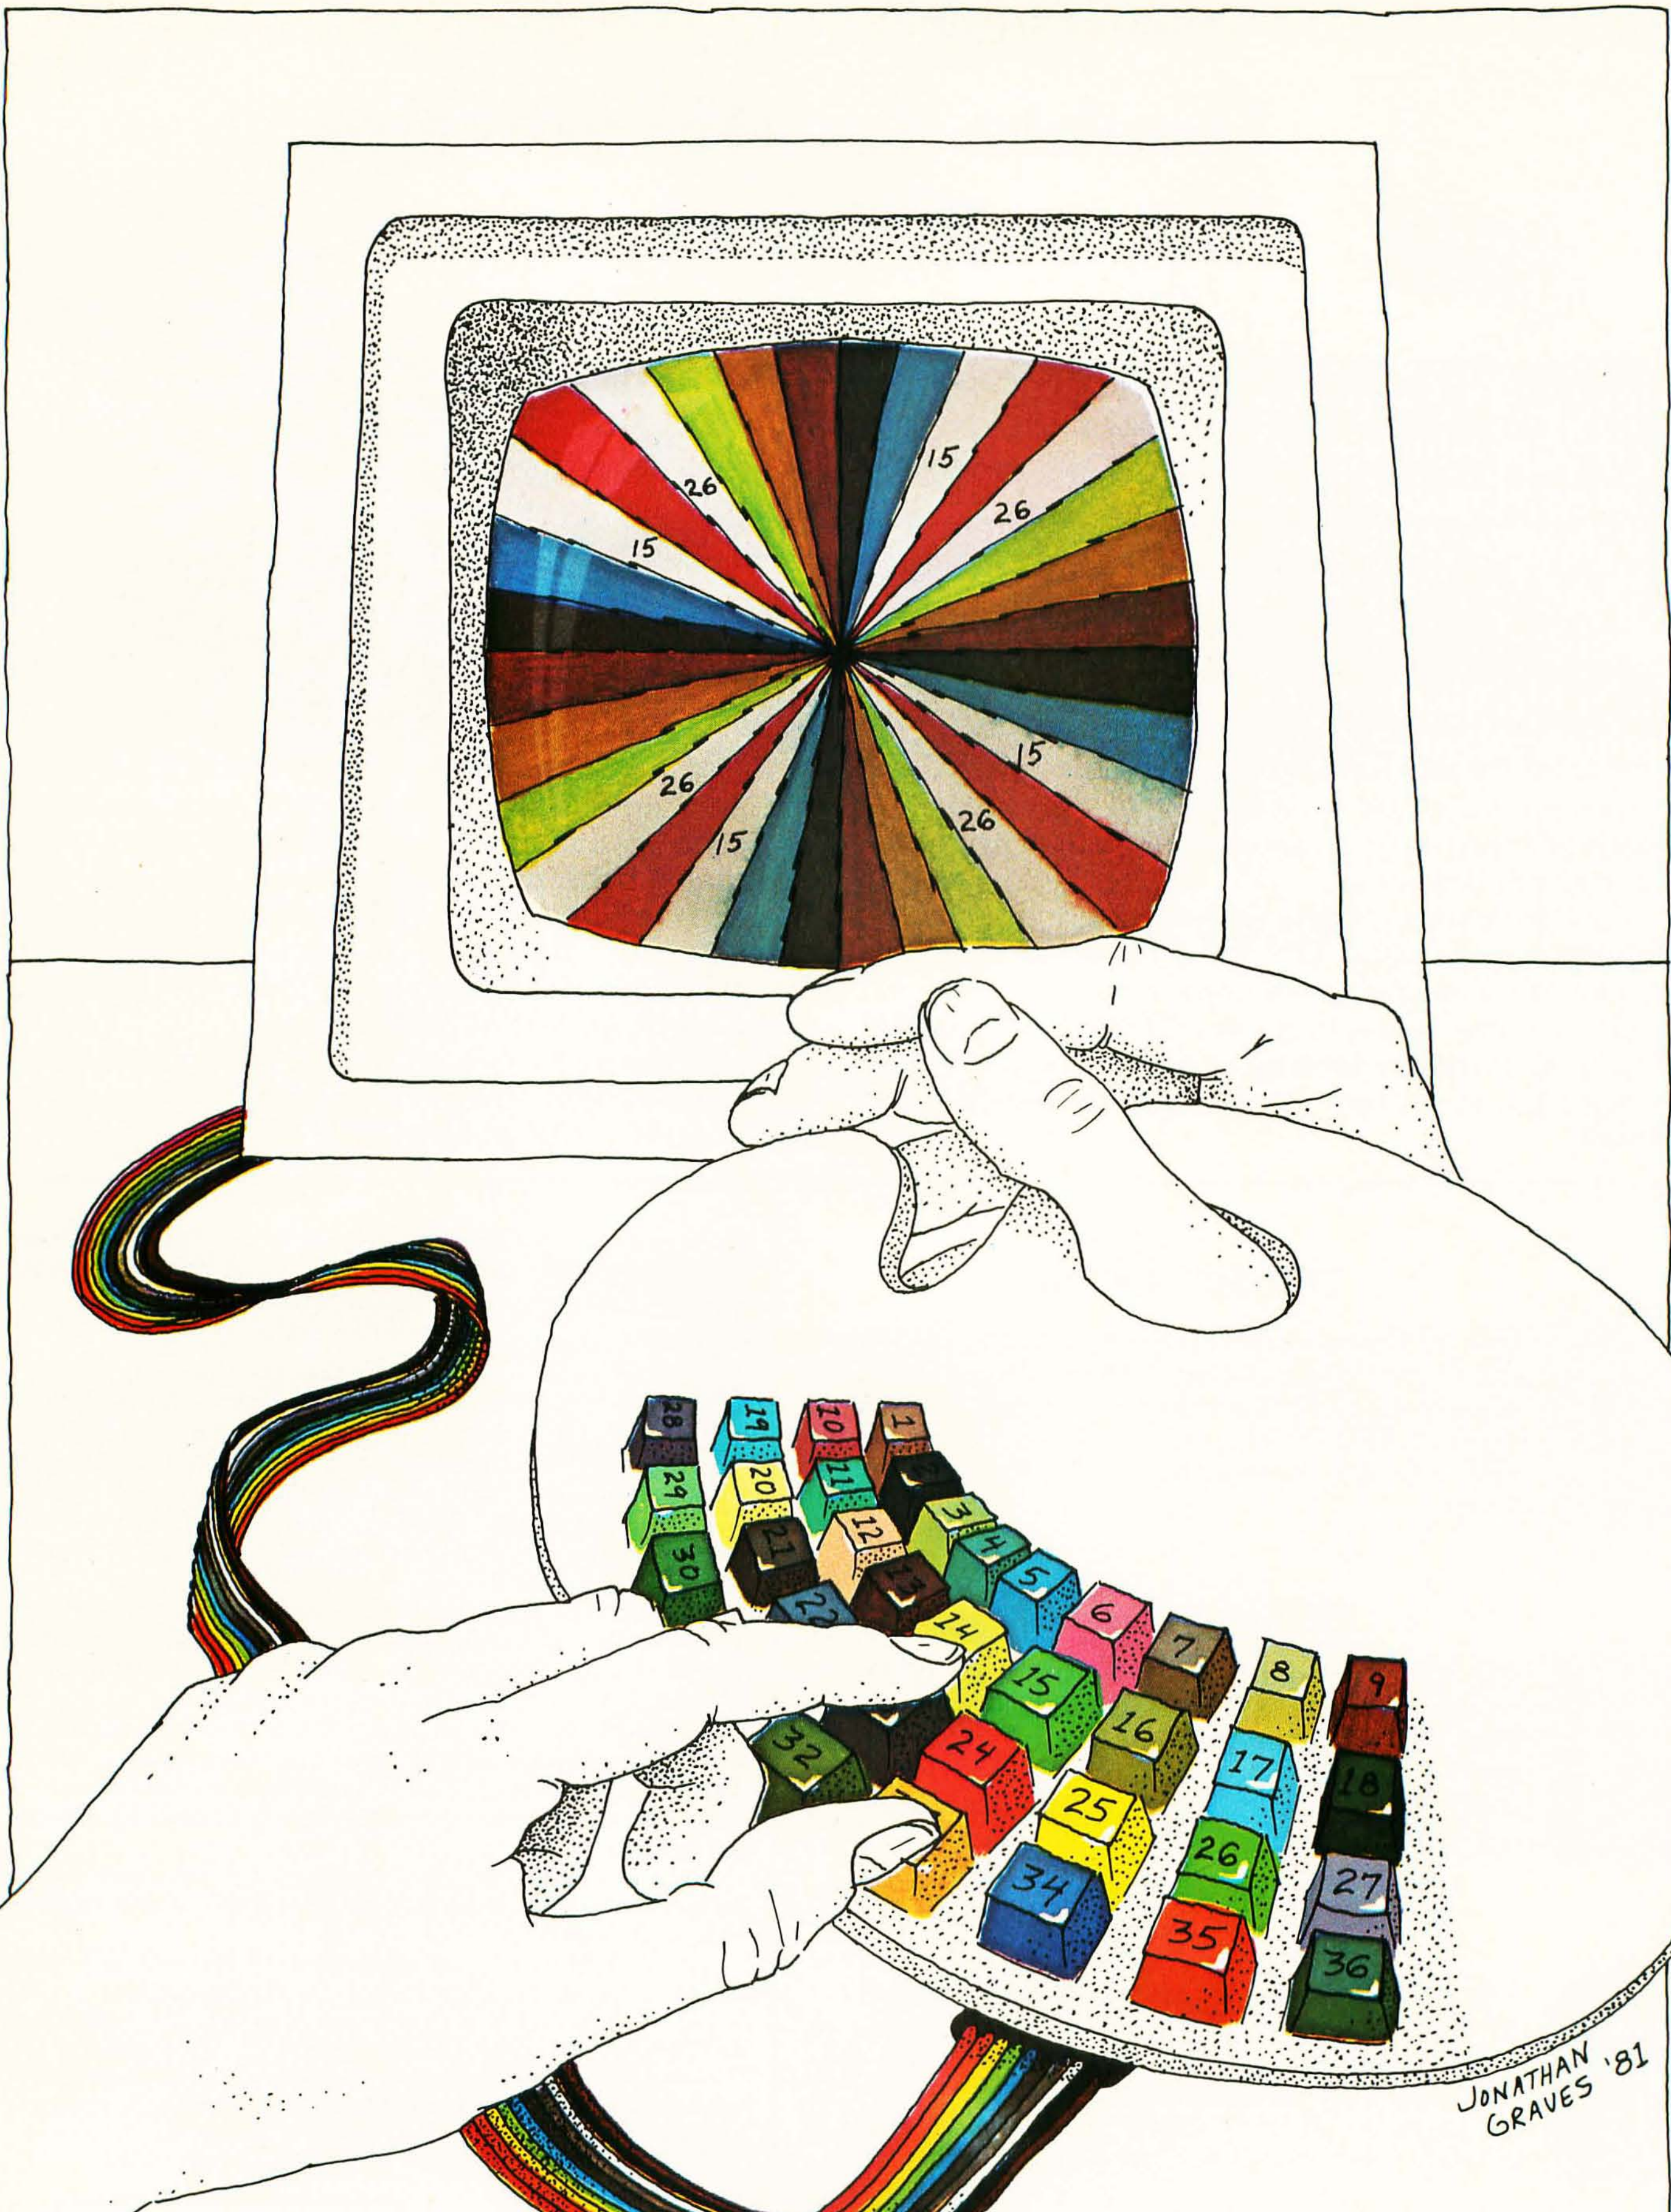
15
26
15
26
15
26
15
26
28
19
10
1
29
20
11
2
3
30
21
12
4
22
13
5
6
7
8
9
24
15
16
32
24
17
18
25
26
27
34
35
36
JONATHAN GRAVES '81

Extended Color BASIC for the TRS-80 Color Computer

Stan Miastkowski, Technical Editor

Inexpensive and easy-to-use color graphics have been the goal of personal computer makers for a number of years. Although graphics have been available, they've been neither inexpensive nor easy to use. Many of the systems currently on the market require the skills of an experienced machine-language programmer in order to generate high-resolution graphics. Some manufacturers have simplified the process; but, for the most part, generating a full-color graphics display is still a tedious exercise.

Radio Shack has released the first *truly* easy-to-use and inexpensive system that generates full-color graphics. Extended Color BASIC is available for the TRS-80 Color Computer and was developed by Microsoft. In fact, the message:

EXTENDED COLOR BASIC 1.0
COPYRIGHT (C) 1980 BY TANDY
UNDER LICENSE FROM MICROSOFT

appears when you turn the Color Computer on. Extended Color BASIC is fast, memory-efficient, and so well designed that anyone (even children) can create graphics shapes in a few minutes. Best of all, it's fun to use and has features that advanced programmers will appreciate.

Getting Into Graphics

If you have a TRS-80 Color Computer, you can add Extended Color BASIC for $99. The computer must be returned to Radio Shack for the modification. Extended Color BASIC also requires 16 K bytes of programmable memory, which, if you don't already have it, adds $119 to the price of modification. The complete Extended Color Computer sells for $599. You'll still need a color monitor—although the family television is still the most popular alternative.

Radio Shack has released the first easy-to-use and inexpensive system that generates full-color high-resolution graphics.

Graphics Modes

Extended Color BASIC has five distinct graphics modes available—two low-resolution, two medium-resolution, and one high-resolution (see table 2). The low- and medium-resolution modes each offer a choice of two-color or four-color modes. When memory space is at a premium, the two-color modes are handy for space conservation. The high-resolution mode has only a two-color mode available. Entering any of the five graphics modes is simple—a PMODE command is the first line of any graphics program. The command is followed by the number (0 thru 4) of the graphics mode you wish to use.

Even though the size of the graphics blocks (or pixels) differ widely in the three main graphics modes, all points are plotted on a 256-by-192 grid (49,152 points). This greatly simplifies matters if you decide to modify any program that uses the graphics modes—if you change the resolution, you don't have to change the parameters of the graphics commands.

Color Combinations

The TRS-80 Color Computer has available a set of nine colors (see table 3). It's interesting to note that the powerful Motorola 6847 Video Display Generator, a key component in the Color Computer, has the capability of displaying a very large number of distinct shades. It's possible to take a look at them by turning on the computer, waiting for the Extended Color BASIC message to appear, and then *rapidly* turning the computer off and on.

Attempting to figure out the color combinations available in each of the

Command	Description
CIRCLE (*x,y*), *r, c, hw, start, end*	Draws a circle, partial circle, or ellipse. *x* is the x-coordinate of the circle's centerpoint. *y* is the y-coordinate of the circle's centerpoint. *r* is the radius of the circle. Each unit is equal to one graphics point on the screen. *c* is a number (0 to 8) which specifies the color of the circle. The number must be one of those specified for the mode/color set combination. If this value is omitted, the foreground color defaults to the previously specified color. *hw* is the height/width ratio of the circle (from 1 to 255). If it's omitted, 1 (a perfect circle) is used. *start* is the starting point of the circle (from 0 to 1). This is optional and if omitted, 0 is used. *end* is the endpoint of the circle (from 0 to 1). If it's omitted, 1 is used.
COLOR *foreground,background*	Sets the foreground and background screen colors within limits specified by the mode/color set combination. *foreground* is a color code (0 to 8). *background* is the background color (0 to 8).
DRAW *line*	Draws a line (or series of lines) by specifying the direction, angle, and color. *line* is a string expression and may include: **Motion Commands** M = Move the draw position U = Up D = Down L = Left R = Right E = 45-degree angle F = 135-degree angle G = 225-degree angle H = 315-degree angle X = Execute a substring and return **Modes** C = Color A = Angle S = Scale **Options** N = No update of draw position B = Blank (no draw, just move)
EDIT	Allows editing of program lines. *n*C Changes *n* characters. *n*D Deletes *n* characters I Allows insertion of new characters. H Deletes remainder of line and allows insertion of new characters. L Lists current line and continues edit. *n*S*c* Searches for *n*th occurrence of character *c*. X Extends line. SHIFT Escape from subcommand. *n* SPACE Moves cursor *n* spaces to the right. *n* Moves cursor *n* spaces to the left.
GET *startpoint—endpoint, destination,* G	Places the graphics contents of a specified rectangle within a specified array. *startpoint* is the coordinate of the upper-left corner of a rectangle on the screen. *endpoint* is the coordinate of the lower-right corner of the same rectangle. *destination* is the name of a predefined array that will store the contents of the rectangle. G tells the computer to store the rectangle's contents with full graphic detail.
LINE (*x1,y1*)—(*x2,y2*), *a,b*	Draws (or erases) a line between two specified points. Also draws a box using the coordinates as the opposing corners. *x1,y1* is the starting position of the line. *x2,y2* is the endpoint of the line. *a* is either PSET or PRESET. *b* is either B (for box) or BF (for filled box).
PAINT (*x,y*) ,*c,b*	Fills a specified area with a specified color. (The color is limited by the mode/color set combination.) *x* is an x-coordinate. *y* is a y-coordinate. *c* is the color code (from 0 to 8). The color selected must match one of the colors available in the particular mode/color set combination in use. *b* is the border color (0 to 8) at which painting will stop.
PCLEAR *n*	Clears a specified number of memory pages (1536 bytes each) for graphics use. *n* is the number of graphics pages (1 to 8).
PCLS *color*	Clears the video display. *color* is the number (0 to 8) of one of the colors available for the mode/color set combination in use. If *color* is omitted, the existing background color is used.
PCOPY *source* TO *destination*	Copies the contents of one memory page to another memory page. *source* and *destination* are memory page numbers (1 to 8).
PLAY	Plays music of a specified note (A thru G or 1 thru 12), octave (1 thru 5), volume, note duration, tempo, and pause. It also allows the execution of substrings and will handle the specification of sharps and flats.
PMODE *mode, start-page*	Selects the graphics mode and the memory page on which a program starts. *Mode* is the graphics mode (0 to 4). The default value is 2. *Start-page* is the number of the graphics page (1 to 8) on which the program will start.
PSET (*x,y,c*)	Turns on selected graphics points. *x* is the position on the *x*-axis. *y* is the position on the *y*-axis. *c* is the color of the dot (0 to 8).
PRESET (*x,y*)	Turns off graphics points which were turned on by the PSET command. *x* is the coordinate on the *x*-axis. *y* is the coordinate on the *y*-axis.
PUT *startpoint—endpoint, source, action*	Places the graphics contents of a rectangle stored in an array by the GET command at a specified position. *startpoint* is the coordinate of the upper-left corner of the rectangle. *endpoint* is the coordinate of the lower-right corner of the rectangle. *source* is the name of a predefined array that contains the data to be written into the rectangle. *action* determines how the data is to be written into the rectangle and can be the following: PSET—Sets the points that were set in the original rectangle. PRESET—Resets the points that were set in the original rectangle. AND—Compares the points stored in the original rectangle with the destination rectangle. If both are set, then the screen point will be set; if not, the screen point is reset. OR—Compares the points as above. If either is set, the screen point will remain set. NOT—Reverses the state of each point in the destination rectangle.
SCREEN *type, color set*	Tells the computer whether you want to use a text screen or a graphics screen and selects the color set. *type* is either 0 (text screen) or 1 (graphics screen). *color set* is either 0 or 1 (see table 4).

Table 1: *Graphics, editing, and music commands available in Extended Color BASIC.*

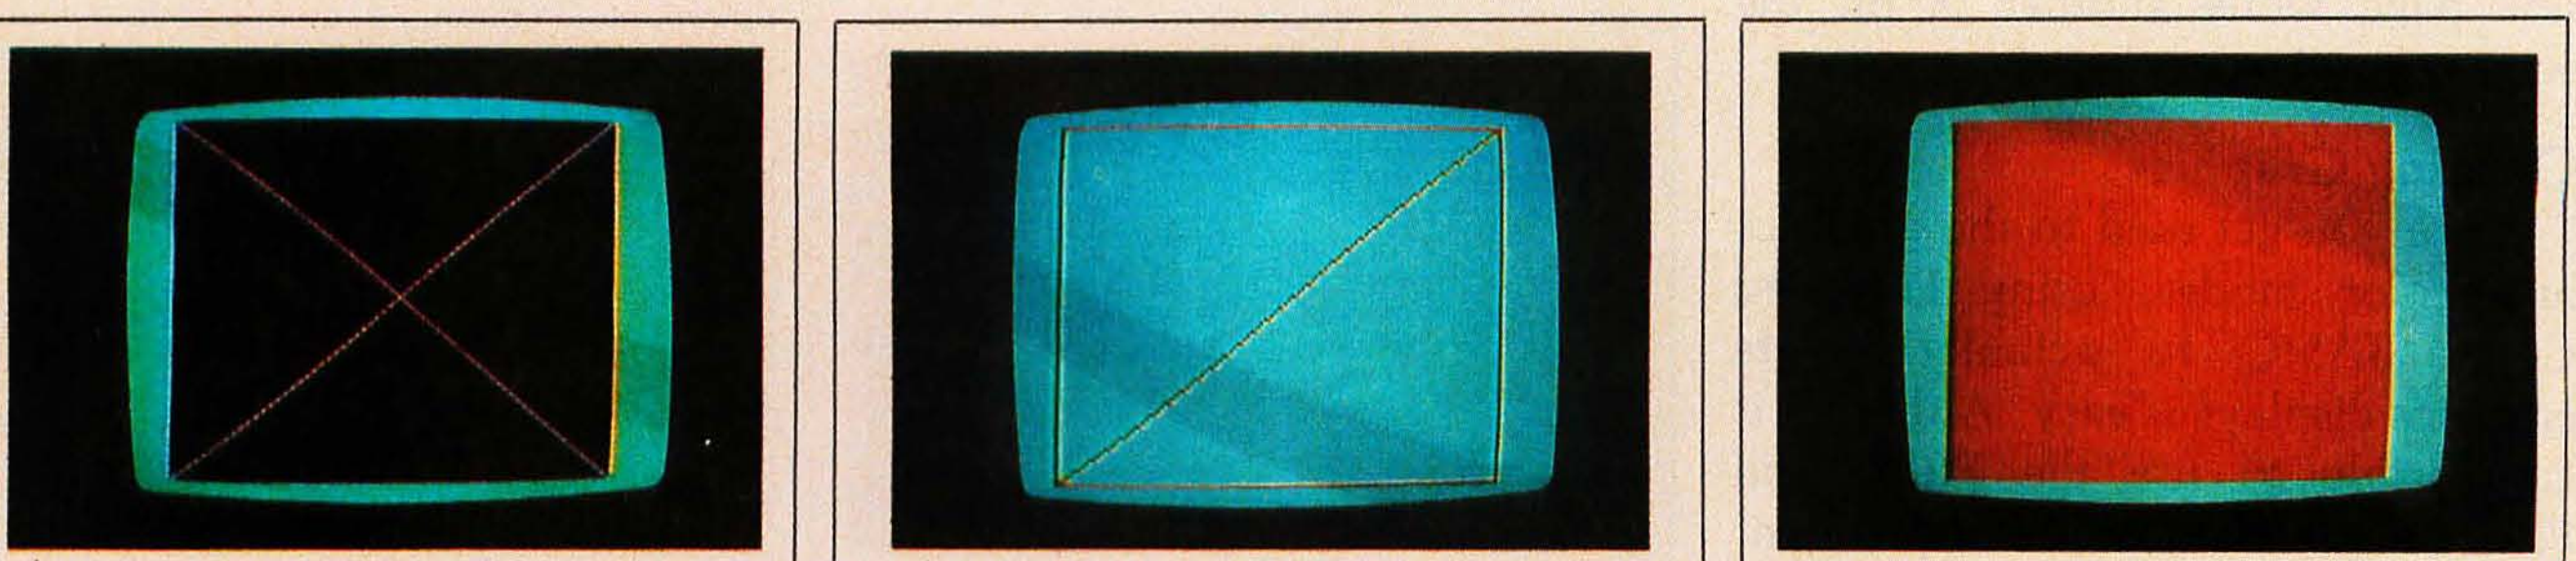

(a)

```
 5  PMODE 4,1
10  PCLS
20  SCREEN 1,1
30  LINE (0,0) - (255,191),PSET
40  LINE (0,191) - (255,0),PSET
50  GOTO 50
```

(b)

```
 5  PMODE 1,1
10  PCLS
20  SCREEN 1,1
25  LINE (0,0) - (255,191),PSET,B
30  LINE (0,191) - (255,0),PSET
40  GOTO 40
```

(c)

```
 5  PMODE 1,1
10  PCLS
20  SCREEN 1,1
25  LINE (0,0) - (255,191),PSET,BF
30  LINE (0,191) - (255,0),PSET
40  GOTO 40
```

Photo 1: *Three examples of the LINE statement in Extended Color BASIC. Photo 1a shows the high-resolution mode (PMODE 4,1). Photo 1b is the low-resolution mode (PMODE 1,1) and shows that when the suffix "B" is added to the LINE command in line 25, a box is created which uses the endpoint coordinates as opposing corners. Photo 1c shows what happens when the suffix "BF" is added to line 25. A box is created and filled with the foreground color. (Note that the line created by line 30 was drawn, but it's invisible because it's the same color as the filled box.)*

graphics modes is, at first glance, probably the most complicated aspect of using Extended Color BASIC. Choosing what's called the *color set* is done by the SCREEN command. This command has two parameters: The first tells the computer whether you want the graphics mode or text mode. The second parameter selects the color set. This is where things get a bit tricky. The three two-color modes (low-, medium-, and high-resolution) each offer a choice of *either* black and green *or* black and buff. The two four-color modes (low- and medium-resolution) offer color sets of either green/yellow/blue/red or buff/cyan/magenta/orange. None of the graphics modes allow you to use all nine colors at one time.

A further "complication" is the COLOR command, which instructs the computer to use specified foreground/background colors. The specified color codes must be in the allowable color set for the graphics mode you're using (see table 4)—otherwise you'll be greeted with an error message when you attempt to run the program.

> **Extended Color BASIC divides the available graphics memory into eight pages of 1536 bytes each.**

Although all this seems extremely complicated, I found that within a few hours of using Extended Color BASIC, the graphics modes and available color sets became second nature. Besides, the system sets default values for you if you don't want to bother remembering all the combinations at first.

Graphics Pages

Extended Color BASIC divides the available graphics memory into eight *pages* of 1536 bytes each. An optional PCLEAR command can be used in the program to specify the number of pages you want to use. (The default is 4.) A PCOPY command is also available which can copy the contents of one page into another page (as long as the new page was allocated by PCLEAR). In addition, the PMODE command has a second parameter that specifies which page to start the program on.

It doesn't take long to realize that the memory pages offer a number of interesting and creative possibilities. Switching between pages offers the opportunity for limited animation—especially since it's possible to update

PMODE Number	Grid Size	Color Mode	Memory Pages Used
4	256 by 192	Two-color	4
3	128 by 192	Four-color	4
2	128 by 192	Two-color	2
1	128 by 96	Four-color	2
0	128 by 96	Two-color	1

Table 2: *The five graphics modes of Extended Color BASIC (two low-resolution, two medium-resolution, and one high-resolution). All modes are selected by the PMODE command and are mapped onto a 256 by 192 grid.*

Code	Color
0	Black
1	Green
2	Yellow
3	Blue
4	Red
5	Buff
6	Cyan
7	Magenta
8	Orange

Table 3: *Colors available on the TRS-80 Color Computer.*

one page while another is on the screen.

Creating Graphics

Once you get used to the graphics and color modes, using Extended Color BASIC to actually create graphics displays is easy. Although it *is* possible to use the PSET and PRESET commands (the equivalent of the familiar SET and RESET commands found in other TRS-80s), the 50,000 or so graphics points available in the high-resolution mode make the setting of individual points a very time-consuming exercise (although this might be necessary in a few cases).

The people who designed Extended Color BASIC have made it simple—such commands as LINE, CIRCLE, DRAW, and PAINT (see photos) make the creation of very sophisticated shapes an easy job. The most-used commands include:

- LINE—Draws a line between two specified sets of coordinates. It will also draw a box and, if desired, fill the box with the foreground color.
- CIRCLE—Draws a circle with a specified radius at a specified coordinate. You also have the option of changing the height/width ratio and drawing only parts of the circle.
- DRAW—Draws a line or series of lines. You specify the direction, angle, and color.
- PAINT—Fills a specified area with a color you pick.
- GET—Places the graphics content of a specified rectangular area of the display within an array.
- PUT—Takes the array used to store the GET information and redraws the graphics within an area that you specify.

(For a complete list of Extended Color BASIC graphics commands, see table 1).

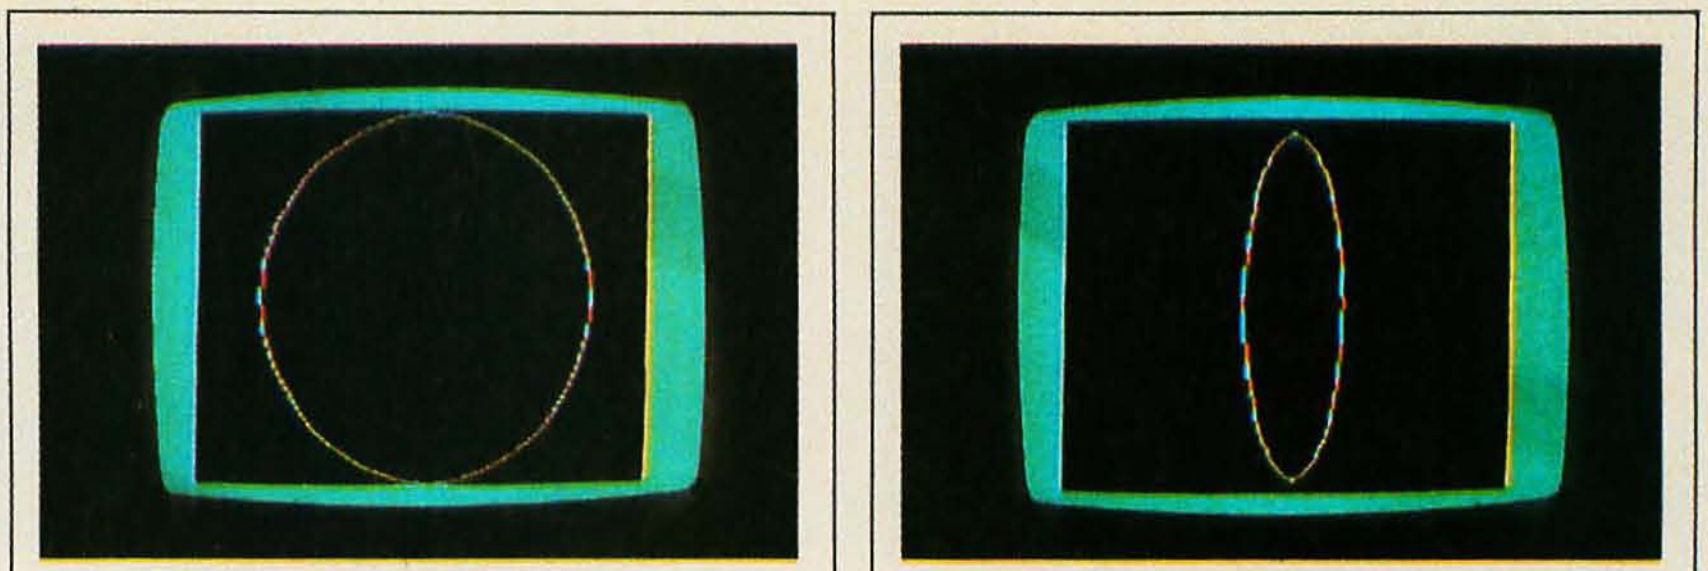

(a)

```
 5  PMODE 4,1
10  PCLS
20  SCREEN 1,1
30  CIRCLE (128,96),95
40  GOTO 40
```

(b)

```
 5  PMODE 4,1
10  PCLS
20  SCREEN 1,1
30  CIRCLE (128,96),30,,3
40  GOTO 40
```

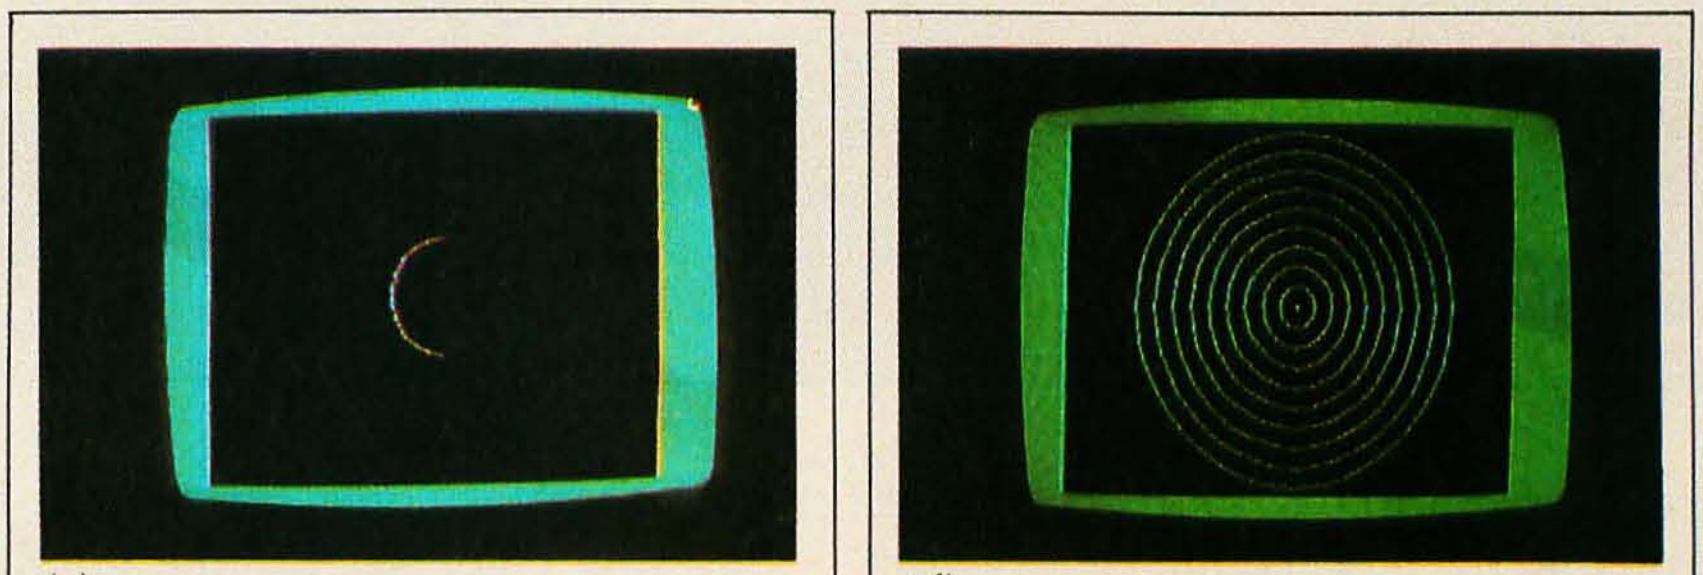

(c)

```
 5  PMODE 4,1
10  PCLS
20  SCREEN 1,1
30  CIRCLE (128,96),30,1,1,.25,.75
40  GOTO 40
```

(d)

```
10  PMODE 4,1
20  PCLS
30  SCREEN 1,0
40  FOR RADIUS = 1 TO 100 STEP 10
50  CIRCLE (128,96),RADIUS
60  NEXT RADIUS
70  GOTO 70
```

Photo 2: *Four variations of Extended Color BASIC's CIRCLE statement, all in the high-resolution graphics mode. Photo 2a is a simple circle with coordinates (128,96) as the centerpoint and 95 graphics blocks as the radius. In photo 2b, the height/width ratio has been specified as 3, creating an oval. The ratio can be specified from 0 to 255. If > 1, the circle is "higher" than it is wide; if < 1, it is wider than it is high. If the ratio is 0, the circle is infinitely higher than it is wide and becomes a straight line. Photo 1c uses the start and finish parameters to specify which part of the circle to draw. Photo 1d uses a single CIRCLE statement and a FOR-NEXT loop to create a bullseye.*

Music

Although fast and easy color graphics is the bread and butter feature of Extended Color BASIC, the system has a number of other strong points, including the ability to perform some pretty fancy music. The non-modified version of the TRS-80 Color Computer (without Extended Color BASIC) allows you to create music by the SOUND command, which gives a range of notes from F_3 to E_7 with a duration of 6/100 to 6/10 seconds. Obviously, there are limitations to this; there is a limited range, each note requires a separate program line, and you have no control over the tempo or volume. Playing all but the most simple tune is a tedious job.

All of those problems have been eliminated in Extended Color BASIC through the use of one powerful command—PLAY. The PLAY command allows you to control the note, octave, duration of notes and pauses, and volume through the use of a single string. You can also execute substrings, making the playing of certain kinds of music a much easier proposition (see listing 1). Notes (over a five-octave range) can be specified by using either the numerals 1 thru 12 or the notes themselves from C to B (including sharps and flats). Duration of notes can be varied from a whole note to a 1/255th note! Thirty-one volume levels can be specified, and tempo and pause-length have a range of



```
5  PMODE 3,1
10 PCLS
20 SCREEN 1,1
30 LINE (0,0)-(255,191),PSET
40 LINE (0,191)-(255,0),PSET
50 CIRCLE (128,96),90
60 PAINT (135,125),8,8
70 GOTO 70
```

Photo 3: *An example of the PAINT statement. The lines and circles shown are in the medium-resolution two-color mode (PMODE 3,1). The PAINT statement in line 60 specifies the beginning point of the painting (135,125), the color choice, and the color number at which the painting will stop.*

PMODE Number	Color Set	Two-Color Combination	Four-Color Combination
4	0	Black/Green	___
	1	Black/Buff	___
3	0	___	Green/Yellow/Blue/Red
	1	___	Buff/Cyan/Magenta/Orange
2	0	Black/Green	___
	1	Black/Buff	___
1	0	___	Green/Yellow/Blue/Red
	1	___	Buff/Cyan/Magenta/Orange
0	0	Black/Green	___
	1	Black/Buff	___

Table 4: *Color combinations (sets) that can be used within Extended Color BASIC. (Color set is the second parameter of the PMODE command.) The two low- and medium-resolution modes each have a two-color and a four-color set available. The single high-resolution mode is two-color and only allows combinations of black/green or black/buff.*

Listing 1: *A demonstration of Extended Color BASIC's music capabilities. Lines 55 thru 80 create six string variables (A$ thru F$) and assign to them note, duration, octave, tempo, and volume-level information. Line 85 assigns string variable X$, a string of commands to execute (X) substrings A$ thru F$. The music is played by the PLAY command in line 90, which calls the nested substrings.*

```
1 '*** BACK TO BACH ***
2 '
5 CLS
10 PRINT @ 96, STRING$(32,"*")
20 PRINT @ 320, STRING$(32,"*")
25 PRINT @ 201, "BACK TO BACH"
40 FOR X = 1 TO 1000: NEXT X
55 A$ = "T6;O2;L2;G;L4;C;D;E;F;L2;G;C;P16;C;"
60 B$="L2;A;L4;F;G;A;B;O3;L2;C;O2;C;P16;C;F;L4;G;
   F;E;D"
65 C$="L2;E;L4;F;E;D;C;L2;O1;B;O2;L4;C;D;E;C"
70 D$="L2;E;L1;D;L2;G;L4;C;D;E;F;L2;G;C;P16;C"
75 E$="L2;A;L4;F;G;A;B;O3;L2;C;O2;C;P16;C;F;L4;G;
   F;E;D"
80 F$="L2;E;L4;F;E;D;C;D;E;L2;F;O1;B;L1;O2;C"
85 X$="XA$;XB$;XC$;XD$;XE$;XF$;"
90 PLAY X$
```

from 1 to 255. If you're musically inclined, you'll find the PLAY command an interesting one, despite the inability to play chords. Even for one not schooled in musical theory, these capabilities are useful for adding sound to program displays, graphics, and animation.

The Added Extras

Extended Color BASIC adds to the TRS-80 Color Computer commands and functions. This makes it substantially the same as the well-known Radio Shack Level II BASIC. After using the non-extended BASIC for a while, it was good to have back such familiar commands as TRON and TROFF (trace on and off), and ON ERROR GOTO. Functions added include PEEK (strangely enough, non-extended color BASIC does have POKE but not PEEK), SQR, EXP, COS, LOG, TAN, and USR.

There are a number of differences. Since both extended and non-extended color BASIC use device numbers for I/O (input/output) operations (0 for the keyboard and video screen, −1 for the cassette, and −2 for the printer), OPEN, CLOSE, INPUT, and EOF (end-of-file) statements are available. Therefore, dumping a program to a line printer is done by the PRINT#−2 command instead of LPRINT.

Also, because Extended Color BASIC includes a USR function, it is possible to call machine-language subroutines from BASIC programs (unlike the non-extended version). The technical information appendix of the Extended Color BASIC manual says, "The ROM (read-only memory) contains many subroutines that can be called from machine-language programs." From this statement, you might think that a long list of ROM subroutines would be included. Unfortunately, such is not the case. A total of seven follows, all dealing with cassette, joystick, and keyboard I/O. To be fair, the lack of ROM subroutine information is not Radio Shack's fault—its license with Microsoft prevents publication of such information.

Despite the lack of specific subroutine information, there are three new statements within Extended Color BASIC which are designed to help out the machine-language programmer:

```
5   PMODE 4,1
10  PCLS
20  SCREEN 1,1
25  DRAW "BM40,80;U40;R40;D40;L40"
30  DRAW "BM + 20,20;U40;R40;D40;L40"
40  LINE (60,100) – (40,80),PSET
50  LINE (60,60) – (40,40),PSET
60  LINE (100,60) – (80,40),PSET
70  LINE (100,100) – (80,80),PSET
80  GOTO 80
```

(a)

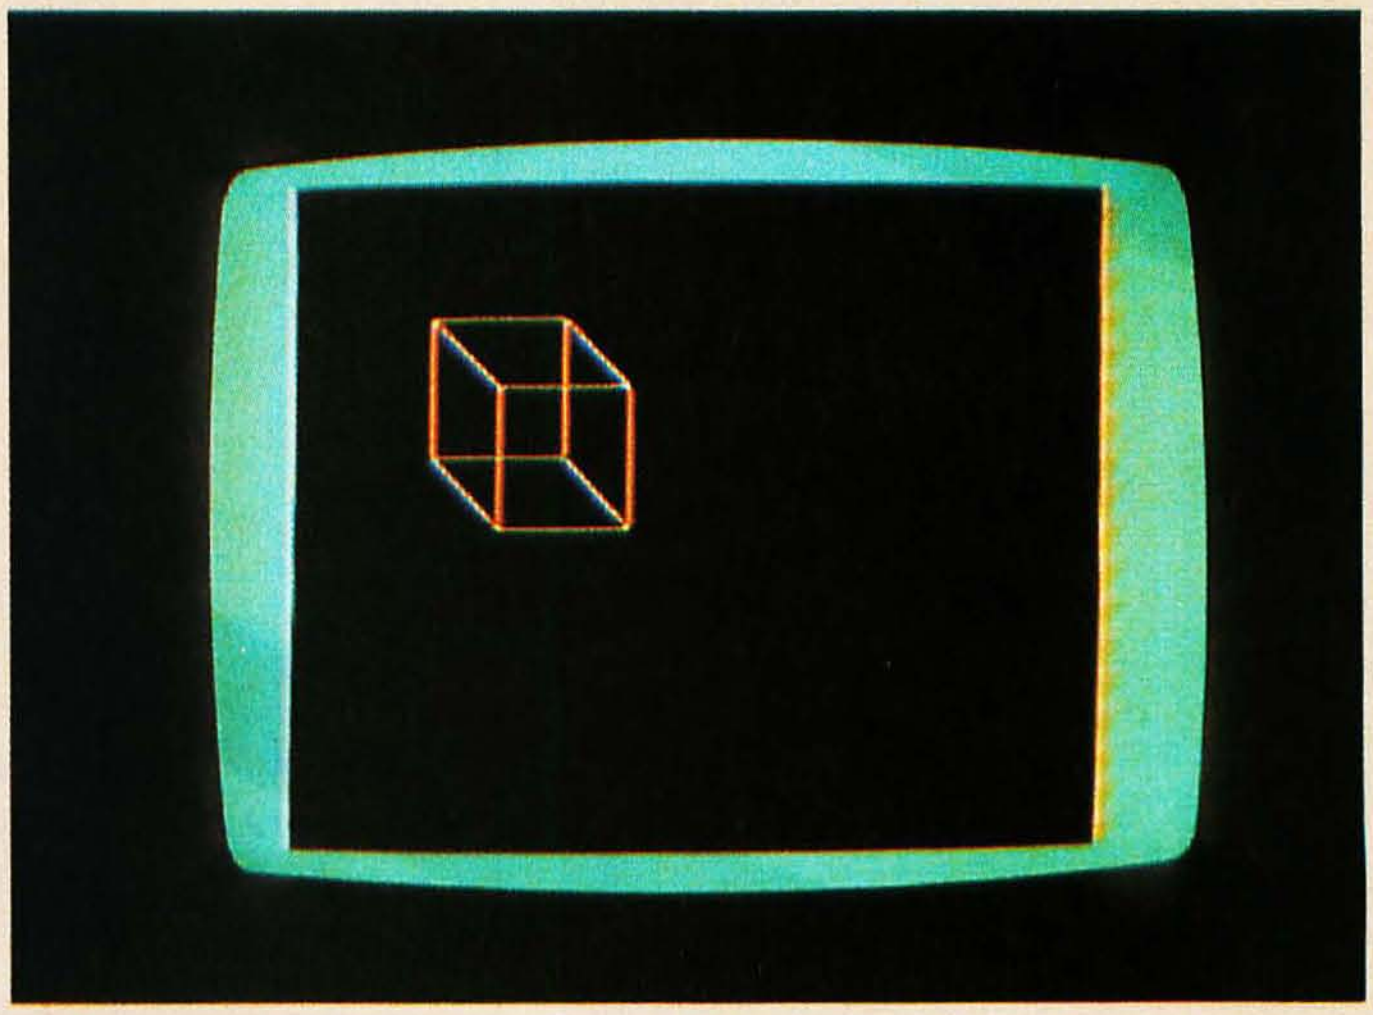

```
5   PMODE 4,1
10  PCLS
20  SCREEN 1,0
30  DRAW "BM98,96;NU80;NE56;
    NR80;NF56;ND80;NG56;NL80;NH56"
40  CIRCLE (98,96),80,1,1,.125,1
50  CIRCLE (135,110),80,1,1,1,.125
60  LINE (135,110) – (190,167),PSET
70  LINE (135,110) – (235,110),PSET
80  GOTO 80
```

(b)

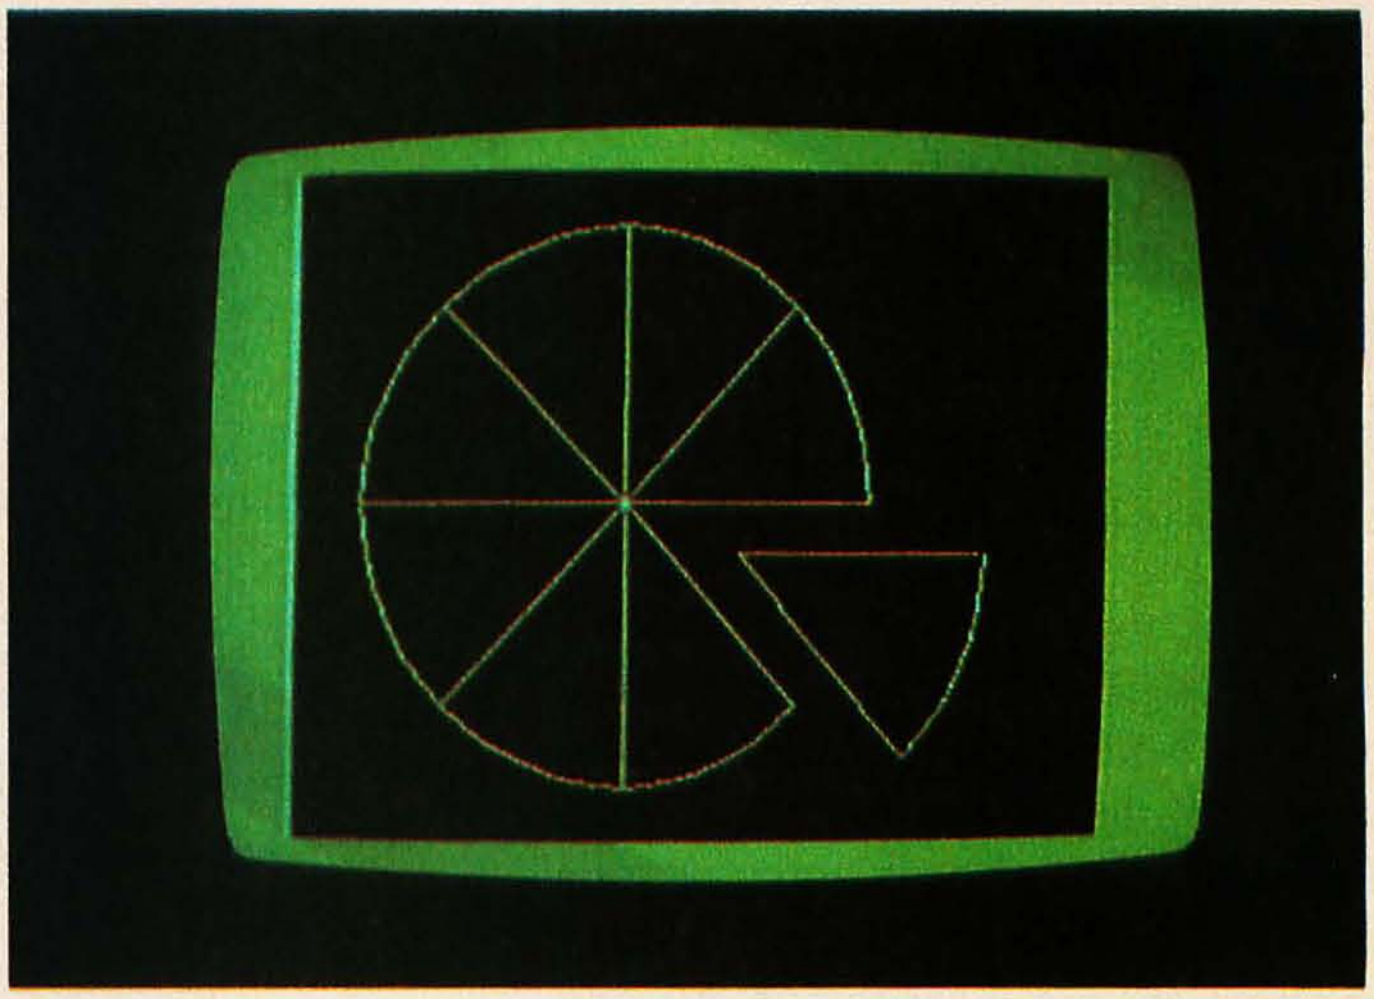

```
5   PMODE 4,1
10  PCLS
15  SCREEN 1,0
20  DRAW "BM50,50R60D10NL20D20L20NU20L20NU20
    L20U20NR20U10" 'TOP VIEW
25  DRAW"BM50,100R20ND20R20ND20R20D20
    NL20D10L60U10NR20U20" 'FRONT VIEW
30  DRAW "BM150,100R30D30L30U10NE20U20"
    'SIDE VIEW
35  ' OBLIQUE VIEW—LINES 40-60

40  DRAW "BM150,50U5E15R10BF20BD30NR5L20H25U10
45  DRAW "BM150,50U5F8U15R15H8F8L15F8NR15D15F8
    ND10E15NR10H8
50  LINE (175,30) – (200,55),PSET
55  LINE  – (200,80),PSET
60  LINE (167,60) – (183,46),PSET
65  GOTO 65
```

(c)

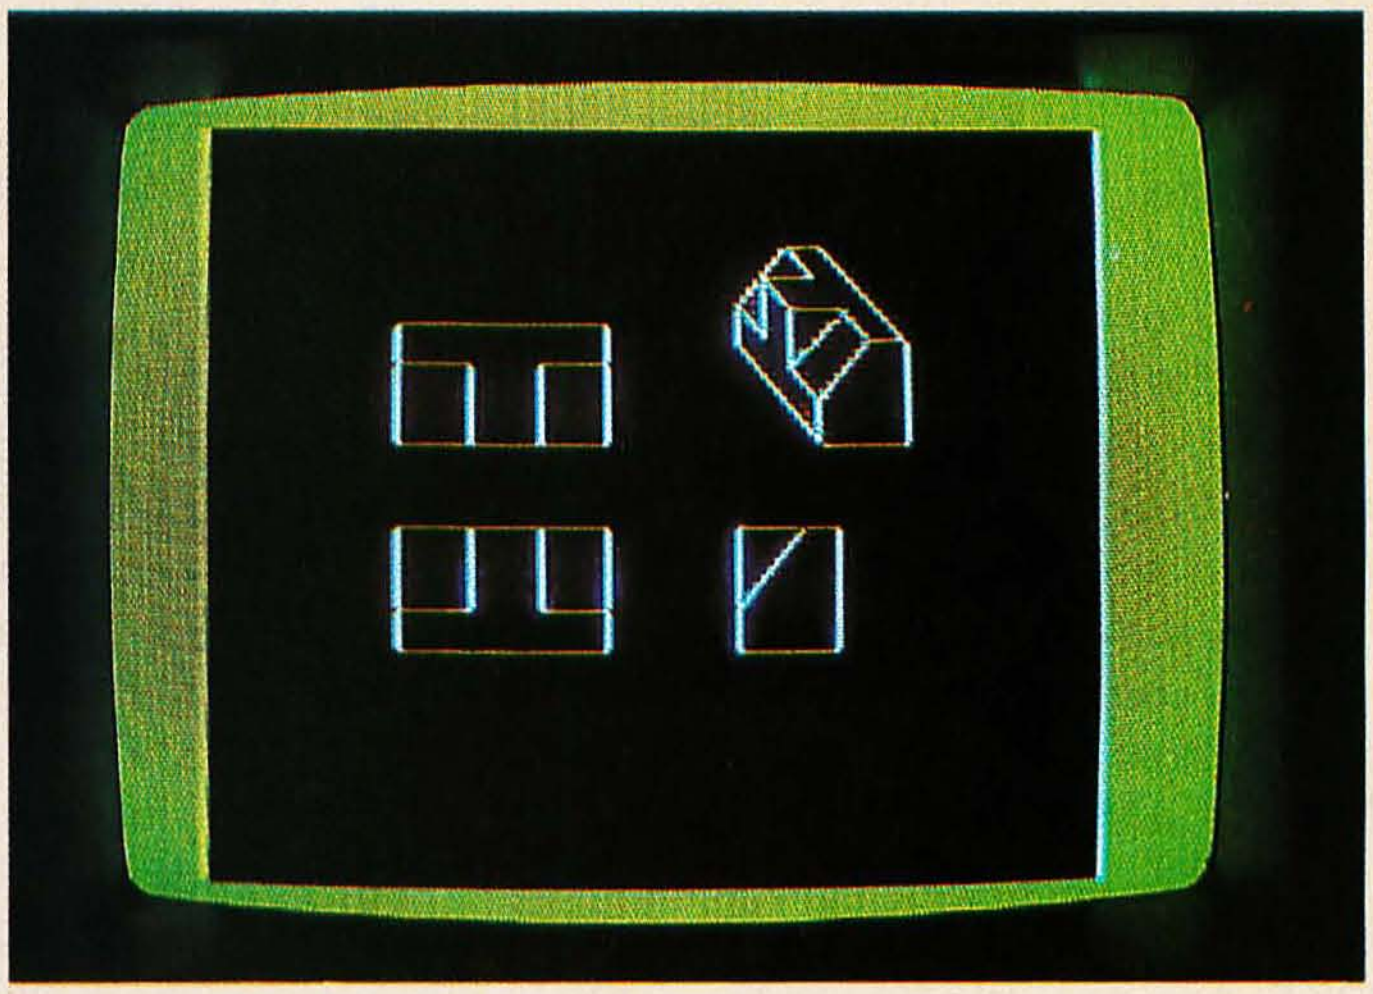

Photo 4: *Three examples of the DRAW statement, which allows you to specify the starting point, direction, angle, and color of a figure. The cube in photo 4a was created by DRAWing two squares (lines 25 and 30) and connecting them with four LINE statements (lines 40 thru 70). Photo 4b is an example of the DRAW statement's "no update" option. Each of the lines radiating from the center of the "pie" is drawn individually, with the computer returning each time to the centerpoint of the circle (98,96). The detached "slice" was created using the CIRCLE statement's start/end parameters and two LINE commands. Photo 4c uses all of the parameters of the DRAW statement to create the four projection studies of a figure.*

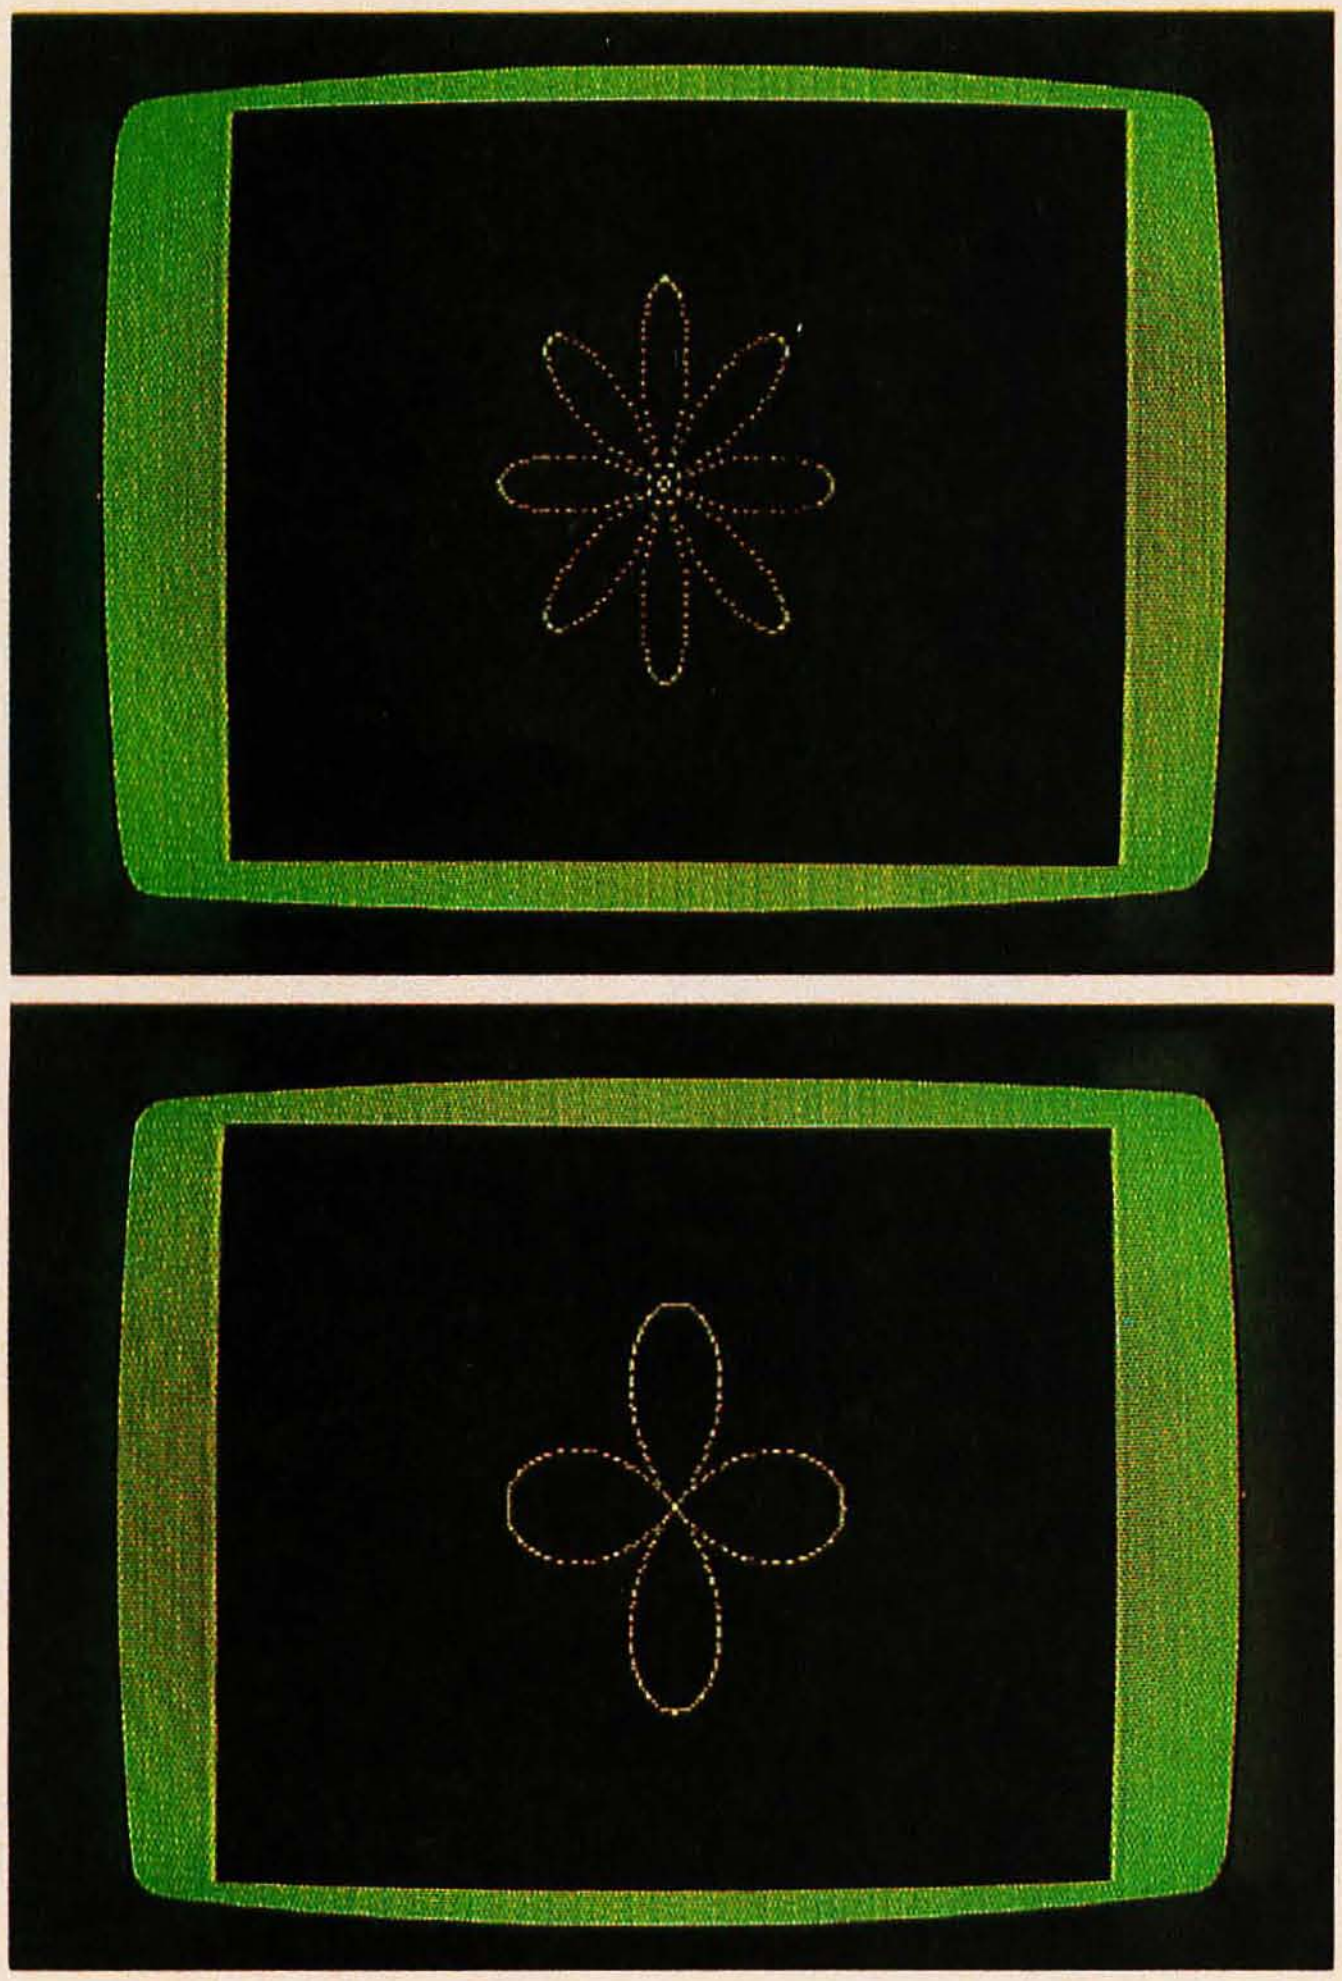

(a)

```
5   PCLEAR 8
10  PMODE 4,1
11  PCLS
12  SCREEN 1,0
13  PI = 3.14159
15  A1 = 0: A2 = 2*PI
20  N = 360:A = 50
25  X = (A2-A1)/N
30  FOR I = A1 to A2 STEP X
35  R = A * COS (4*I)
40  X = R *SIN(I)
45  Y = R * COS (I)
50  PSET(128 + X,96 + Y,5)
55  NEXT I
60  GOTO 13
```

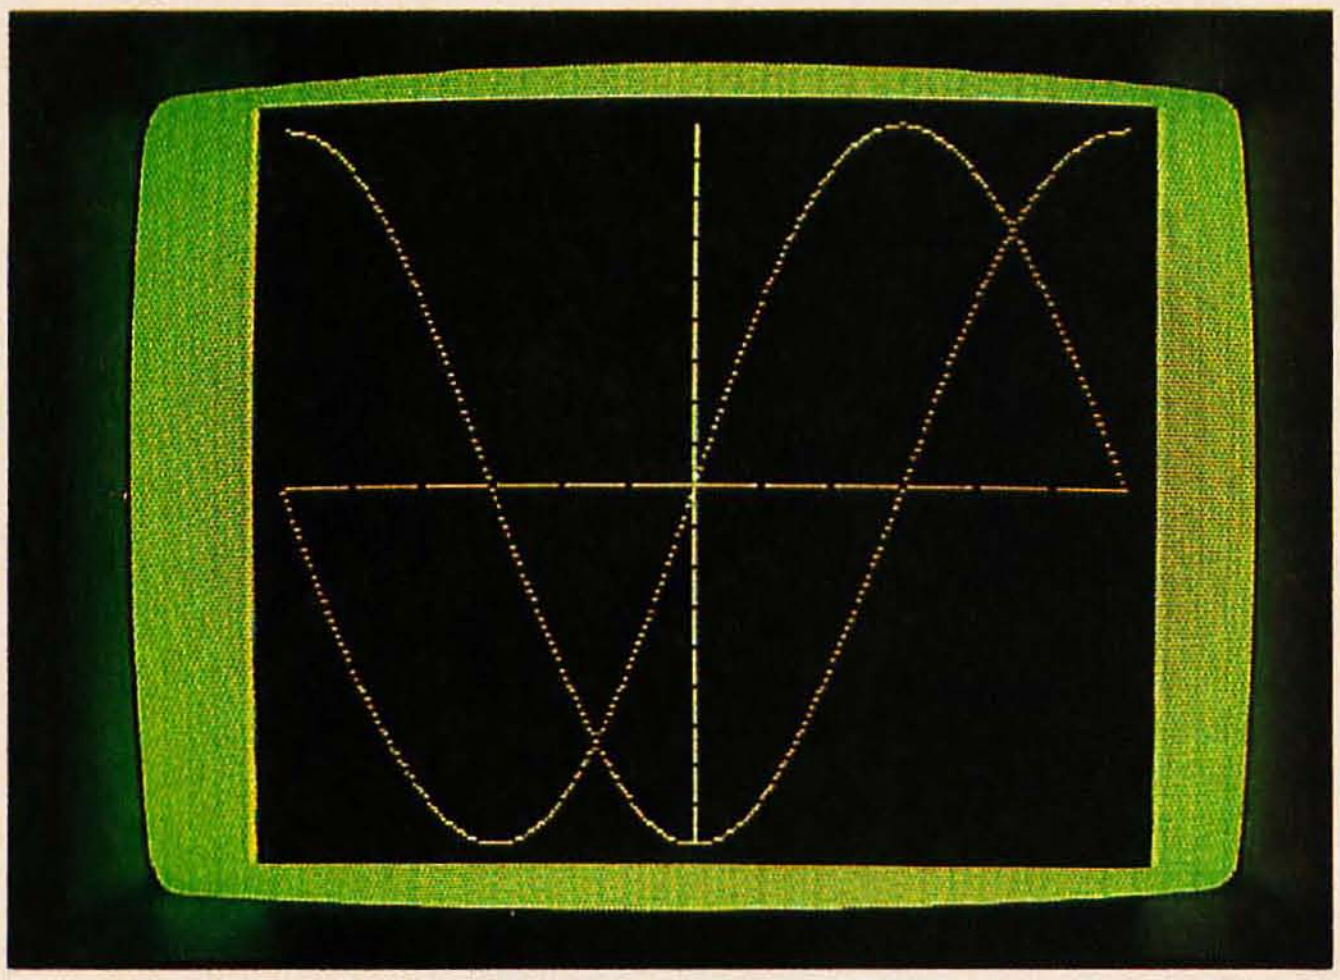

(b)

```
10  PMODE 4,1
20  PCLS
30  SCREEN 1,0
40  LINE (127,5)-(127,185),PSET
50  LINE (7,95)-(247,95),PSET
60  FOR XSCALE = 7 TO 247 STEP 20

70  PRESET (XSCALE,95)
80  NEXT XSCALE
90  FOR YSCALE = 5 TO 185 STEP 10
100 PRESET (127,YSCALE)
110 NEXT YSCALE
130 FOR X = -180 TO 180 STEP 1.5
140 AX = X/57.29578
145 XP = X/1.5 + 127
150 F1 = -(SIN(AX)*90) + 95
160 F2 = -(COS(AX)*90) + 95
170 PSET(XP,F1,1): PSET(XP,F2,1)
180 NEXT X
190 GOTO 190
```

Photo 5: *Three high-resolution examples of the use of PSET, SIN, and COS. The eight-leaf clover in photo 5a is changed to a four-leaf clover (photo 5b) by changing the cosine value in line 35 to 2. In photo 5c, the computer uses PSET, SIN, and COS to draw the sine/cosine waves and LINE to draw the x-y axis. Notice that each wave travels 360 degrees (from +180 to −180) and that the x-axis increments 30 degrees at each gradation. This is a good exercise in mapping (scaling down) a program to fit the video display.*

- CLOADM—Loads a machine-language program from cassette. You can also specify a memory offset.
- CSAVEM—Writes a machine-language program to cassette.
- DLOADM—Loads a machine-language program at the speed you specify (300 or 1500 bps [bits per second]).

Advanced programmers should be able to use its speed and efficient use of memory space to avoid the tedium of machine-language programming.

Although a lack of machine-language information might be considered a handicap by some, it is not. One of the most striking features of Extended Color BASIC is that it is *fast*—despite the fact that the microprocessor runs at the relatively slow speed (for computers) of .894 MHz (million cycles per second). It's evident that the 6809E is an extremely powerful microprocessor. Creating graphics by the PSET (point-by-point) method is slow, but the LINE, CIRCLE, DRAW, and PAINT statements are surprisingly fast—obviously calling machine-language subroutines in the Extended Color BASIC ROM.

The Editor

The color graphics and musical ability of Extended Color BASIC are the most interesting features; however, the addition of a full-feature editor (once again similar to the Level II BASIC editor) will surely be appreciated. It only takes a couple of times of retyping long program lines to correct a single error to convince any programmer that editing capability is not a luxury.

Documentation

As usual, the Radio Shack people have done an outstanding job of providing a manual aimed squarely at the "average" user of Extended Color BASIC (ie: the non-programmer).

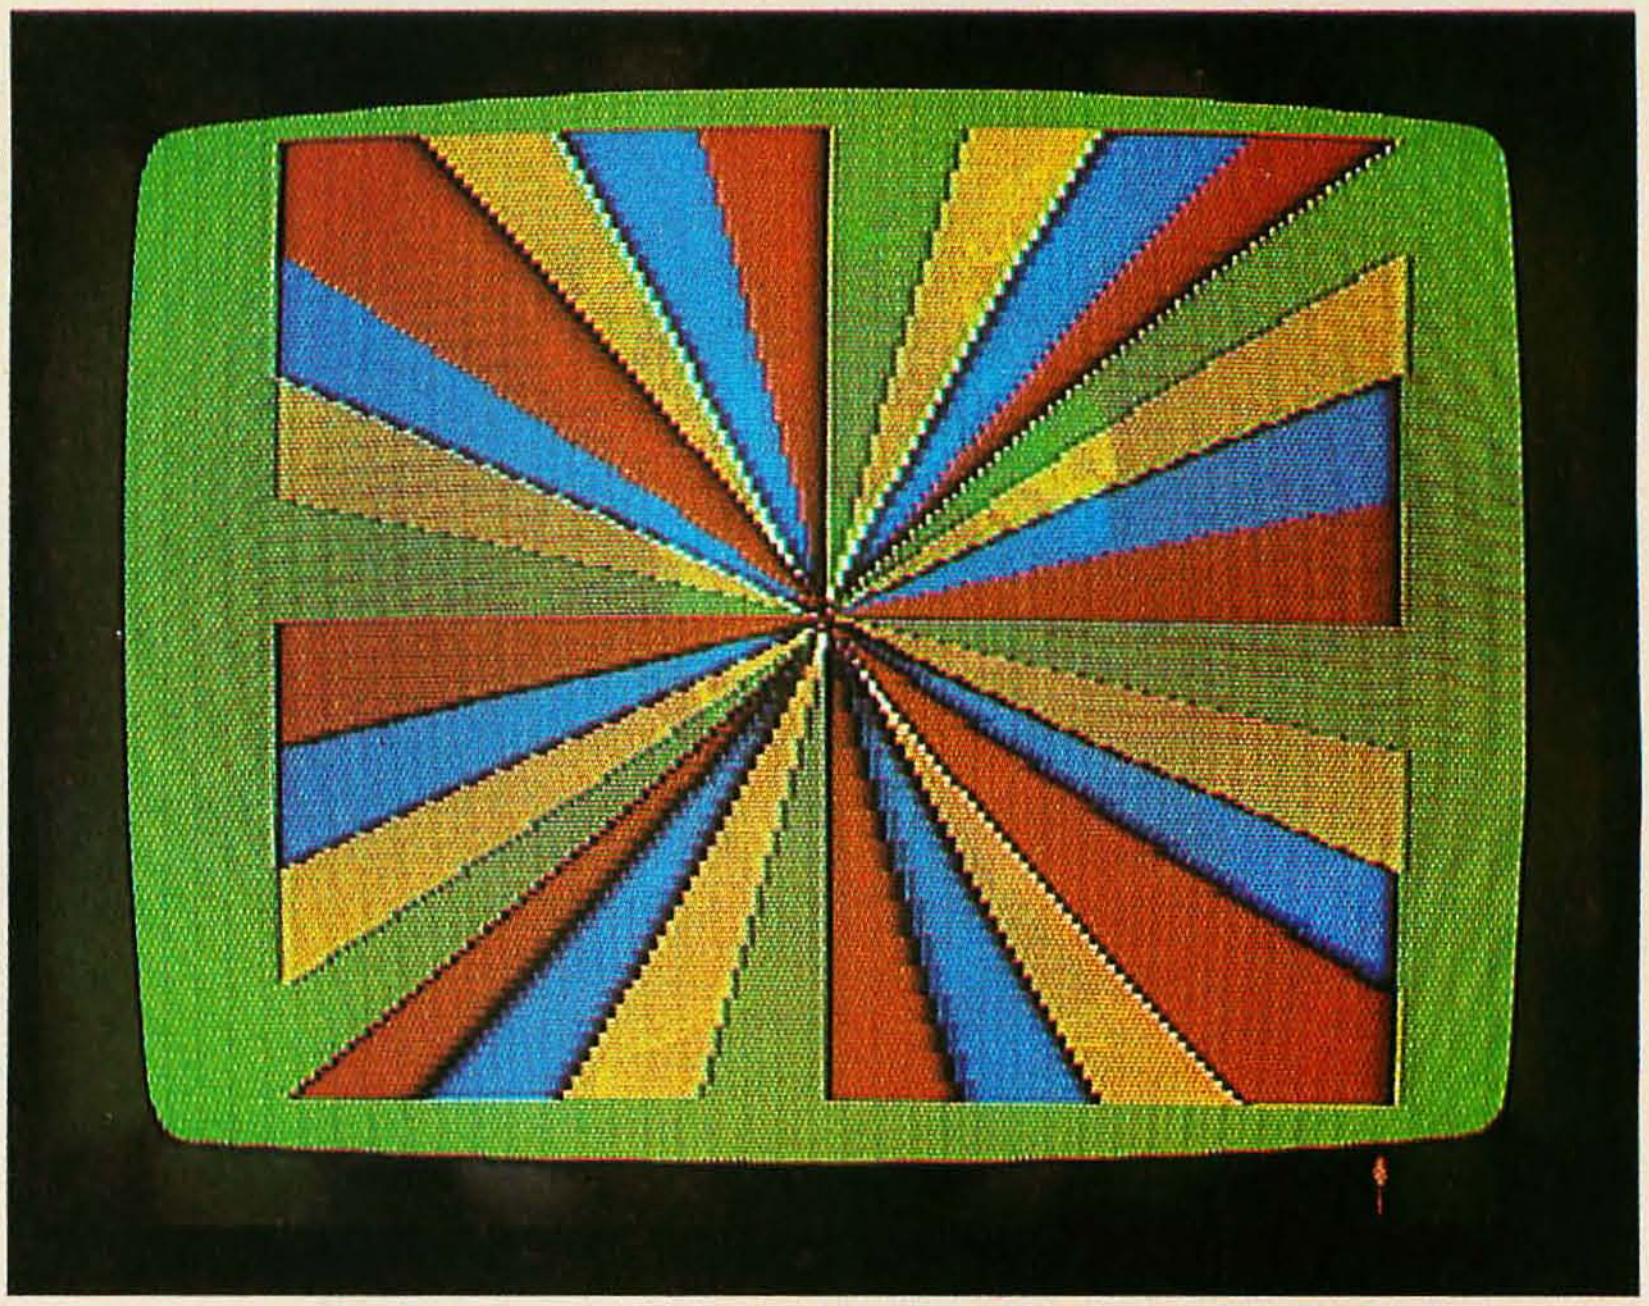

```
5    PCLEAR 8
50   GOTO 600
60   LINE ((255 - X),(191 - Y)) - (X,Y),PSET

61   J = J + 1:IF J > A THEN J = 0:A = RND(50)
63   RETURN
600  REM ROTATING FAN
601  FOR I = 1 TO 5 STEP 4
602  PMODE 3,1
603  PCLS
604  SCREEN 1,0
605  A = 25:X = 0: Y = 0: J = 0
610  FOR X = 0 TO 254
612  COLOR X/32 + 1,5
615  GOSUB 60: NEXT X
620  FOR Y = 0 TO 190
623  COLOR Y/24 + 1,5
625  GOSUB 60: NEXT Y
630  FOR X = 255 TO 1 STEP -1
633  COLOR X/32 + 1,5
635  GOSUB GO: NEXT X
640  FOR Y = 191 TO 1 STEP -1
643  COLOR Y/24 + 1,5
645  GOSUB 60: NEXT Y
650  NEXT I
660  FOR I = 1 TO 5 STEP 4
670 PMODE 3,1
680  SCREEN 1,0
690  FOR T = 1 TO 30: NEXT T
700  NEXT I
710  GOTO 660
```

Photo 6: *Advanced programming in Extended Color BASIC. The program uses the available parameters of LINE, SCREEN, and COLOR to create a multicolor rotating display.*

Hexadecimal Address	Decimal Address	Contents
0-3FF	0-1023	System Use
0FF	255	Direct Page Memory
3FF	1023	Extended Page Memory
400-5FF	1024-1535	Text Screen Memory
		Graphic Screen Memory
600-BFF	1536-3071	Page 1
C00-11FF	3072-4607	Page 2
1200-17FF	4608-6143	Page 3
1800-1DFF	6144-7679	Page 4
1E00-23FF	7680-9215	Page 5
2400-9FF	9216-2559	Page 6
2A00-2FFF	2560-12287	Page 7
3000-35FF	12288-13823	Page 8
3600-3FFF	13824-16383	Program and Variable Storage
8000-9FFF	37768-40959	Extended Color BASIC
A000-BFFF	40960-49151	Color BASIC
C000-FEFF	49152-65279	Cartridge Memory
FF00-FFFF	65280-65535	Input/Output

Table 5: *TRS-80 Color Computer memory map. (Map as shown is with Extended Color BASIC and 16 K bytes of programmable memory installed.)*

Technical Writer Jonathan Erickson has written a manual ("documentation" is a dirty word in the halls of Radio Shack, since they feel it connotes *non*-readability) in Radio Shack's informal, chatty, and *very* readable style. He's also managed to do this without talking down to the reader. Best of all, the material is well organized so that finding specific information is quick and easy.

Summary

Radio Shack's Extended Color BASIC is a breakthrough in color graphics for personal computers. It's fast, easy-to-use, and capable of producing striking graphics. In addition, advanced programmers should be able to use its speed and efficient use of memory space to avoid the tedium of machine-language programming. It lends itself well to the development of games and is also a great way for children to get involved with programming. For experienced programmers, "getting into" the system in order to broaden its features will present a challenge and eventually result in even more exciting graphics.

Extended Color BASIC (in its present form) and the TRS-80 Color Computer system do not readily lend themselves to a professional or business environment. The inability to mix graphics and text on the screen makes it difficult to set up charts and graphs. But better things are coming—Radio Shack will introduce a floppy-disk drive for the Color Computer within a few months and also plans to market a low-cost plotter/printer for the system.

Finally, Extended Color BASIC is the first incarnation of Microsoft's continual development of software dedicated to computer graphics, one of the fastest growing fields of the future. If Extended Color BASIC is an indication of the beginning for personal computers, we can expect amazing products in the years to come.■

At a Glance

Name
Extended Color BASIC

Type of package
Color graphics, music, and BASIC extension

Manufacturer
Radio Shack
1300 One Tandy Ctr
Fort Worth TX 76102

Price
$99 to add to existing TRS-80 Color Computer;
$599 for complete system (less video display)

Format
ROM (read-only memory)

Language used
BASIC

Computer needed
Radio Shack TRS-80 Color Computer with 16 K bytes of programmable memory.

Documentation
"Going Ahead With Extended Color BASIC"
215 pages, 22 by 28 cm (8½ by 11 inches)

Of interest to
Everyone

Additional comments
If Extended Color BASIC is to be added to an existing TRS-80 Color Computer, the unit must be returned to Radio Shack for modification.

The Commodore VIC 20 Microcomputer:

A Low-Cost, High-Performance Consumer Computer

Gregg Williams
Senior Editor

"Why haven't you bought a personal computer yet?" This question will elicit varying responses from people interested in buying one. However, most of them fit into two categories: "They're still too expensive," or "The ones I can afford are not a good long-range investment." There are some good general-purpose microcomputers around, but they're in the $1000 price range. And some computers cost as little as $200; that's certainly the right price, but you know you're sacrificing *something* (quality of materials, expandability, etc) to get such a low price.

The Commodore VIC 20 microcomputer may change all this. It is well constructed, has color, sound, and graphics, and is easy to use. It comes with everything needed to use it (except an ordinary color television set), includes a well-written instruction manual, and is supported by a line of optional extensions, peripherals, and documentation (see figure 1). Looking at a picture of the version selling in Japan (photo 1) might cause you to think $600 would be a fair price. It is, compared to the cost of other units. But it does not cost $600—the VIC 20 retails for $299.95.

Acknowledgment

I would like to thank Ramon Zamora, David Cole, and the rest of the Avalanche Inc staff for their assistance during the writing of this article.

The Commodore VIC 20 is well constructed, has color, sound, and graphics, and is easy to use.

Physical Characteristics

The VIC (which stands for Video Interface Computer) is a small unit, about the size of the main (keyboard) component of the Radio Shack TRS-80 Model I. It measures 40.3 by 20.4 by 7.2 cm (15.9 by 8 by 2.8 inches) and is small enough to easily fit on a work desk or a shelf. In fact, it is small enough to fit into a suitcase (along with its external power supply and RF (radio-frequency) modulator), making it usable as a portable personal computer.

The first thing I noticed about the VIC was its keyboard. It is the equal of any personal-computer keyboard in both appearance and performance. This is a remarkable accomplishment, almost unbelievable considering the price of the entire unit. Three of its closest competitors, the Atari 400, the Radio Shack TRS-80 Color Computer, and the Sinclair ZX80, have keyboards that are less than perfect as a result of cost cutting. In this respect, the Commodore VIC 20 stands clearly ahead of its competition.

Photo 2a shows the rear panel of the VIC 20. The long slot on the left is used to plug in memory cartridges, program cartridges, or a VIC Master Control Panel, which allows up to four cartridges to be plugged in. Immediately to the right of the cartridge slot is the TV output socket. The signal from this plug goes directly to a video monitor or through the RF modulator and a TV switch box to a standard television set. (The necessary cable, RF modulator, and switch box are supplied with the VIC.)

The middle (round) connector on the rear panel is a serial interface that drives a single 5-inch floppy disk and a printer. Up to five peripheral devices can be daisy-chained through each other to this connector. The next slot to the right (the short rectangular

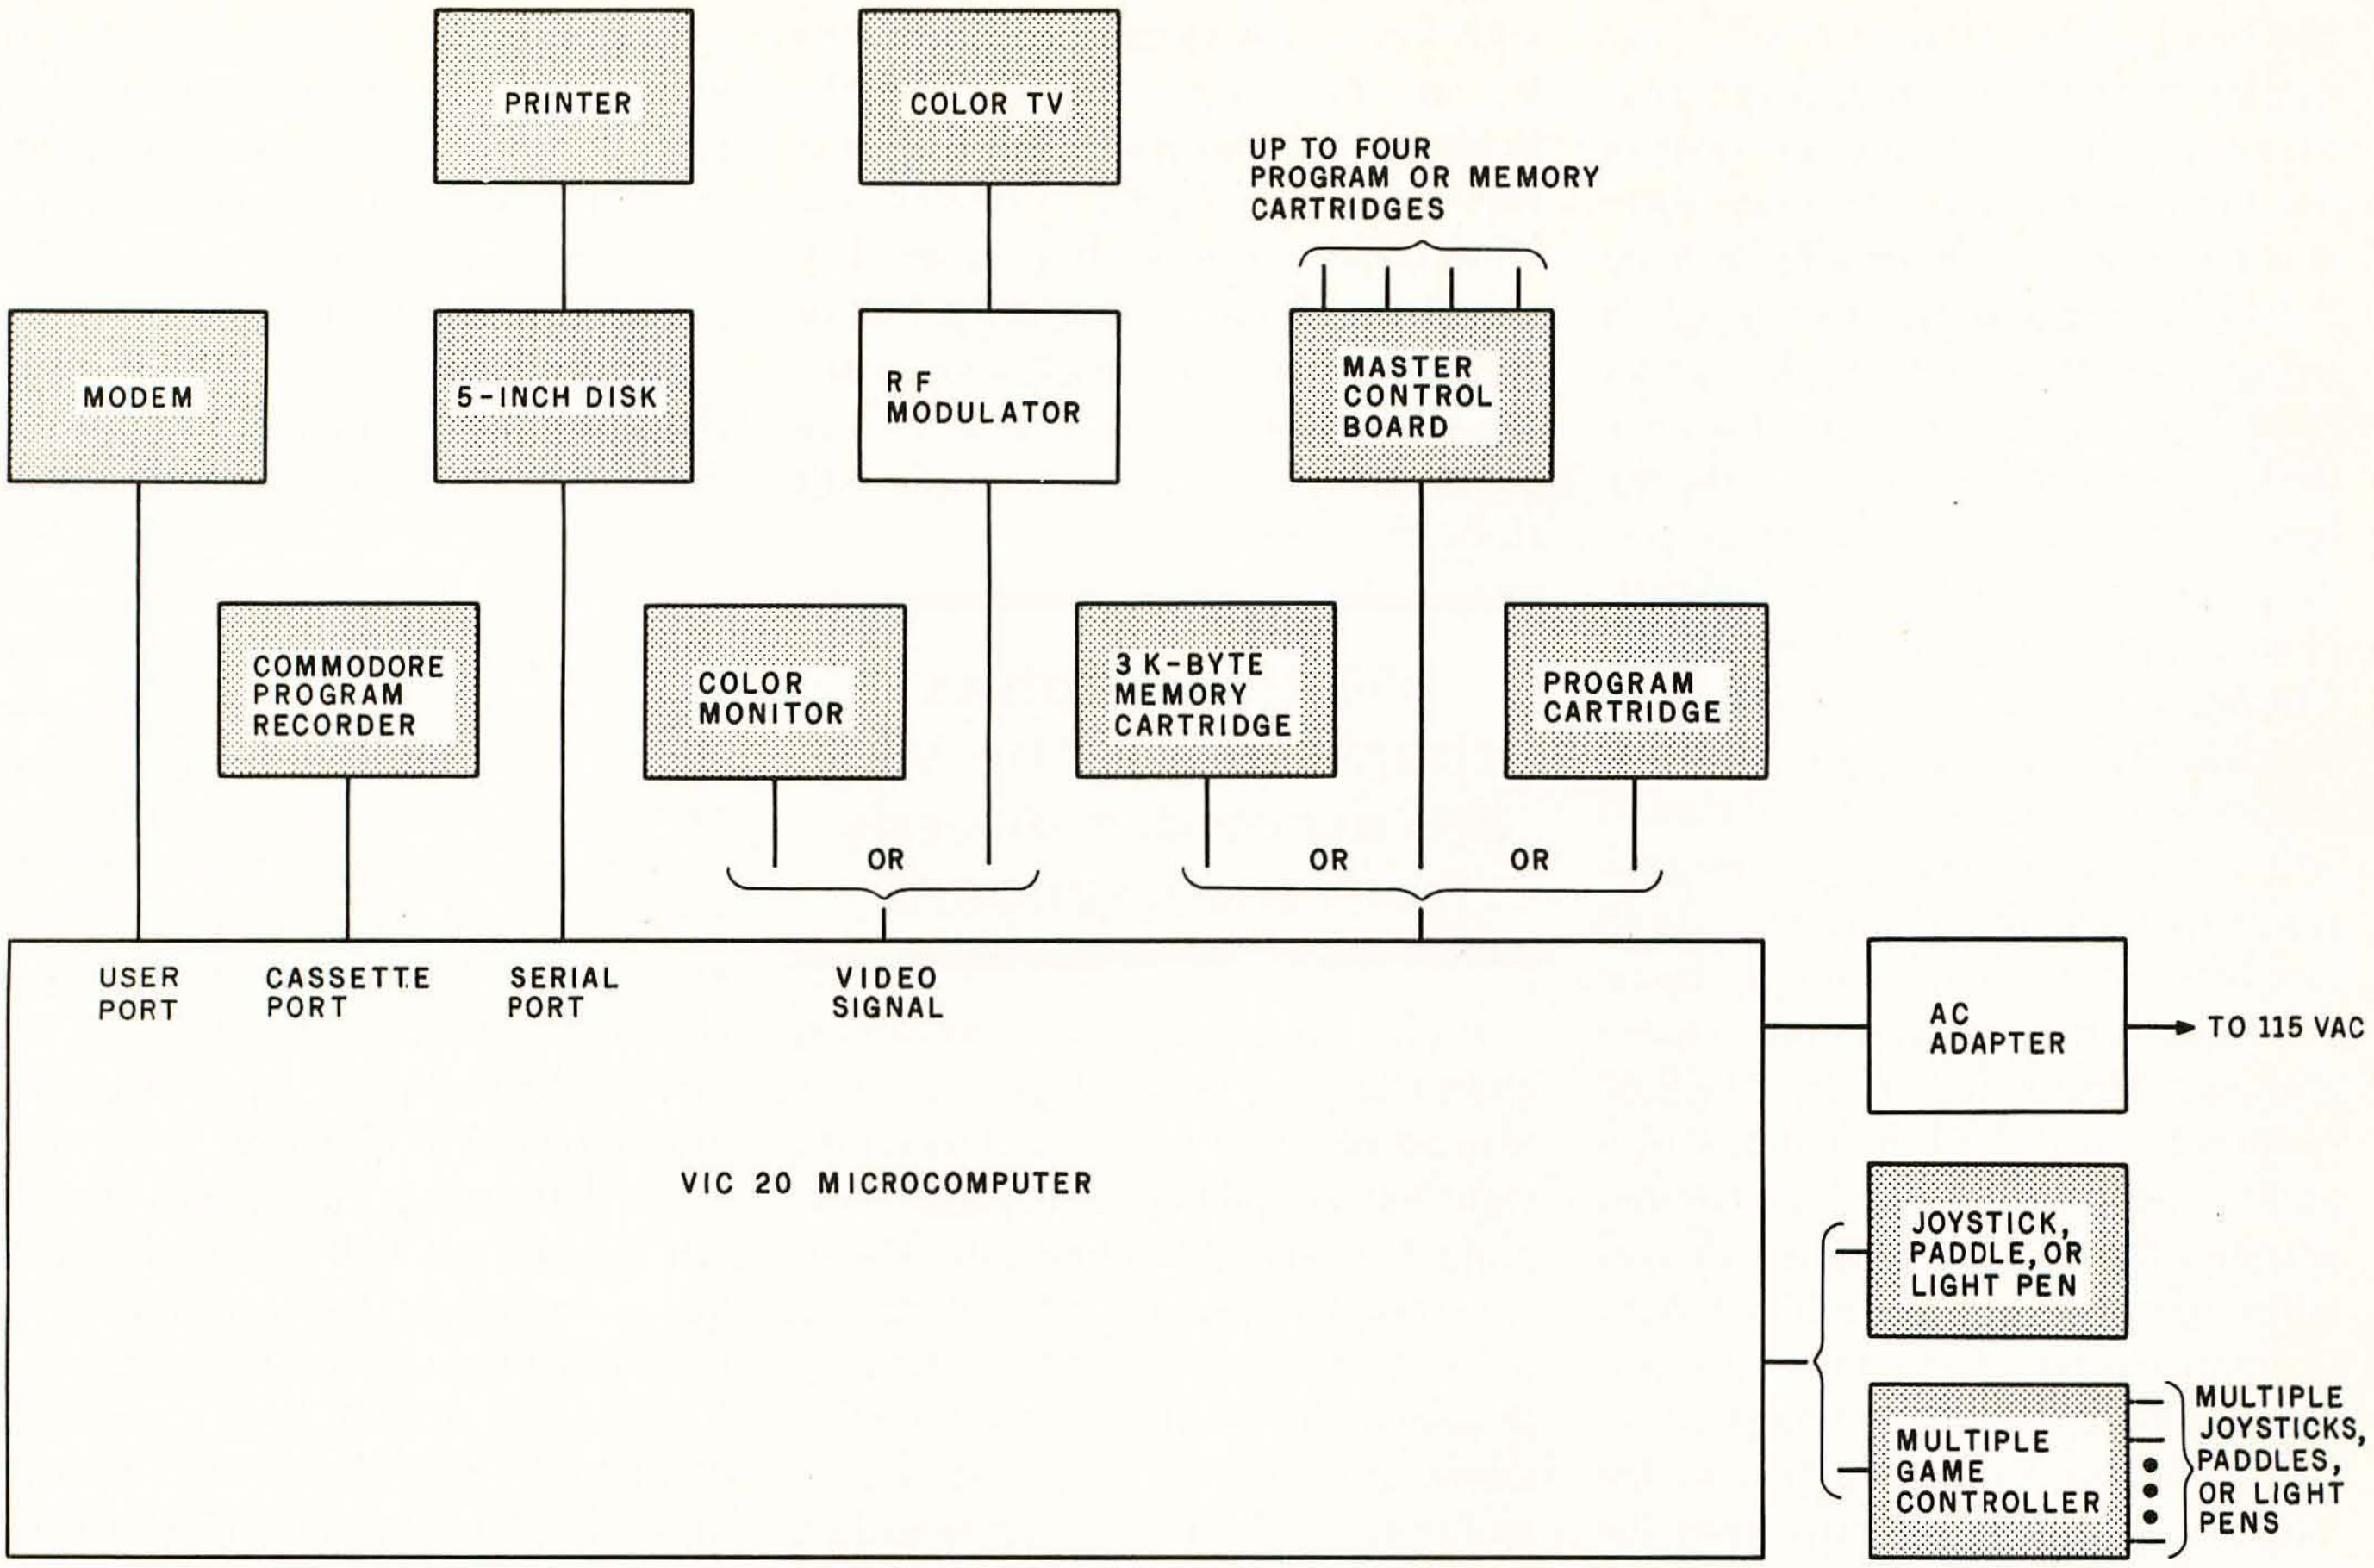

Figure 1: *A block diagram of the Commodore VIC 20 system (shaded components are available at extra cost).*

slot) goes to the VIC cassette recorder (which is available separately). The rightmost slot contains a "user port" that can be connected to a printer, a modem, or one of several other peripheral devices. With an optional RS-232C adapter card, this port can also be used with RS-232C devices.

The left-side panel (see photo 2b) contains (from left to right) a game port, a rocker-type on/off switch, and a socket to receive power from the VIC power supply. The game port, according to Commodore, can accept a joystick, a light pen, a game paddle, or a VIC Multiple Game Controller (which allows several game devices to be connected to the VIC).

Photo 1: *The Commodore VIC 20 microcomputer. This unit, a final prototype based on the Japanese version of the VIC microcomputer, differs from the American model only in the model number.*

When the VIC 20 is turned on, the video display (a color television tuned to channel 3 or 4) stays dark for about three seconds, then shows the display given in photo 3. The VIC display has 23 lines of 22 characters or graphics symbols per line, with cyan (greenish blue) letters on a white background. The active display area in the VIC is delineated by a border of a different color (in photo 3, a cyan border). The border crisply marks the working area of the VIC. For me, it has the psychological effect of making the screen area seem bigger; this is important, since the VIC displays fewer characters per line than any of its competitors.

VIC Graphics

The VIC 20 graphics character set is virtually identical to that of its predecessors, the Commodore PET and CBM (Commodore Business

Machine). The standard VIC can display over sixty graphics symbols, shown on the front faces of most of the keys (see photo 1). Since these symbols are directly available from the keyboard and can be stored in string variables and displayed by PRINT statements, it is easy for even the inexperienced BASIC user to combine these symbols into larger pictures. This character-size building-block approach is used by Atari, Commodore, Ohio Scientific, and Sinclair. It is a good way to generate graphics that are easy to understand and use without having to design a separate graphics mode. Such graphics are better than simply being able to turn on and off coarse graphics blocks (as in the TRS-80 Models I and III and the Color Computer) because character-oriented graphics allow more detailed images (although, unlike the graphics-blocks system, character graphics do not allow full control of the image).

All the graphics characters in the VIC are accessible directly from the keyboard. For characters shown on the fronts of key caps, pressing either shift key or the Commodore key (the key in the lower left corner of the keyboard) causes one of these characters to be displayed. Pressing the Commodore key with a given key causes the character on the left half of the front face to be displayed; pressing either shift key with a given key causes the character on the right half to be displayed.

All the graphics characters in the VIC are accessible directly from the keyboard.

Both uppercase and lowercase characters can be displayed, but you lose access to all the characters on the right half of the key front faces. Toggling between this uppercase/lowercase/graphics mode and the default uppercase/graphics mode is done by pressing the shift key, holding it down, pressing the Commodore key, and releasing both keys. The graphics characters on the left half of the key front faces are still available with lowercase letters. Commodore grouped what it believes are the most useful graphics characters (ones that might be used with lowercase letters in business applications) on the left half of the key front faces.

Finally, the number of graphics characters that can be displayed is doubled because *any* character can be displayed as is or in reverse (see photo 3). This can be done immediately or during program execution. Pressing the RVS ON key (the CTRL key plus the 9 key simultaneously) causes all displayed characters to appear in reverse on the screen. (If you are programming and hit the RVS ON key while defining a character string, a reverse R will appear and subsequent keystrokes will not be reversed. However, when you print that string, the reverse R will not appear but will cause all subsequent characters to be displayed in reverse.) Pressing the RVS OFF key (CTRL plus the 0 key) causes all displayed characters to appear unreversed on the screen. (When included in a character string, the RVS OFF key causes all subsequent characters to be displayed normally; its symbol appears in the character string as a reverse underline.)

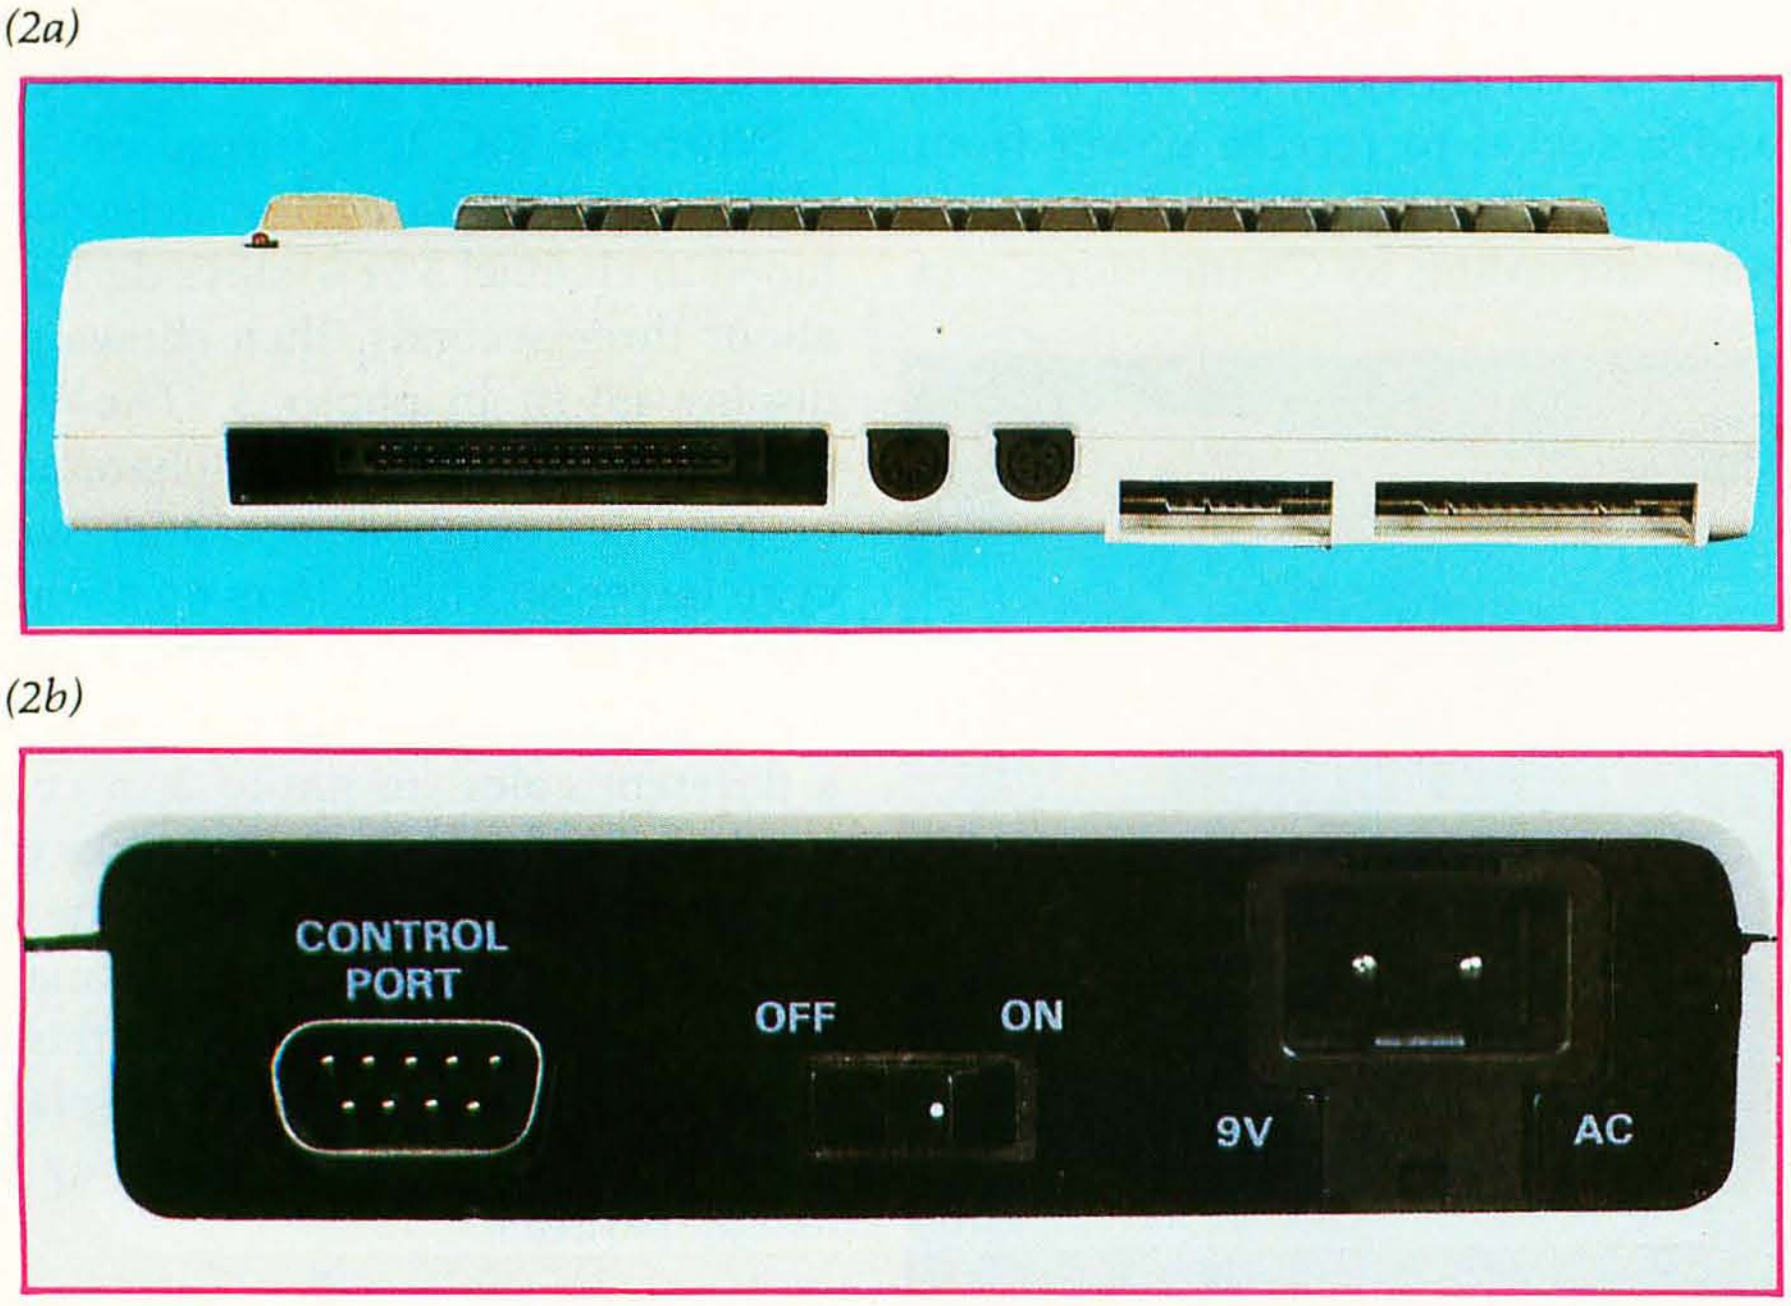
(2a)

(2b)

Photo 2: *Connections to the VIC 20 microcomputer. Photo 2a shows the rear panel of the VIC; from left to right are a slot for program cartridges and connections to a television or video monitor, a floppy disk, a Commodore cassette recorder, and a printer or other peripherals. Photo 2b shows a game device port, an ON/OFF rocker switch, and a connector for an external power supply.*

VIC Color

To quote an adage from photography, "If you can't make it good, make it red." There is an element of truth in that—color *does* make things more exciting, and it's always one of the most striking features of a microcomputer video display. The VIC has an impressive color display due largely to the complete control you have over the placement and combination of colors.

The VIC allows you to display normal and reversed characters (including all graphics symbols) in eight colors: black, white, red, cyan, purple, green, dark blue, and yellow. The color of the flashing cursor and all subsequent characters displayed on the video screen is set by simultaneously pressing the CTRL key and the appropriate color key (one of the keys numbered 1 through 8). As described for the RVS ON and

Circle 292 on inquiry card. →

What has nine lives, three forms, multiple faces and a price tag that almost disappears?

The Magical Microline 80 Printer

It's magic! Well, almost. The Microline 80 will run all day at 80 cps with no duty cycle limitations. The head is warranted for 200,000,000 characters. That translates to over nine years on your TRS-80,™ APPLE® or other small computer.

Want to change forms? The magical Microline 80 is three printers disguised as one. There is a whisper-quiet rubber platen for cut sheets and roll paper, pins on nine inch centers for pin feed stock and optional snap-on tractors that adjust to suit all your other forms. The Microline 80 also saves paper by letting you tear off as close as one inch from the last print line.

Want to change your image? The magical Microline 80 really does tricks. It prints upper and lower case, condensed and double width characters *and* block graphics for charts, graphs and diagrams.

The Microline 80 is not a toy. With two motors, a rugged cast aluminum base and a head you never have to throw away, the Microline 80 is built to handle the most demanding business applications.

Which brings us to the biggest magic of all, the price tag, the one that almost disappears. If we're not the lowest, we are so close that it doesn't matter. There are stocking Microline distributors throughout the country. Call or write today for the name of the one near you and the price of the Magical Microline 80.

OKIDATA

Okidata Corporation, 111 Gaither Drive, Mount Laurel, New Jersey 08054 609-235-2600

Okidata is a subsidiary of Oki Electric Industry Company, Ltd.

```
**** CBM BASIC V2 ****
3583 BYTES FREE
READY.
```

Photo 3: *The VIC 20 video display immediately after being turned on.*

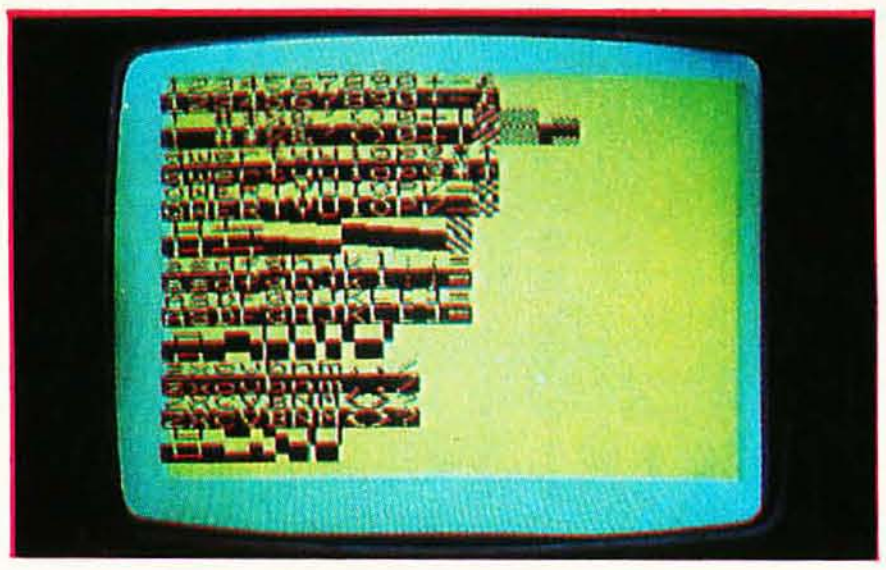

Photo 4: *The character set of the VIC 20. Any character can be displayed in reverse.*

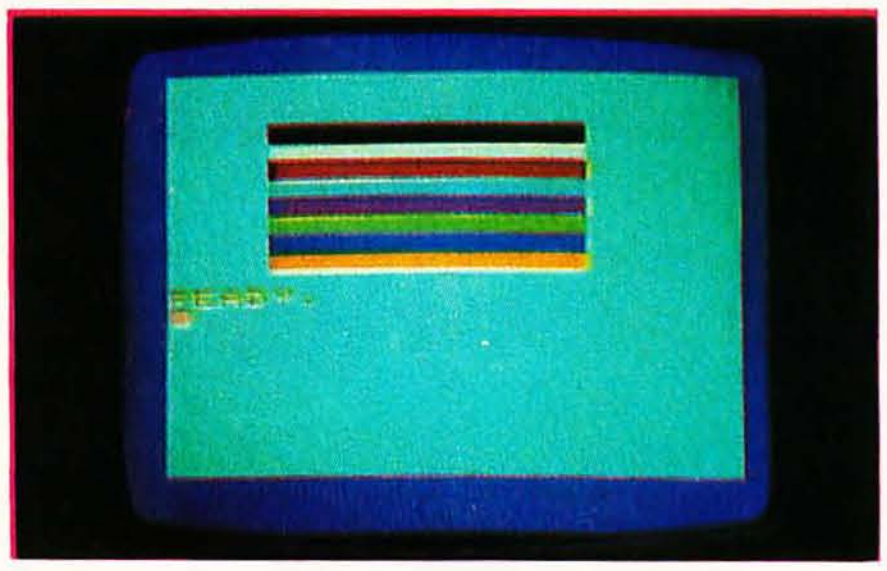

Photo 5: *The eight character colors available on the VIC 20. All characters can be displayed in any of these colors.*

RVS OFF keys, pressing a color key within a character string causes a reverse character to be placed in the string. This tells the VIC not to immediately change the display color, but to change it when that string is printed. Photo 5 shows the eight colors available, each of which is displayed by printing the corresponding color control character followed by a line of reverse spaces (which appear as solid squares of the current color). The computer displays *all* ouput in the current color. In photo 5, since the last color used was yellow, the VIC responds with its end-of-program message in yellow.

The VIC also allows you to change the background color of the working area in the center and the border that surrounds it. Choose from sixteen background colors and eight border colors (ie: 128 background/border combinations). The two are changed by executing (either directly or from a program) the statement:

POKE 36879,X

where X is a value as given in table 1. The background colors can be any of the eight character colors or orange, light orange, pink, light cyan, light purple, light green, light blue, or light yellow. The border colors can be any of the eight character colors.

An unusual thing about the VIC is that the background color can change independently of the character color (other color microcomputers can't do this). Combined with the color and reverse keys, this allows a tremendous amount of control over the video display. Photos 6a and 6b show a run of a program differing only in the value poked to memory location 36,879. Photo 6a shows a light green background and a cyan border; this was accomplished by poking the value 219 to that location. Photo 6b shows a light cyan background and a red border; this was accomplished by poking the value 186 to that location. In addition, notice the two sets of angle brackets on each line. The first set contains an X symbol, a space, and a small square. The second set contains the *reverse* of each of these characters. Notice the role of the background and character colors in these reversed and nonreversed characters. If the background color were changed with those characters on the screen, the characters would assume the new background color but retain the old character color.

Photo 7 contains a listing of the program that produced photo 6b. Several control characters appear in this listing as seemingly arbitrary reverse characters. These are screen-manipulation characters stored for later use because they appear within a character string; if a quote mark had not been previously typed on the same line, the character would have been executed immediately and would not have appeared on the screen. The reverse heart in line 100 is the VIC symbol to clear the screen and put the cursor in the upper left corner. The reverse R and reverse underline in line 110 correspond to the RVS ON and RVS OFF keys, respectively. They cause the three characters between them to be displayed in reverse. The reverse characters in lines 120 through 180 are the result of pressing the corresponding color keys (CTRL plus the keys 1 through 8, respectively). They cause all printed characters to be displayed in the given color, as shown in photo 6b.

The VIC video display is memory-mapped (ie: the contents of the screen are determined by the contents of a given range of memory locations inside the VIC). Because of this, the

Background	Border							
	Black	White	Red	Cyan	Purple	Green	Blue	Yellow
Black	8	9	10	11	12	13	14	15
White	24	25	26	27	28	29	30	31
Red	40	41	42	43	44	45	46	47
Cyan	56	57	58	59	60	61	62	63
Purple	72	73	74	75	76	77	78	79
Green	88	89	90	91	92	93	94	95
Blue	104	105	106	107	108	109	110	111
Yellow	120	121	122	123	124	125	126	127
Orange	136	137	138	139	140	141	142	143
Light orange	152	153	154	155	156	157	158	159
Pink	168	169	170	171	172	173	174	175
Light cyan	184	185	186	187	188	189	190	191
Light purple	200	201	202	203	204	205	206	207
Light green	216	217	218	219	220	221	222	223
Light blue	232	233	234	235	236	237	238	239
Light yellow	248	249	250	251	252	253	254	255

Table 1: *Background and border color combinations in the VIC 20 microcomputer. Poking decimal location 36,879 with the values given in this table gives a video display with the colors shown.*

Chief Relief

For years many small business system buyers thought that in order to get "real" performance and enough storage to be a "real" business system they would have to sacrifice the family jewels.

But with the introduction of the Smoke Signal Chieftain series office computers a lot of people's minds have been changed.

Because we designed the highly reliable Chieftain small business system with the most innovative combination of performance and efficiency around.

At your fingertips there are 64,000 characters of random access memory and you can address anywhere from 740,000 characters to 2 million characters with Smoke Signals's new double density controller. For larger concerns, there's a 20M byte hard disk available.

At a time when other small computer manufacturers tell you "you're on your own", Smoke Signal offers an abundance of easy-to-use software programs such as order entry, inventory control, accounts receivable, invoice entry, payroll, word processing and much, much more. There's BASIC, COBOL and FORTRAN — even a multi-user BOS (Business Operating System) that allows for numerous users simultaneously.

Chieftain systems starting at under $200.00 per month display performance on par with systems costing twice to three times as much.

So call (213) 889-9340 for your nearest authorized Smoke Signal dealer — he'll be glad to demonstrate the Chieftain's high reliability and ease of operation.



For dealers only, circle 371
All other inquiries, circle 372

SMOKE SIGNAL BROADCASTING

31336 Via Colinas, Westlake Village, California 91361, (213) 889-9340

screen can be directly manipulated by poking values into certain memory locations. Memory locations 7680 through 8185 (decimal) contain the code for a given character; memory locations 38,400 through 38,905 contain the code for the *color* of the respective character. Locations 7600 and 38,400 determine the character in the upper left corner. Locations 7601 and 38,401 determine the character to its right, and so on down to the character in the lower right corner.

VIC Sound and BASIC

The VIC 20 can produce three independent "voices" of music and one voice of noise through the speaker of the attached television set. Each voice, covering a three-octave range, covers a different part of the audio spectrum. The voices are labeled "tenor," "alto," and "soprano"; they are activated by poking a number between 128 and 254 into locations 36,874 through 36,876. The noise generator is similarly activated at location 36,877, and an overall volume control (which takes values between 0 and 15) is located at 36,878. Table 2 lists important memory locations in the VIC 20. Table 3 lists the values to be poked into the music-voice locations to give a certain musical pitch within the three-octave range of that voice.

VIC BASIC is a version of Microsoft BASIC modified by Commodore. It is a full-blown BASIC with the features found on most microcomputers, allowing the VIC to accept other BASIC programs with little or no modification. A list of BASIC keywords accepted by the VIC is given in table 4. The keywords listed have the standard definitions given by Microsoft BASIC.

The VIC Product Line

Although prices and availability of VIC peripheral devices were not

(6a)

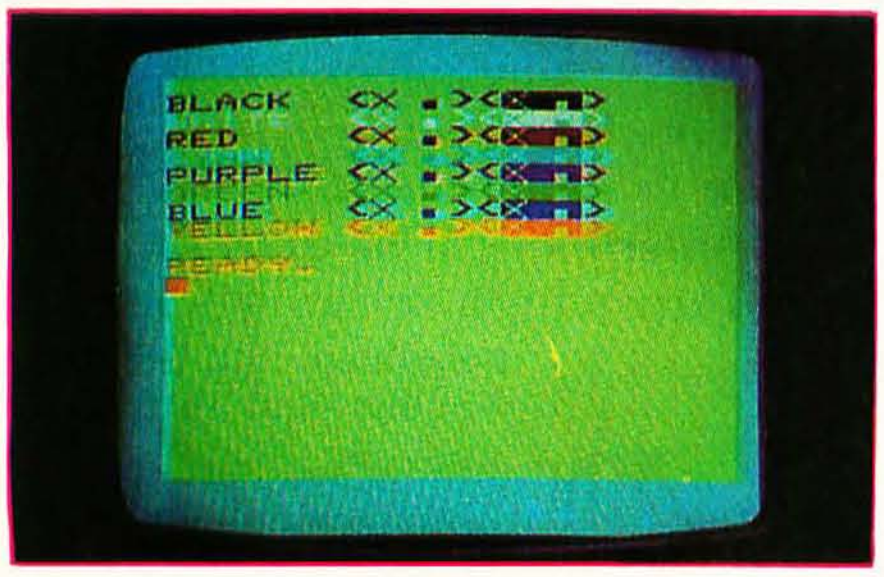

(6b)

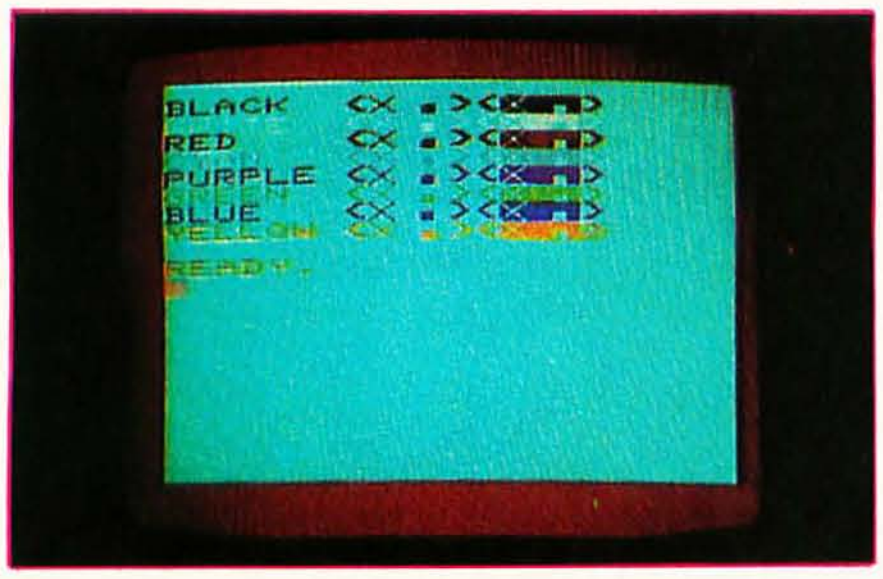

Photo 6: *Variations in character, background, and border colors on the VIC 20. Photos 6a and 6b differ only in the value stored in location 32,879, which determines the background color (from sixteen choices) and the border color (from eight choices).*

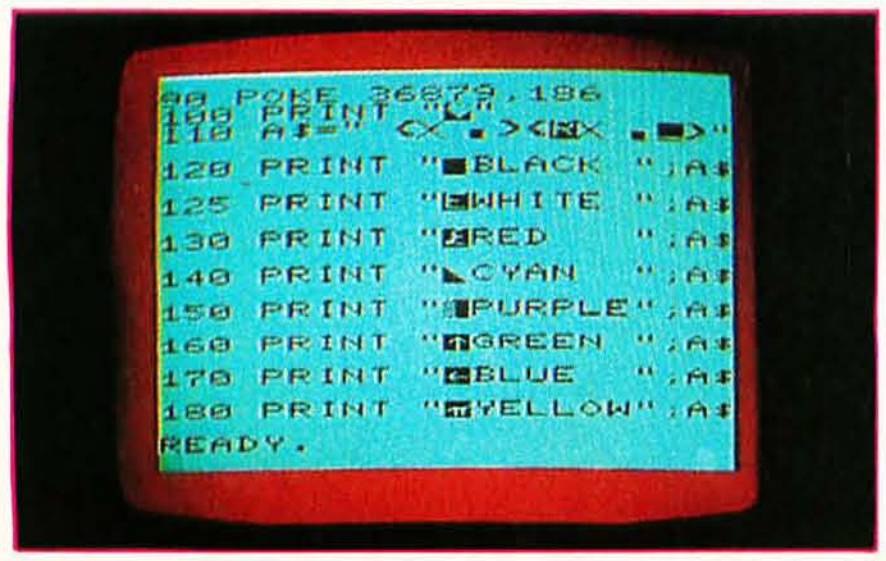

```
90 POKE 36879,186
100 PRINT "■"
110 A$=" <X ■><■X ■■>"
120 PRINT "■BLACK  ";A$
125 PRINT "■WHITE  ";A$
130 PRINT "■RED    ";A$
140 PRINT "◣CYAN   ";A$
150 PRINT "■PURPLE";A$
160 PRINT "■GREEN  ";A$
170 PRINT "■BLUE   ";A$
180 PRINT "■YELLOW";A$
READY.
```

Photo 7: *A VIC BASIC program utilizing color, graphics, and reverse video. This program produces the video display shown in photo 6b. The reverse character before each color word in the PRINT statements is a control character determining the color of everything displayed after it. See the text for details.*

Memory Location (in Decimal)	Use
7680 to 8185	contains character contents of VIC video display; characters are mapped by row, with location 7680 corresponding to the upper left corner of the display
36,874	corresponds to tenor music "voice"; should contain either 0 (for silence) or 128 through 254 (for note; see table 3)
36,875	corresponds to alto music "voice"
36,876	corresponds to soprano music "voice"
36,877	corresponds to a noise-producing "voice"; accepts values of 0 and 128 through 254; higher values give higher-pitched white-noise sounds
36,878	volume control for all music and noise "voices"; effective values are 0 through 15
36,879	control byte for background and border colors; see table 1
38,400 to 38,905	contains character color contents of VIC video display; mapped to video display in the same way as the character contents (see above)

Table 2: *Some important memory locations in the VIC 20 microcomputer.*

Note	Value	Note	Value
C	135	G	215
C#	143	G#	217
D	147	A	219
D#	151	A#	221
E	159	B	223
F	163	C	225
F#	167	C#	227
G	175	D	228
G#	179	D#	229
A	183	E	231
A#	187	F	232
B	191	F#	233
C	195	G	235
C#	199	G#	236
D	201	A	237
D#	203	A#	238
E	207	B	239
F	209	C	240
F#	212	C#	241

Table 3: *Values used in the generation of music on the VIC 20 microcomputer. On the VIC, these values are stored in memory locations 36,874 through 36,876 to generate the appropriate note within the three-octave range of a given music voice.*

IT WAS INEVITABLE

Sooner or later, someone had to take all this proven microcomputer hardware and software technology and wrap it up in a portable package at a price that shocks the industry. Adam Osborne decided to do it sooner.

The OSBORNE 1®, from Osborne Computer Corporation. You get full CP/M® disk computer capabilities—Z80A® CPU, 64K bytes of RAM memory, a full business keyboard, a built-in monitor, and two floppy drives with 100K bytes each of storage. You get two interfaces, the IEEE 488 and the RS-232C. Just connect a printer, via either interface.

Software? You get CP/M®, CBASIC-2®, Microsoft BASIC®, the WORDSTAR® word processing system with the MAILMERGE® mailing list feature, and the SUPERCALC® electronic spreadsheet package. All standard. All for $1795.



And it's *portable*. When the keyboard is clipped over the display panel, only the weatherproof brushed aluminum case is exposed. (There are even optional modem electronics, couplers, battery packs, and external monitor connections, providing practically unlimited system portability.)

It's all business. The OSBORNE 1 delivers *significant* productivity at an irresistable price. At $1795, its immediate and lasting success as a personal business computer is, quite simply, inevitable.

$1795

OSBORNE
COMPUTER CORPORATION
26500 Corporate Avenue Hayward, California 94545 (415) 887-8080

Orders for the Osborne 1 Computer can be placed over the telephone at (415) 887-8080. Your order will be forwarded by the factory for delivery by your nearest authorized Osborne 1 dealer.

definite at press time, Commodore has announced an extensive line of products to be "introduced during and throughout 1981." (By the time you read this, Commodore expects to have the VIC computer itself available through Commodore dealers.) This list of peripheral devices and accessories includes:

- *Memory-expansion products*—Commodore will sell a line of cartridges that add programmable memory to the VIC, increasing the size and complexity of programs that can be run. A 3 K-byte cartridge can be plugged directly into the VIC, and 8 and 16 K-byte cartridges can be plugged in through a Master Control Panel that plugs into the VIC cartridge slot and accepts up to four cartridges. The maximum amount of programmable memory is 32 K bytes.

Arithmetic Operators:
ABS, ATN, LET, SGN, INT, SQR, RND, LOG (to base *e*), EXP (to base *e*), COS, SIN, TAN, +, −, *, /, ↑(exponentiation), <, >, =

Character Operators:
CHR$, ASC, SPC, TAB, LEN, STR$, VAL, LEFT$, RIGHT$, MID$, + (to concatenate strings)

Control Words:
FOR, TO, STEP, NEXT, GOTO, IF, THEN, GOSUB, RETURN, ON (used with GOTO and GOSUB), WAIT, END, USR

File and I/O Words:
OPEN, CLOSE, INPUT, INPUT#n, PRINT, PRINT#n, GET, READ, DATA, DIM, RESTORE

Command Words:
RUN, STOP, LOAD, SAVE, VERIFY, CONT, LIST, NEW, CLR

Miscellaneous Words:
AND, OR, REM, DEF FNx, FNx, POKE, NOT, FRE, PEEK

Table 4: *A list of VIC BASIC keywords.*

- *Storage peripherals*—Commodore will sell both a low-cost cassette recorder (although existing Commodore recorders work with the VIC) and a low-cost single 5-inch floppy-disk drive. The disk drive will hold up to 170 K bytes of data.
- *Other peripherals*—These include a dot-matrix printer, joysticks, light pens, game paddles, and a Multiple Game Controller (discussed earlier).
- *Interfaces*—Commodore plans two interfaces for the VIC, a modem and an IEEE-488 bus interface. The modem allows communication with other computers over telephone lines. The IEEE-488 interface allows the VIC (like the PET and CBM machines) to interface with PET peripherals and a wide variety of test instruments and devices that use this standard bus.
- *Firmware*—A wide range of software will be distributed in cartridge form; three firmware cartridges have already been announced. The first, the RS-232C Interface Cartridge, allows you to use the VIC and a modem to communicate with other computers and access information utilities like MicroNet and The Source. The second, the VIC Programming Cartridge, will include a machine-language monitor and a number of utility functions useful during programming; it will also use the four function keys (on the right-hand side of the keyboard) to execute predetermined functions. The third, the VIC Super Expander Cartridge, will add 3 K bytes of programmable memory, a new level of high-resolution graphics, and additional music-related capabilities. The high-resolution graphics (which I have not seen) are said to be excellent (176 rows by 176 columns of graphics dots, also called *pixels*).
- *Documentation*—In addition to the *VIC User's Manual*, supplied with the VIC, Commodore plans a series of book-plus-cartridge packages explaining several aspects of using and programming the VIC. (Documentation is discussed in greater detail later in this article.)

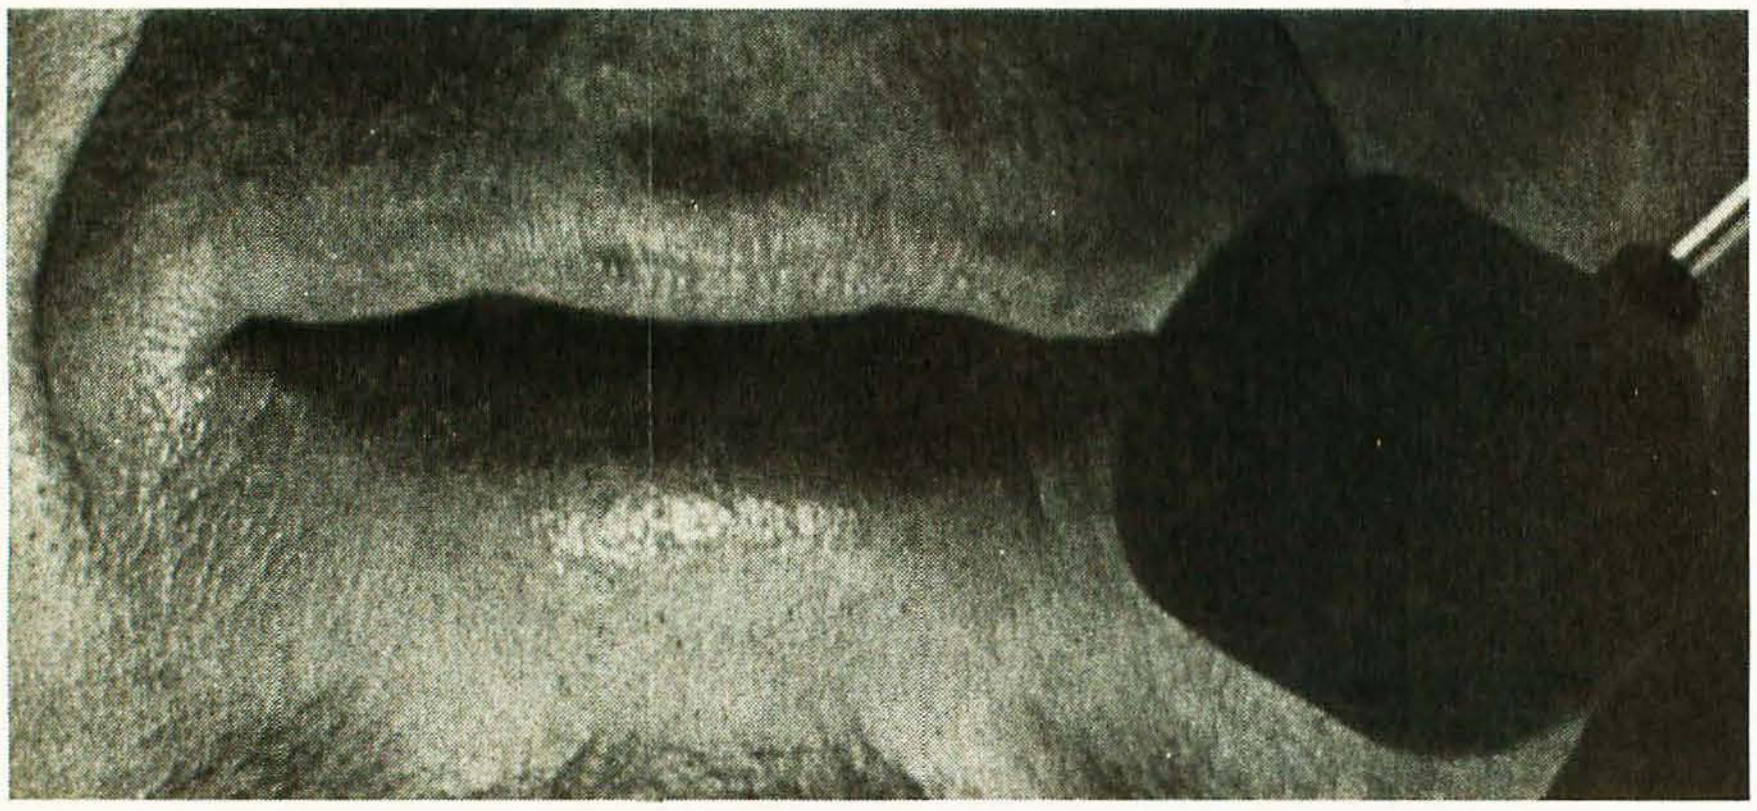

STRUCTURED SYSTEMS FINANCIAL SOFTWARE.

ANYTHING LESS IS CHEATING YOUR OWN BUSINESS.

Penny wise and software foolish. One of the best ways to cheat your business is to waste a whole lot of time on solutions that don't work, or that can't grow with your business. And frankly, we get phone calls every day from computer users who've tried to get by on "bargain" software, and found that "bargain" software is the most expensive kind a business can own.

Here's a fact: if you have a real need for a computer in any of these areas:

General Ledger
Accounts Receivable
Accounts Payable
Order Entry
Inventory Control
Payroll,

any business software less than Structured Systems Financial Software is cheating your business. You'll cheat yourself out of lots of time. Time spent with systems which aren't designed for high volume use. You'll cheat yourself out of reliable audit controls and reliable error prevention features. Out of the training you invest in a system you outgrow when you need to add more disk storage, more customers, more data. You'll be cheating yourself out of a software bargain in the truest sense of the word—the greatest value for your dollar.

CP/M® microcomputer systems can do the job of minicomputers. Structured Systems software makes that potential a reality. Right now, hundreds of businesses are profiting from the financial controls and operating efficiency of SSG financial software. So can yours.

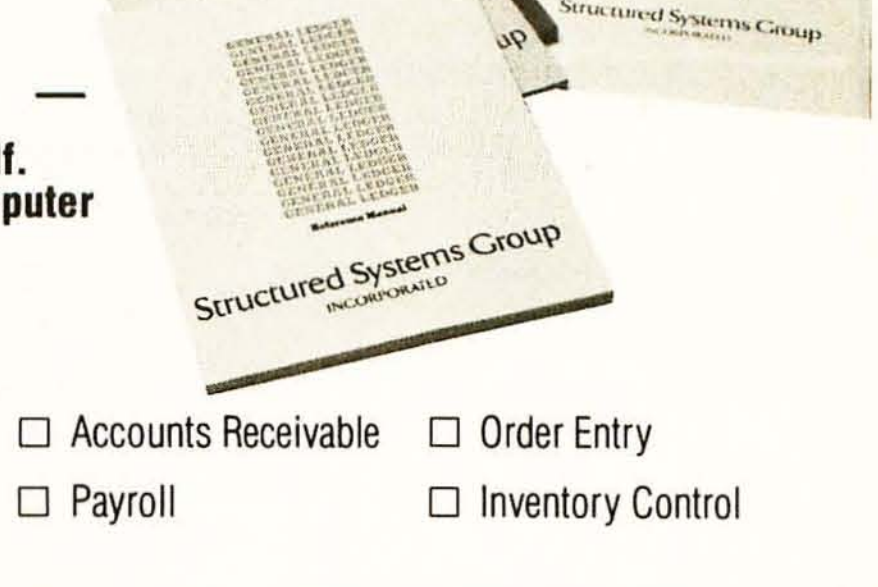

Take it easy on yourself. But sentence your computer to hard labor.

Please send more information on your

☐ General Ledger
☐ Accounts Receivable
☐ Order Entry
☐ Accounts Payable
☐ Payroll
☐ Inventory Control

Name ______
Company ______
Address ______
City State Zip ______
Telephone ( ) ______

CP/M is a registered trademark of Digital Research.

Structured Systems Group
INCORPORATED
5204 Claremont, Oakland, California 94618 (415) 547 1567

Circle 388 on inquiry card.

Human Engineering on the VIC

When the microcomputer industry was smaller, hobbyists put up with about anything in a computer as long as it worked. But now that major corporations are marketing microcomputers for the general public, *human engineering*—the design of systems to make them easy and efficient to use—has become the most important factor in the usability of computer systems. The VIC deserves high marks in human engineering because it is easy to understand and use.

The VIC keyboard is one of the best I've seen. It is well constructed and has a good feel during typing. The key names on the top and front faces of the keys are highly visible and easy to read. In most cases, key functions have been wisely chosen and named. For example, the key used to stop a program from executing is labeled as the RUN/STOP key. Pressing it (instead of the arbitrary control-C combination used by many computers) causes the VIC to stop executing the program and print out the line number where the program was stopped. Use of the CLR/HOME (clear-screen-and-home-cursor-to-upper-left-corner/home-cursor) and INST/DEL (insert/delete

Name of Computer	Atari 400	Commodore VIC 20	Ohio Scientific Challenger 1P	Radio Shack TRS-80 Color	Sinclair ZX80
Microprocessor used	6502	6502A	6502	6809E	Z80A
System clock frequency	1.8 MHz	slightly more than 1 MHz	1 MHz	slightly less than 1 MHz	3.25 MHz
List price	$499/$630 (two models, 8 K or 16 K)	$399.95	$479	$399	$199.95
Type of keyboard	touch-sensitive flat panel; slightly smaller than normal keyboard	full-size normal keyboard; very good feel	full-size normal keyboard	full-size normal keyboard; keys have feel of calculator buttons (not good)	touch-sensitive flat panel; much smaller than normal keyboard
Amount of programmable memory supplied	8 K or 16 K bytes (see above)	5 K bytes	8 K bytes	4 K bytes	1 K bytes
Maximum programmable memory possible	16 K bytes	32 K bytes	32 K bytes	16 K bytes	16 K bytes
Type of BASIC	full BASIC	full BASIC	full BASIC	limited BASIC (extended BASIC for more sophisticated music and graphics at extra cost)	limited BASIC (extended BASIC available at extra cost)
Video screen size (in characters)	16 rows by 32 columns	23 rows by 22 columns	24 rows by 24 columns or 12 rows by 48 columns	16 rows by 32 columns	24 rows by 32 columns
Lowercase letters available?	yes	yes	yes	accepts lowercase letters but displays uppercase as inverse capitals	no
Color available?	yes	yes	yes, at extra cost ($229 extra)	yes	no
Graphics characters available?	yes; characters available from keyboard	yes; characters available from keyboard	yes; graphics available only through POKE and CHR$ statements	no, but unit color block is ¼ normal character size	yes; characters available from keyboard
High-resolution graphics available?	yes, included (320 by 192 pixels)	yes, at extra cost (176 by 176 pixels)	no	yes, at extra cost (256 by 192 pixels)	no
Music available?	yes, three voices of music; can mix noise with each voice	yes, three voices of music, one of noise	yes, one voice of music (needs external speaker and amplifier)	yes, one voice of music	no
Extensions to BASIC for color, low-resolution graphics, and music?	yes, uses BASIC commands to manipulate all three	no, uses control characters and pokes to manipulate all three	no, uses pokes to manipulate all three	yes, uses BASIC commands to manipulate all three	low-resolution graphics available from keyboard
Uses program cartridges?	yes	yes	no	yes	no
Machine-language monitor included?	no	no	yes	yes	no
Assembly-language assembler available (at extra cost)?	yes	yes	yes	no	no

Table 5: *A comparison of five low-cost microcomputers, including the Commodore VIC20.*

Meet the HP Series 80: Hewlett-Packard's new one-on-one computing systems for professionals.

Together, you can analyze technical problems and evaluate solutions. Rapidly and accurately.

HP Series 80 personal computing systems provide the technical solutions you require. Quickly! Easily! Inexpensively! Analysis techniques that were formerly difficult and often impossible, become part of your everyday work routine. You can evaluate functional behavior, select variable alternatives, perform cost analysis...and more...all with greater accuracy and using more variables than you thought possible.

SERIES 80, VISICALC™ PLUS AND YOU

HP's VisiCalc™ PLUS is a major new software tool. It's an electronic worksheet that instantly recalculates results as you change the variables. You ask the *what-if* questions and immediately see their effects on your solution. No programming is necessary...you can become proficient with VisiCalc™ PLUS in a few hours...and then watch your horizons broaden. VisiCalc™ PLUS features many powerful functions including statistical analysis tools and the entire HP Series 80 BASIC math set. Plus graphics! Create professional presentations with curve-fitting plots, stacked or clustered bar-graphs, exploded pie-charts and line graphs, all in up to four colors, on paper or transparencies.

ONLY FROM HEWLETT-PACKARD

HP Series 80 personal computing systems are part of a forty-year tradition of electronic products built to uncompromising standards of excellence. Additionally, HP Series 80 products are serviced by HP technicians and on-site service contracts are now available. We urge you to judge for yourself with a hands-on, one-on-one demonstration at your HP dealer. For locations, call TOLL-FREE 800-547-3400, Dept. 283A, except Alaska/Hawaii. In Oregon call 758-1010. Or write Hewlett-Packard, Corvallis, Oregon 97330, Dept. 283A.

611/04

HP Series 80 Personal Computers for Professionals: HP-85 ($3250*) and HP-83 ($2250*) specifications: 16K RAM expands to 32K, 32K ROM expands to 80K; CRT with integrated graphics; (HP-85 only; built-in thermal printer, cassette tape unit); Software includes VisiCalc™ PLUS, Information Management, Graphics Presentations, Surveying, Data Communications (Spring '81), Statistics, Regression Analysis, Math, Linear Programming, Waveform & Circuit Analysis, BASIC Training. HP peripherals include floppy discs, printers and plotters.

VisiCalc is a trademark of Personal Software, Inc.

*Suggested retail price excluding applicable state and local taxes—Continental U.S.A., Alaska & Hawaii.

HEWLETT PACKARD

Circle 183 on inquiry card.

text) keys is obvious when they have been used a few times.

The RESTORE key performs a valuable function in a computer where so many changes in character, background, and border color are possible. It resets the VIC to its state when it was turned on, except that it leaves the current program in memory (unlike some reset keys). Finally, the four large keys marked "f1/f2" through "f7/f8" have no predefined use but can be used by a programmer (through use of the GET statement) to produce a specific function within the program. By using the shift key, these four keys can trigger up to eight user-defined functions. These keys are also used in some application cartridges to execute predefined functions.

As I mentioned earlier, the VIC video display is well designed. The large letters are easy to read, even on an inexpensive color television, and the border around the active area of the display is restful to the eye. The narrow screen width (22 characters) will be a problem for some users, especially people using programs that need to display large amounts of data. Still, the screen width was a design decision reflecting the intended market, and I think that Commodore made a good decision under the circumstances.

Probably the most unexpected feature of the VIC is that it will be able to exchange both tape and disk files with the Commodore PET and CBM machines. Whether or not the program runs correctly on the other machines depends on whether it contains system-dependent code. For example, a CBM program using the full 80 columns of the CBM video display will not run correctly on the VIC, nor will a program larger than 32 K bytes. The ability to exchange data and programs among machines from the same manufacturer is almost unheard of. One good example of its usefulness is a situation where someone buys several VIC 20s to be used for data entry and feeds the results into a Commodore CBM computer.

I also found the screen-manipulation characters and POKE statements for music easy to use. By manipulating color, graphics, and sound without using any new BASIC keywords, Commodore has achieved two advantages. First, VIC programs are syntactically equivalent to PET programs. Programs can be transferred between machines without syntax errors due to unrecognized keywords; also, Commodore probably developed VIC BASIC faster and at less cost because of its similarity to PET BASIC. Second, VIC BASIC is easier to learn for people who know PET BASIC or another version of Microsoft BASIC.

An interesting thing about the VIC not apparent at first is the lightness of the unit. It literally has fewer components inside than you would expect. This is possible because it is built around a custom "video interface chip" built by MOS Technology for its parent company, Commodore. This integrated circuit handles all the interaction between the 6502 microprocessor (also manufactured by MOS Technology) and the color television (this function is done by a handful of integrated circuits in many other microcomputers). The low component count plus Commodore's ability to manufacture and assemble almost all of the VIC within its own factory account for the lighter weight and extremely low cost of the unit.

One final human-engineering feature of the VIC that will be appreciated by machine-language users and software developers shows Commodore's willingness to learn from hard-earned experience. The developers of VIC BASIC separated a kernel of I/O (input/output) subroutines from the rest of BASIC. They have written these routines as true subroutines and have devised a method for passing parameters to them so they can be used by anyone who wants to develop software for

At a Glance

Name
VIC 20

Manufacturer
Commodore Business Machines
950 Rittenhouse Rd
Norristown PA 19401
(215) 666-7950

Price
$299.95

Dimensions
40.3 by 20.4 by 7.2 cm (15.9 by 8 by 2.8 inches)

Processor name and type
6502, 8-bit

System clock frequency
slightly over 1 MHz

Memory
5 K bytes

Mass storage
cassette recorder or floppy disk optional

Other hardware features
character-size graphics symbols, keyboard, uppercase and lowercase letters, eight-color foreground and sixteen-color background video display, three-part music generator, external RF (radio-frequency) modulator and power supply, built-in serial port

Software included
16 K-byte VIC BASIC in ROM (read-only memory)

Hardware options
cassette recorder, floppy disk, dot-matrix printer, modem, IEEE-488 interface, joystick, light pen, game paddle, extra memory cartridges (up to a total of 32 K bytes), RS-232C adapter

Software options
VIC Programming Cartridge (includes programming utilities and machine-language monitor), VIC Super Expander Cartridge (adds 3 K bytes more memory, high-resolution graphics capability)

NEVER UNDER$OLD.

Thats right. If you can find a lower price in this magazine WE WILL BEAT IT! Period.*

S-100 HARDWARE

SD SYSTEMS	
Versa Floppy I kit	$259
Versa Floppy II kit	$349
ExpandoRam II kit	$249
ITHICA INTERSYSTEMS	$CALL
ALTOS	$CALL
NORTHSTAR	$CALL

SUPPLIES

Verbatim Datalife Diskettes	
MD525-01,10,16	$26.50
FD34-9000	$30.00
FD34-8000	$44.00
Avery Tabulables	
5,000 3½ X 15/16	$18.75
3,000 3½ X 15/16	$14.25
1,000 3½ X 15/16	$8.15
UARCO Paper (prices are FOB S.P.)	
9½ X 11, 15 or 18 Lb.	$25.95
14 7/8 X 11, 15 or 18 Lb.	$35.00

SOFTWARE

Microsoft Basic-80	$299
Microsoft Basic Compiler	$319
Microsoft Fortran-80	$399
Magic Wand	$275
Apple Visicalc	$113
Pickles and Trout CP/M®	$175

APPLE HARDWARE

Microsoft Z-80 Softcard	$259
Microsoft Ramcard	$170
SSM AIO A&T	$165
SYMTEC Apple Light Pen	$219
MOUNTAIN HARDWARE:	
Super Talker	$270
ROMWRITER	$157
INTROL/X-10	$180
ROMPLUS +	$162
MUSICSYSTEM	$499
Apple Clock	$252
Lobo Drive	$CALL
Videx 80 × 24	$299
Andromeda	$170
M & R Sup-R-Term	$299
Enhancer	$100
NEC Green Monitor	$240
Sanyo Green Monitor	$240
D.C. Hayes Micromodem	$299
CALIFORNIA COMPUTER SYSTEMS	

See our full page ad in this magazine.

PRINTERS

EPSON MX-80	CALL
MX-80 Graphics ROM	CALL
NEW EPSON MX-80 TF	CALL
Okidata Microline 80	$415
Okidata Microline 82	$625
Okidata Microline 83	$899
IDS Paper Tiger 460G	$1050
Anadex DP-9000,1	$1195
Anadex DP-9500,1	$1295
Centronics 737	$689
NEC Spinwriter	$CALL
NEC w/ Sellum Option	$CALL
C. Itoh Starwriter 25 cps	$1440
C. Itoh Starwriter 45 cps	$1770
Diablo 630	$2195
Malibu 165	$1995
Malibu 200	$CALL
MPI 88G	$495

TRS-80 HARDWARE

TRS-80's	$CALL
Micropolis 77 track	$399
Percom Doubler	$199
Percom Separator	$27
Orchestra 80	$79

ALPHA BYTE STORES

5115 Douglas Fir Road • Suite B • Calabasas, CA 91302

*Include $2.00 shipping and handling on all orders. Visa and Master Card accepted. Never undersold offer applies only to items currently deliverable from other retail vendors at advertised price. All never undersold offers good as supply lasts. Please add $2.00 for all COD orders. Please call for items not listed. We gladly answer any questions on all of our hardware, software, and supply needs. Quanitity discounts available. School purchase orders accepted. Please remember to figure competitors shipping and handling charges when arriving at never undersold price.

(213) 883-8594

the VIC. In addition, all I/O routines called by BASIC are called indirectly through programmable-memory pointers holding the addresses of the true I/O routines; in this way, users can substitute their own I/O routines to be executed in place of those provided within the VIC.

These design decisions (which will be documented to interested parties by Commodore) do two things. First, they encourage the potential software developer to write software for the VIC by eliminating the need to write custom I/O routines. Second, they help isolate the structure of VIC BASIC from some machine-language code that may need to be changed; in this way, Commodore can prevent having several versions of VIC BASIC at some time in the future (a problem that plagued the PET and CBM machines).

Problems and Limitations

The VIC 20 is a very good machine, but it is not without some problems; fortunately, none of them are major.

The juxtaposition of several key pairs on the keyboard is unfortunate. First, the CLR/HOME key is next to the INST/DEL key; while inserting or deleting characters in a BASIC line, you may inadvertently clear the screen or return the cursor to the upper left corner of the screen. More annoying are the reversals of the colon and semicolon keys and the RETURN and RESTORE keys (see photo 1). Touch typists and keyboard users are used to finding these key pairs in different positions (eg: the RETURN key in the same row as the top row of letters). Since the VIC keyboard does not have the layout of previous Commodore machines, it is unfortunate that the keyboard was not laid out in a slightly different way.

Another problem has to do with the music voices. Once a music voice is turned on by the appropriate POKE statement, only poking that location to zero, turning off the sound on the television set, or turning off the computer will shut off the sound. Neither stopping the program that turned on the sound nor typing the keyword

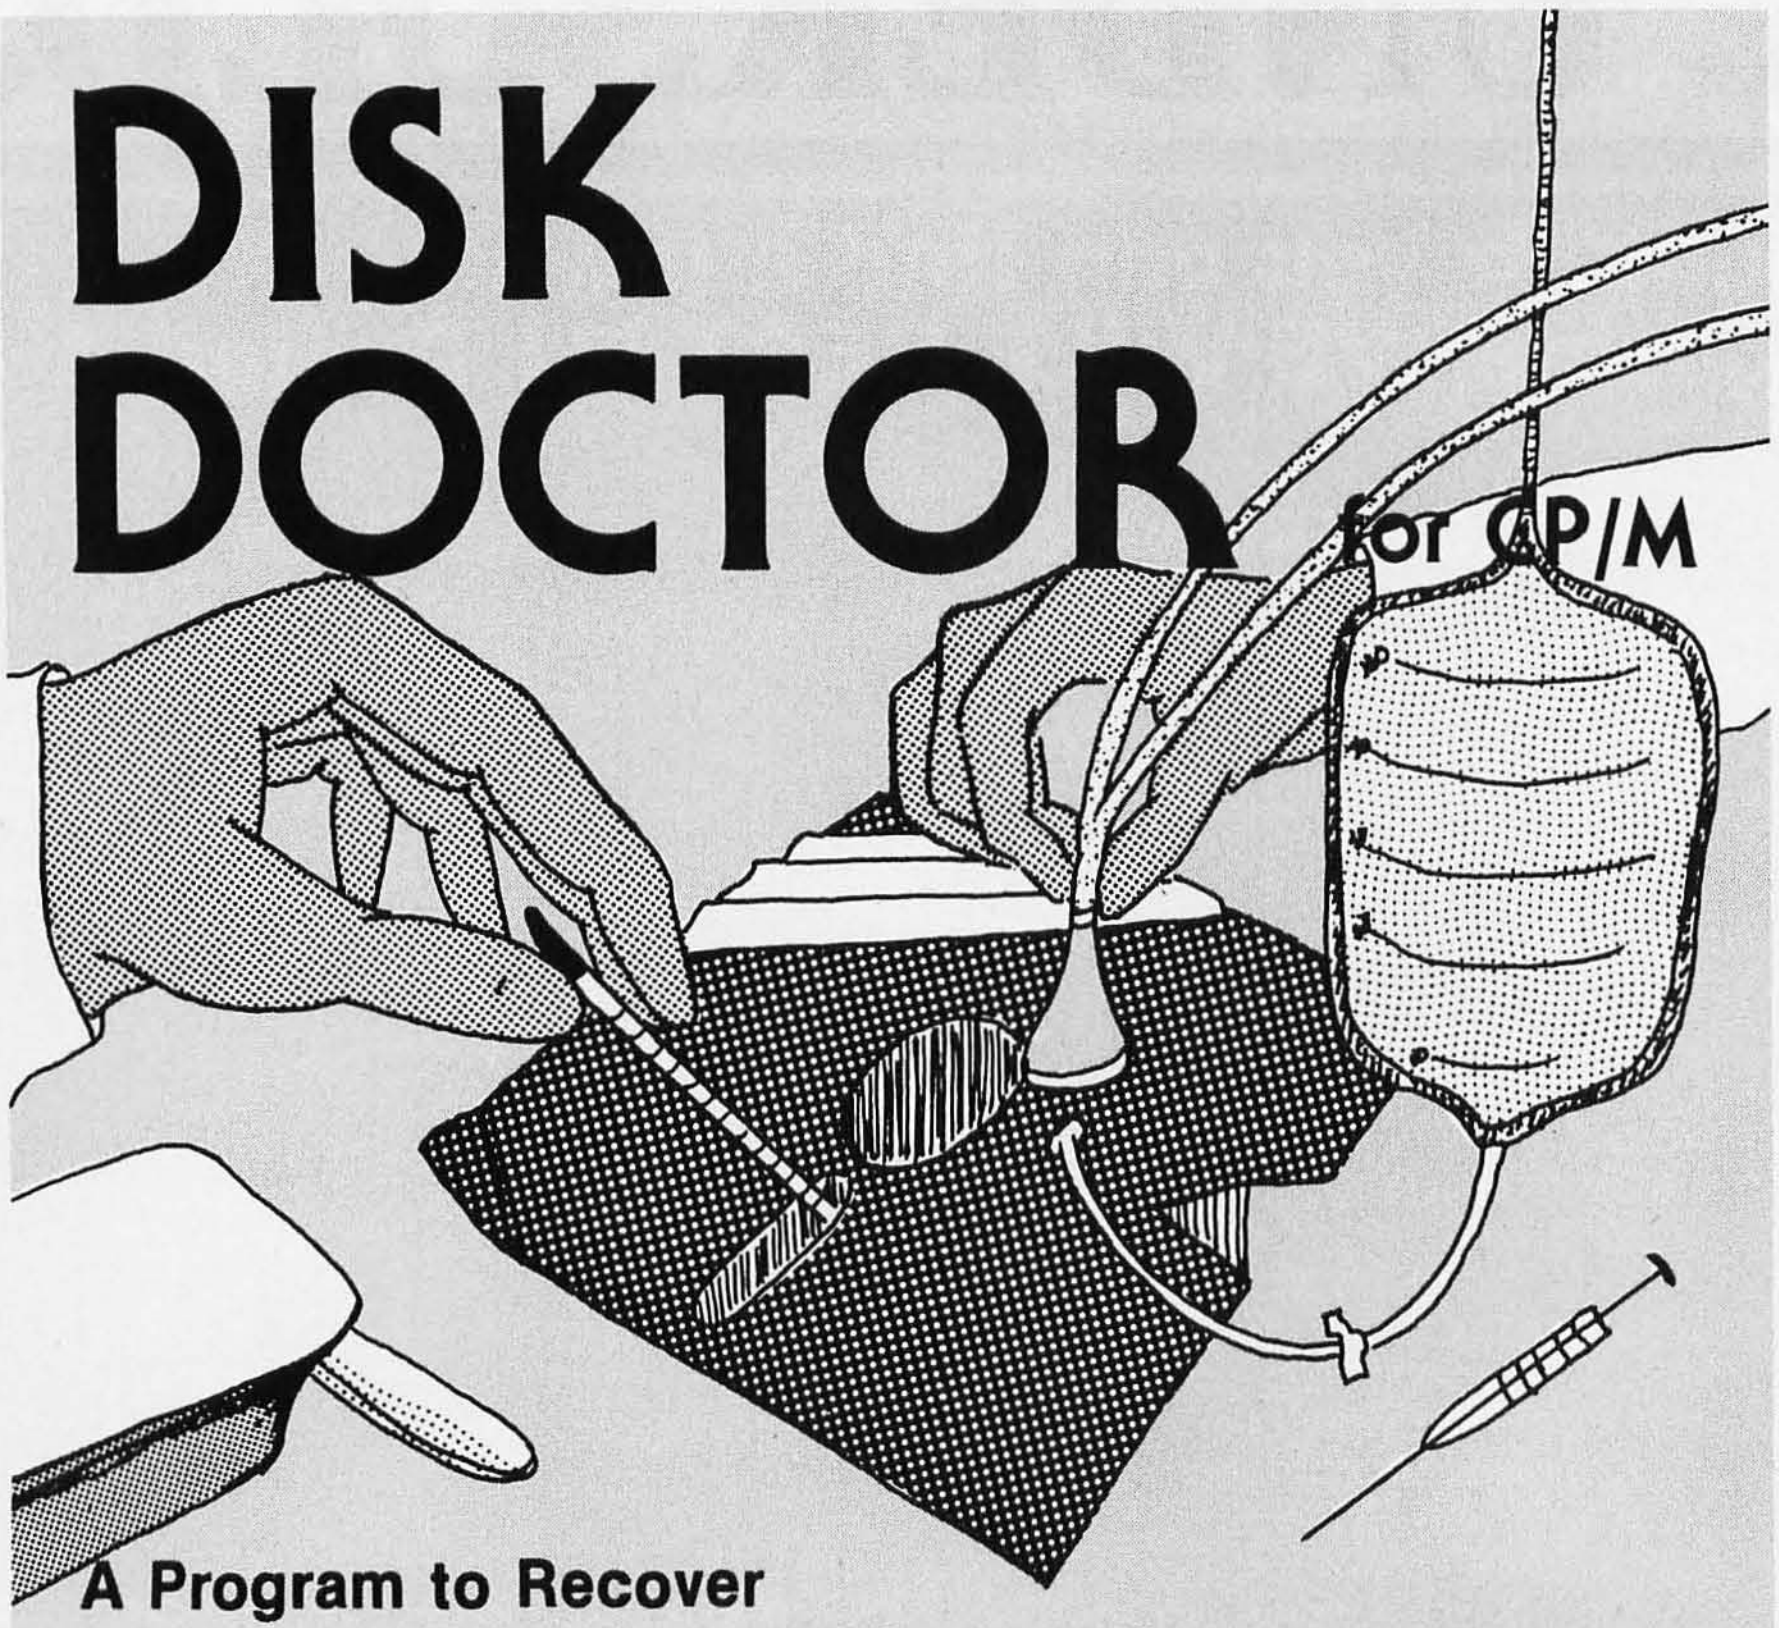

Twenty new products for your TRS-80™ that are so hot...

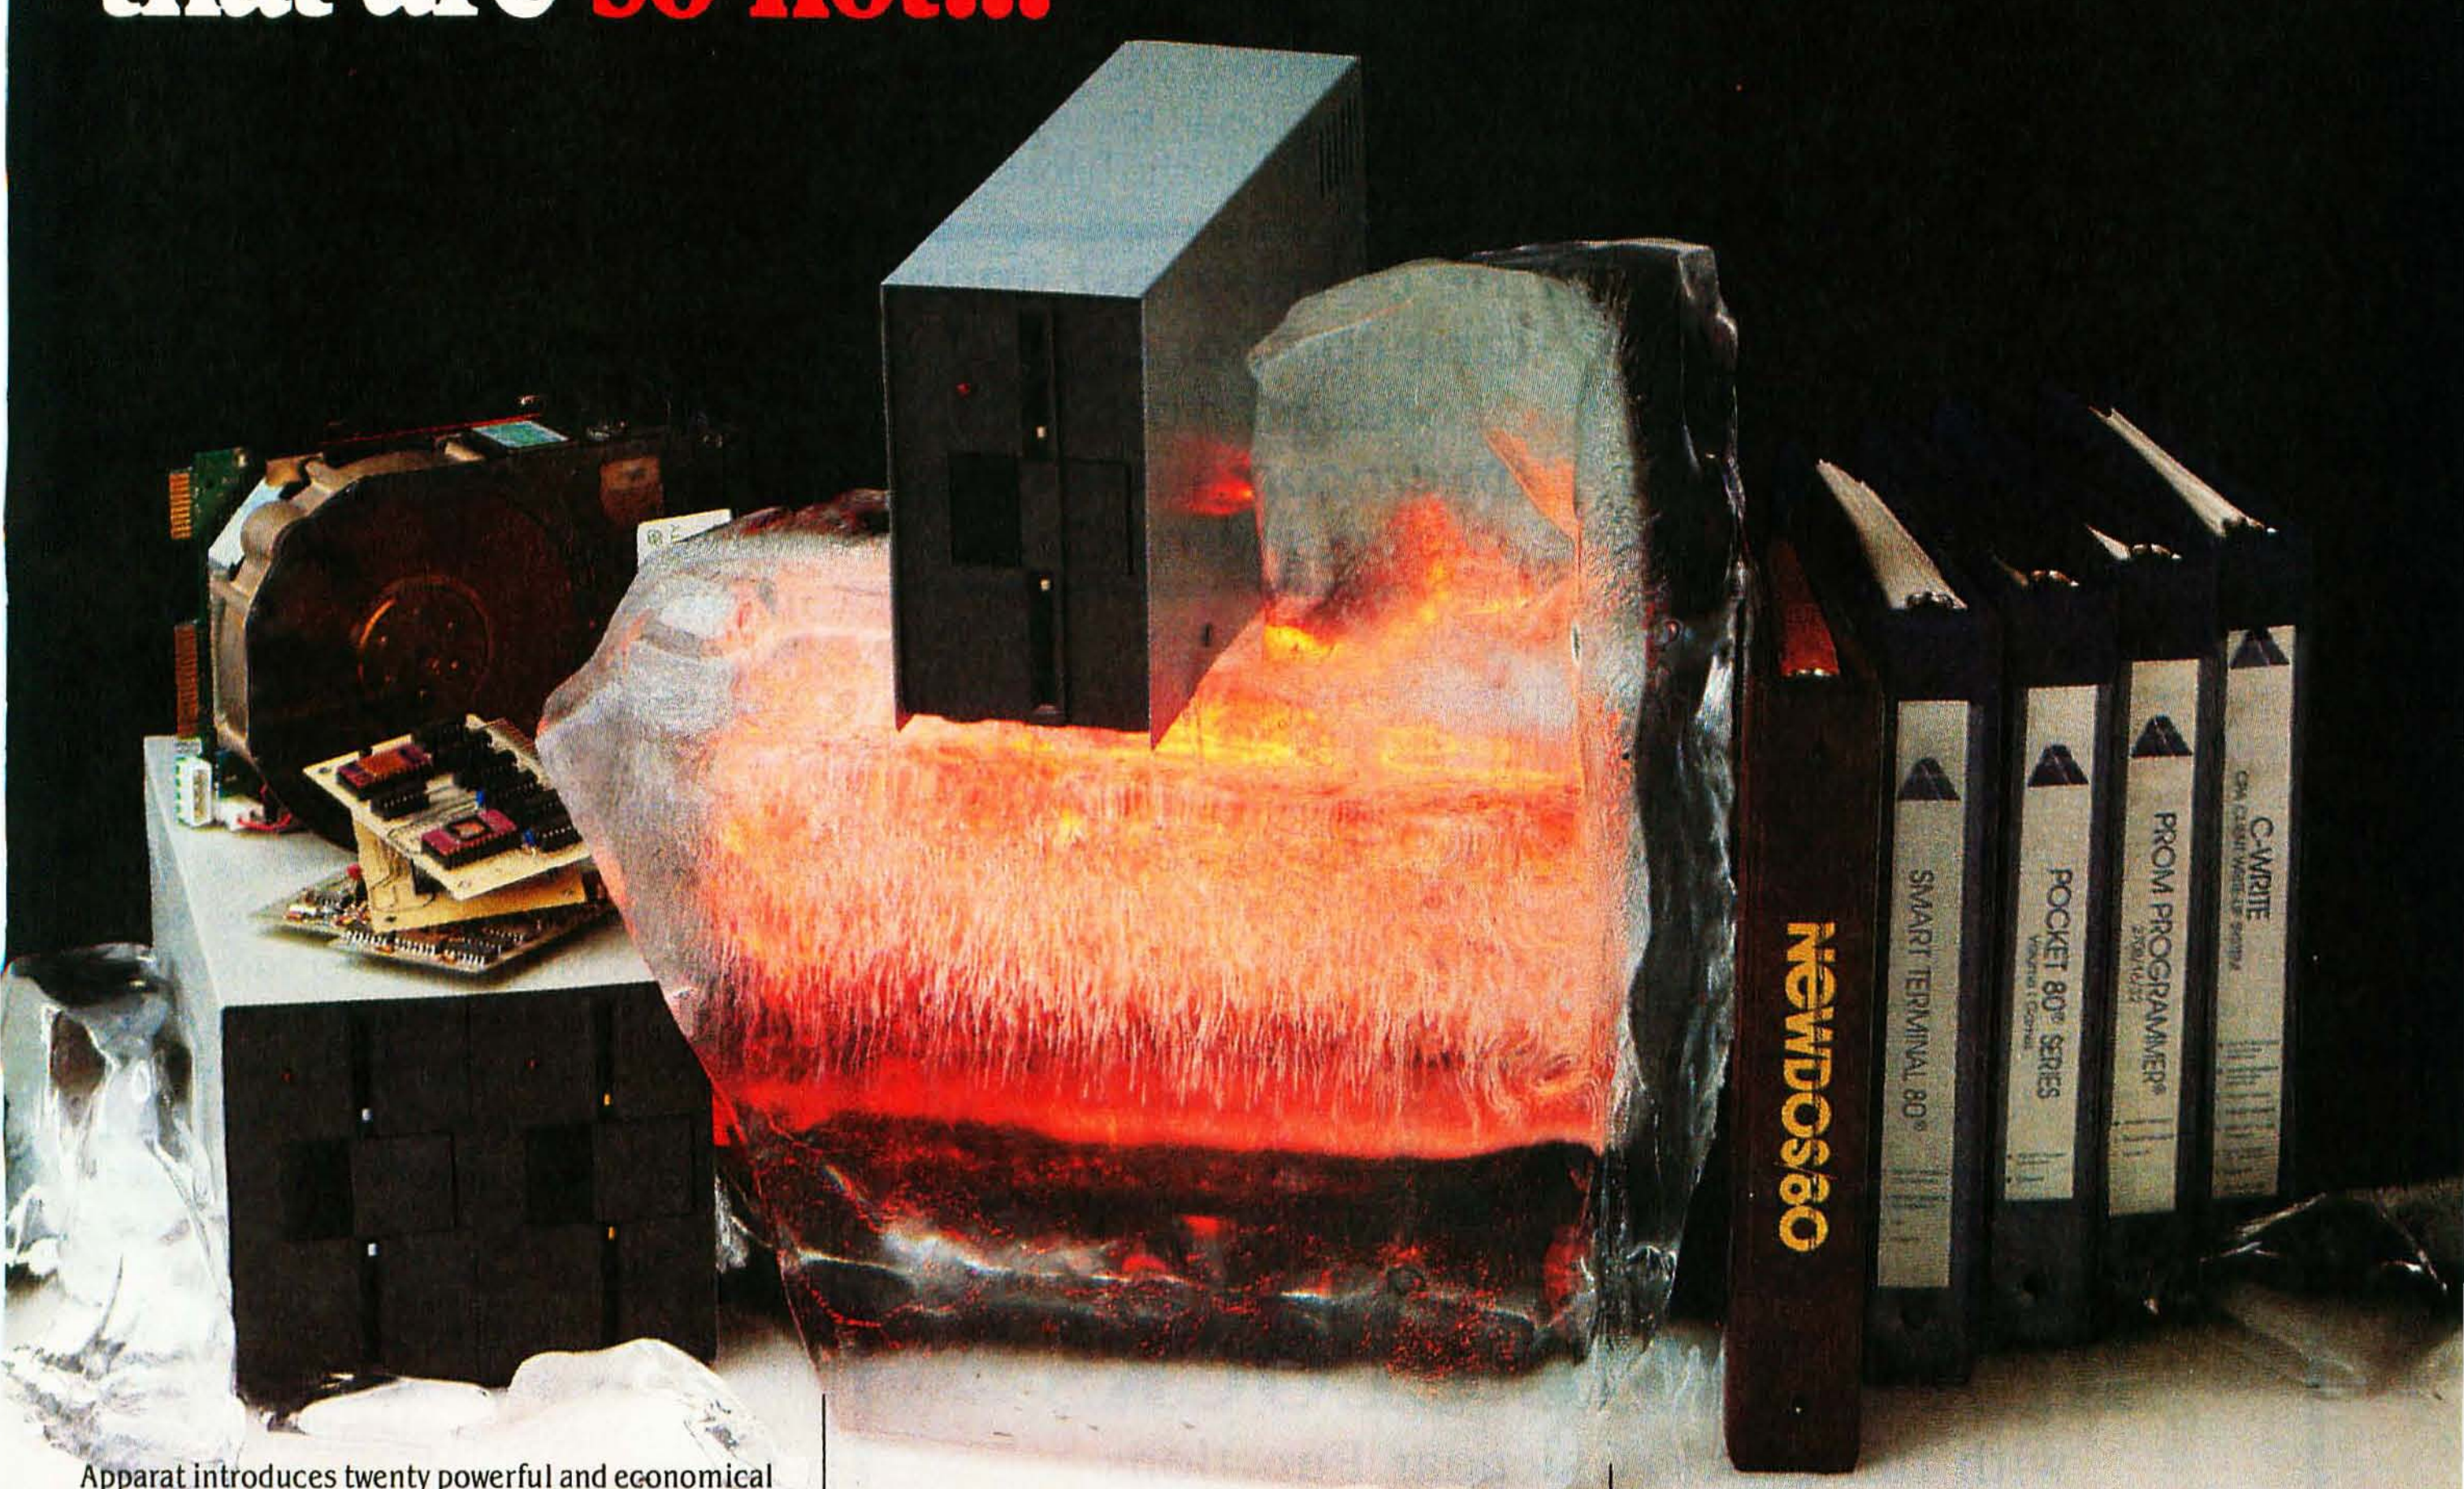

Apparat introduces twenty powerful and economical add-ons for your TRS-80 system. Hardware and Software to increase your capabilities:

Software

SMART TERMINAL 80—Converts the Model I or III to an intelligent terminal.

NEWTRIEVE—Rapid search and retrieval of memory/disk for a character string of any length.

FLEXTEXT—Provides proportional spacing, compressed and extended characters, underlining and so on. Operates on the Centronics 737 printer in conjunction with SCRIPSIT for the Model I.

FLEXTEXT II—Provides proportional spacing, right justification and so forth, on the NEC Spinwriter 5500 series printers printing in conjunction with SCRIPSIT II®.

BIONIC BASIC—Add new functions to BASIC. Editing and array handling functions available.

POCKET 80 GAMES—For the Pocket Computer.

C-WRITE—Comprehensive client write-up system for the professional accountant.

NEWDOS/80—For the Model III—all the features available on the Model I plus double density.

VOCAL SYNTHESIZER—Provides Morse, Spelled and Spoken output of data files through the TRS-80® Vocal Synthesizer.

INTEGRATED SALES AND INVENTORY SYSTEM—Provides inventory, sales and receivables for manufacturers.

Hardware

CLOCK/CALENDAR/APPOINTMENT SCHEDULER—Time, date and up to 100 time/date appointment interrupts.

PROM BLASTER—Programs 25XX and 27XX 1 to 4K multi and single voltage PROM.

MULTI-PROCESSOR EXPERIMENTOR SYSTEM—Provides a COPS 402 processor with I/O RAM, and a cross assembler for real time or process control requirements.

ASAP (APPARAT SCIENTIFIC ARITHMETIC PROCESSOR)—Fast processing of scientific functions.

TRS-80® BUS EXTENDER—Allows up to six hardware products to be plugged into Models I or III bus. Has self-contained power supply.

DISK SEPARATOR—Improves floppy disk performance required because of insufficient data separation on the Model I.

SPEECH I/O MODULES—Voice and sound input and output for the Models I and III.

APPARAT CONNECTION—Adds auto answer and auto dial modem capabilities to your TRS-80®

MODEL III FLOPPY DISK SYSTEM—Add one to four drives plus controller to your Model III with up to 2.8 megabytes capacity under NEWDOS/80.

WINCHESTER DISK SYSTEM—Five to forty megabyte storage with optional tape or floppy backup.

If you're going to upgrade your system, call us about our twenty new TRS-80 Products, or our complete line of add-ons for the TRS-80. You'll find our products innovative and our prices hard to beat. Dealer inquiries welcome. For more information on Apparat's new products, send $1.00 (refundable on your first order) for our 1981 catalog, or call us at (303) 741-1778.

To order any product, call us toll-free (except Alaska, Colorado and Hawaii) at

800-525-7674.

Apparat, Inc.

4401 So. Tamarac Parkway, Denver, CO 80237 (303) 741-1778

END will stop it. (The Atari 400 has a similar problem, but typing END causes it to silence all sound generators.)

Another problem is shielding against RFI (radio-frequency interference). Although the Federal Communications Commission has passed a set of rules to eventually keep personal computers and similar devices from interfering with television and radio reception, most manufacturers have received extra time to modify their products. In the case of Commodore, only units manufactured after March 1981 must meet the new requirements. I have been told by Commodore that unshielded units will be marked as such. If you live in close proximity to other people, I recommend that you wait for a shielded unit. If you use an unshielded VIC, people nearby may not be able to use radios and televisions while the computer is on.

The most serious problem I found can be avoided with some forethought. The VIC tape recorder, once put into play or record mode, can be started and stopped by the computer. A potential problem occurs when you have just done a LOAD and are about to do a SAVE (to save, for example, a revised version of the program just loaded). When you did the LOAD, the VIC instructed you to press the play button to begin the loading process. When it finished loading the program, it stopped the tape-transport motor but left the play button depressed. If you then give the SAVE command, the VIC initiates the process, even though the record button has not been pressed. (If no recorder buttons are pressed when the SAVE command is given, the VIC instructs you to press both the play and record button, and the recording process occurs without error.) The RUN/STOP key will not abort the loading process, although pressing the RUN/STOP and RESTORE keys will. Still, there are two chances to lose the program: one, not realizing that the program is not being recorded; two, realizing it but turning the VIC off from not knowing that the SAVE command can be aborted and restarted.

One of the most important components of a consumer-oriented microcomputer is its documentation.

Documentation

One of the most important components of a consumer-oriented microcomputer is its documentation. Microcomputer documentation was neglected in the past because it was seen as being too expensive and time-consuming to justify the perceived benefits. Now, however, good documentation can make the difference between the average consumer using or ignoring the same machine. Microcomputer documentation has a heavy burden to carry because of the multiple functions it needs to perform. First, it must tell the user how to unpack the computer, get it running, and use it with prepackaged software. Second, it must guide the user carefully through the first sessions with the computer (because many people still have some uneasiness or fear of computers). Third, it must educate the user about microcomputers in general so its potential for use can be seen. Fourth, it must document the features of the microcomputer in a way that is both complete and easy to understand.

Commodore recognized the need for good documentation. Avalanche Inc (of Palo Alto, California) has been commissioned to produce several books about the VIC. The first, the *VIC User's Manual,* is supplied with the VIC and is a good introduction to the VIC and its features. Its style is informal, friendly, and respectful of the reader's intelligence, but it assumes no previous knowledge of computers. There are illustrated chapters on setting the VIC up and on using its graphics, color, and music. Each feature of the VIC is illustrated with several short programs (5 to 25 lines each), making it

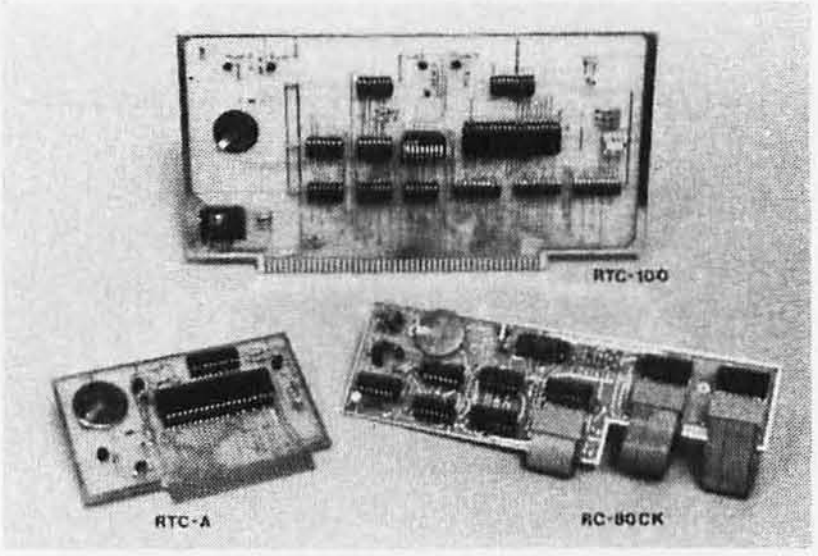

Circle 359 on inquiry card.

Circle 29 on inquiry card. →

Eleven new products for your Apple™ that are so hot...

Apparat introduces eleven powerful and economical add-ons for your Apple system. Hardware and Software to increase your capabilities:

THE EXTENDER—Extends Applesoft™ by adding these functions:
- Print Using • Auto Line Numbering
- Decimal/Hex Conversion • High Resolution Screen Color Indication • Single Color Screen Fill and much more...

HANDY DISK—Utility programs and device handlers for the APEX operating system—A powerful alternative to Apple DOS.

XPLO—A Block Structured—Pascal type high level language operating under APEX—Now with floating point arithmetic.

ASAP—Apparat's Scientific Arithmetic Processor Board—Faster execution of scientific functions.

CLOCK/CALENDAR/APPOINTMENT SCHEDULER—Provides time and date which can be read by the Apple or automatically DMA'd to the video screen. Also maintains up to one hundred times and dates for use in maintaining an appointment calendar.

PROM BLASTER— Programs all 1K to 4K PROMS of 25XX of 27XX single or multi-voltage types—With all personality modules and read/write software.

APPLE ADD-ON FLOPPY DISK DRIVES—Using the highly reliable TANDON disk drives—Provides greater capacity in 40 and 80 track single or dual sided versions. Includes software to integrate this greater capacity to the Apple DOS's.

WINCHESTER MICRO DISK—5 to 10 megabyte capacity optional tape backup. Software to integrate this greater capacity to the Apple DOS's.

PASCAL GENERAL LEDGER—Menu driven general ledger program based on the Osborne System. Customized utility for a true turn-key general ledger system. (This is the system we use!)

SALES AND INVENTORY SYSTEM—Inventory, sales and invoicing package. Particularly advantageous in a manufacturing environment.

APEX—The operating system for the Apple II—Total control of your Apple—fast program loading and execution—Flexibility—Efficiency. Once you've tried APEX you can never go back to any other Apple DOS.

If you're going to upgrade your system, call us about our eleven new Apple Products, or our complete line of add-ons for the Apple. You'll find our products innovative and our prices hard to beat. Dealer inquiries welcome. For more information on Apparat's new products, send $1.00 (refundable on your first order) for our 1981 catalog, or call us at (303) 741-1778.

To order any product, call us toll-free (except Alaska, Colorado and Hawaii) at

800-525-7674.

VISA master charge

Apparat, Inc.

4401 So. Tamarac Parkway, Denver, CO 80237 (303) 741-1778

easy to begin learning about the computer. Most of the chapters do not rely on material from previous chapters, meaning that the reader can learn about the features in any order.

Avalanche has produced two more books, *Introduction to Computing ...On the VIC* and *Introduction to BASIC Programming...On the VIC*. Both books, part of the Commodore Learning Series, are available at extra cost. They are written in the same friendly style and cover the use of the VIC in greater depth. What makes these books so innovative is that each book is sold with a program cartridge containing longer example programs that are used in the book. This allows the reader to learn from longer programs without the drudgery of having to type them in.

Comparison to Other Computers

Table 5 gives a comparison of five low-cost, consumer-oriented microcomputers: the Atari 400, the Commodore VIC 20, the Ohio Scientific Challenger 1P, the Radio Shack TRS-80 Color, and the Sinclair ZX80. Although the VIC is a very good machine, some of the others have features that may make them the best choice for you. The Atari 400 has the most sophisticated design; it allows detailed video graphics (although they are more difficult to program) and is the logical choice of anyone wanting access to sophisticated arcade-like games. The TRS-80 Color Computer might be the best choice if you want the convenience of getting service and repairs from a Radio Shack store. In any case, the best computer for you depends on your needs and your budget.

Conclusions

- The final verdict on the Commodore VIC 20 is not in yet because of the large amount of hardware and software not yet commercially released. But if the rest of the product line is as good as the VIC 20 microcomputer is, the VIC computer system will be one of the strongest on the market.

- The VIC 20 computer unit is unexcelled as a low-cost, consumer-oriented computer. Even with some of its limitations (eg: screen size of 23 rows by 22 columns, maximum programmable memory of 32 K bytes), it makes an impressive showing against more expensive microcomputers like the Apple II, the Radio Shack TRS-80, and the Atari 800.

- The low cost of the VIC ($299.95) is made possible by a custom computer-to-video interface circuit that replaces several other integrated circuits and by Commodore's manufacturing most of the VIC at in-house factories in Japan.

- The VIC is well designed and easy for the novice to use. A large part of its suitability for first-time users is due to its excellent documentation and attention to human-engineering factors. The unit has some small design flaws, but they are minor.■

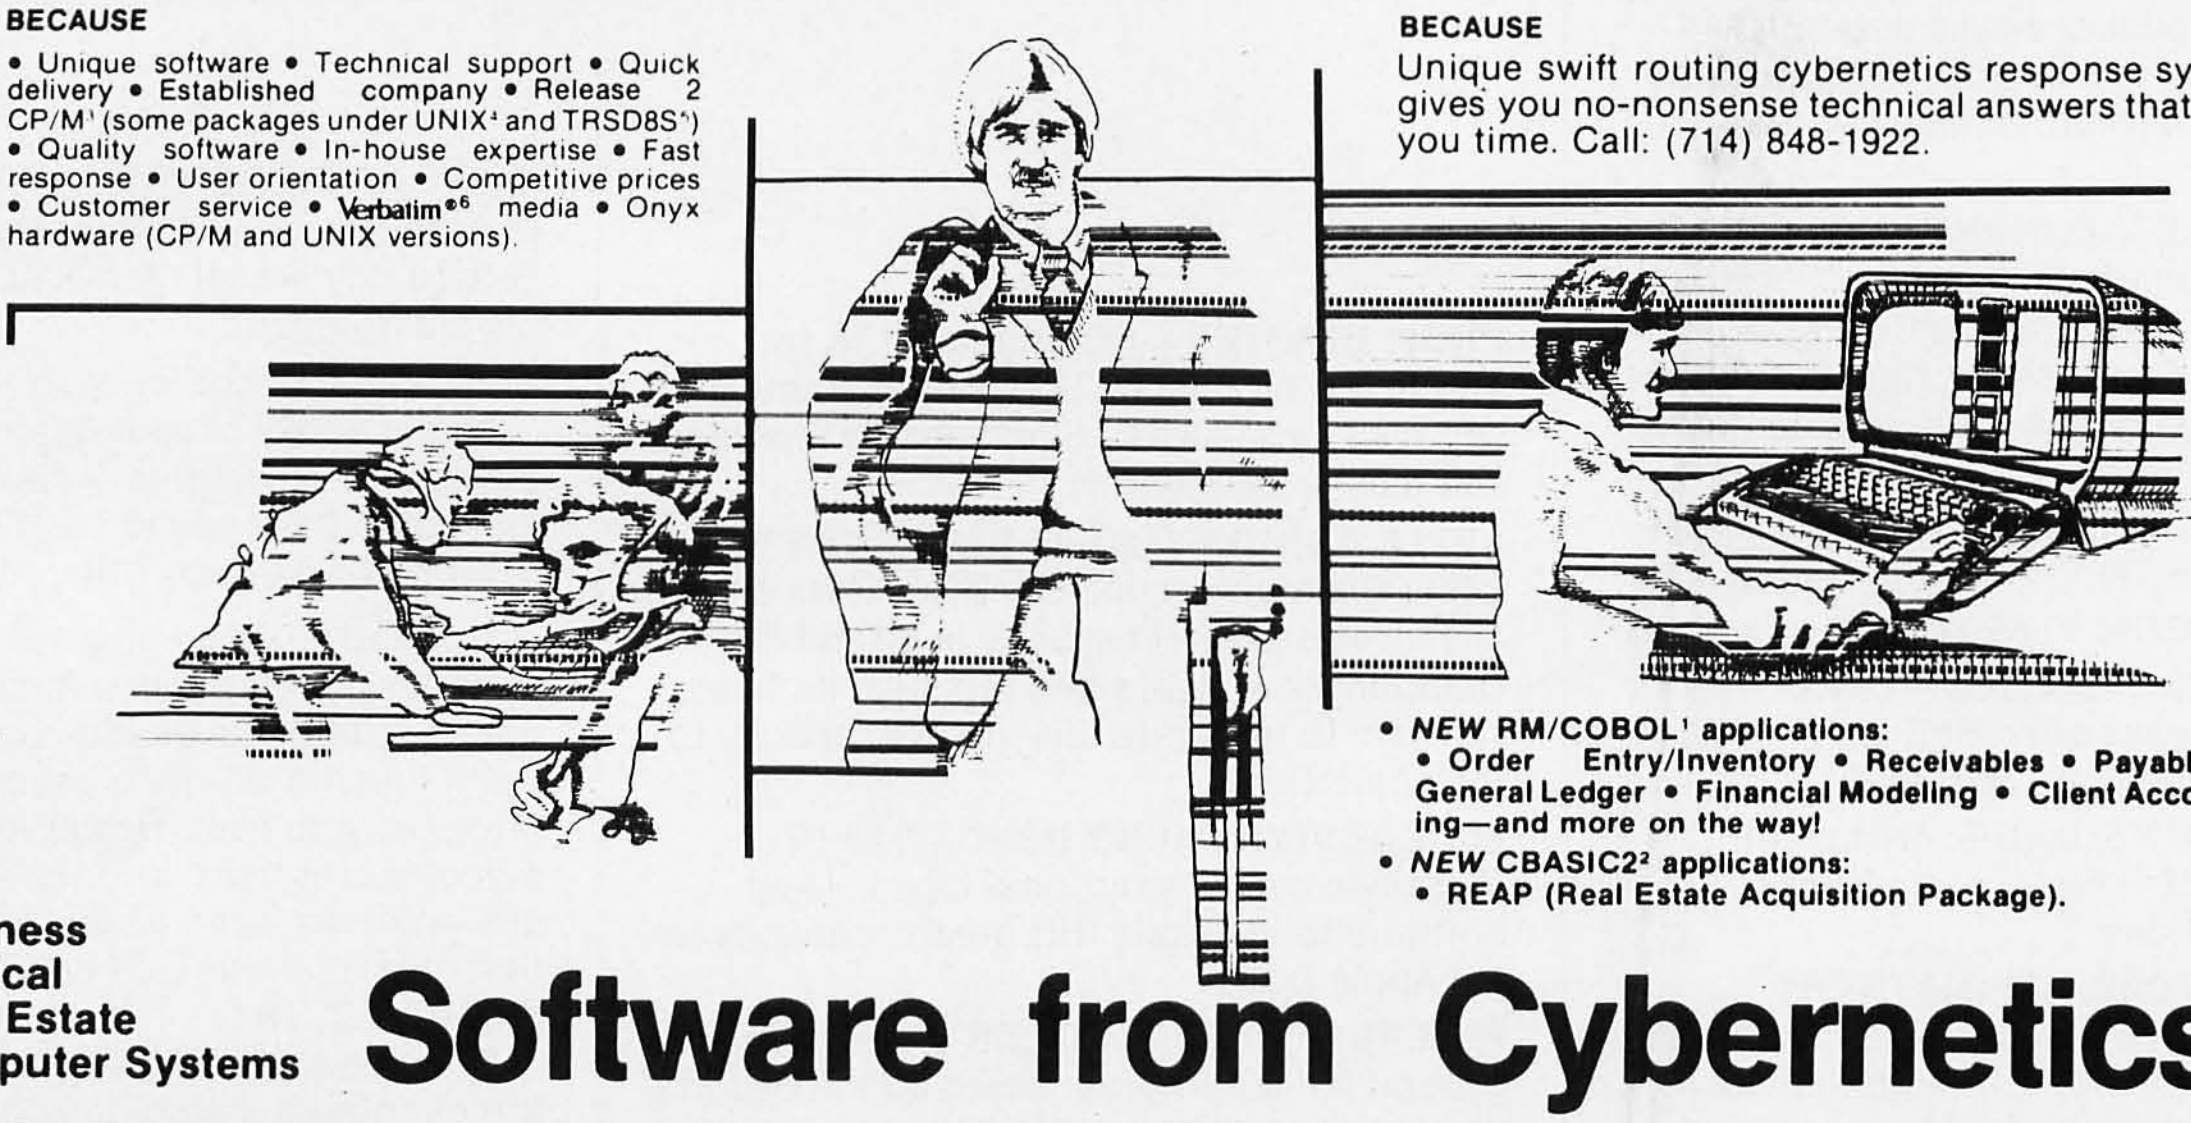

"My computer helped me write The Final Encyclopedia. I wouldn't trust anything less than Scotch® Brand Diskettes to make a long story short."

Cover art by Michael Whealen, courtesy of Ace Publishing Co.

Gordon R. Dickson,
Science Fiction Author,
Minneapolis, Minnesota

Gordon Dickson: a small businessman whose product is his own imagination. He's written more than 40 novels and 150 short stories; his newest work is *The Final Encyclopedia*. He uses his personal computer and word processing software to maximize his production. All his words—his product—are stored on diskettes. He calls up sentences and paragraphs on demand, and gets more rewrite out of the time available. So he depends on Scotch diskettes to save himself production time.

Dependable Scotch media can work just as hard for you. Each Scotch diskette is tested before it leaves our factory, and certified error-free. So you can expect it to perform exactly right.

Scotch 8″ and 5¼″ diskettes are compatible with computer/diskette systems like TRS-80, Apple, PET, Wang and many others. Get them from your local 3M distributor. For the one nearest you, call toll-free: 800/328-1300. (In Minnesota, call collect: 612/736-9625.) Ask for the Data Recording Products Division. In Canada, contact 3M Canada, Inc., Ontario.

If it's worth remembering, it's worth Scotch Data Recording Products.

3M Hears You...

3M

DC Motor Controls
Build a Motorized Platform

Steve Ciarcia
POB 582
Glastonbury CT 06033

Many of you grew up as I did, taking all your toys apart. In most cases, the wrapping was scarcely off a gift before a screwdriver was skillfully applied to pry it apart.

I haven't changed much over the years. I still take most of my gadgets apart. Five months ago, I bought the Milton-Bradley Big Trak toy tank for use in a project. Instantly, I had the screwdriver and pliers ready to do their job. I unpacked the Big Trak, installed the batteries, placed it on the floor, and pressed the Test button. The tank beeped a few times and executed a preprogrammed test sequence. Everything worked, so I began to disassemble it. The time from my unpacking the box to unscrewing the case wasn't more than a minute and a half.

I took Big Trak apart because I was interested in the motorized mechanism inside the vehicle. I found it an impressive engineering accomplishment that such sophisticated control could be provided with inexpensive motors. My previous experience led me to believe that only industrial-quality DC (direct-current) motors could be controlled so well. It seems that many things have changed since I was a kid: permanent-magnet DC motors aren't what they used to be.

DC motor *controls* are not the same, either. They are simpler, more accurate, and cheaper. Using DC motors has become relatively easy. It's no longer a black art.

I hope this article discussing the principles of DC motors will dispel your reluctance to experiment with them. First the basics, then some examples of motor use.

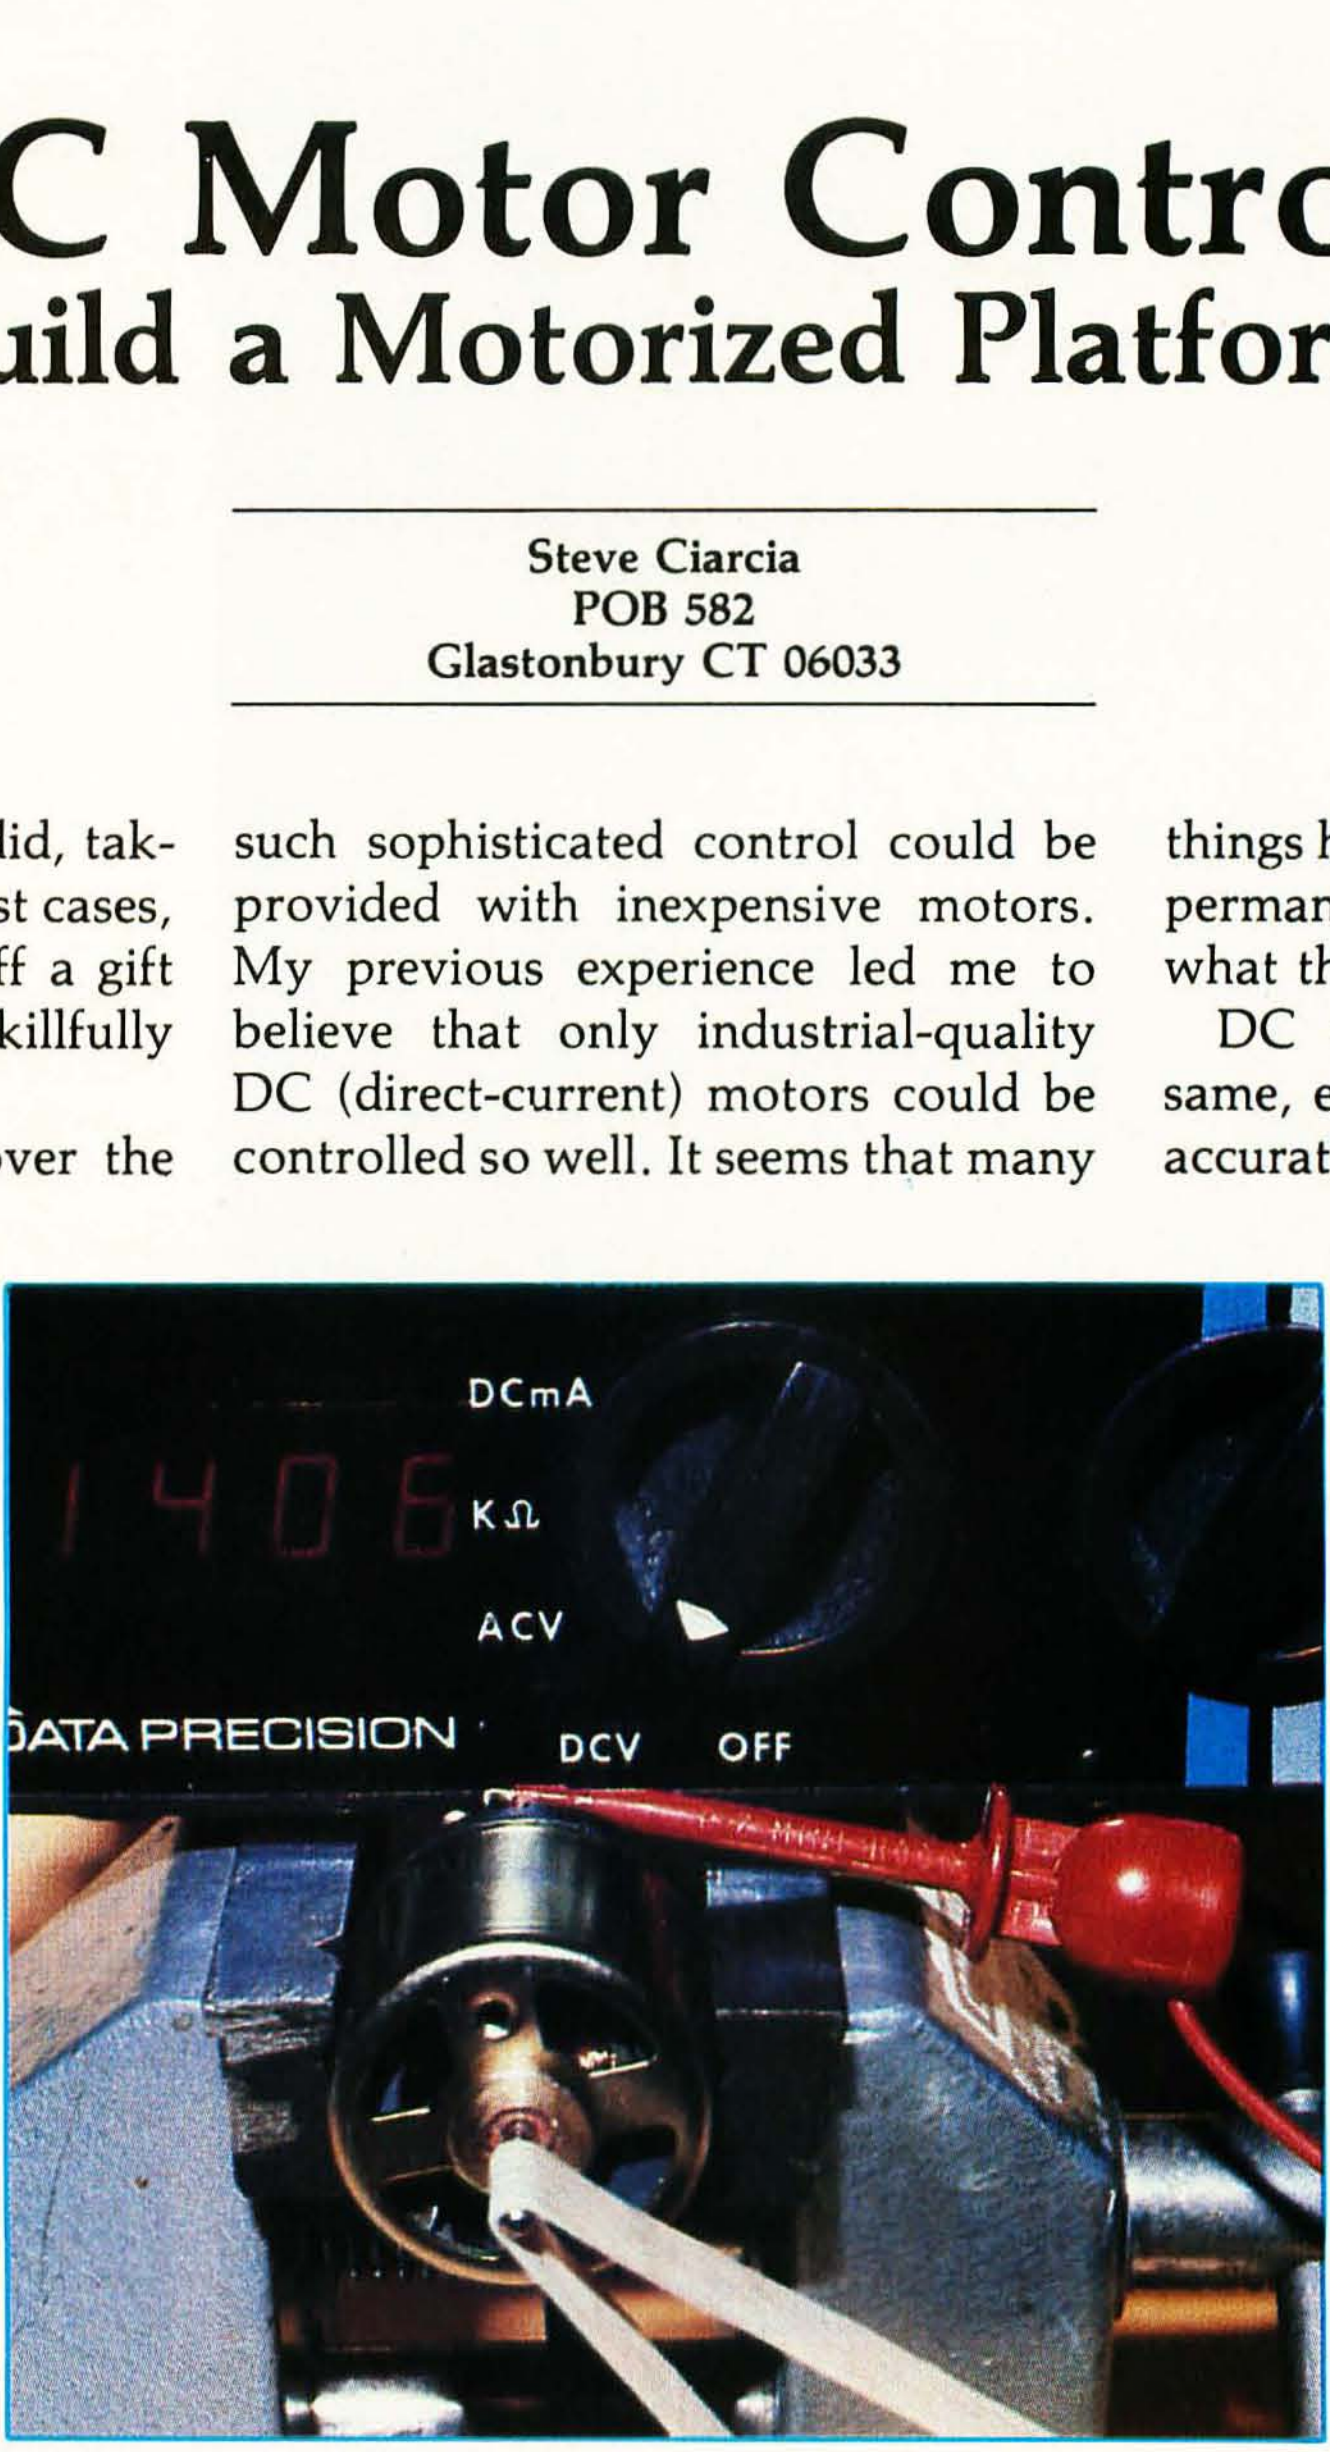

Photo 1: *A PM (permanent-magnet) DC motor can also be used as a generator-type tachometer, or tachometer-generator. When the shaft is turned, a DC current proportional to the speed is produced. In the case shown, a small PM DC motor is secured in a vise, and the shaft is slowly turned (by the belt attached to the shaft and extending to the lower right). The digital voltmeter above the motor indicates the actual generator output voltage. In this case, the shaft is turning at about 150 rpm.*

What Is a DC Motor?

The DC motor was invented by Michael Faraday early in the nineteenth century. He determined that when a current-carrying conductor is placed in a magnetic field, a force is applied to the conductor, causing it to move. Shown graphically in figure 1, the direction and magnitude of this force are functions of the conductor current and the direction of the magnetic field. Conversely, moving

VEDIT

CP/M
CUSTOMIZABLE
FULL SCREEN EDITOR

The best news since CP M... customizable full screen editing

As a serious computer user you spend much of your time editing, whether it be for program development or word processing. Make the best use of your time with the help of VEDIT, an exceptionally fast and easy to use full screen editor. VEDIT is a highly refined and proven editor which is easy enough for novices to learn and use. Yet its unequalled set of features also makes it the choice of computer professionals. And because VEDIT is user customizable, it adapts to your keyboard, hardware, applications and preferences.

In VEDIT, the screen continuously displays the region of the file being edited, a status line and cursor. Changes are made by first moving the cursor to the text you wish to change. You can then overtype, insert any amount of new text or hit a function key. These changes are immediately reflected on the screen and become the changes to the file.

VEDIT has the features you need, including searching, file handling, text move and macros, plus it has many special features. Like an 'UNDO' key which undoes the changes you mistakenly made to a screen line. The Indent and Undent Keys allow automatic indenting for use with structured programming languages such as Pascal and PL/I. The disk write error recovery lets you delete files or even insert another disk should you run out of disk space during an edit session. And you have the ability to insert a specified line range of another file anywhere in the text. Disk access is very fast and VEDIT uses less than 12K of memory. The extensive 70 page, clearly written manual has sections for both the beginning and experienced user.

Totally User Customizable

Included is a setup program which allows you to easily customize many parameters in VEDIT, including the keyboard layout for all cursor and function keys, screen size, default tab positions, scrolling methods and much more. This setup program requires no programming knowledge or 'patches', but simply prompts you to press a key or enter a parameter.

The CRT version supports all terminals by allowing you to select during setup which terminal VEDIT will run on. Features such as line insert and delete, reverse scroll, status line and reverse video are used on 'smart' terminals. The memory mapped version supports bank select and a hardware cursor such as on the SSM VB3. Special function keys on terminals such as the H19, Televideo 920C and IBM3101, and keyboards producing 8 bit codes or escape sequences are also supported.

Ordering

Specify the CRT version, your video board or microcomputer, the 8080/Z80 or Z80 code version, and disk format required. (Call for pricing and delivery on the CP/M-86 version)

Standard Package: Disk and manual	$130
Manual: Price refunded with software purchase	$15

VISA and MASTER CARD Welcomed.
Attractive Dealer Terms.

New CRT Emulation Package

Get the details on our CRT emulation package for S-100 computers, which features the PIICEON V-100, 24x80 video board and our software to give you an exceptionally compatible and high speed alternative to a CRT terminal.

CP/M and MP/M are registered trademarks of Digital Research, Inc. Apple II is a registered trademark of Apple Computer, Inc. SoftCard is a trademark of Microsoft. TRS-80 is a trademark of Tandy Corp.

North Star ● Cromemco ● Heath H8/H89 ● SuperBrain ● Apple II Softcard ● Sorcerer ● TRS-80 Model II & Model I
Most other CP/M Systems with CRT or Memory Mapped Displays ● MP/M ● CP/M-86

CompuView Products Inc.

618 Louise, Ann Arbor, Michigan 48103 ● Telephone (313) 996-1299

Circle 74 on inquiry card.

a conductor through a magnetic field was found to induce a current in the conductor proportional both to the intensity of the field and the velocity of the conductor as it passes through the field.

Faraday found the best way to obtain useful work from this magnetic force. He assembled a rotating disk-shaped conductor within the magnetic field. The resultant force vectors caused the disk to spin. To attach current-carrying leads to the spinning conductor, he used sliding contacts.

These two discoveries became the basis of the DC motor and the DC generator. Eventually, the disk was replaced with many turns of wire placed in deep slots of a laminated iron rotor. This part is the *armature*. The externally applied magnetic field, the *stator field*, was produced by an electromagnet (or a permanent magnet) and the sliding contacts became carbon *brushes* and *commutators*.

The optimum DC-motor configuration has the most conductors in the magnetic field. Maximum force is developed at a right angle to the stator field. Between these positions, the resultant force is a function of the sine of the angles between the two fields. As the rotor turns, the magnetic field rotates with it unless some provision has been made to switch the direction of current flow in individual armature conductors so they maintain the maximum force vector.

This switching is done with a commutator, as shown in figure 2 on page 70. Current flows in through brush A and out through brush B. During clockwise rotation, the current in coils 3 and 6 will have reversed after one sixth of a revolution past the position shown. In fact, after every one sixth of a revolution, the current in two opposite armature conductors changes directions. As a result, the current-flow and field vectors in the armature occupy a fixed position in space independent of rotation of the coils. This provides steady, unidirectional torque.

Motor Classification

DC motors are often classified by the type of stator field used. Fractional-horsepower DC motors using electromagnets to generate the stator field are called "wound-field motors." There are three basic types: series field, shunt field, and compound field. A graphic comparison of speed, torque, and current of these three motors is given in figure 3 on page 72.

Series-field motors provide the greatest torque at start-up because the high initial armature current flows through the stator field as well. As the speed increases, the current decreases. This further increases the speed. If not for internal friction and coil-winding energy losses, this type of motor could theoretically run away under no-load conditions. This type of motor is best used where large starting torques are required, such as automotive propulsion. A schematic representation and speed/torque graph are shown in figure 3a.

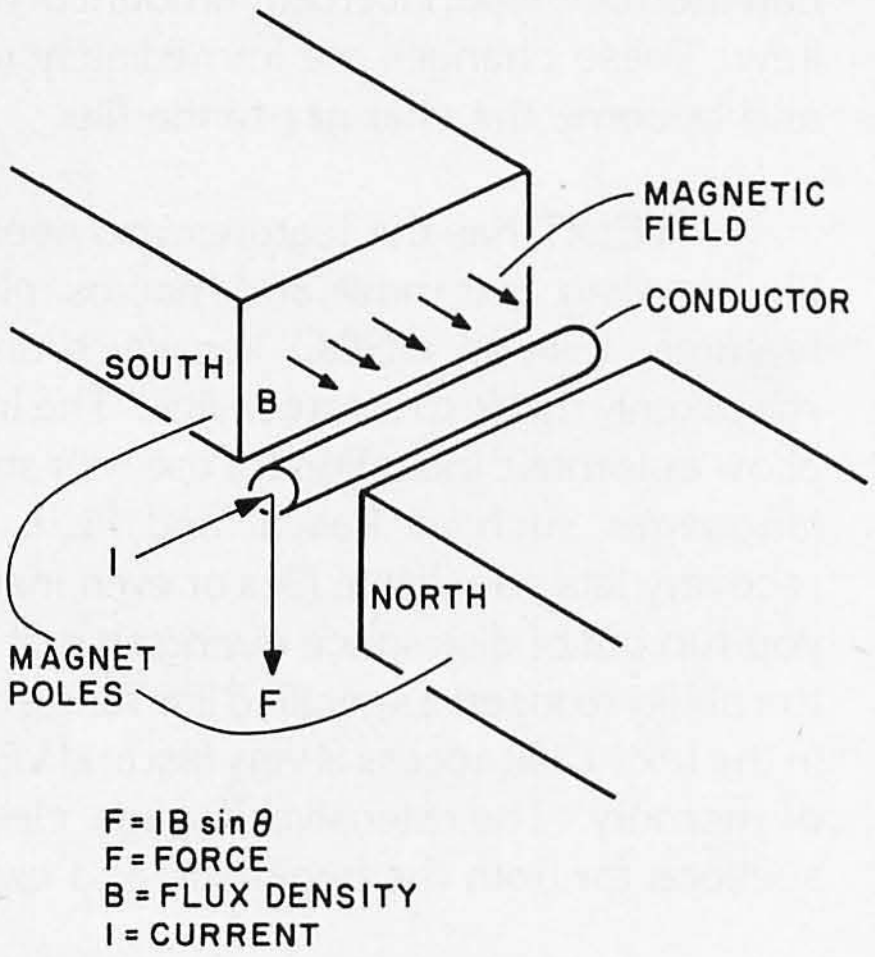

Figure 1: *Simplified diagram of the basic electromagnetic principles behind the DC motor. When a current-carrying conductor is placed in a magnetic field, the conductor feels a mechanical force, F, in the indicated direction, perpendicular to the current and the magnetic field. The force is greatest when the current is flowing perpendicular to the lines of flux ($\theta = 90°$), as shown here. The force is zero if current flows parallel to the lines of flux ($\theta = 0°$).*

SAVE $50

We design and manufacture a complete line of industry compatible microcomputer assembled and tested boards and kits for your system. All are S-100 bus compatible and use the Z-80 microprocessor.

With over 25,000 boards and hundreds of computer systems installed throughout the world, SD Systems offers you both proven and state-of-the-art products! We provide you with a complete family of kits for all your systems needs —

SBC 100/200 — A 2.5/4 megahertz range of single board computers which are effective standing alone or combined with the complete SD board range.

ExpandoRAM I/II — For use with 250/200 nanosecond RAM, these high density boards offer 16 to 64K memory; the ExpandoRAM II can achieve RAM capacities up to 256K using 64K chips.

Versafloppy I/II — A floppy disk controller for up to four drives, supporting single/double density and single/double-sided disk formats.

VDB-8024 — A full function visual display board with a Z-80 controller that adds display capabilities to your system.

Z-80 Starter Kit — A low-cost entry into the world of microcomputers designed primarily for education and experimentation.

Prom 100 — A specialty board of SD Systems which allows you to program 2708/2716/2732 proms.

SD SYSTEMS

P.O. Box 28810 • Dallas, Texas 75228 • Telex 6829016

YOU CAN SAVE $50

when you purchase any two SD Systems board kits from participating DEALERS and present coupons included in any two kits to participating DEALERS listed below. Coupons must be presented to participating DEALERS by 10-15-81.

A.S.A.P. COMPUTER PRODUCTS
Signal Hill, Ca. 213-595-6431

Q. T. COMPUTER SYSTEMS, INC.
Lawndale, Ca. 213-970-0952

S-100
Clark, N.J. 201-382-1318

COMPUTERS, ETC
Dallas, Texas 214-644-5030

JADE COMPUTER PRODUCTS
Hawthorne, Ca. 800-421-5500

COMPUTER CENTRE
Swansea, England, U.K.
44-792-460023

ARKON ELECTRONICS LTD
Toronto, Ontario, Canada
416-868-1315

RATIONAL SYSTEMS
Newport Pagnell,
Buckinghamshire, U.K.
0908-611349

ALPHA BYTE STORES
Calabasas, Ca. 213-883-8594

ARISIA MICRO SYSTEMS
Mississauga, Ontario Canada
416-274-6033

SIRTON PRODUCTS
Surrey, England, U.K.
UK-01-660-5617

EXCELTRONIX COMPONENT & COMPUTING, INC.
Toronto, Ontario, Canada
416-921-4114

S. M. ELECTRONICS
Mitcham Melbourne, Australia
03 874-3666

COMPROCESSING COMPUTING SYSTEMS
Sale, Victoria, Australia
011-51-443399

LYBEN COMPUTER SYSTEMS
St. Clair Shores, Mi.
313-777-7780

SD

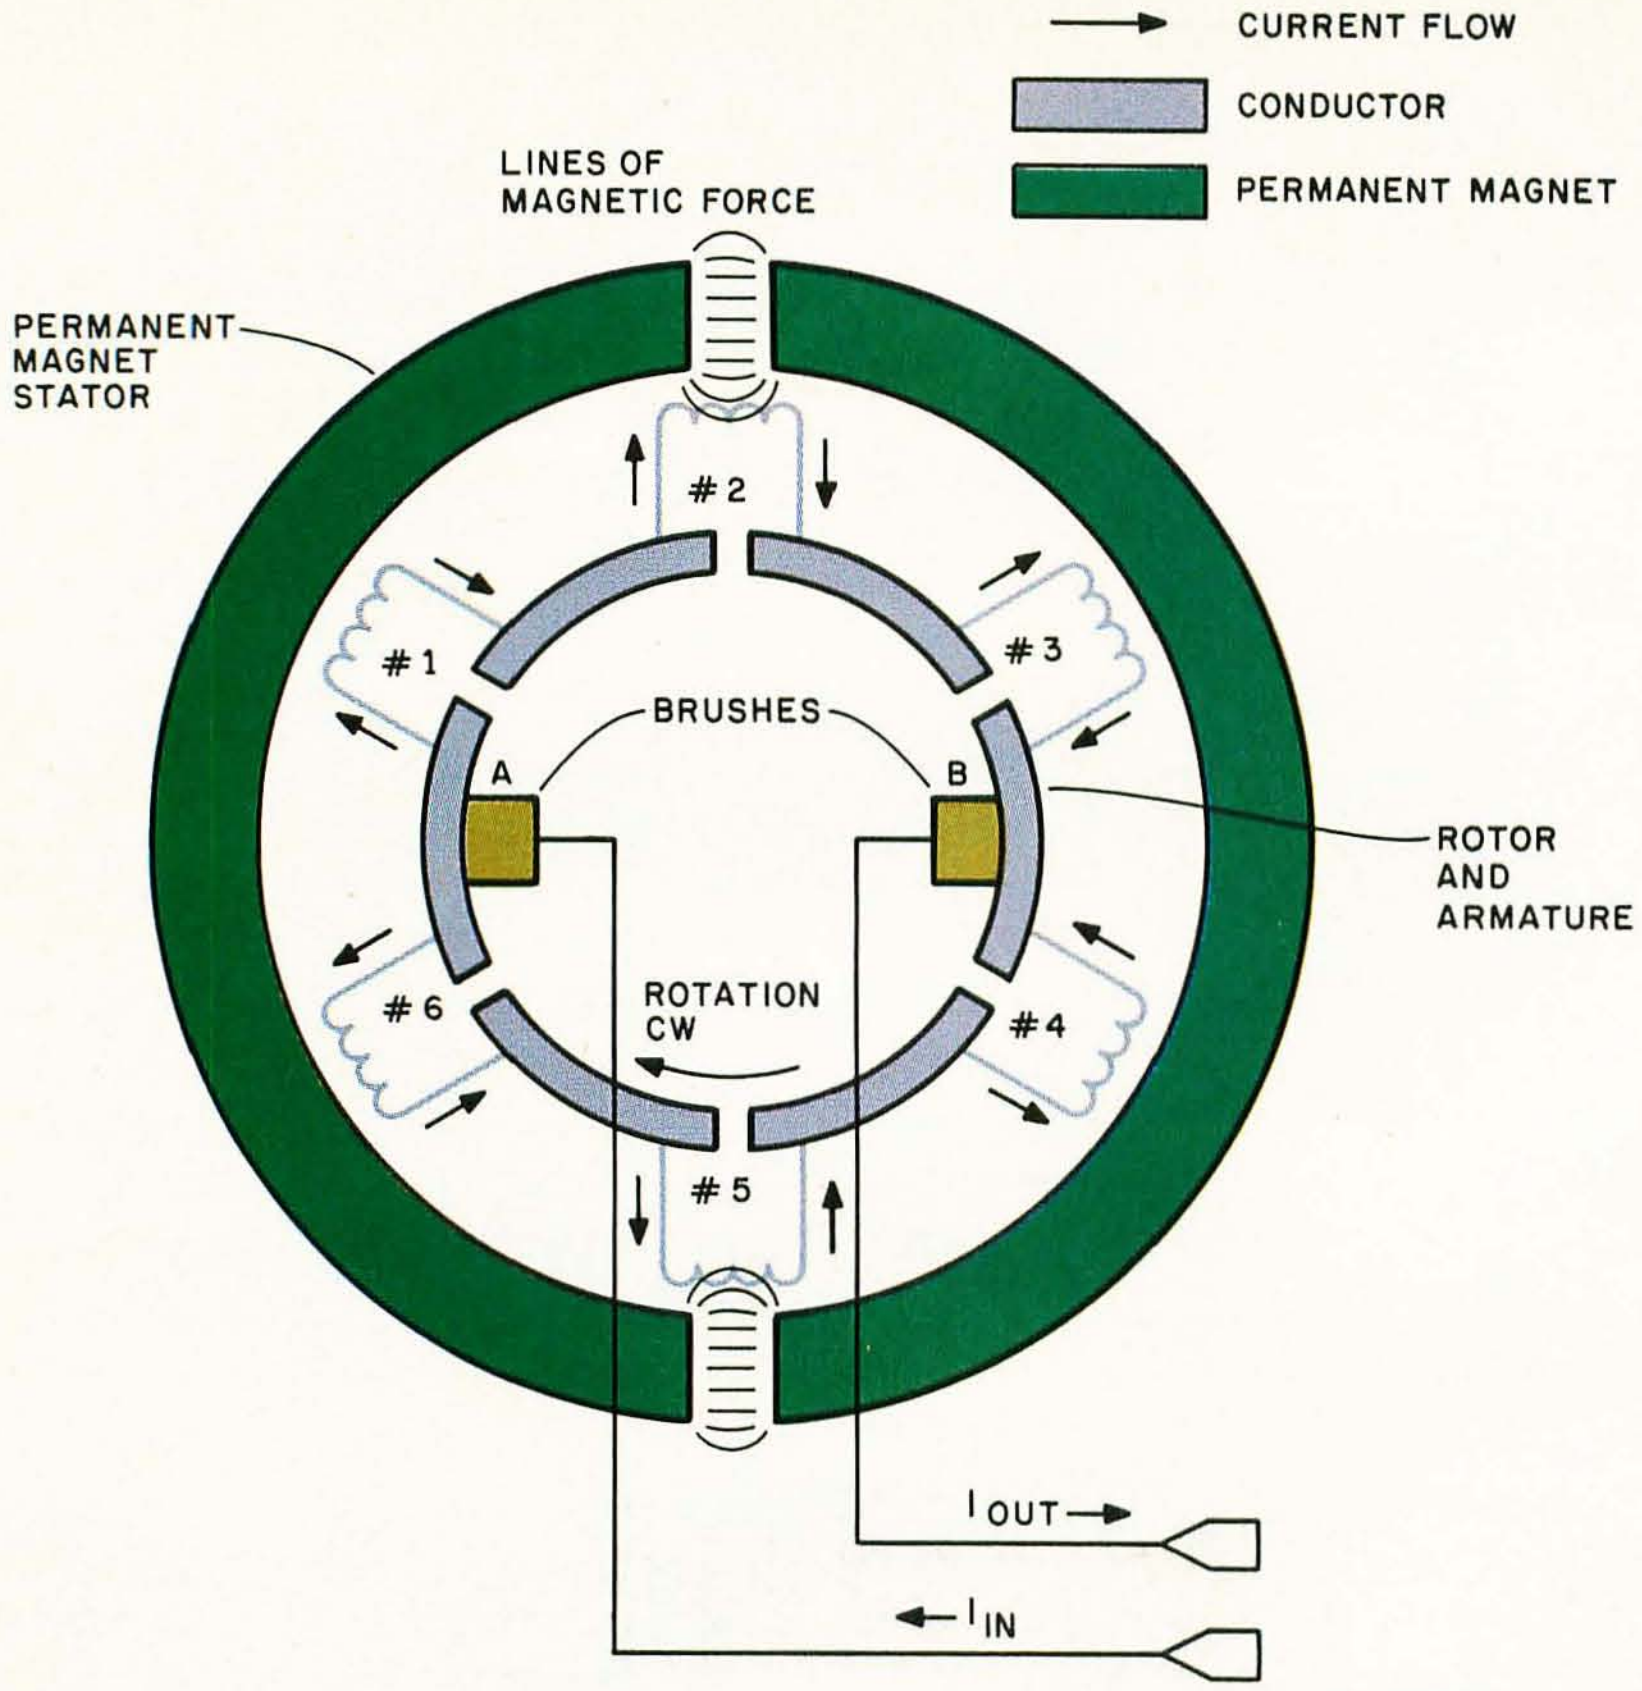

Figure 2: *Internal structure of a typical PM (permanent-magnet) DC motor. Brushes transfer current to the armature coils. As the armature rotates, the brushes contact the assembly at different points, reversing the direction of current flow in the appropriate coils to maintain the electromagnetic force and provide continuing torque.*

Shunt-field motors, shown in figure 3b, have the armature and field coils connected in parallel. The lower-current field winding, used only for creating a magnetic field and not required to carry the heavy armature current, makes this motor popular for fixed-speed applications. Except at start-up, the shunt-field motor has greater torque than the series-field motor for a given speed.

Compound-field motors have both series- and shunt (parallel)- field windings. These motors exhibit high starting torque and relatively flat function curves for speed/torque characteristics. While useful in providing rotation in one direction, this motor is difficult to reverse since connections to *both* windings must be reversed in polarity. Complex switching circuits are required for reversal control.

Permanent-Magnet Motors

In a PM (permanent-magnet) motor, the stator field is produced by a permanent magnet, not an electromagnet. The PM motor has a speed/torque curve that is linear over an extended range, as shown in figure 3d.

The obvious advantage of using a permanent magnet is that it requires no electrical power to generate the stator field. Because the actual electrical-to-mechanical energy conversion takes place in the armature, the major part of the power supplied to the electromagnetic field coil in a wound-field motor is lost as heat. The PM motor requires less power and less cooling.

The PM motor is not new. It has been around for many years and was used in your childhood toys. However, high-power PM motors were very expensive and rarely found in the home. Only recently has the in-



Unretouched CAT-400 display, 242x256x16 bits per pixel, 128K byte image buffer. Partial picture shown here to highlight detail quality. Image processing courtesy of Earth Resources Data Analysis Systems, Inc., 999 McMillan St., N.W., Atlanta, Ga.

corporation of new ceramic magnet materials made the PM motor practical for low-cost/high-power applications. Previously, most PM motors used *alnico*-alloy magnets, which are susceptible to demagnetization.

The magnet material in all PM motors is magnetized during manufacture by placing it into a strong electromagnetic field. If, later on, the motor is not carefully regulated while in use, high armature currents can produce fields exceeding the original magnetization flux. Consequently, this can demagnetize the stator magnet.

The current at which this phenomenon occurs is approximately seven or eight times the stated normal operating current of the motor. A PM motor with a 3 A current rating would have problems at currents exceeding 24 A. While such values seem

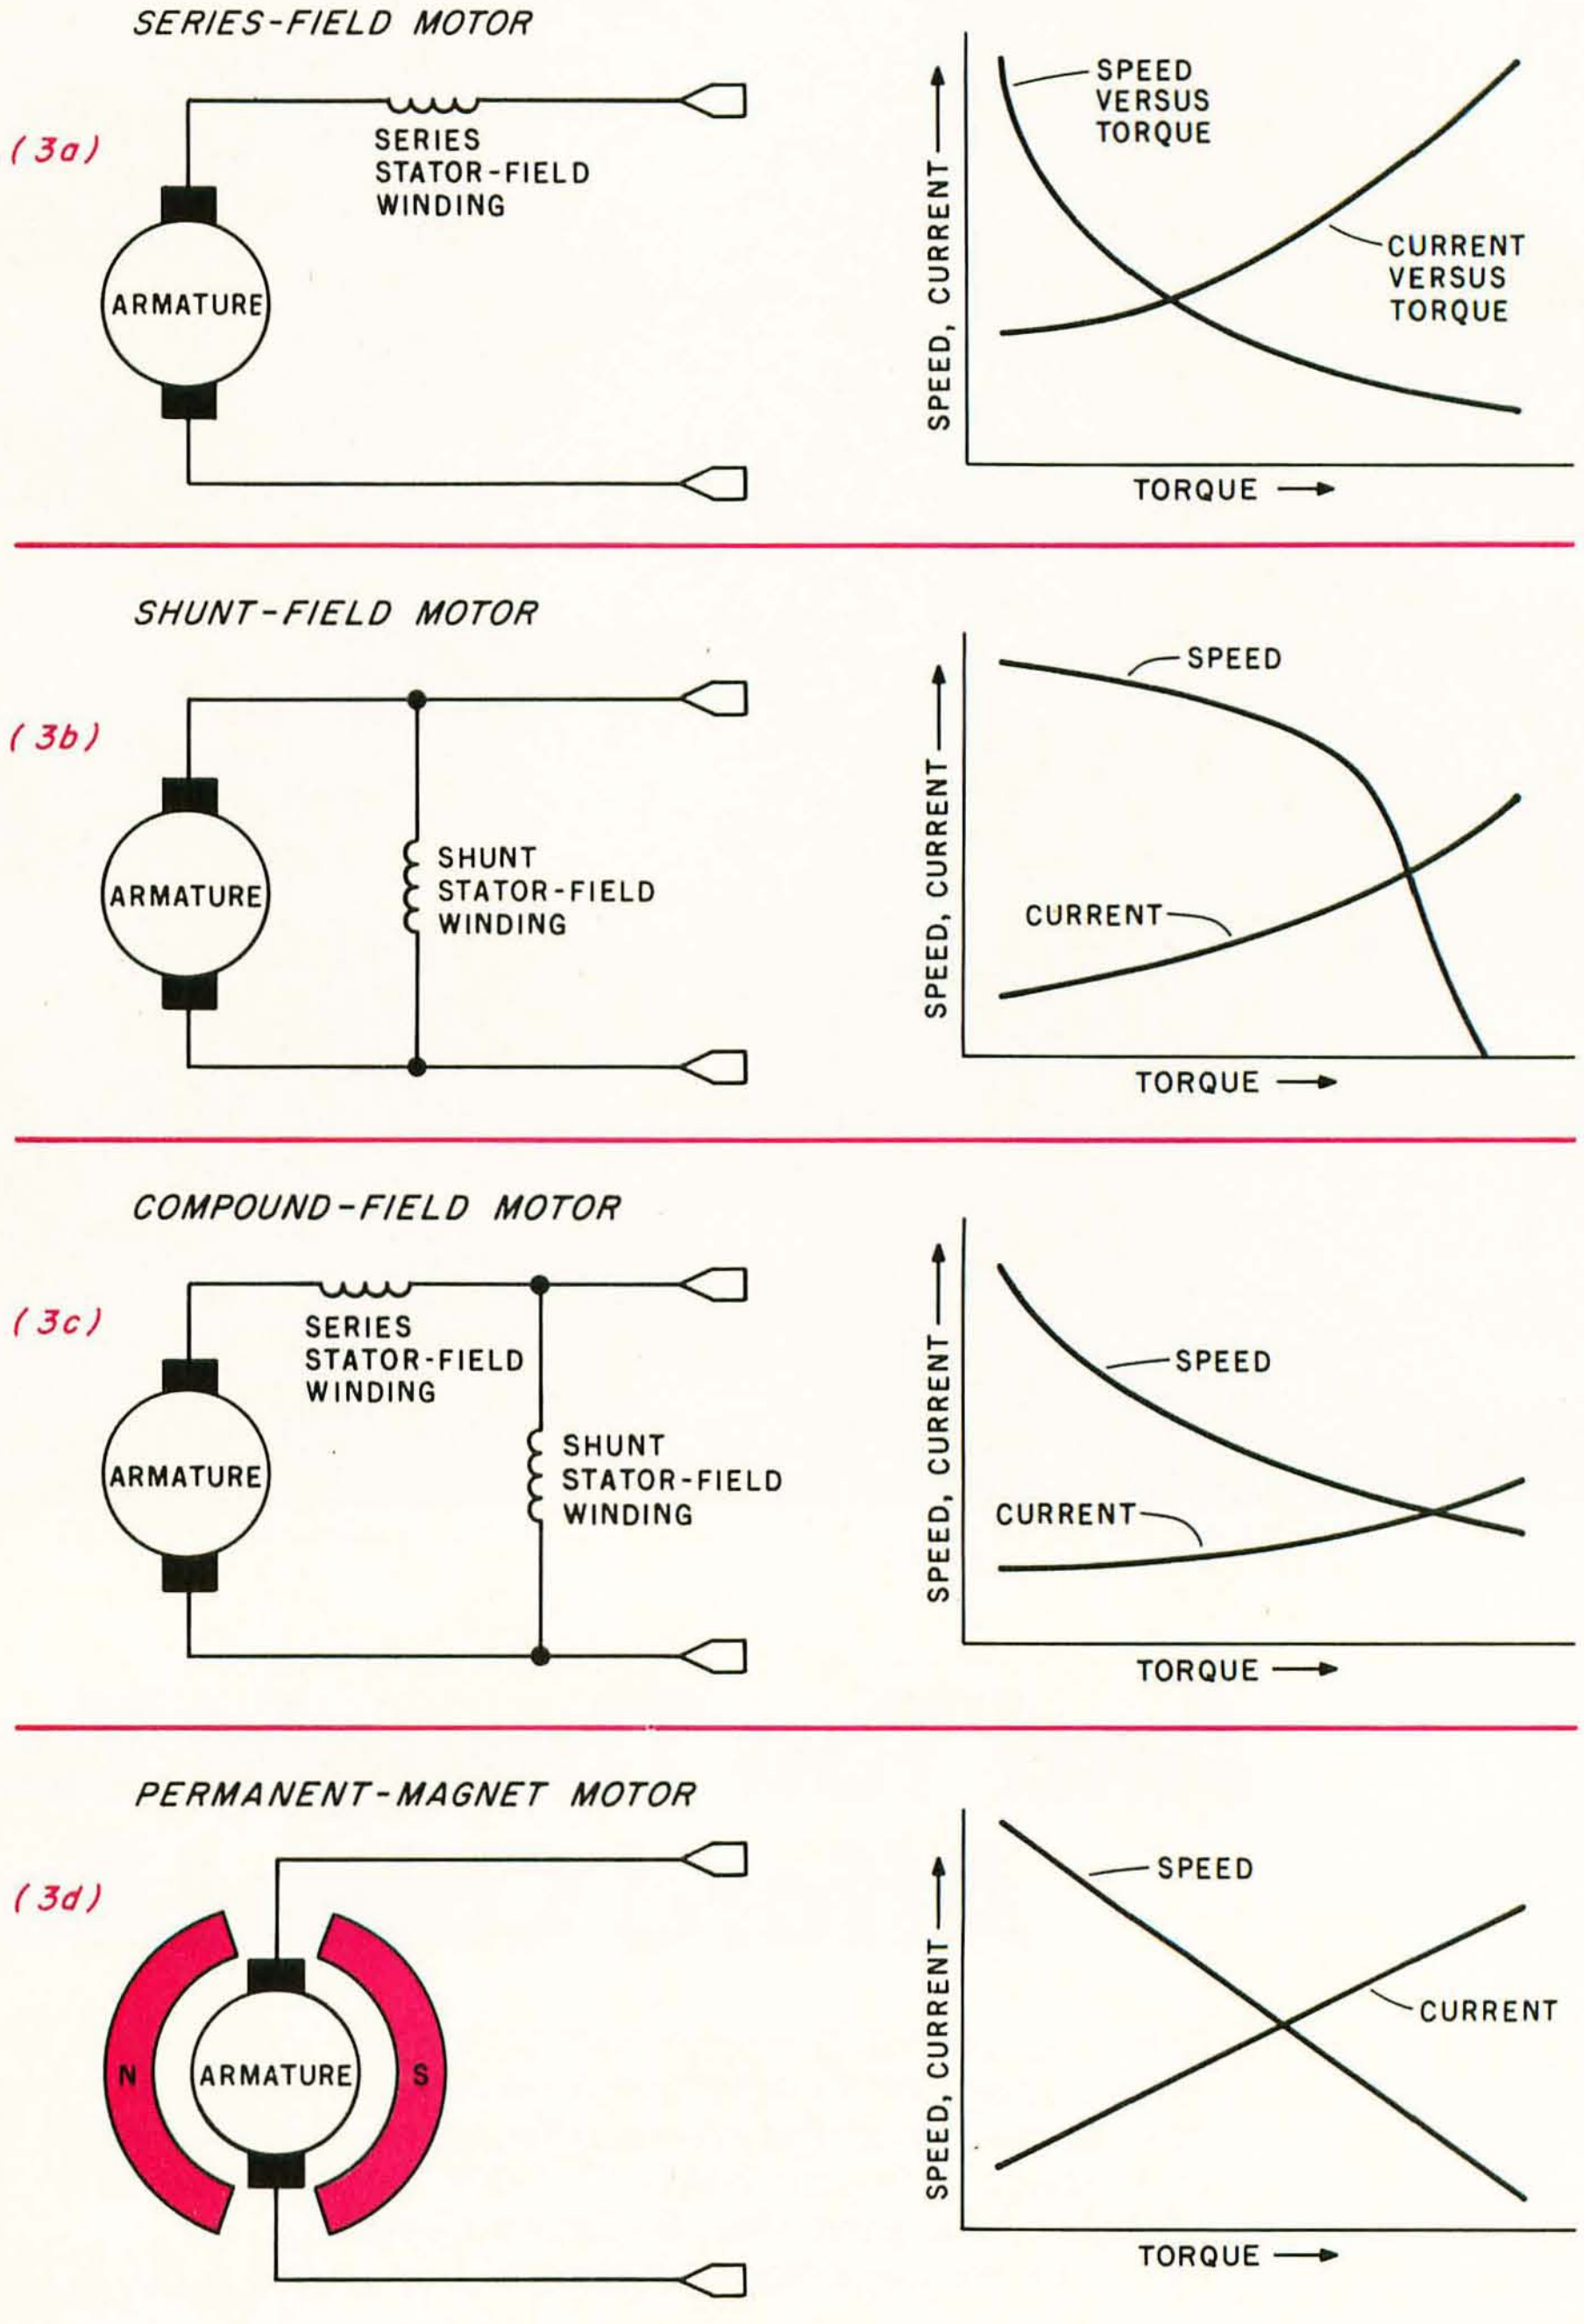

Figure 3: *Different types of DC motors are distinguished by the type of stator field. Three types use an electromagnet to produce the stator field; the fourth uses a permanent magnet. Different methods of connecting windings in the stator electromagnet produce different speed/torque and current/torque function curves.*

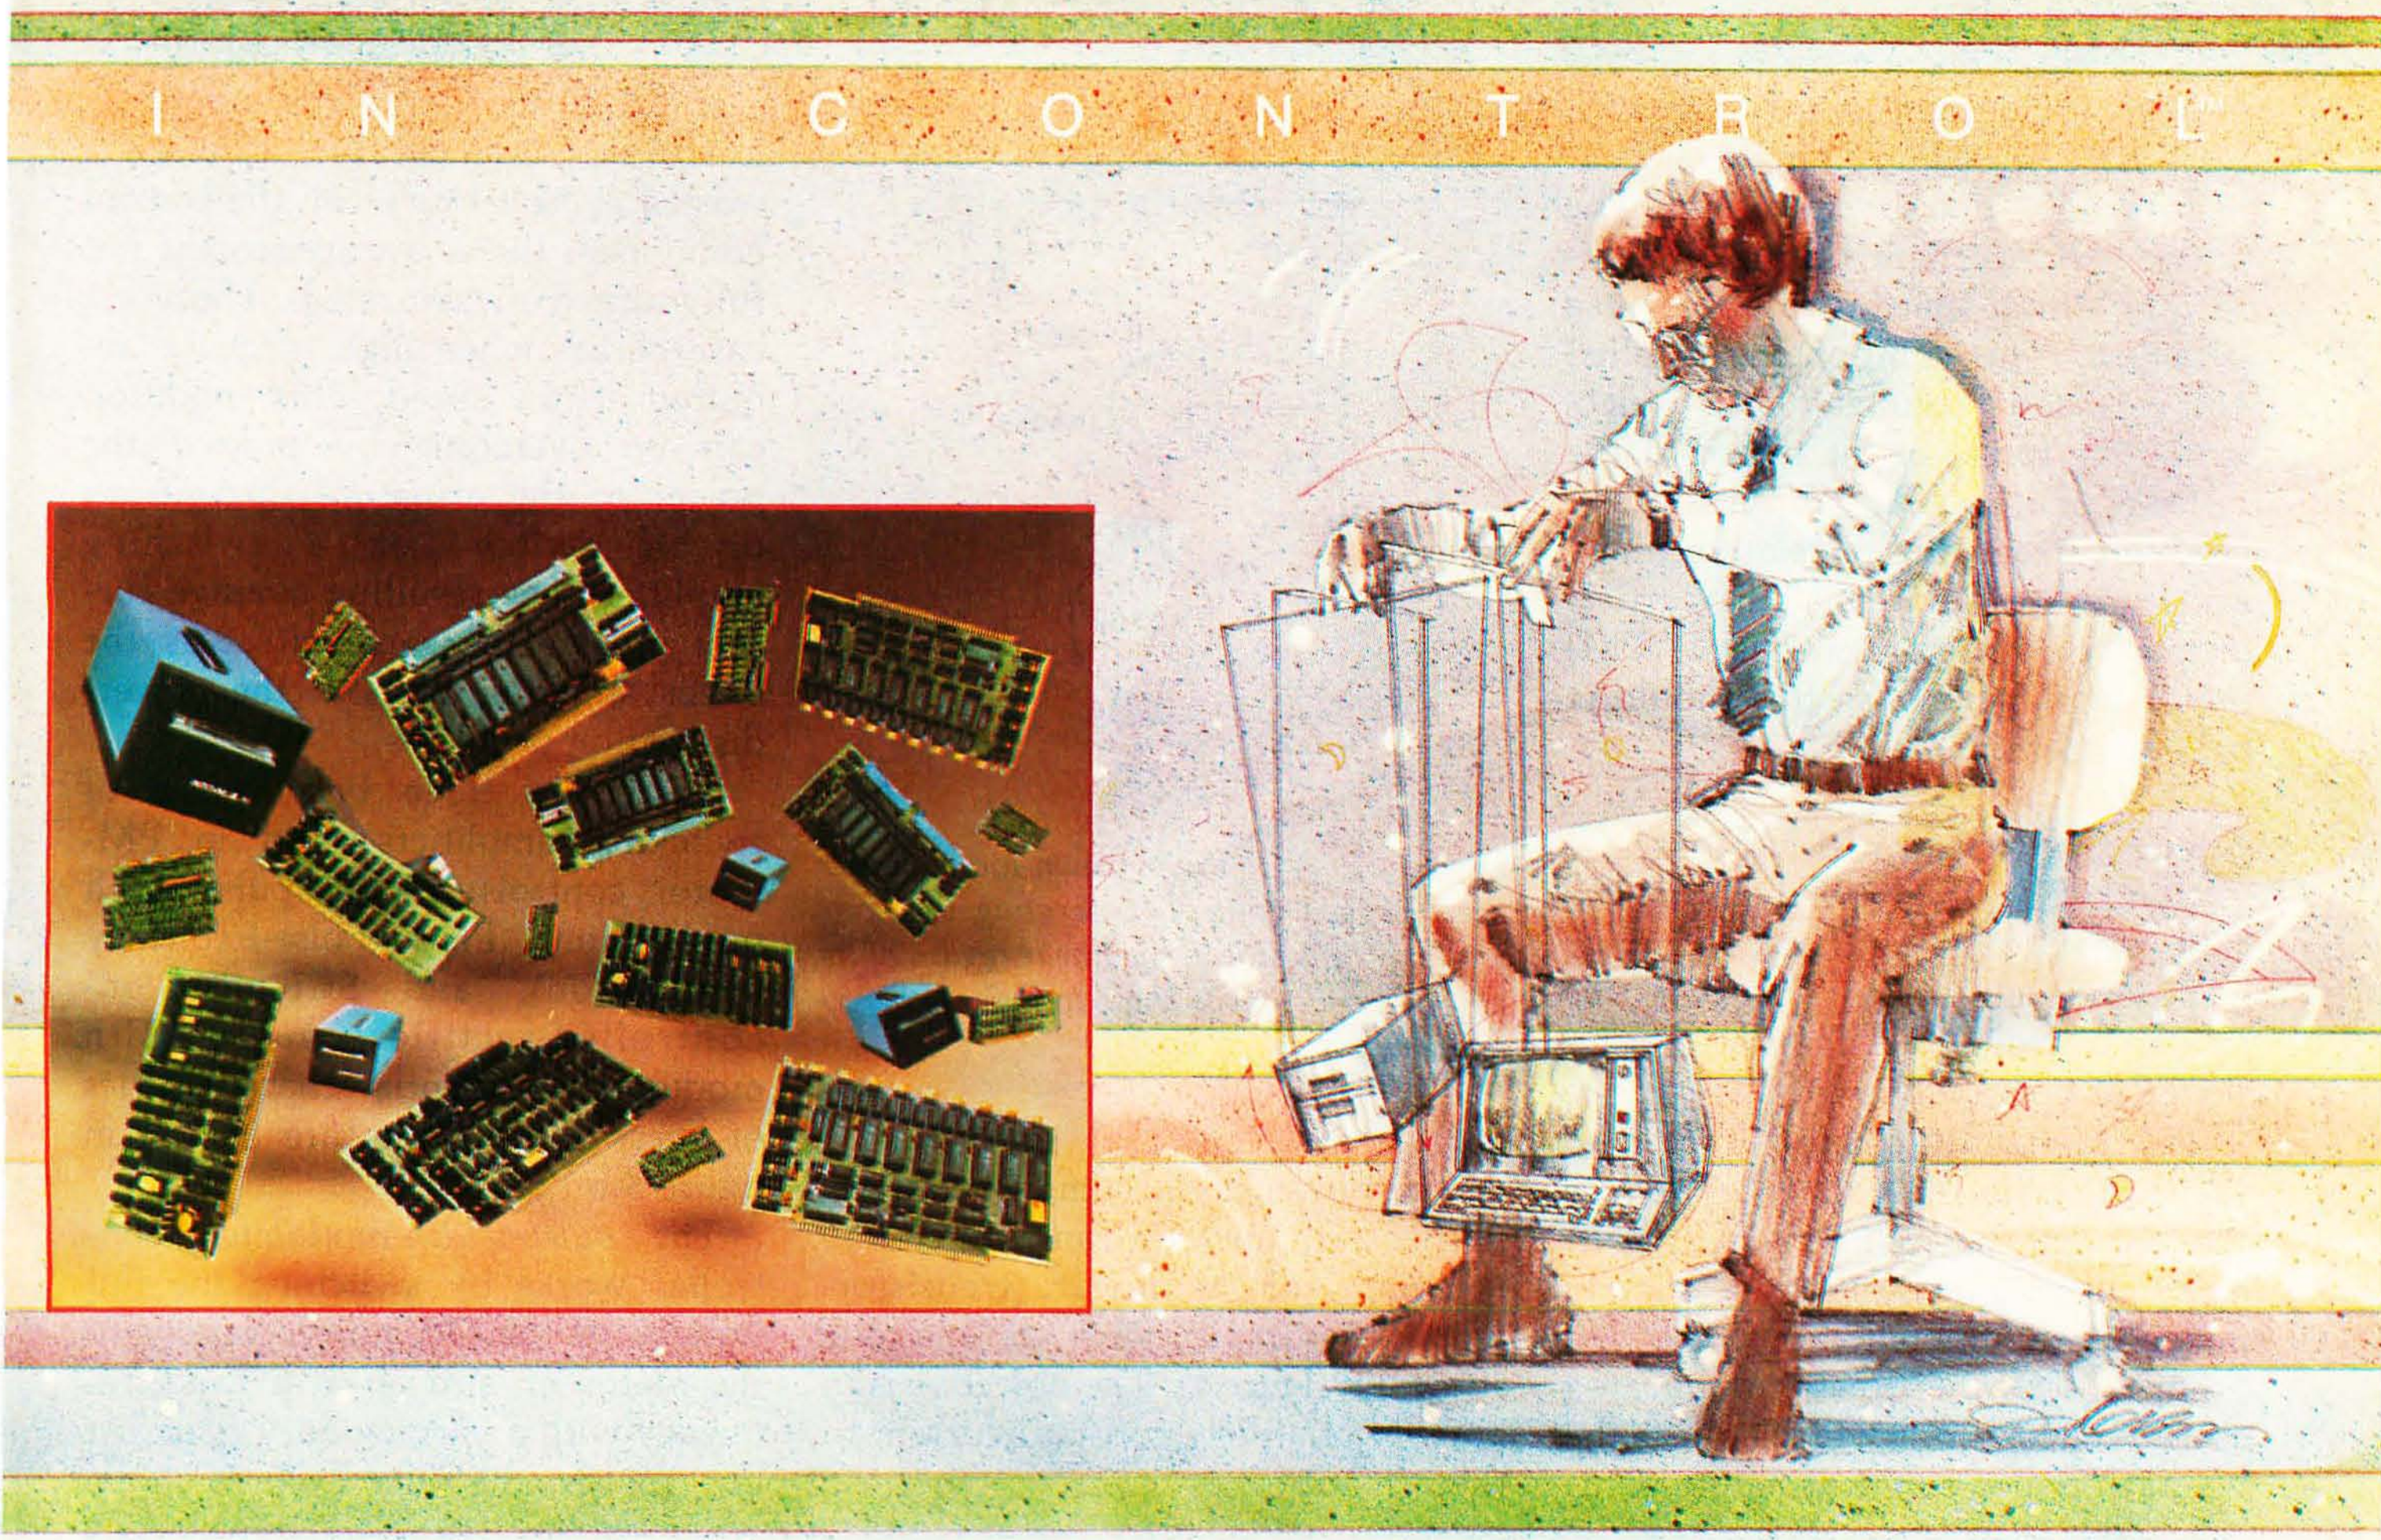

New Hard Disk Control At Your Fingertips.

Introducing THE DAVID™ a giant step forward.

Konan, known for its innovative, versatile selection of high performance controllers, now offers THE DAVID.

THE DAVID is a series of intelligent HARD DISK CONTROLLERS for the Apple, S-100, Radio Shack, IEEE 488 and others.

Here are all the mighty things THE DAVID does:

- Error correction. 32 bit poly, 11 bit correct.
- Flaw mapping done by controller.
- Single high-speed bidirectional port.
- Fully buffered 256 and 512 byte sectors.
- Write pre-comp/data separation if required.
- Format command. Full or partial disk.
- Read next command.
- Power on diagnostics.
- Single/double density 5 1/4" and 8" floppy available in 8" hard disk products.

Hard disks currently supported include most 5 1/4's and CDC Finch. To come are all 8" hard disks with the SA1000 interface (7-81), and SMD drives (9-81). Other drive implementations available soon

These very low cost controllers are all host software and hardware compatible. That means total flexibility to change drive types or manufacturers, without rewriting software or designing new hardware.

In other words, THE DAVID is a giant in its own right...and every bit IN CONTROL. Put this powerful equipment to work for you. Give us a call on Konan's toll-free order line:

800-528-4563

Or write to: Konan Corporation
1448 N. 27th Avenue, Phoenix, AZ 85009
TWX/TELEX 9109511552

Konan offers a selection of other fine tape and disk controller products and is actively pursuing license agreements.

IN CONTROL and THE DAVID are registered trademarks of Konan Corporation.

KONAN™
in control

unlikely in normal use, very high currents are often incurred in low-speed, high-torque, pulsed operation. The greatest risk occurs during a high-torque, high-speed, rapid-reverse situation. The sum of the applied voltage and counter EMF (electromotive force) of the motor at the instant of reversal can create excessive current due to relatively low armature resistances. This article primarily covers low-speed PM-motor applications, so this shouldn't be a problem.

Speed Control in PM Motors

Controlling the speed of a PM motor is much easier than controlling a wound-field motor because the speed/torque characteristics are linear. If you apply a fixed voltage to a PM motor, it rotates at a fixed speed. Double the voltage or reduce the torque (load) requirement by half, and the speed increases by a linearly proportional amount.

Therefore, the least complicated speed control is one which adjusts the voltage applied to the armature. This can be physically accomplished using a rheostat, an autotransformer and rectifier, or a linear transistor-amplifier circuit (such as the one shown in figure 4). The objective is to apply a relatively constant current to the armature.

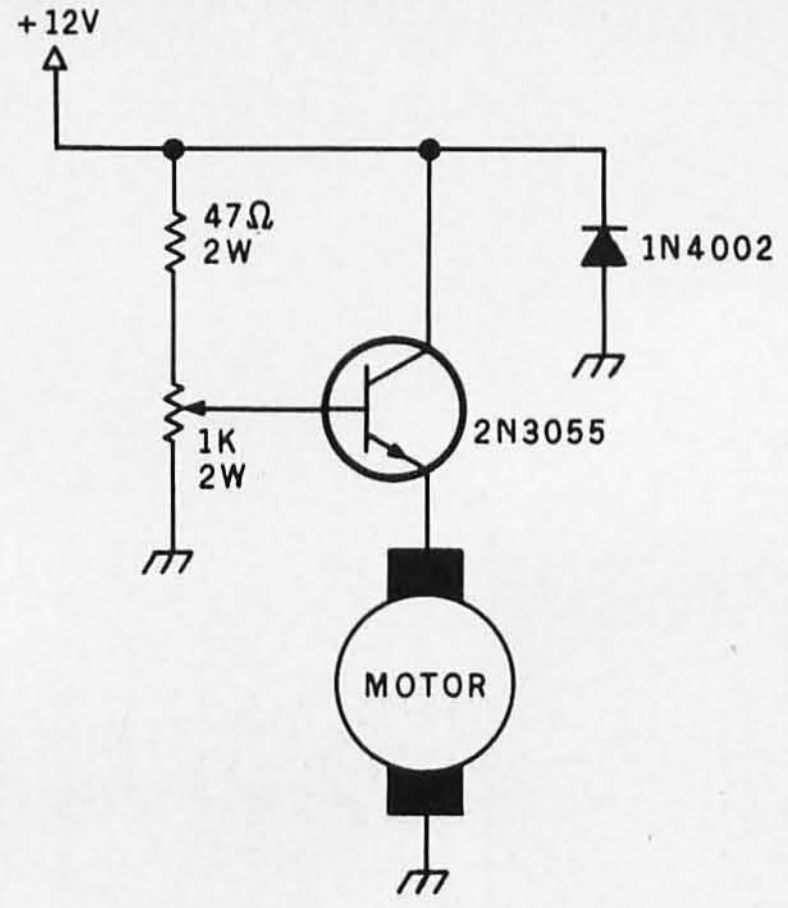

Figure 4: *A simple open-loop linear motor-speed control. Operating the controlling transistor in the linear region of its characteristic curve leads to loss of energy as heat.*

In the case of the linear amplifier, however, considerable power is wasted as heat loss when the control component (here, a transistor) is not fully turned on (saturated). The worst case occurs when high torque is required at low speed. This condition can be overcome by *pulsing* the power to the armature through an on/off switch or a switching amplifier. The resulting average current creates the same effect as the linear amplifier without the power-dissipation problems.

There are three basic types of switching amplifiers used in PM-motor controls: PWM (pulse-width modulation), PFM (pulse-frequency modulation), and SCR (silicon-controlled-rectifier) pulse-width modulation. Essential characteristics of these three forms are shown in figure 5 on page 76.

The *pulse-width-modulated* controller works by switching the full voltage of the DC power supply to the motor on and off at a fixed frequency with a varying duty cycle. At low speeds, the duty cycle is short,

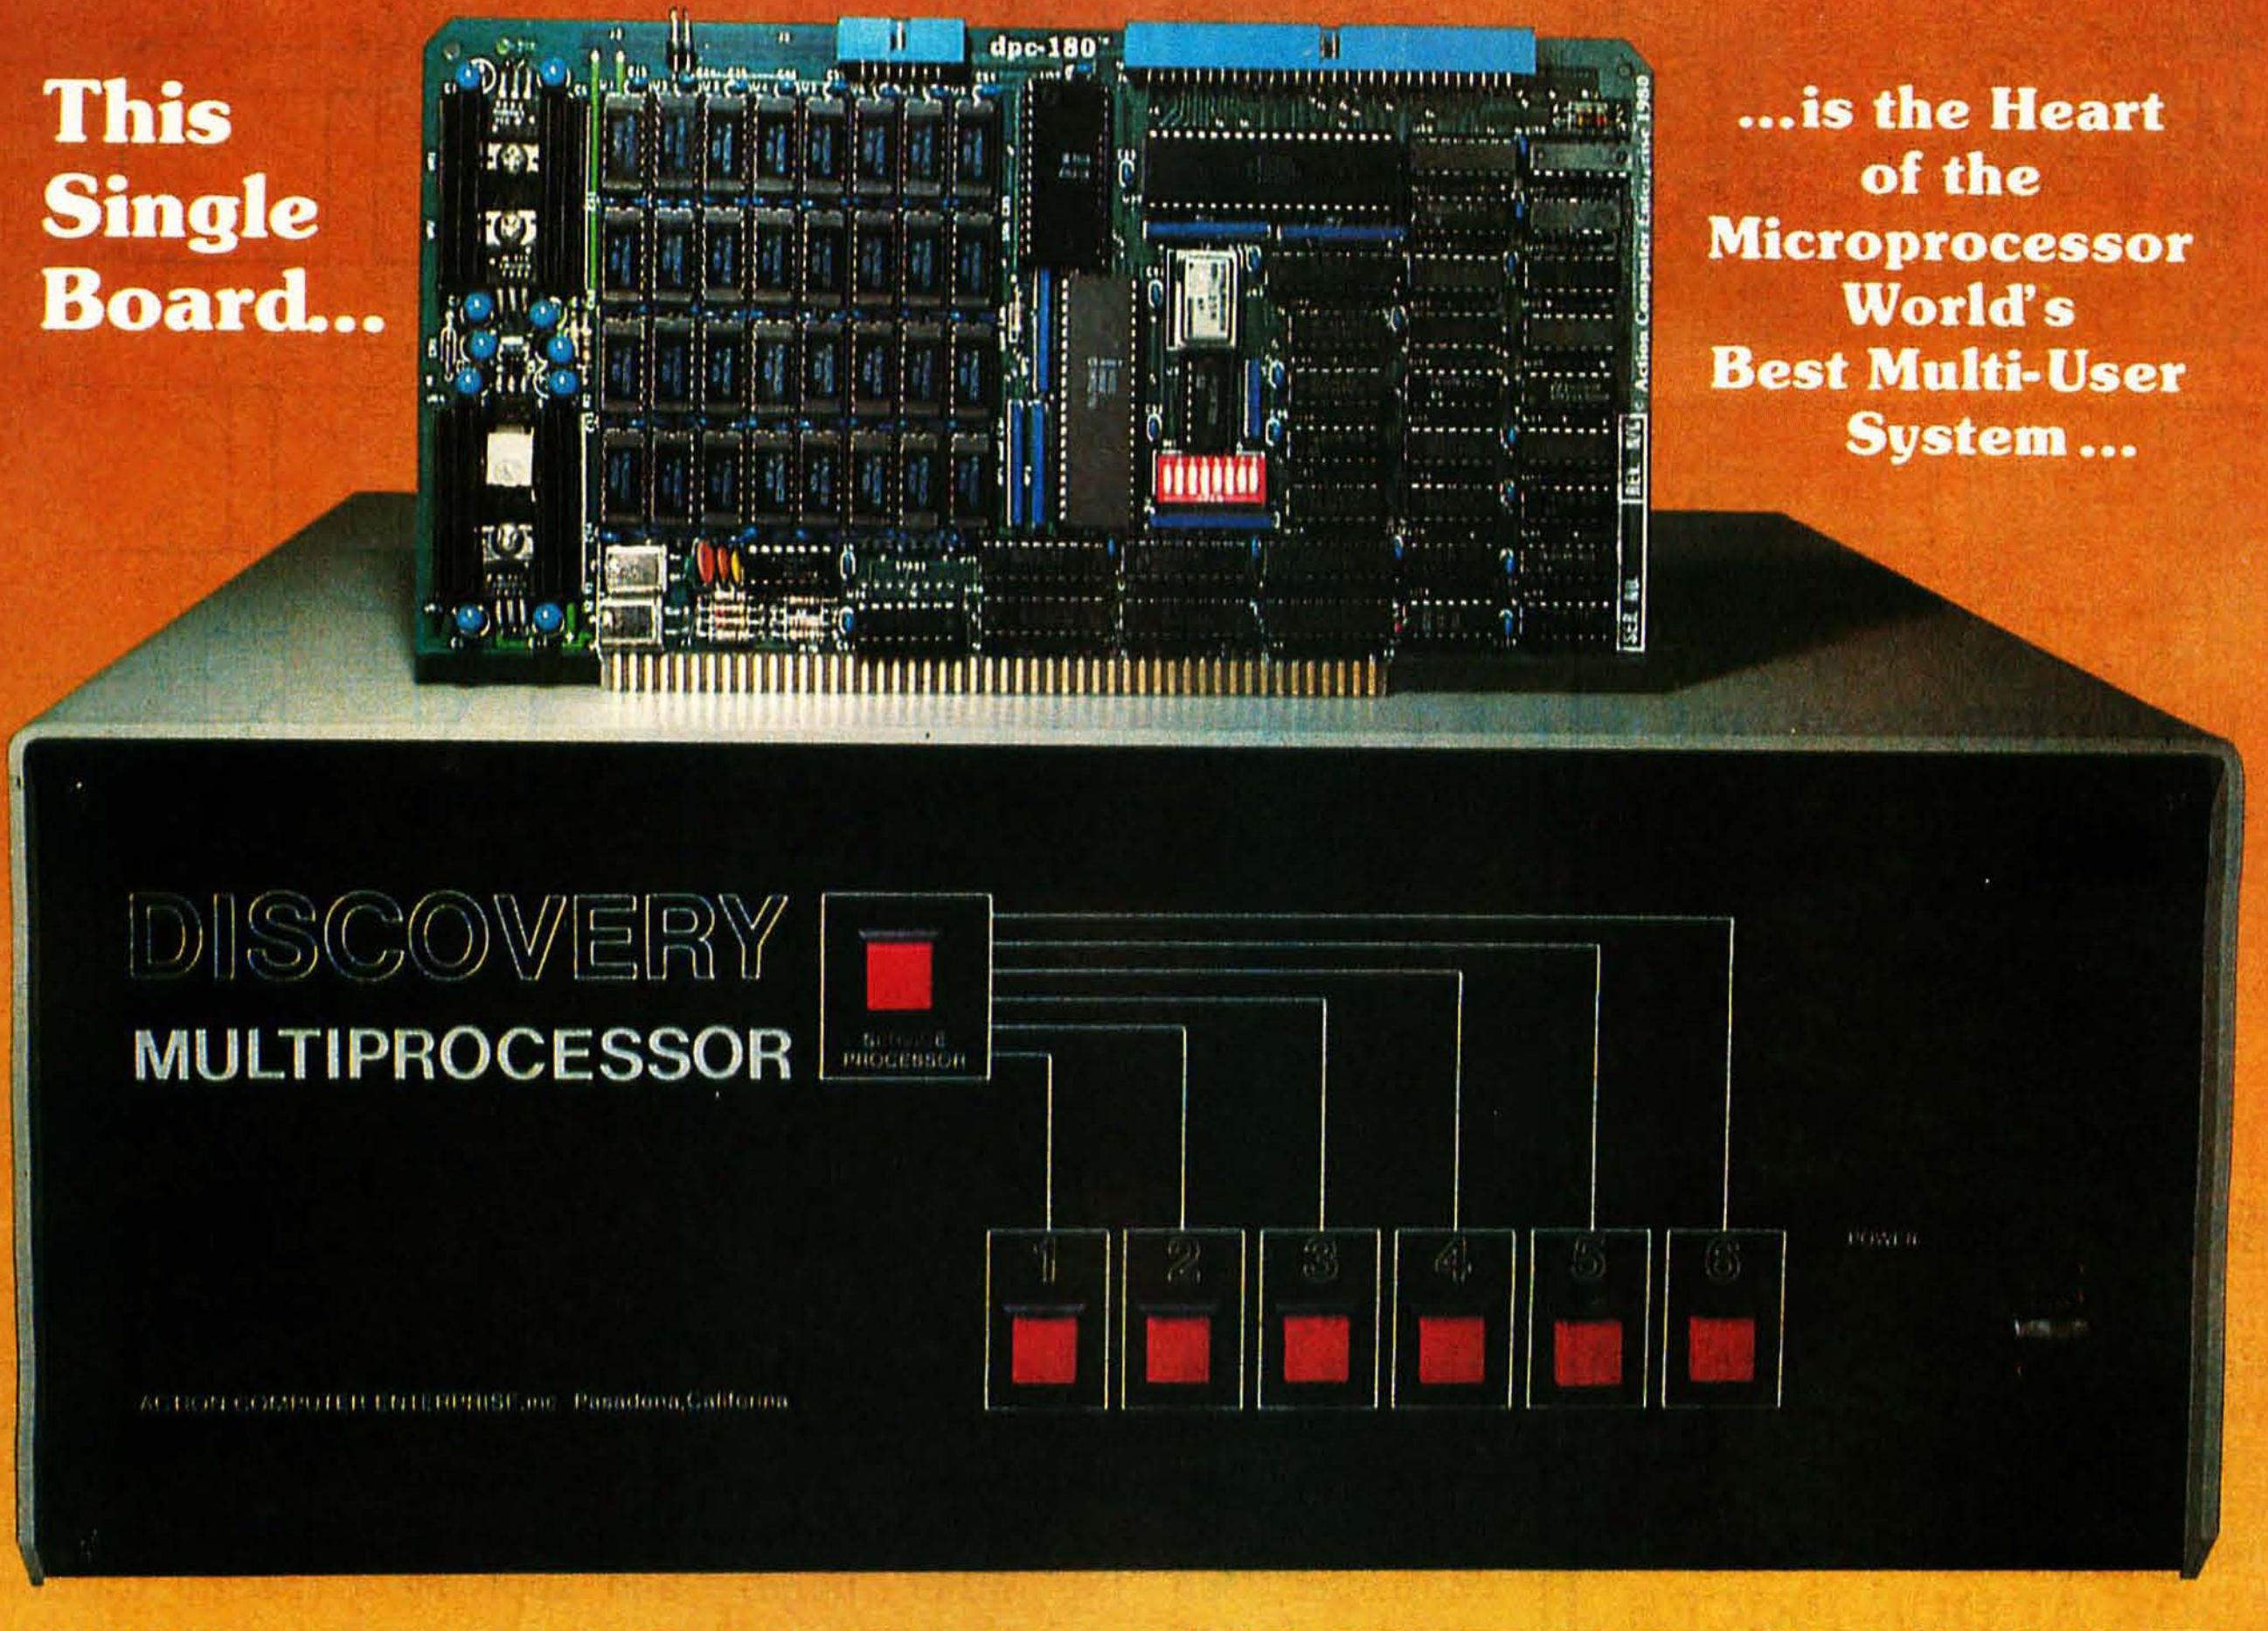

THE DISCOVERY MULTIPROCESSOR

The dedicated power of this complete single board computer is provided to each user, making the DISCOVERY MULTIPROCESSOR unique among multi-user systems. With the power and expandability of distributed processing ● With the economy of shared peripherals ● With the flexibility of shared and public files ● And all of this with full CP/M* and S-100 compatibility.

Multiprocessing Software

Our Distributed Processing Operating System, **dpc/os**©, resides in the Service Processor, establishing a CP/M environment for each user and managing access to the shared system resources. Multiuser facilities are provided for print spooling, for interprocessor communication and for private, public and shared-update files. Several processors can be employed concurrently by a single user via the enhanced batch submit facilities. And with **DISCOVERY** all CP/M compatible programs will execute without modification, thus protecting your software investment.

Multiprocessing Hardware

The ACE 64K Distributed Processing Single Board Computer, the **dpc-180**™ gives the **DISCOVERY** MULTIPROCESSOR its own unique architecture. One DPC is dedicated to each user providing exclusive use of the onboard Z-80, 64K ram and serial I/O. Access to the shared resources is provided by an expanded DPC used as a Service Processor. Additional users can be added at any time by simply inserting additional DPC's into the standard S-100 bus — up to a total of sixteen user processors in a single chassis!

*CP/M is a registered TM of Digital Research, Inc.

DISCOVERY has been proven in installations throughout the World. If you need the Power of Multiprocessing ... it's time you discovered us!

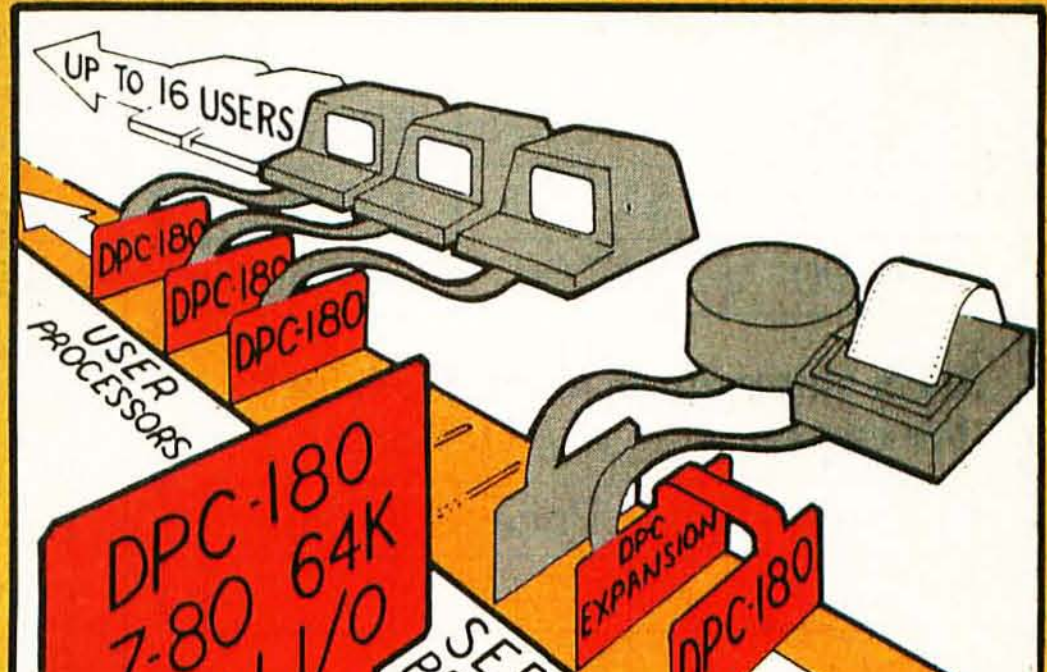

The ACE **DISCOVERY MULTIPROCESSOR** dedicates a complete 64K Z-80 Distributed Processing single board Computer, the **dpc-180**™ to each user. An expanded DPC coordinates all of the system activities.

Multiuser mainframes with 192K ram start at under $6000. The 64K **dpc-180**™ is priced at $1395. Immediate delivery. A complete line of standard peripherals including a 26M byte hard disk subsystem can be supplied on request.

Dealer and OEM inquiries are invited.

Action Computer Enterprise, Inc.
The Multiprocessing Company

Visit our Booth at the NCC

55 West Del Mar Boulevard, Pasadena, California 91105 USA ● Cable ACEPAS Pasadena ● (213) 793-2440

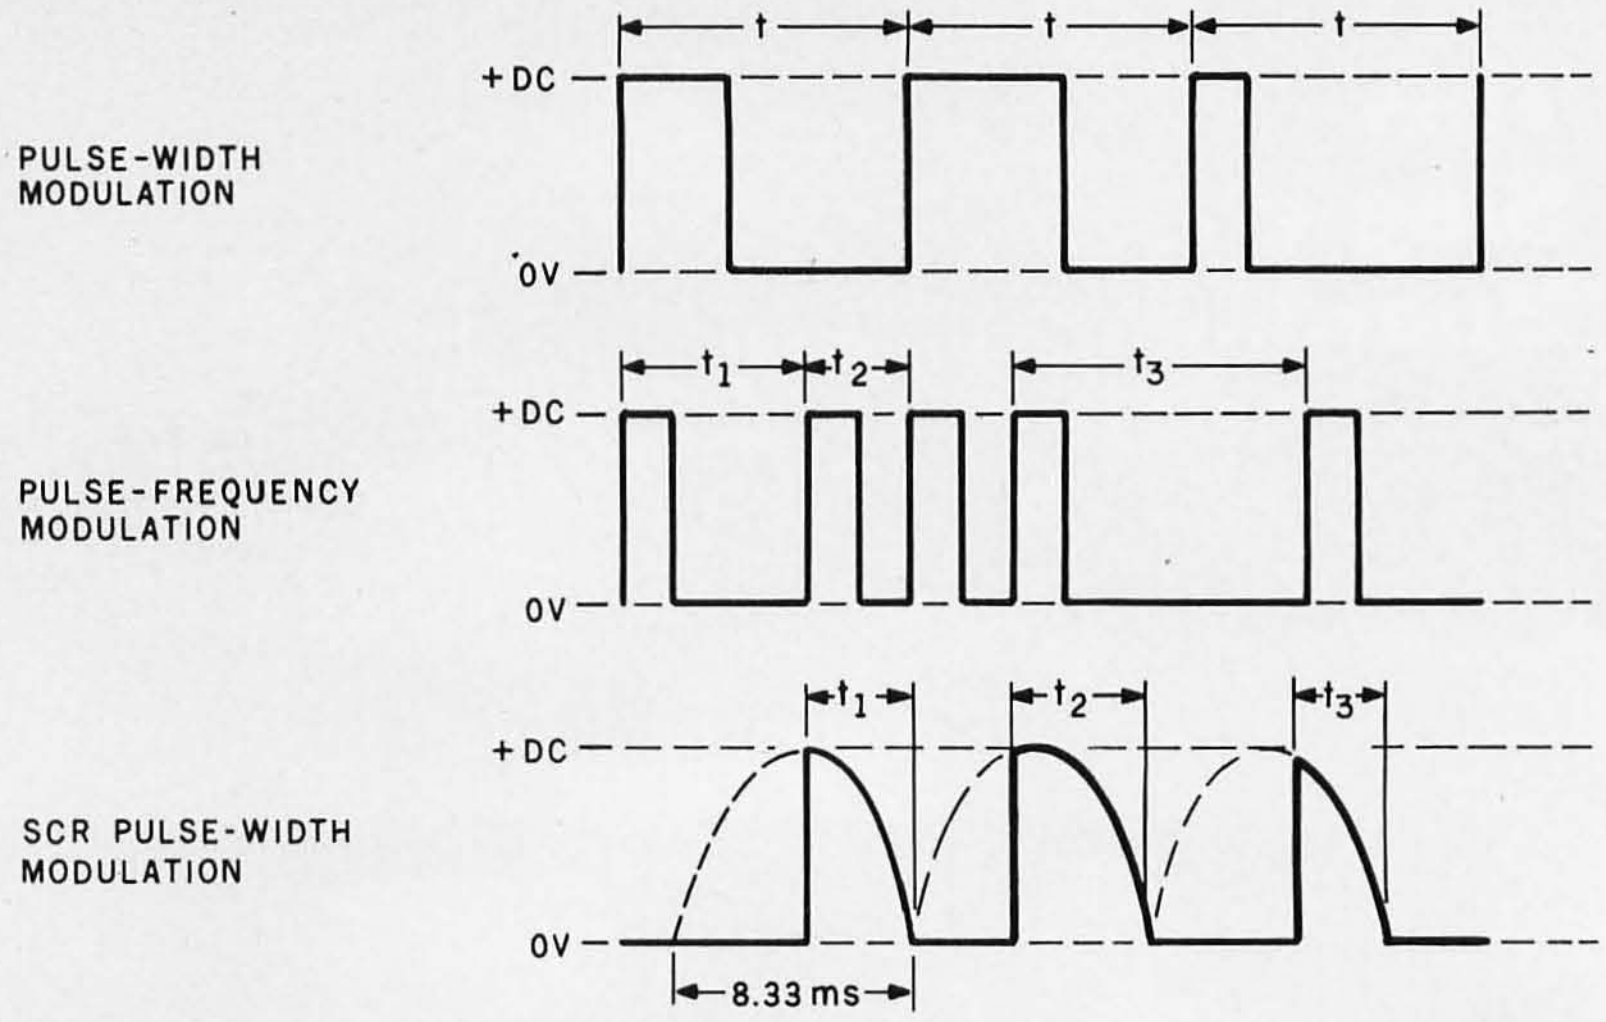

Figure 5: *Comparison of three basic switching-amplifier control-circuit output waveforms. The controlling semiconductors are saturated; the average amount of electrical current transferred to the motor is limited by rapidly cutting the current off and on.*

and the average voltage applied to the armature is low. At high speeds, the duty cycle is much longer, and the average voltage is increased.

The *pulse-frequency-modulated* controller, on the other hand, switches the DC supply on for a fixed period of time at a varying repetition rate. At slow speeds, the switching frequency is low, and the resulting average applied voltage is low. At higher speeds, the pulse width of the applied power is the same, but the switching frequency is increased to raise the average voltage level.

Figures 6 and 7 on page 78 illustrate simple circuits allowing you to experiment with PWM and PFM speed controls. The components and frequencies in the schematics are selected for high-current DC motors such as those found in electric drills. (For use on high-speed/low-torque hobby motors, the frequencies and pulse widths may require adjustment.) In figure 6, 10 to 100% PWM speed control is accomplished by adjusting the duty cycle of a one-shot (monostable multivibrator) triggered from a fixed 100 Hz frequency source. In figure 7, PFM speed control is obtained by varying the frequency of 1 ms pulses applied to the motor.

The third method, using an SCR as the switching element, is a variation on PWM. *SCR speed control* is nearly always used at the power-line frequency (50 or 60 Hz). It functions by changing the firing angle (ie: the point in the waveform where conduction is triggered) between 0 and 180 degrees and applying a specific fraction of each voltage waveform to the motor. At low speeds, the firing time is short, resulting in a low average voltage applied to the motor. At high speeds, the firing time becomes longer, resulting in a higher average voltage.

The SCR controller does not have the precise control resolution of the linear amplifier, but its major advantages are high power-conversion efficiency in the switching mode and low forward-voltage drop. The predominant use of SCRs in fractional-horsepower DC-motor controls is primarily due to the simplicity of the circuitry. A typical wide-range SCR speed-control circuit is shown in schematic form in figure 8 on page 80. Figure 9 illustrates a speed-control circuit which maintains constant speed under varying load conditions.

Closed-Loop Speed Control

The speed-control designs presented so far have been open-loop controllers. They are adequate for setting speeds where torque requirements are constant. For applications where there is a variation in load demand or where constant velocity is required, a closed-loop control system must be

UniFLEX™

Multi-User

UniFLEX is the first full capability multi-user operating system available for microprocessors. Designed for the 6809 and 68000, it offers its users a very friendly computing environment. After a user 'logs-in' with his user name and password, any of the system programs may be run at will. One user may run the text editor while another runs BASIC and still another runs the C compiler. Each user operates in his own system environment, unaware of other user activity. The total number of users is only restricted by the resources and efficiency of the hardware in use.

Multi-Tasking

UniFLEX is a true multi-tasking operating system. Not only may several users run different programs, but one user may run several programs at a time. For example, a compilation of one file could be initiated while simultaneously making changes to another file using the text editor. New tasks are generated in the system by the 'fork' operation. Tasks may be run in the background or 'locked' in main memory to assist critical response times. Inter-task communication is also supported through the 'pipe' mechanism.

Support

The design of UniFLEX, with its hierarchical file system and device independent I/O, allows the creation of a variety of complex support programs. There is currently a wide variety of software available and under development. Included in this list is a Text Processing System for word processing functions, BASIC interpreter and precompiler for general programming and educational use, native C and Pascal compilers for more advanced programming, sort/merge for business applications, and a variety of debug packages. The standard system includes a text editor, assembler, and about forty utility programs. UniFLEX for 6809 is sold with a single CPU license and one years maintenance for $450.00. Additional yearly maintenance is available for $100.00. OEM licenses are also available.

FLEX™

UniFLEX is offered for the advanced microprocessor systems. FLEX, the industry standard for 6800 and 6809 systems, is offered for smaller, single user systems. A full line of FLEX support software and OEM licenses are also available.

tsc technical systems consultants, inc.

Box 2570, West Lafayette, IN 47906
(317) 463-2502 Telex 276143

™UniFLEX and FLEX are trademarks of Technical Systems Consultants, Inc.

NEW!!! THE *
ELECTRIC MOUTH

for S100, Elf II, Apple, TRS-80 Level II*
From $99.95 kit

Now — teach your computer to talk, dramatically increasing the interaction between you and your machine.

That's right: the ELECTRIC MOUTH actually lets your computer talk! Installed and on-line in just minutes, it's ready for spoken-language use in office, business, industrial and commercial applications, in games, special projects, R&D, education, security devices — there's no end to the ELECTRIC MOUTH's usefulness. Look at these features:

★ Supplied with 143 words/letters/ phonemes/ numbers, capable of producing hundreds of words and phrases.
★ Expandable on-board up to thousands of words and phrases (just add additional speech ROMs as they become available).
★ Four models, which plug directly into S100, Apple, Elf II and TRS-80 Level II computers.
★ Get it to talk by using either Basic or machine language (very easy to use, complete instructions with examples included).
★ Uses National Semiconductor's "Digitalker" system.
★ Includes on-board audio amplifier and speaker, with provisions for external speakers and amplifier.
★ Adds a new dimension and excitement to programming; lets you modify existing programs and games to add spoken announcements of results, warnings, etc.
★ Installs in just minutes.

Principle of Operation: The ELECTRIC MOUTH stores words in their digital equivalents in ROMs. When words, phrases, and phonemes are desired, they are simply called for by your program and then synthesized into speech. The ELECTRIC MOUTH system requires none of your valuable memory space except for a few addresses if used in memory mapped mode. In most cases, output ports (user selectable) are used.

Spoken Material Included

one
two
three
four
five
six
seven
eight
nine
ten
eleven
twelve
thirteen
fourteen
fifteen
sixteen
seventeen
eighteen
nineteen
twenty
thirty
forty
fifty
sixty
seventy
eighty
ninety
hundred
thousand
million
zero
again
ampere
and
at
cancel
case
cent
400hertz tone
80hertz tone
20ms silence
40ms silence
80ms silence
160ms silence
320ms silence
centi
check
comma
control
danger
degree
dollar
down
equal
error
feet
flow
fuel
gallon
go
gram
great
greater
have
high
higher
hour
in
inches
is
it
kilo
left
less
lesser
limit
low
lower
mark
meter
mile
milli
minus
minute
near
number
of
off
on
out
over
parenthesis
percent
please
plus
point
pound
pulses
rate
re
ready
right
ss
second
set
space
speed
star
start
stop
than
the
time
try
up
volt
weight
a
b
c
d
e
f
g
h
i
j
k
l
m
n
o
p
q
r
s
t
u
v
w
x
y
z

*"Elf II" and "The Electric Mouth" are reg. trademarks of Netronics R&D Ltd. "Apple" is a reg. trademark of Apple Computer Inc. "TRS-80 Level II" is a reg. trademark of Tandy Corp.

Continental U.S.A. Credit Card Buyers Outside Connecticut
CALL TOLL FREE 800-243-7428
To Order From Connecticut Or For Technical Assistance, Etc.,
Call (203) 354-9375
NETRONICS R&D LTD. Dept B5
333 Litchfield Road, New Milford, CT 06776

Please send the items checked below:
☐ S100 "Electric Mouth" kit $99.95
☐ Elf II "Electric Mouth" kit $99.95
☐ Apple "Electric Mouth" kit $119.95
☐ TRS-80 Level II "Electric Mouth" kit..... $119.95
Add $20.00 for wired & tested units. All plus $3.00 postage & insurance. Conn res. add sales tax.
Total Enclosed $ ________
☐ Personal Check ☐ Cashier's Check/Money Order
☐ Visa ☐ Master Charge (Bank No. ________)
Acct. No. ________
Signature ________ Exp. Date ________
Print Name ________
Address ________
City ________
State ________ Zip ________

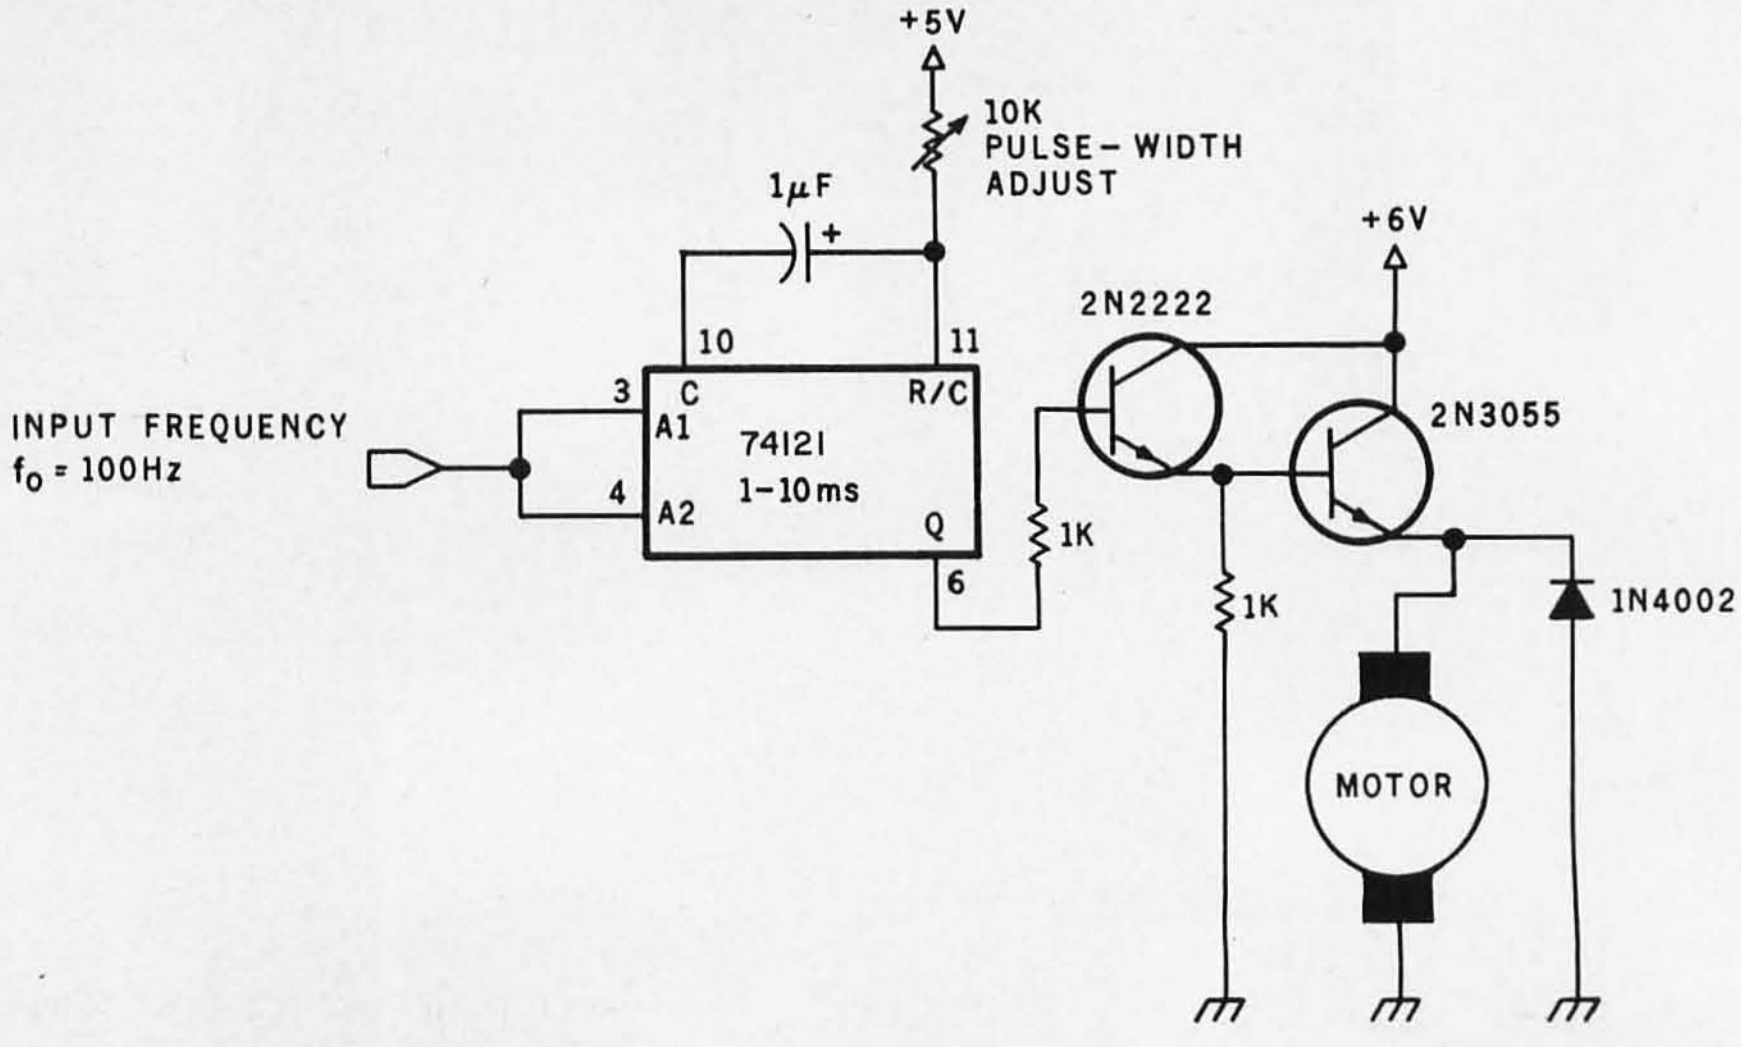

Figure 6: *A simple PWM (pulse-width-modulated) motor-speed control. The duty cycle of the monostable multivibrator (74121) is adjusted by the variable resistor to change the average integrated (in the mathematical sense) electrical current supplied to the motor through the driving transistors. Pin 14 of the 74121 should be connected to +5 V, while pin 7 should be connected to ground. The 2N3055 transistor must be mounted on a heat sink.*

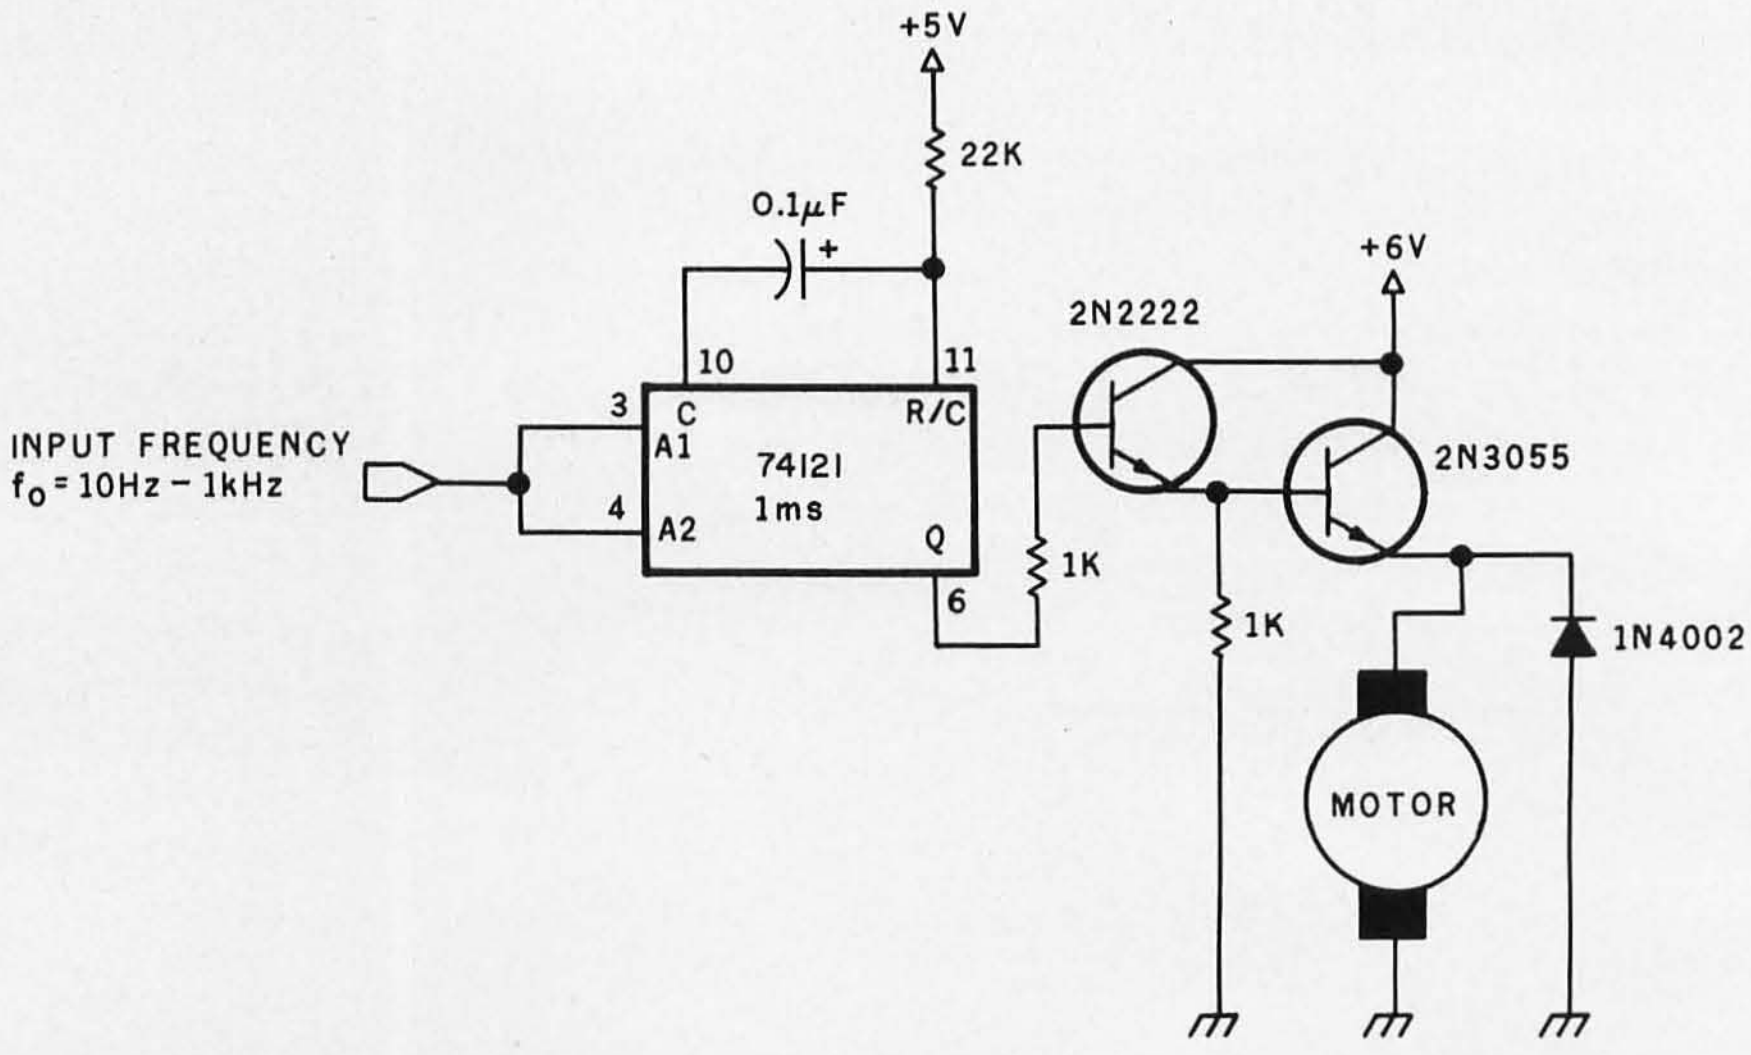

Figure 7: *A simple PFM (pulse-frequency-modulated) motor-speed control. The number of constant-duration pulses supplied to the driving transistors over a given interval controls the speed.*

employed.

Figure 10a on page 84 shows an open-loop controller; figure 10b shows a closed-loop system. Both controllers use an amplification device to drive the motor. The amplifier block can be broadly interpreted to represent any of the driving methods discussed (PWM, linear amplifier, etc). In the open-loop controller, any variation in load demand causes the motor to speed up or slow down.

The basic difference between the open- and closed-loop control methods is that the latter uses a sensor attached to the motor shaft to monitor the actual motor speed. The sensor provides a feedback signal proportional to the shaft's speed. This can be compared with the desired value of the signal (the set point) to find out if the motor is running fast or slow. If the speed is too low, the comparator applies more voltage to the amplifier to bring the speed up. When

Circle 426 on inquiry card. →

Verbatim comments:

“Compared to the brands I've used before, Verbatim Datalife™ is the best yet!”
Sandy Tiedeman
Las Vegas, NV

“New Verbatim helped eliminate I/O errors on my Apple.”
Richard Adams
Ft. Walton Beach, FL

“I would prefer Verbatim Datalife over any brand I've ever used.”
Skip Piltz
Overland Park, KS

“My experience with Verbatim diskettes has been excellent. I've used several boxes over the past few months and they've all been error-free.”
Robert Roeder
Las Vegas, NV

“Much stronger, better centering. A definite improvement.”
Leroy LaBalle
Marrero, LA

“It has worked perfectly everytime!”
Richard Ruth
Shippensburg, PA

“I like the thicker protective cover.”
David Hendel
Lititz, PA

“Great! I have had *no* problems!”
Timothy Roscoe
Mechanicsburg, PA

“So far my Verbatim disks have been performing flawlessly. Not always so with other disks.”
Chris Otis
Hoffman Estates, IL

“Runs quieter in the disk drive.”
Richard Cannova
Los Angeles, CA

“Verbatim disks are super. They're our standard for quality.”
Bob Mills
Mission, KS

“Anything that prolongs the life of a diskette is a plus. Thank you Verbatim for an excellent improvement.”
Steve Toth
Piscataway, NJ

“Of the 130-plus Verbatim disks I have, I'm not aware of any problems. I'm sure the improvements will give your disks an even longer life.”
Gerald Janas
Warren, MI

“FANTASTIC. Not a single registration problem. Much more reliable than what I had been using.”
Gary Sandler
Playa Del Rey, CA

“Verbatim is much more reliable. I wouldn't trust anything else.”
Howard Chin
Pomona, CA

“Thank you for the improvements. Just another reason why I'll always use Verbatim.”
James Hassler
Cheyenne, WY

We introduced Verbatim Datalife mere months ago. And it's already playing to rave reviews like these.

But don't take anybody else's word for it. Try it yourself, and see if you don't agree it's the best media you've ever tried. For the name of your nearest Verbatim dealer, call (800) 538-1793, in California call (408) 737-7771 collect.

We play it back, Verbatim!

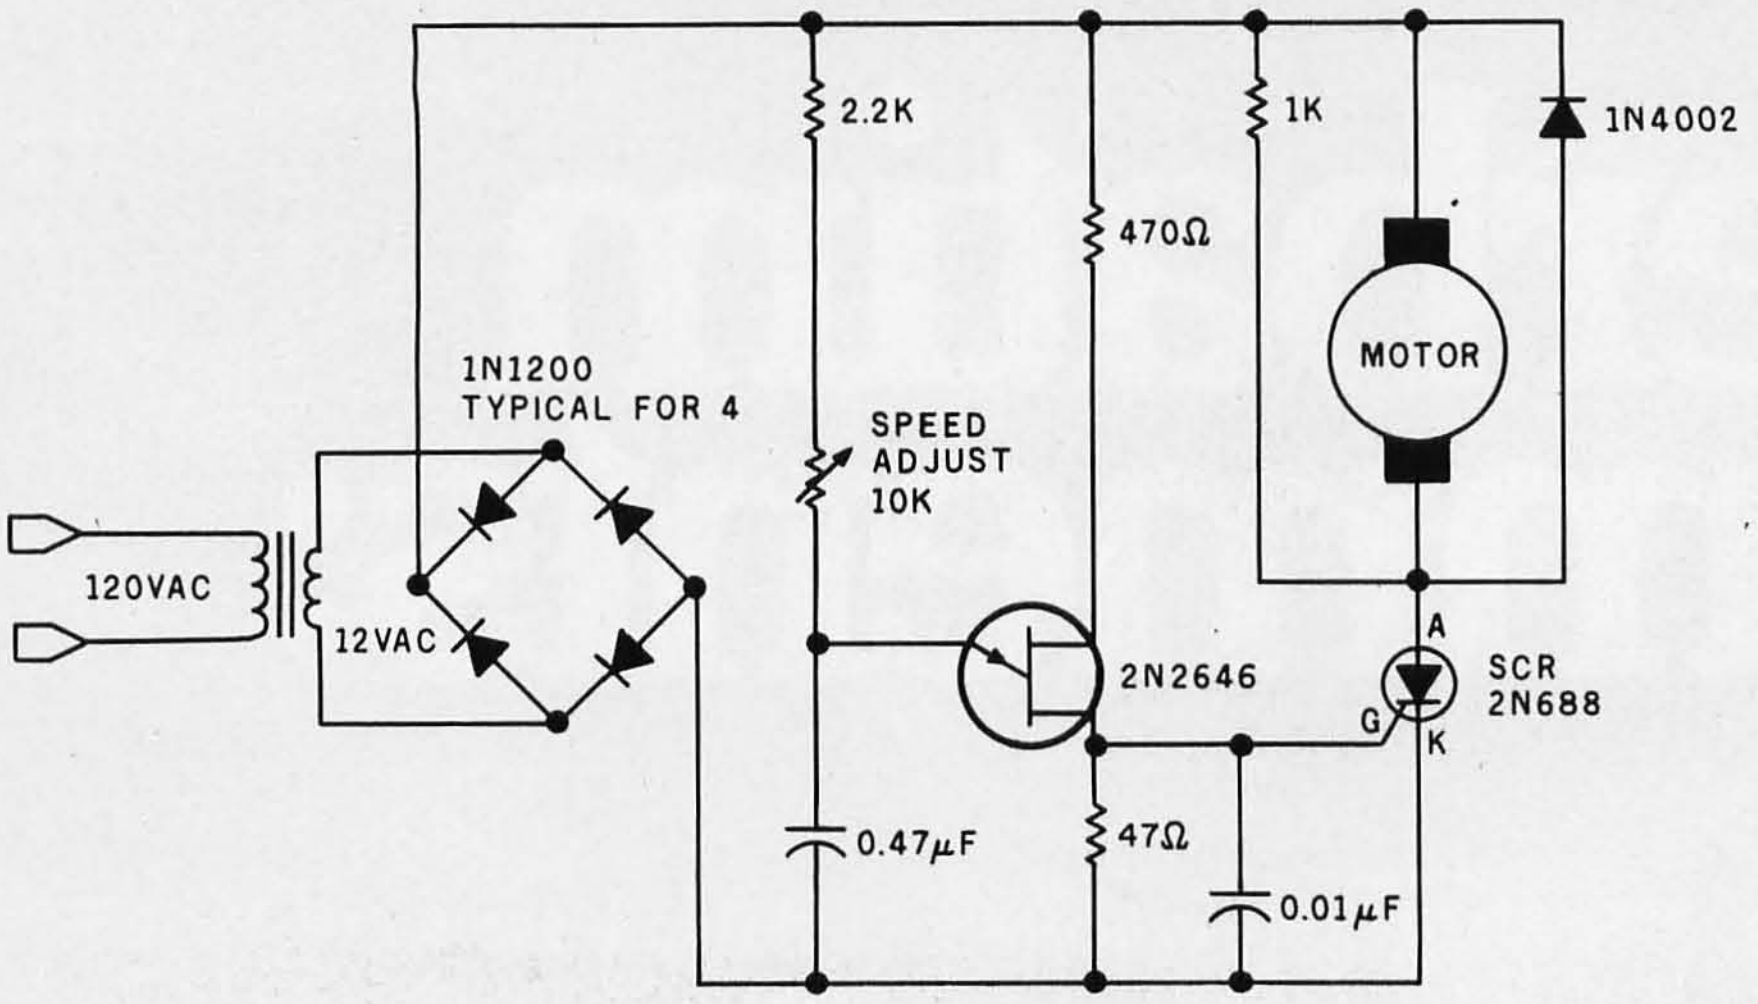

Figure 8: *An SCR- (silicon-controlled rectifier) controlled motor-speed circuit. This method, a variation of PWM (pulse-width modulation), has a wide speed range, high power-conversion efficiency, and low forward-voltage drop across the controlling semiconductor, but not the precise control resolution of a linear-amplifier circuit.*

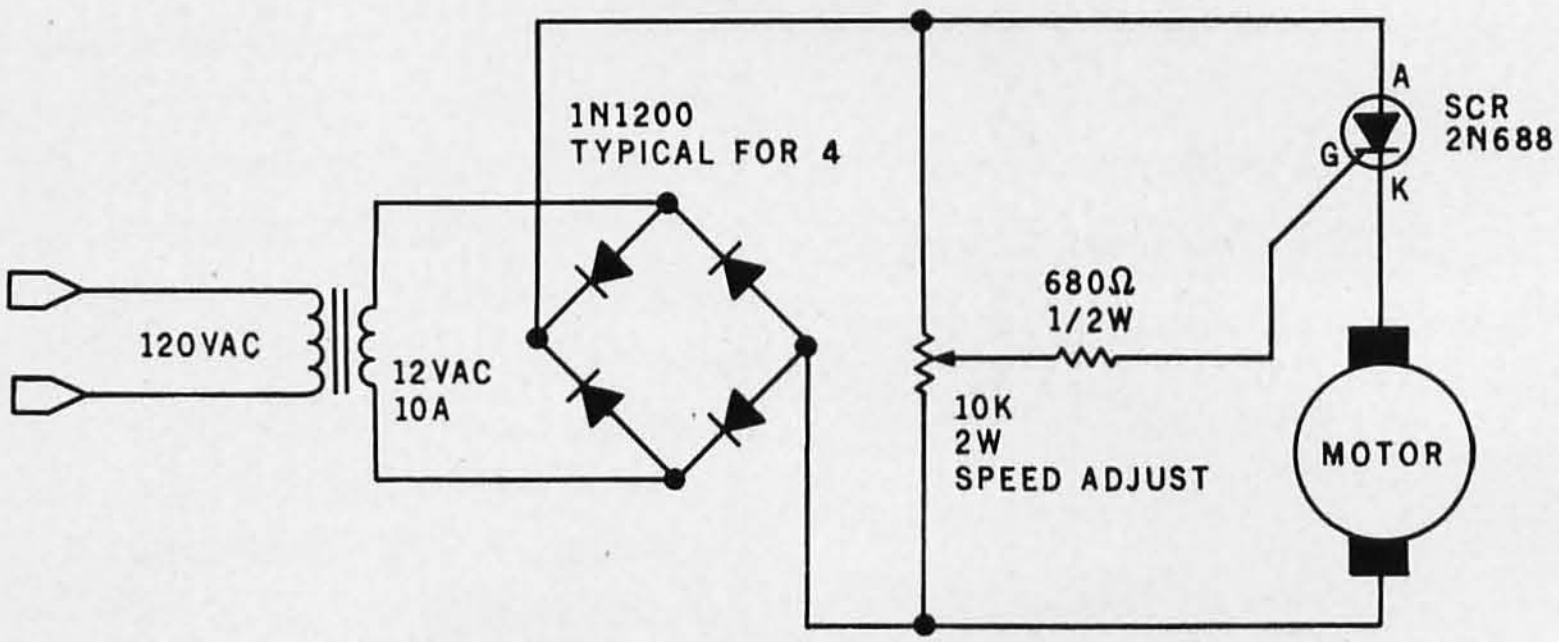

Figure 9: *A second type of SCR-controlled motor-speed control. This design has a limited speed range but maintains constant speed under varying load conditions.*

DETACHABLE INSERT

the speed sensor indicates the speed is too high, the comparator reduces the current to the motor, and the speed drops.

The speed sensor is generally a DC generator. This is nothing more than another PM motor operated in reverse. When the armature is turned, its coils cut through the PM stator-field lines, inducing a current in the armature windings. A motor with a rating of 500 rpm per volt, when used as a generator, produces an output of approximately 4 V if the armature is rotated at 2000 rpm. Such generator-type tachometers (or tachometer-generators) are useful for medium- and high-speed applications when they have a reasonably detectable and steady output. Photo 1 shows a PM motor being used as a generator.

At low speeds, an *incremental encoder* is often used instead of the generator-type tachometer. An incremental encoder generates a pulse when the shaft has rotated through a given angular increment. They are most suitable in low-speed and position-mode controllers. Photo 2 on page 81 shows a simple incremental encoder. More on this later.

Servo Controls

So far, we have discussed open- and closed-loop speed controls. We can turn a potentiometer and set a speed of 2000 rpm on a PWM-controlled motor. We can even attach a tachometer to regulate the speed at this set point. All these controls, however, are scalar and unidirectional. When the speed control is adjusted, we are setting a fixed number of revolutions per minute, rather than attempting to rotate the motor shaft to a particular position or to have it make ten revolutions and stop.

When control systems capable of

DETACHABLE INSERT

Operating in Quadrants

The torque/current and torque/speed function curves of figures 3a, 3b, 3c, and 3d on page 72 all lie in the first quadrant of a Cartesian coordinate system. In these graphs, torque and speed are considered positive when the motor's shaft is rotating in the forward direction, and current is positive or negative according to its direction of flow.

During most modes of operation, the curves remain in the first quadrant; only when sudden stopping and reversing take place do the curves enter other quadrants.

For instance, in dynamic braking, the inputs to the armature coils are shorted together. As the motor continues to rotate, the existing magnetic field induces in the coils a counter electromotive force that attempts to produce a field opposing the existing field. The opposition of the two fields produces negative torque and surprisingly fast braking action. The current of this counter electromotive force is negative, and the torque/current function curve momentarily moves into the third quadrant.

providing positive- and negative-output voltages for four-quadrant operation in conjunction with feedback control are discussed, we are no longer talking about mere speed controls, but about *servo systems*. Servo systems are usually configured to provide velocity, position, or torque control, or combined velocity/position control. The definition encompasses all DC-motor applications beyond first-quadrant fixed-speed operation (see the text box above).

The simplest type of servo operation is a forward/reverse motor control. Reversing the rotation on a PM DC motor is accomplished by reversing the polarity of the applied voltage. While this can be done manually by using a switch, in automatic-control systems it is most frequently done with transistors. Two typical circuits are illustrated as schematic diagrams in figures 11a and 11b on page 86. In figure 11a, a forward-control signal turns on transistors Q1 and Q4, routing the current through the motor as shown. A

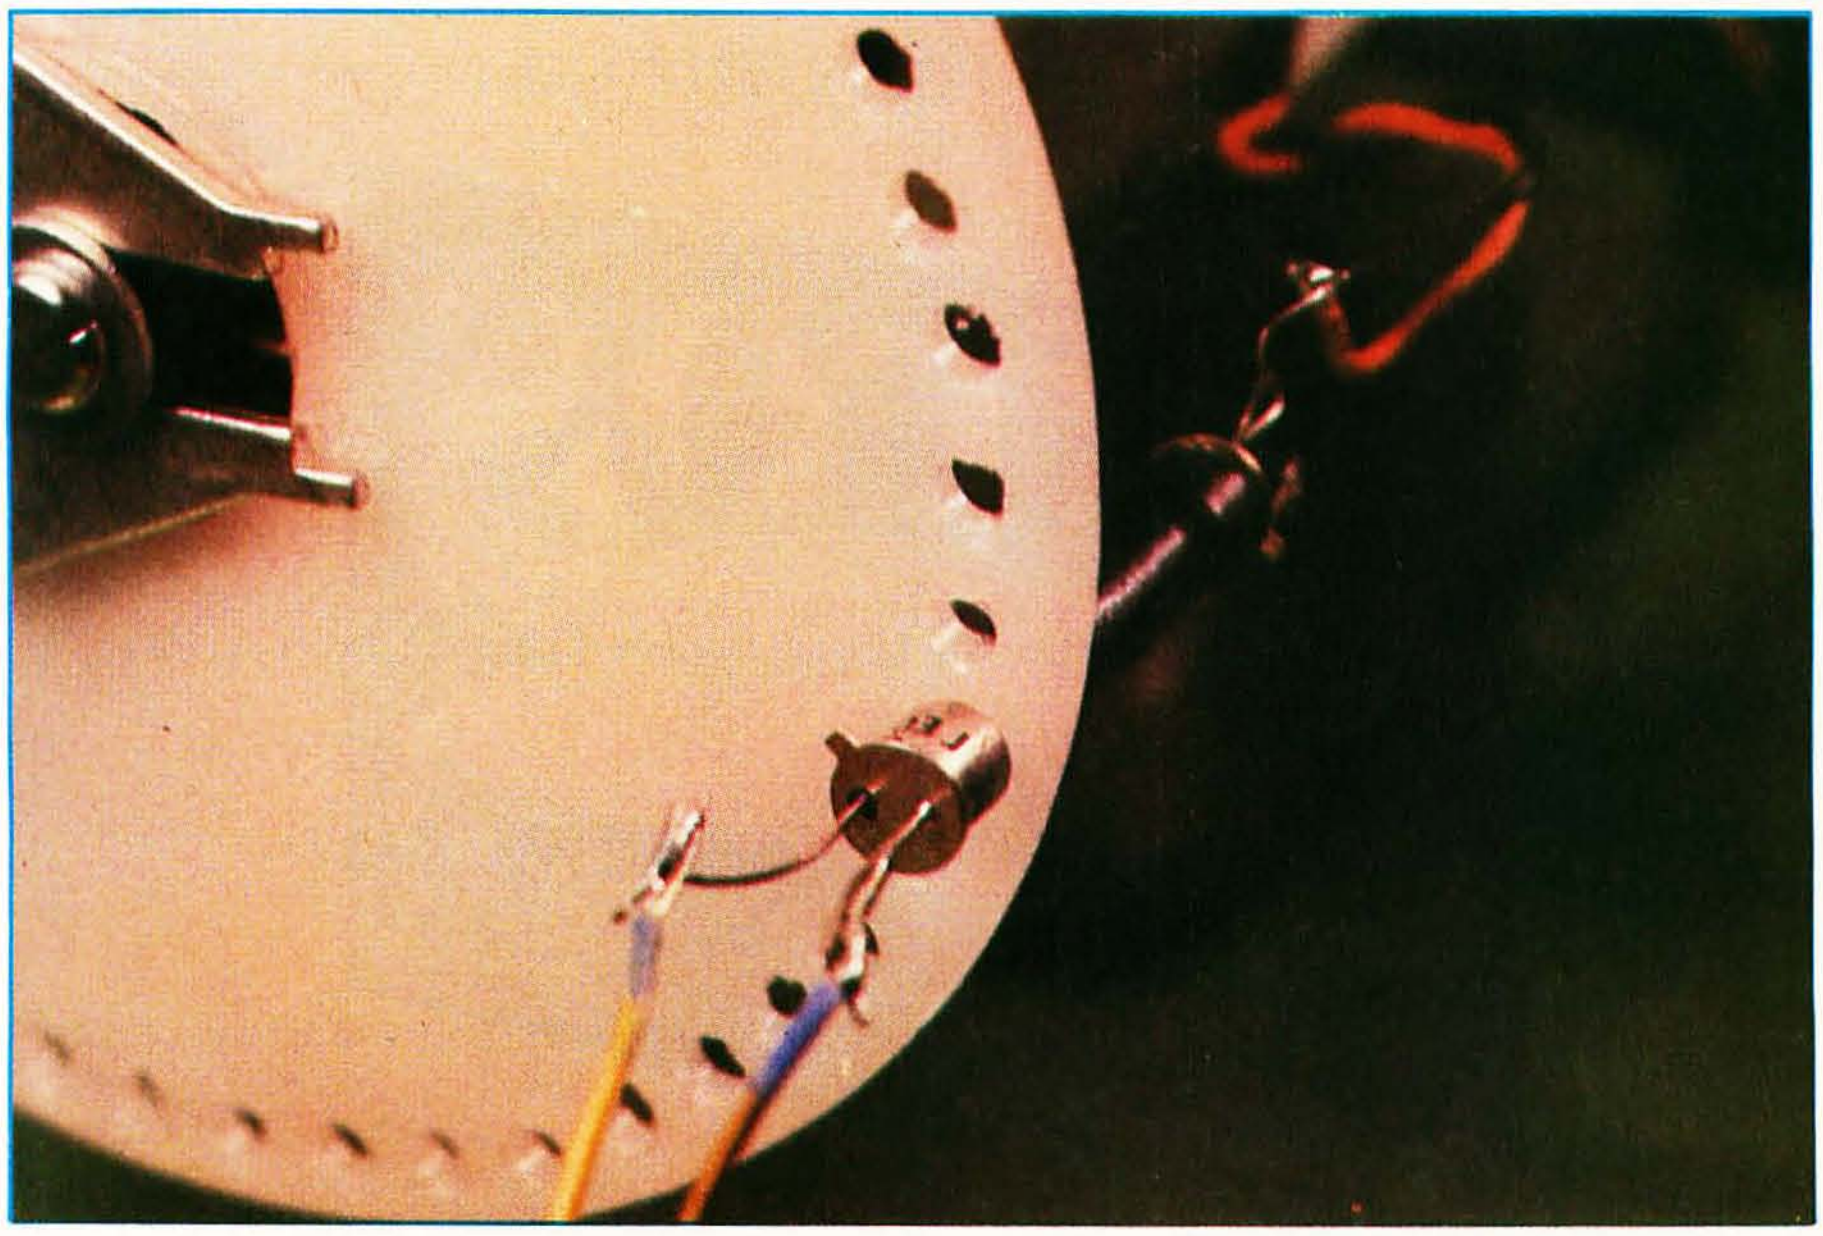

Photo 2: *The most frequently used nongenerator speed-feedback device is the incremental encoder. This is a homemade encoder, consisting of a plastic disk attached to the motor shaft. Around the perimeter of the disk are slots or holes. A light source is placed on one side; a light sensor on the other side. As the shaft turns, the disk interrupts the light seen by the photo sensor and creates a pulsed output with a pulse rate proportional to the speed of the rotation.*


ALTOS
COMPUTER SYSTEMS
ALTOS
COMPUTER SYSTEMS
Built On Dependability
ALTOS
BRAND
QUALITY
RELIABILITY
DELIVERY
PROVEN VALUE
COMPUTER · SYSTEMS
PRODUCED IN THE HEART OF SILICON VALLEY, CALIFORNIA U.S.A.

FRESH IDEAS ARE GROWING AT ALTOS

Silicon Valley, California. At one time few places in the world were as abundant with orchards. Today, no other area is as technologically fertile. And nowhere on earth is the business climate as prolific with computer innovation.

Yet within this competitive environment, one microcomputer firm continues to grow above the rest. Altos Computer Systems. Recognized as a world leader in single board microcomputer technology, Altos flourishes on its ability to produce ideas and deliver them to the market while they're still fresh and packed with price performance value.

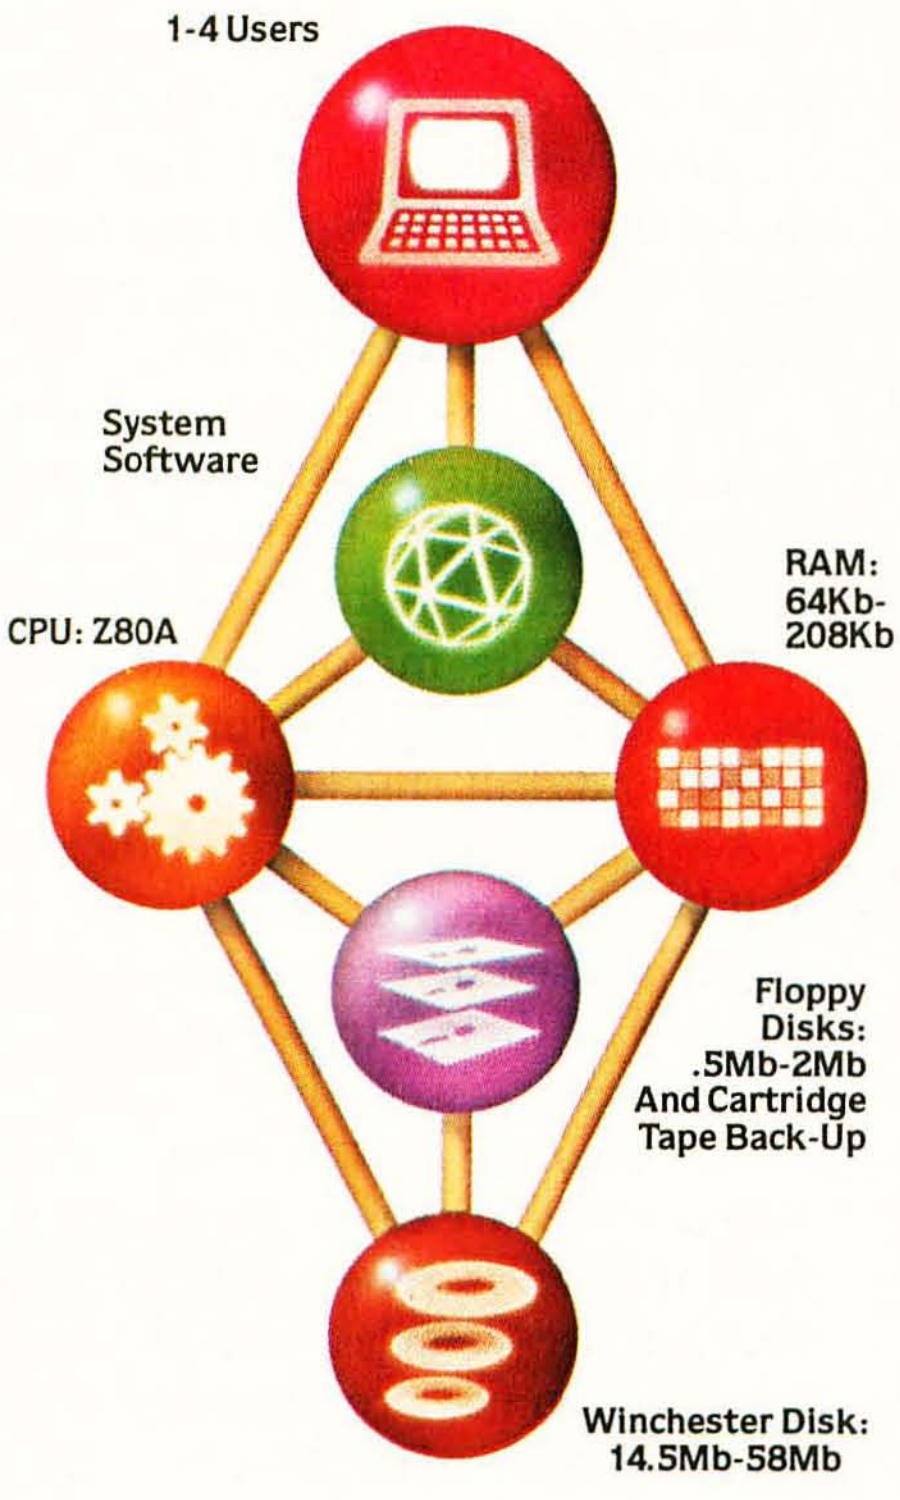

Fresh ideas like Altos' new ACS8000-6/MTU single board microcomputer system with a DEI ¼-inch cartridge tape back-up drive, and Shugart's 8-inch floppy and 14-inch Winchester hard disk drives, with total on-line capacities from 14.5 MBytes to 58 MBytes.

The ACS8000-6/MTU joins Altos' growing family of products that branch out to a multitude of single board system configurations to serve the OEM, the business sector, and many other end users. These systems range from the ACS8000-2 with its dual 8-inch floppy disk drives, to the powerful ACS8000-5, which is upgradable to any of Altos' hard disk and multi-user systems.

Altos supports three industry standard operating systems: single/multi-user CP/M*, OASIS,† and Altos' proprietary AMEX.™ Seven high level programming languages are offered which are CP/M or AMEX compatible.

Ideas aren't the only things growing at Altos. In three years over 4,000 field-proven microcomputer systems have been shipped worldwide to an ever-increasing customer base of over 300 companies. And recently a new facility has been acquired, expanding Altos' plot to over one-and-a-half acres of production facilities.

Weed through the microcomputer system alternatives. No matter what your application, you'll pick Altos.

For specific details about pricing or performance, call or write:
Altos Computer Systems,
2360 Bering Drive, San Jose, CA,
95131, (408) 946-6700, Telex 171562
ALTOS SNJ.

Packed with Fresh Ideas

ALTOS
COMPUTER SYSTEMS

*CP/M is a registered trademark of Digital Research, Inc.
†OASIS is a registered trademark of Phase One Systems, Inc.

Circle 14 on inquiry card.

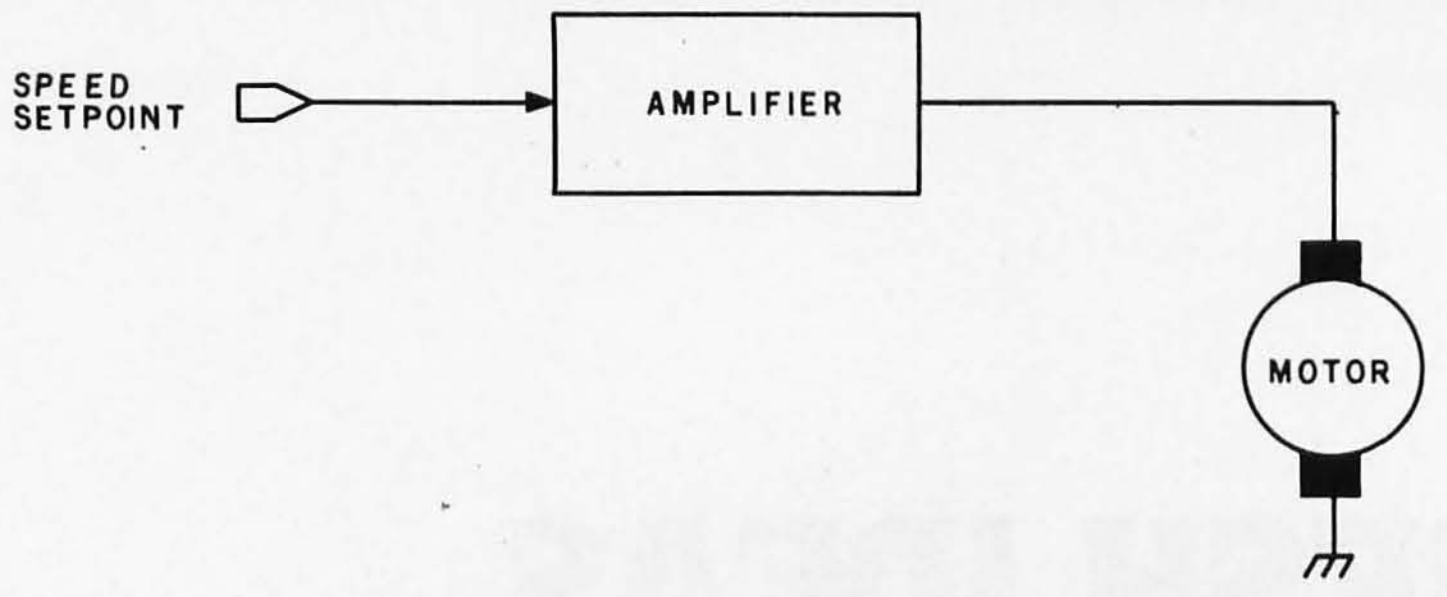

Figure 10a: *Block diagram of an open-loop controller. Variations in mechanical load cause the motor to speed up or slow down.*

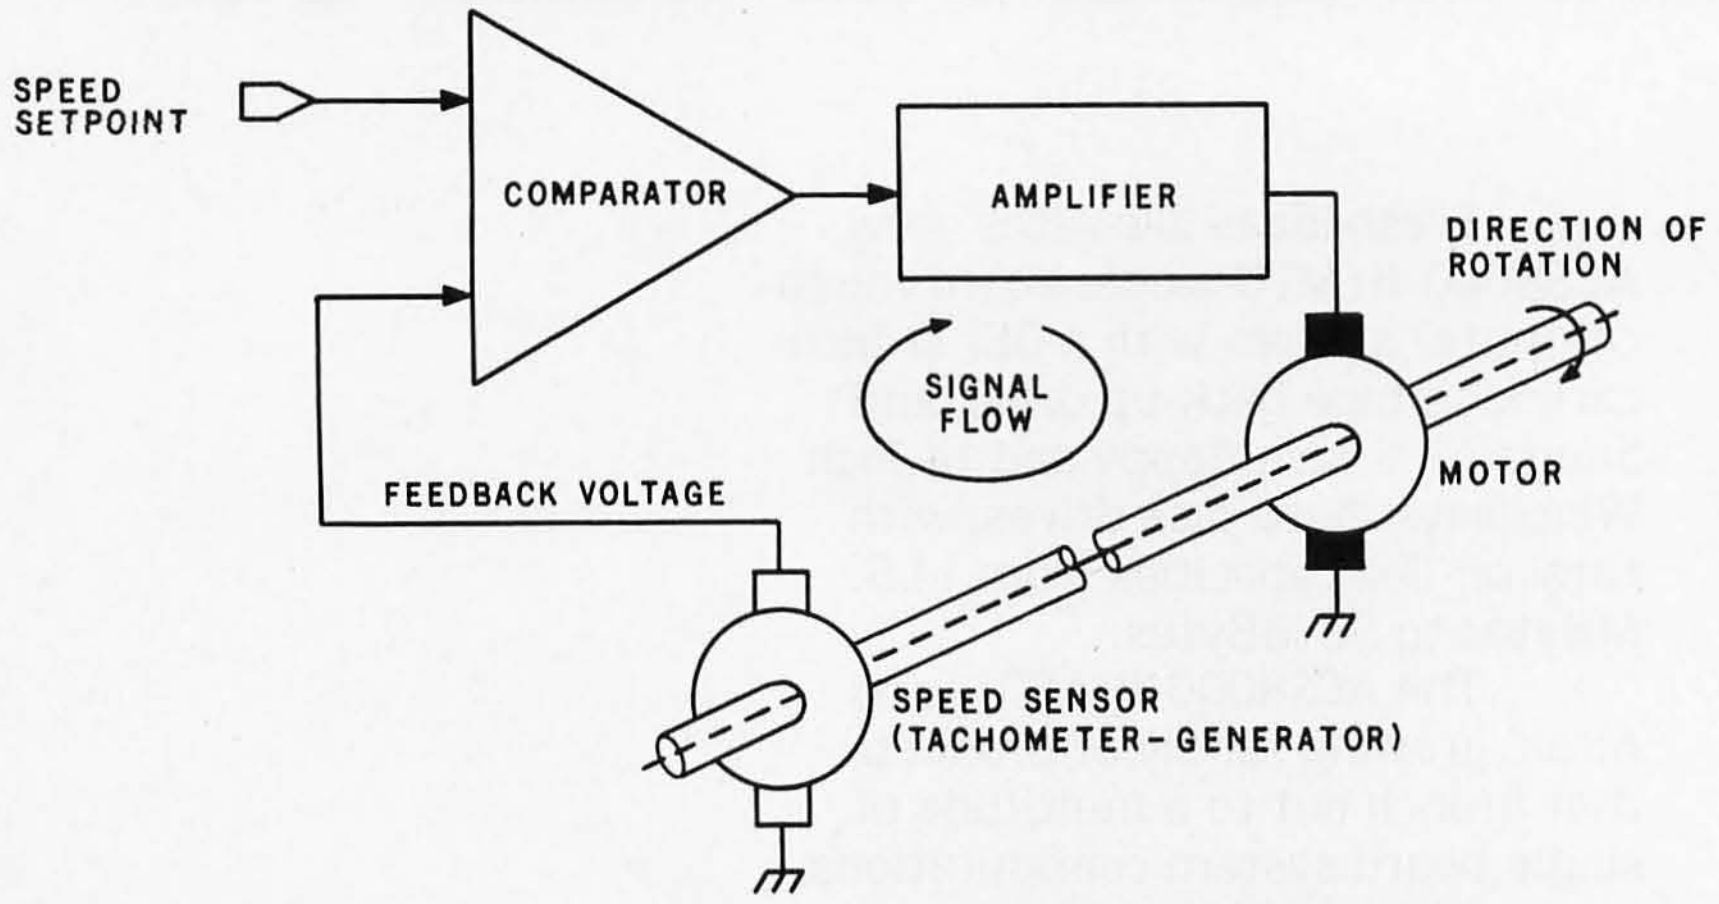

Figure 10b: *Block diagram of a closed-loop controller. The speed sensor detects too-fast or too-slow motion and keeps the motor running without variation in speed over wide variations in load.*

reverse-control signal enables transistors Q2 and Q3 to route the current through the motor in the opposite direction. This circuit, frequently called a *bridge output,* uses only a single DC supply voltage and is generally reserved for use in PWM or PFM controllers. Figure 11b shows a complementary output driver. It is more suitable for linear-control operation, and it requires two opposite-polarity power-supply voltages.

Incremental-Motion Systems

Usually, we don't think of performing positional control with DC motors. Most of our experience has been with 7000 rpm, 3 V PM motors salvaged from toys. However, using special DC motors, it is possible to perform repeatable intermittent or incremental motion. These are the motors generally used in computer-peripheral magnetic-tape transports and line-feed mechanisms. In these, it is frequently necessary to run the motor at fast speeds to achieve high media-slew rates, as well as slow incremental motion. (Stepper motors generally cannot attain the high speeds required.)

The incremental drive is basically a high-performance velocity-controlled DC-servo system. The incremental motion is obtained by applying variable-amplitude voltage pulses to the input and accelerating the armature for predetermined periods of time. Figure 12 on page 88 shows the control waveforms.

Special DC motors are used in computer peripheral devices where widely varying speeds are needed.

With the system initially at rest, a high positive step voltage, t_1, is applied to the input. This causes the motor to accelerate almost instantaneously. Shortly thereafter, the voltage is reduced to a level, t_2, maintaining constant rotational speed. Some time later, the shaft rotation is stopped by applying a reverse-polarity input, t_3. Attempting to accelerate in the opposite direction causes the motor to brake. The exact timing of these pulses depends upon the specific motor and torque requirements.

The entire process takes only a few milliseconds and may move the armature a fraction of a revolution. This incremental motion is repeatable, enabling practical application. If, for example, it is applied at 100 steps per second while using an incremental encoder for speed control, the motion will appear to be produced by a high-torque stepper motor.

Build a Motorized Platform

Experimenting with incremental-motion controls on permanent-magnet DC motors is not as difficult as you might imagine. Once you discover the capabilities, you may find yourself experimenting with different mechanisms, as I have.

The cheapest high-power low-voltage PM DC motor I found was the one in a hand-held battery-operated drill. The motor I used was from a Black & Decker Model 9001 $^1/_4$-inch cordless drill. This same motor is probably used in a variety of other tools and appliances, possibly hedge trimmers and the like.

The basic unit consists of a power pack (containing a 4.8 V rechargeable nickel-cadmium battery and a charger) and the motor/drill-chuck assembly. The motor/chuck assembly contains the PM motor, reduction gears, and drill chuck.

A major stumbling block in building a transport mechanism that might be used in a robot has been the expense of the motors and gears. In lightweight assemblies, designers often incorporate stepper motors because they are easily controlled and their motion is repeatable. In larger and heavier vehicles, use of stepper motors becomes prohibitively expensive, and alternative drive mechanisms are required.

Circle 227 on inquiry card. →

The One Printer Solution for the Two Printer Problem.

HIGH SPEED DATA PROCESSING

The new Dual-Mode 200 brings speed and uncompromising print quality to business and professional applications.

Financial statements, inventory reports, labels and more are printed at data processing speeds from 165 cps to 250 cps.

Fully adjustable tractors and a friction feed platen provide precise forms handling for pinfeed and single sheet paper.

Complete "Dot Control" graphics is standard with resolution to 120 x 144 dots per inch.

Interfacing is easy with both E.I.A. RS-232C serial and an ASCII parallel port.

LETTER QUALITY WORD PROCESSING

The Dual-Mode 200 also features letter perfect print you will be proud to use for business letters and reports. Letter Mode speeds range from 42 cps to 60 cps.

The standard Titan 10 pitch font is complemented by an array of optional fonts including Elite 12 pitch, italics, proportionally spaced, OCR-A, scientific and foreign character sets.

Up to 12 font selections may be stored in the printer and interchanged while printing.

The Dual-Mode 200 accepts standard daisywheel print commands for word processing system compatibility.

It's the perfect solution for the two printer problem.

The Dual-Mode 200 Printer for the one printer office.

Call or write today for complete specifications

2301 Townsgate Road, Westlake Village, CA 91361, (805) 496-1990

malibu
Electronics Corporation

a subsidiary of **Datametrics Corporation**

DOTS DO IT BETTER™

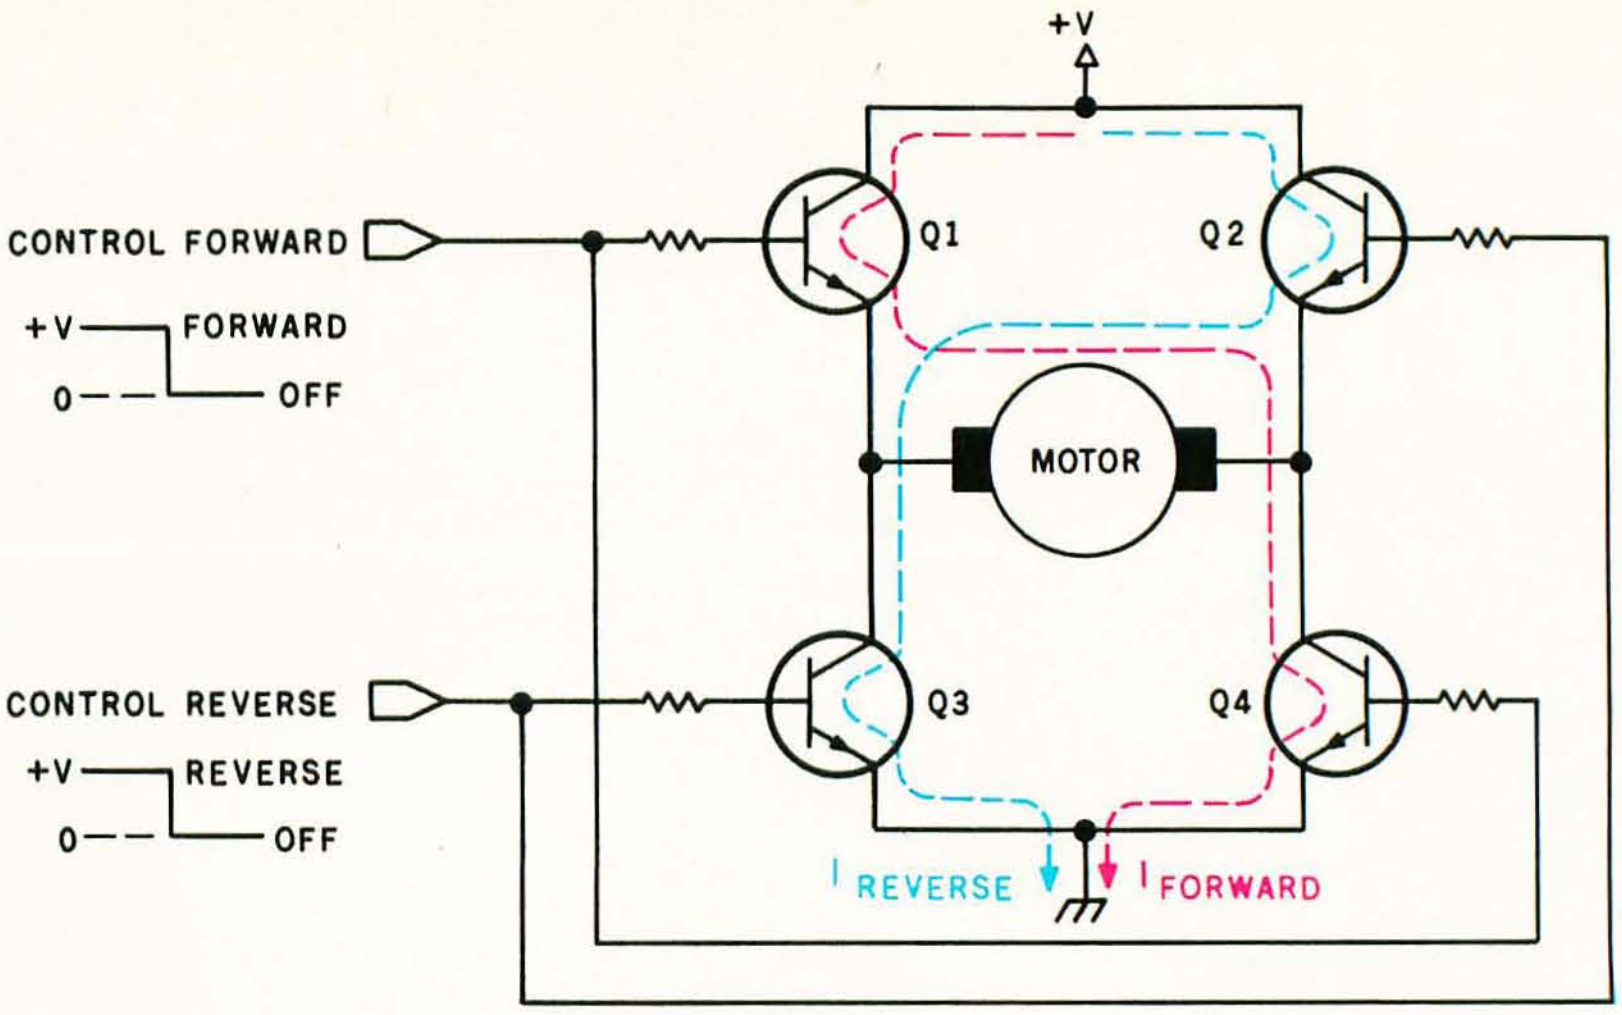

Figure 11a: *One of two basic reversing motor-control circuits. This bridge-type switch uses a single DC supply voltage and is used mostly in PWM or PFM controllers.*

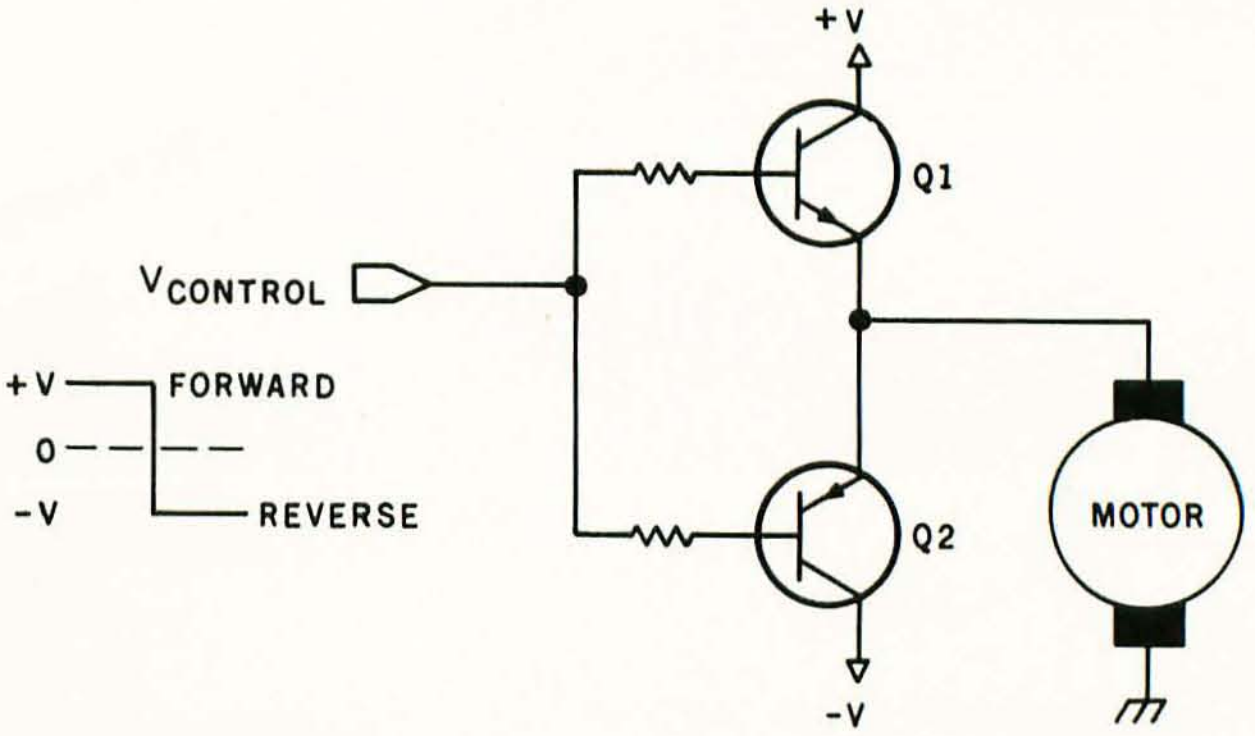

Figure 11b: *A complementary-type reversing circuit. It is more suitable for linear-amplifier control operation, while requiring two opposite-polarity power-supply voltages.*

While I did not intend to build a 300-pound "Son of Robbie," I wanted to experiment with some form of remote-controlled transport. Since the drills contained gear-reduced, low-voltage/high-torque motors and a chuck to attach an axle, it was natural to consider their use. The only problem I envisioned was reducing the nominal 750 rpm motor speed to a fairly constant value around 60 rpm. An incremental-motion controller was the answer.

The result of my experimentation is the motorized platform shown in photos 3, 4, and 5 on pages 90 and 92. A sketch of the major parts is shown in figure 13 on page 88. The platform consists of a T-shaped metal frame with a drive motor on each "arm" and a swivel wheel on the "leg." I designed it in a T shape so the drive motors could provide steering control, as well as forward/backward motion. In a conventional four-wheeled vehicle, this can be accomplished only by turning the axis of two wheels in the direction of the turn. This could not be accommodated in the present mechanism.

With the T shape, steering is like simple rotation. For forward motion, both motors rotate clockwise; for reverse motion, both motors turn counterclockwise. Turns are accomplished by driving the motors in opposite directions. For a right turn, motor A goes clockwise and motor B goes counterclockwise. A left turn, or left rotation, occurs with the opposite settings. The effect is that it rotates in place. Usually, reversing the polarity to the motors is handled through transistor switches, but I found that the voltage drop through the switch-

Text continued on page 90

THE GREAT PROFILE

... arrives at NCC '81

SPRINTER 80
The Great Profile

Low-cost, high-speed matrix printer/plotter, featuring ultra-modern molded housing, provides program control up to 240 full 80-character LPM using a graphic 560 x n dot matrix.

SPRINTER 40 & 20
Two For The Future

Low-cost, futuristic-looking high-speed matrix printer/plotters that will copy your screen. Model 40 offers program control up to 240 full 40-character LPM using 280 x n dot matrix. Model 20 delivers up to 110 full 20-character LPM using a 140 x n dot matrix and prints upside down and sideways.

ALPHACOM
The Dedicated Printer Co.

Alphacom designs, manufactures and markets packaged printing systems and drive electronics for every application whether OEM or Consumer, and is exclusive agent for Olivetti OEM print mechanisms.

A PRINTER FOR EVERY PURPOSE

Be sure to come by and see our "Great Profiles" in action and *preview* even newer profiles at Booth 5424 during NCC'8I.

Alphacom Alphacom, Inc.
An Olivetti agency

2323 So. Bascom, Campbell, CA 95008 Tel. (408) 559-8000 TLX: 357481

NEW CATALOGUE LISTINGS FROM
JOHN D. OWENS
ASSOCIATES, INC.

CAT 100 FULL COLOR GRAPHICS

Complete S-100 color imaging system with high performance video FRAME GRABBER. 3 fundamental functions are + digitization of video input in real time ++ image storage in dual-port, on-board memory +++ video input of buffered image in gray levels, NTSC color or RGB color.
Discount price . . . . $1,875.
Write or call for option descriptions and pricing, too numerous to list here.

HOUSTON INSTRUMENTS HIPAD DIGITIZER

Create your own graphics using either stylus or optional cursor. Excellent for architectural drawing, business graphs, schematics, free form drawing, etc. More accurate and easier to use than keyboard input or joysticks. "Stream mode" allows continuous placement of coordinate pairs on 11" X 11" pad using either stylus or optional cursor. For S-100 systems and also Apple, TRS-80, PET.
Our discounted price . . . . $ 755.

LDOS for TRS-80 USERS

New operating system can support up to 8 drives (either 5¼", 8" or new Winchester fixed disk) in any combination. Features include ISAM Accessing Techniques. Keyboard type ahead, graphics string packer, dated files and many, many more.
Our discounted price . . . . $ 126.
Manual only . . . . $ 25.

DMA-DOS North Star 8" FLOPPY SUBSYSTEM

A new operating system, completely CP/M® compatible that allows use of both 8" (Shugart single sided, double density via Tarbell controller) and 5¼" drives.
Complete hardware, software package
. . . . $1,910.

TARBELL CPU Z-80

Features memory management hardware that allows dynamic mapping of logical to 1 MB of physical memory in 4K blocks. Supports an easy to use implementation of MP/M®. Either 2 or 4 MHZ, jumper selectable. TWO on board RS232 ports will full handshaking capability; crystal controlled programmable timer.

SEE OUR ADS ON PAGES
448 AND 449

JOHN D. OWENS
Associates, Inc.
12 Schubert Street
Staten Island, New York 10305
212 448-6283 212 448-2913 212 448-6298
Overseas Callers: Phone 212 448-6298

WE HAVE NO READER INQUIRY NUMBER.
PLEASE WRITE OR CALL.

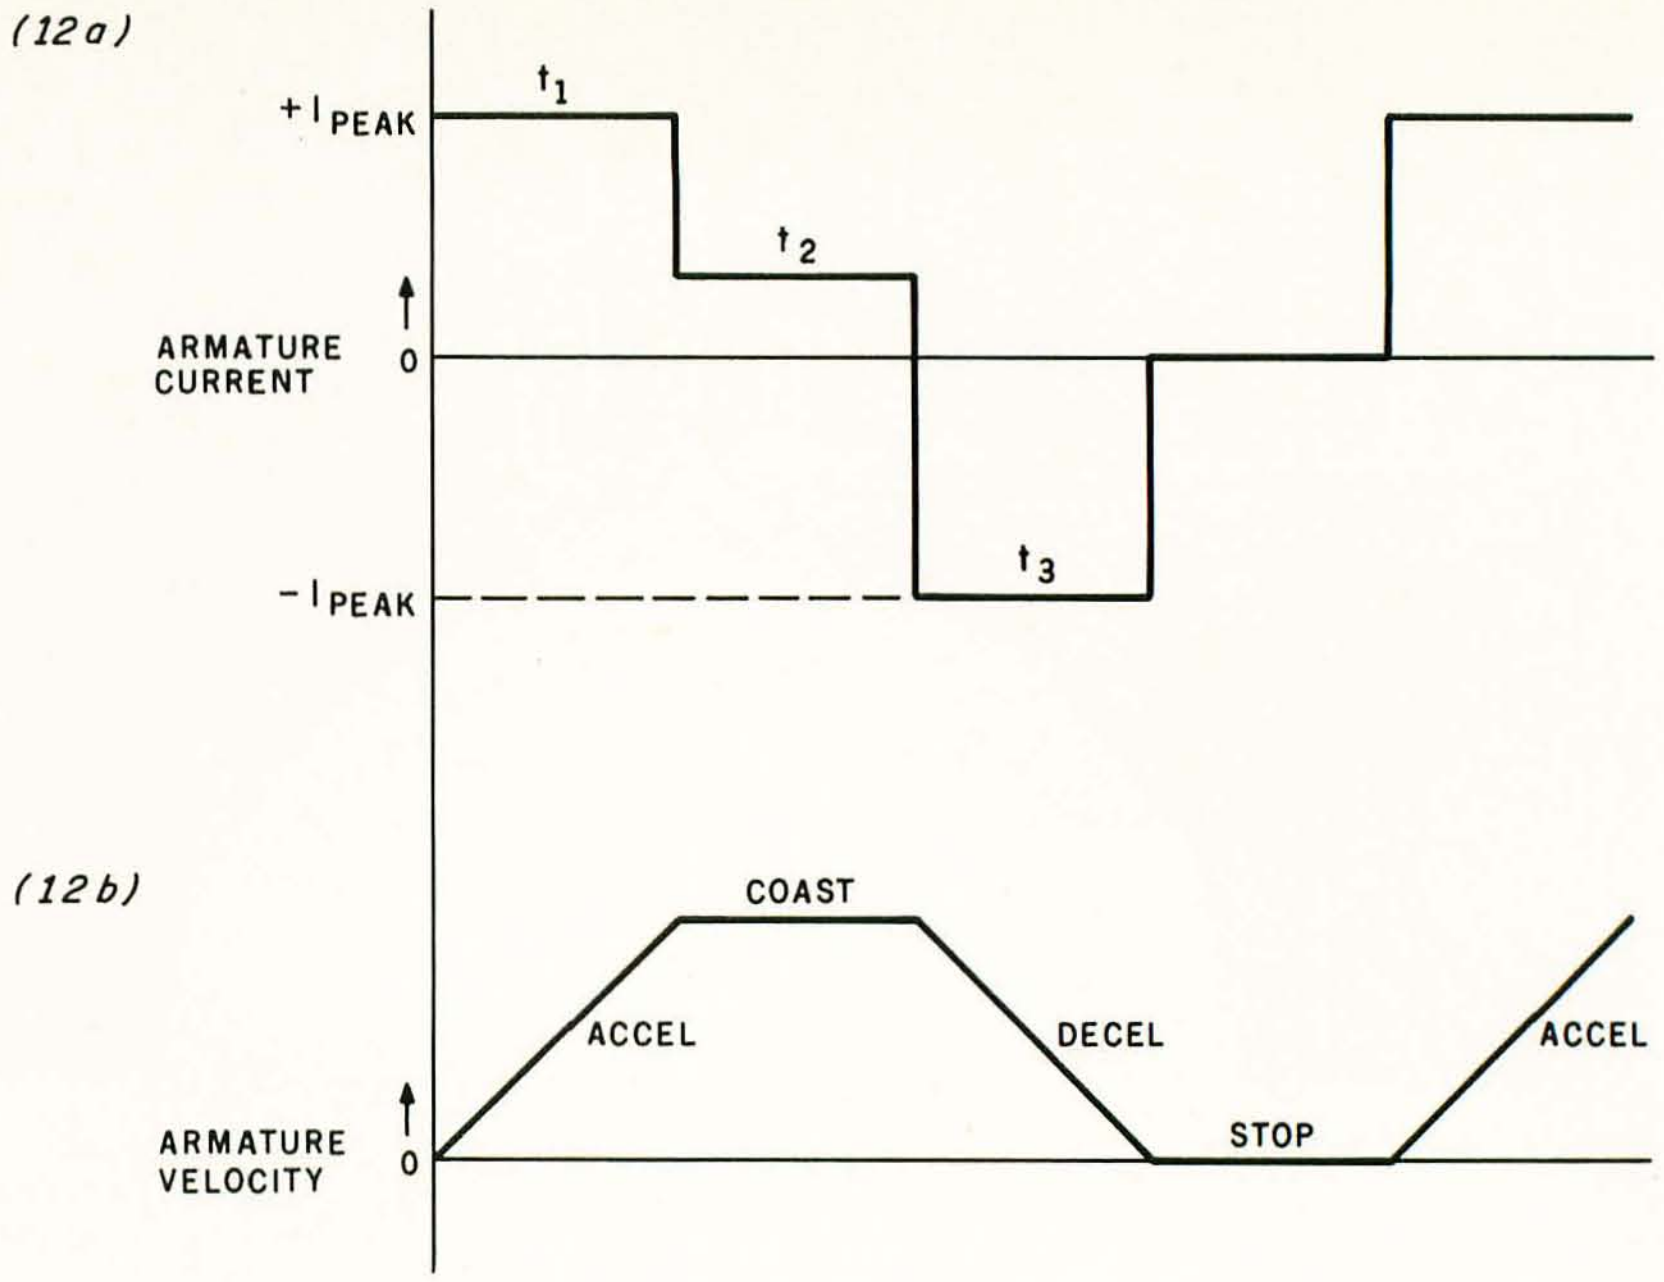

Figure 12: *Precise control can be achieved using incremental-motion controllers. During predetermined periods of time, variable-amplitude voltage pulses are applied to the motor's coils. With the system initially at rest, a high positive step voltage, t_1, is applied to the motor. After motion has begun, the voltage is reduced to a lower continuing value, t_2. When the motor is to be stopped, a negative braking voltage, t_3, is applied.*

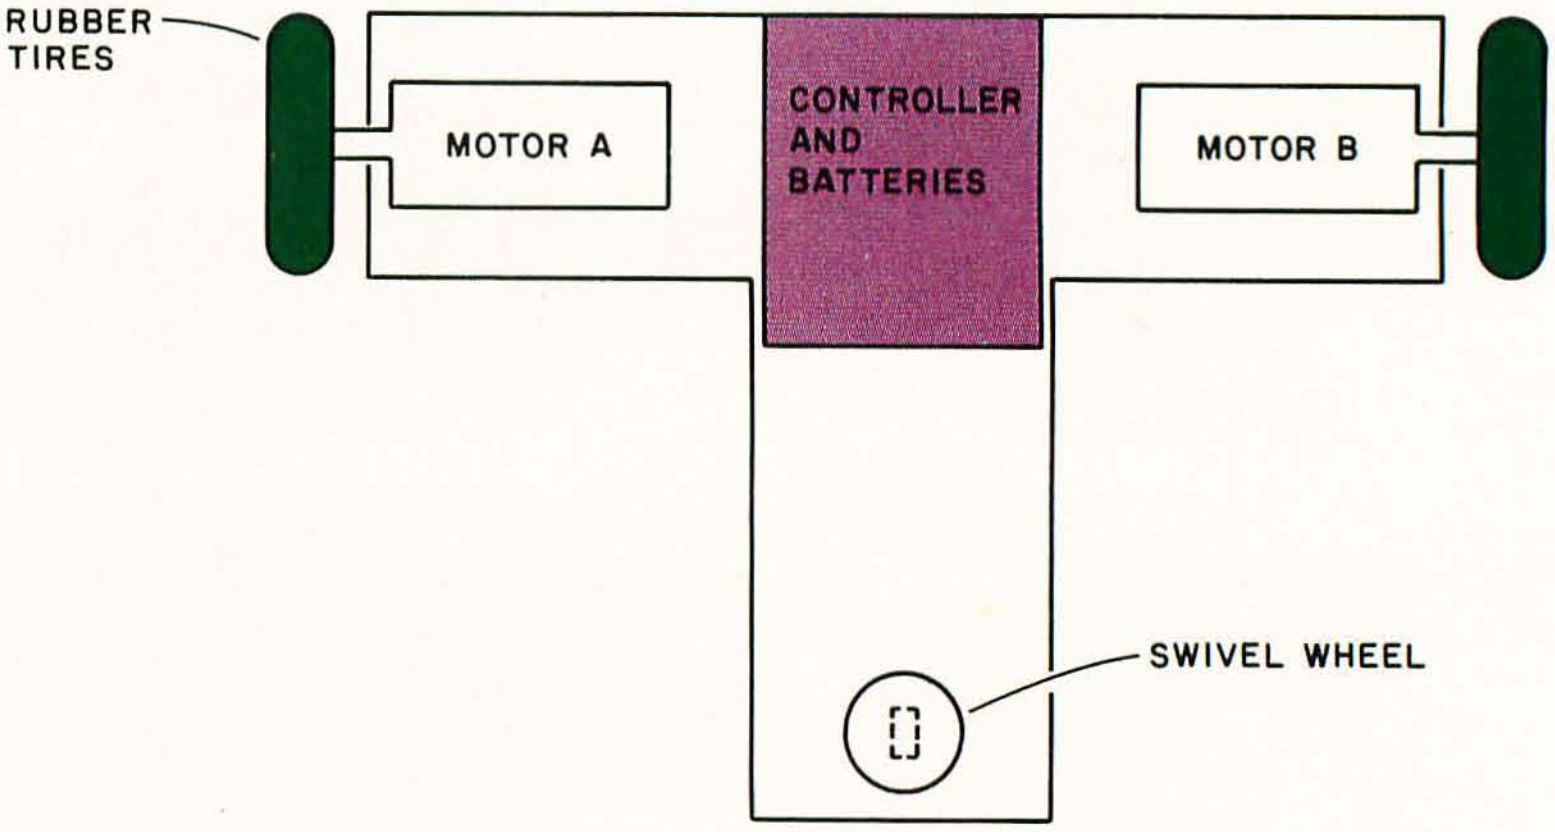

	DIRECTION OF ROTATION	
FUNCTION	*MOTOR A*	*MOTOR B*
FORWARD	CW	CW
RIGHT TURN	CW	CCW
LEFT TURN	CCW	CW
BACKWARD	CCW	CCW

Figure 13: *Arrangement of components of the motorized platform. Steering is done in the simplest case by rotation. Both motors turn in the same direction for straight motion, whereas for a turn, one motor turns CW (clockwise) and the other turns CCW (counterclockwise).*

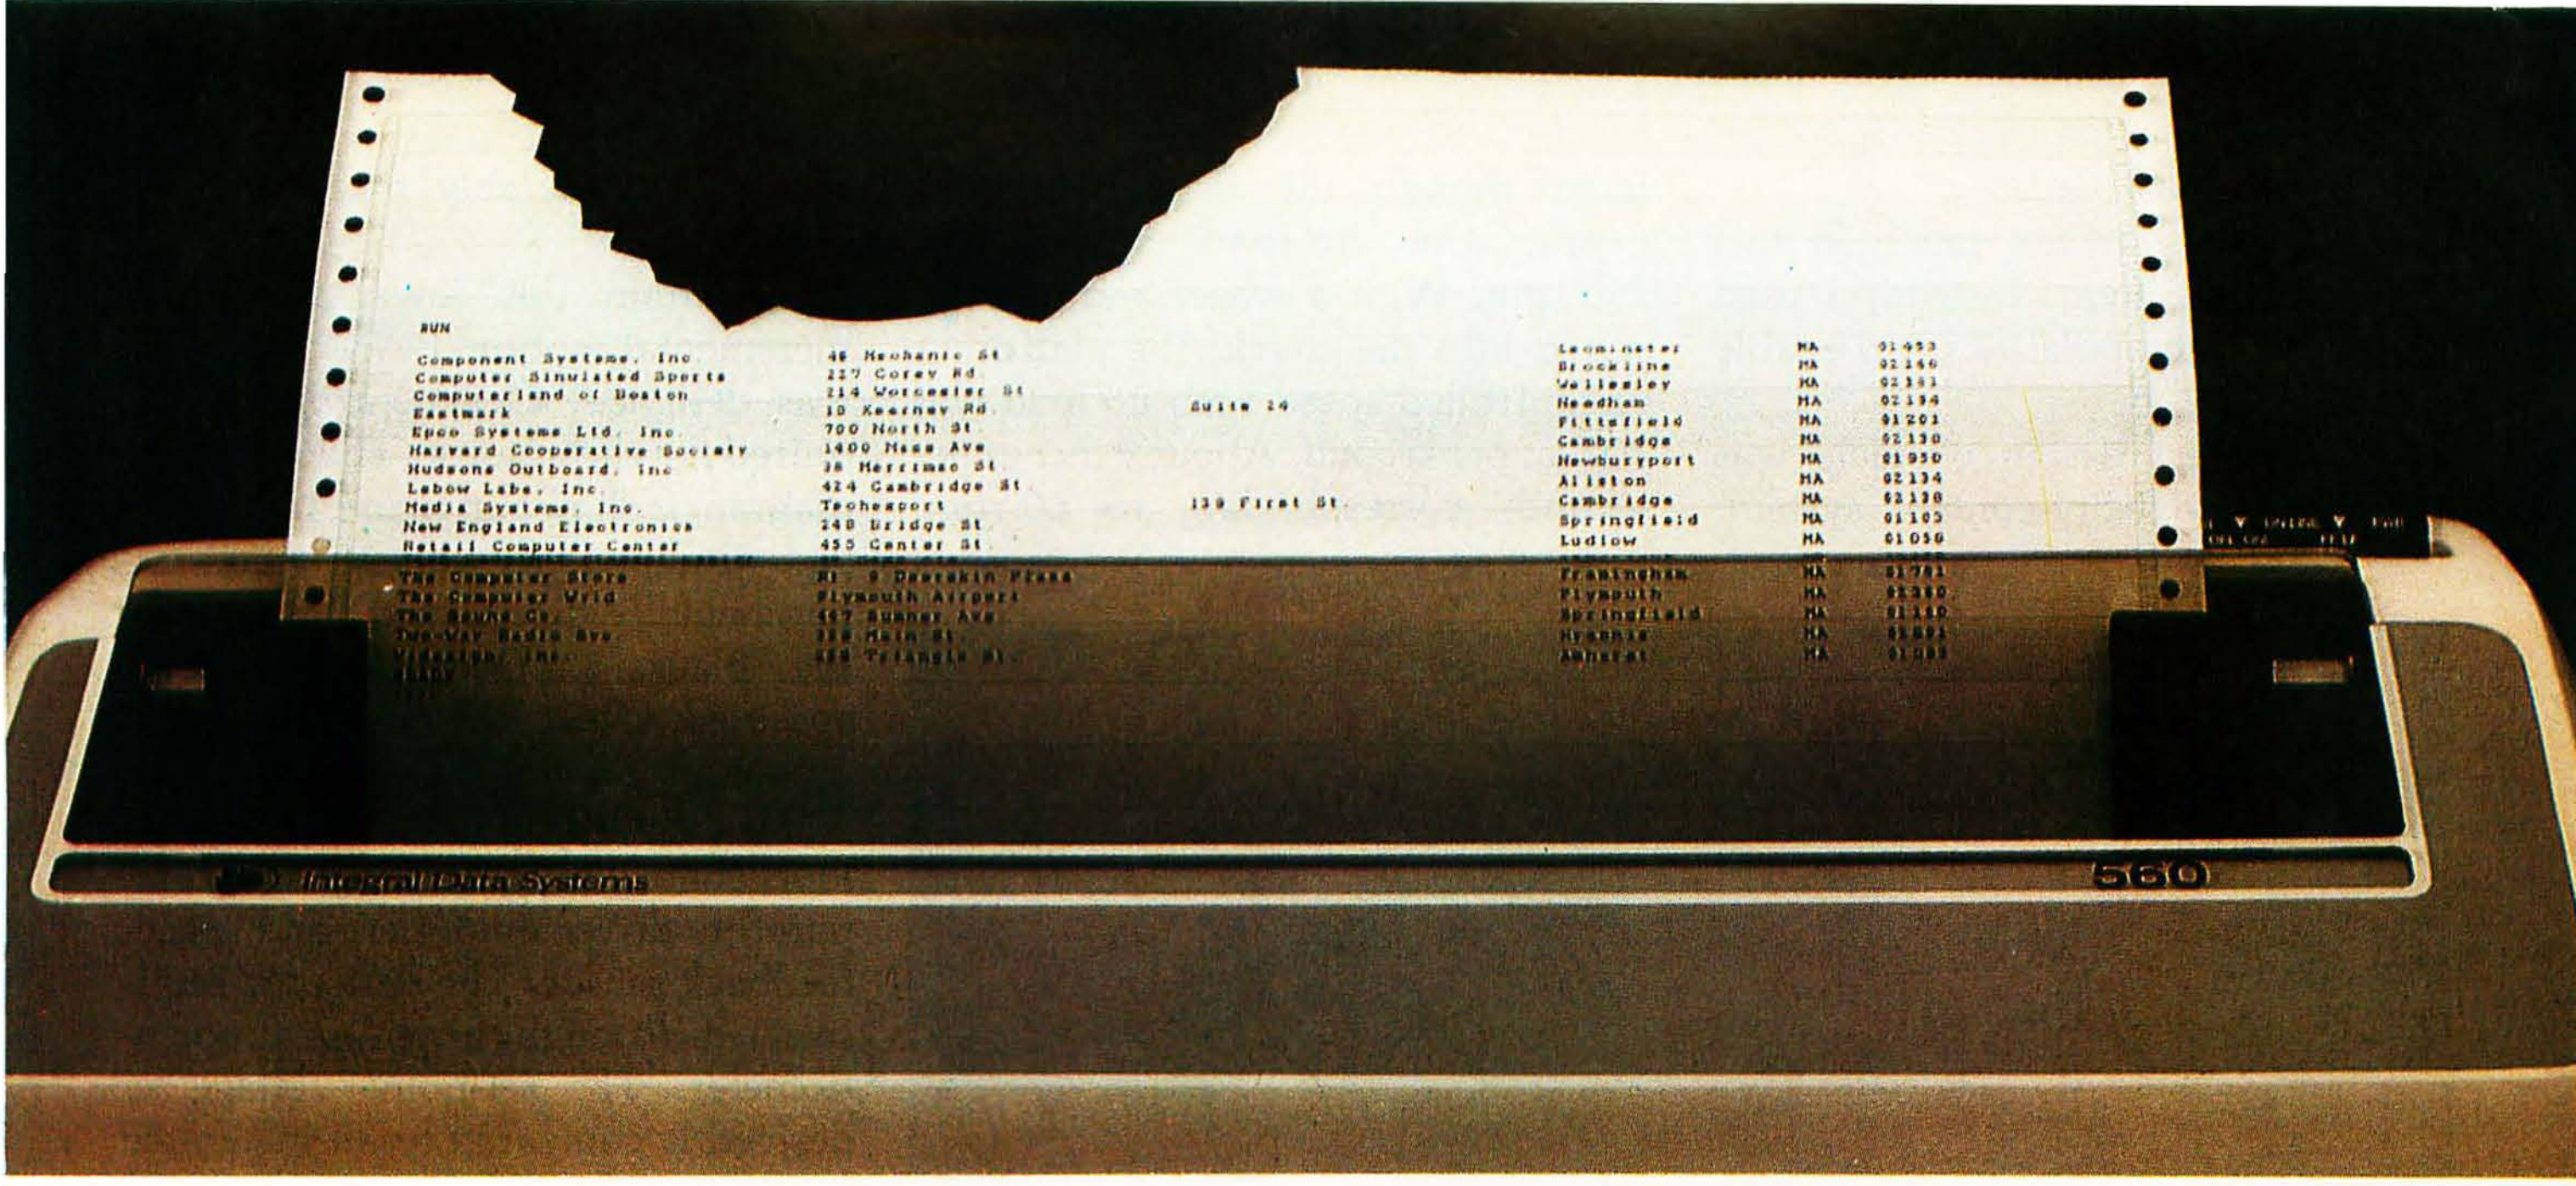

Meet the Tiger with a bigger bite.

Introducing the remarkable 132-column Paper Tiger™ 560. The first full-width matrix printer to give you fully formed characters for a low $1695.*

The new 560 features a staggered nine-wire ballistic type print head that overlaps dots in both horizontal and vertical planes. It bi-directionally prints up to 150 dense, text quality characters per second.

The 560 also features a reliable cartridge ribbon that lasts up to four times as long as spool and cassette ribbons, separate heavy-duty stepper motors to drive the print head and advance the paper, plus true tractor feed.

```
presents a breakthrough in matrix printin
ering the user excellent print quality wit
ce of a matrix printer.  Employing a uniq
red column" head manufactured by Integr
 creates high quality printouts by overla
```

Paper Tiger 560 Print Sample

And famous Paper Tiger performance comes with every new 560. Like fixed or proportionately spaced text, programmable tabbing and business forms control, automatic text justification, print formats to 220 columns, parallel and serial interfaces, self-diagnostics, and more. All inside the most compact printer of its kind.

Need more stripes? Dotplot,™ our high-resolution raster graphics package, is standard on every 560.

For data processing, word processing and small business applications, this is your Tiger. The business-sized Paper Tiger™ 560.

It's a Tiger you can count on.

Call TOLL FREE 800-258-1386 (In New Hampshire, Alaska and Hawaii, call 603-673-9100.) Or write: Integral Data Systems, Inc., Milford, NH 03055.

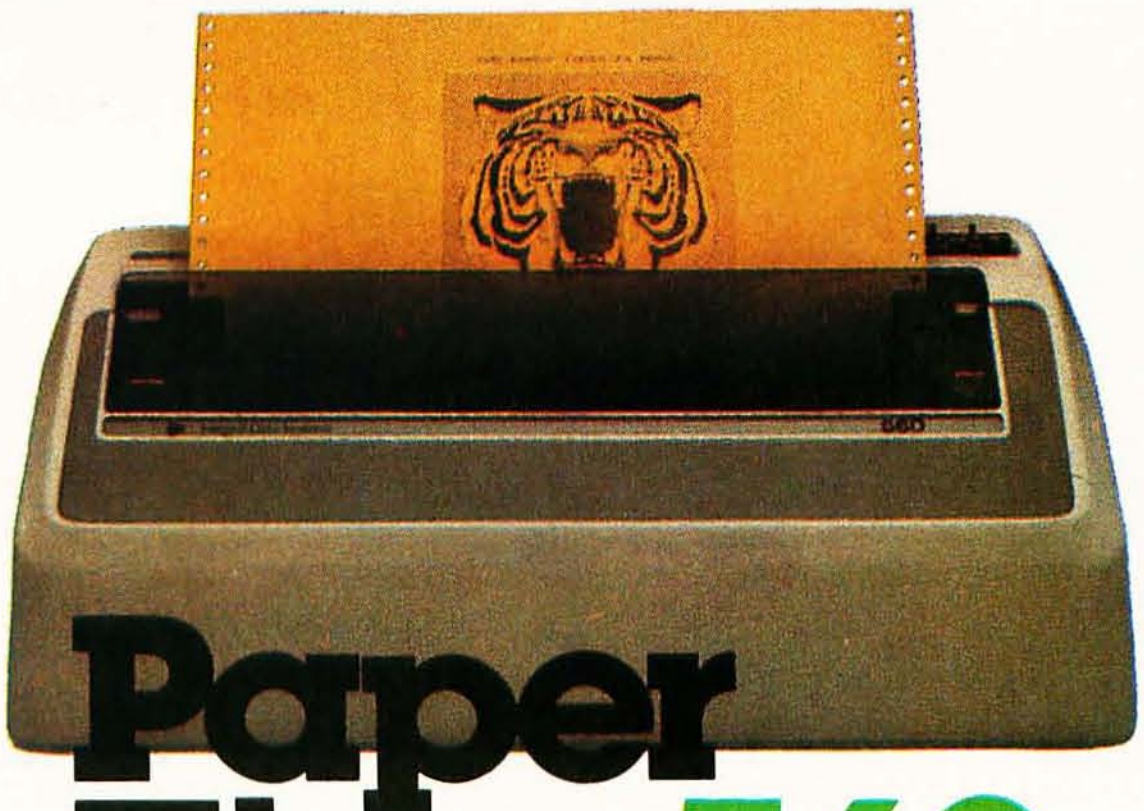

Paper Tiger 560

Integral Data Systems, Inc.

Circle 196 on inquiry card.

*Suggested U.S. retail price.

Text continued from page 86:

ing network was too much in this low-voltage system. Instead, I used relays to switch polarities and enable motion.

The greatest design obstacle was the actual velocity-control system. Even though the drills contained gears, the no-load speed was 750 rpm. With a wheel and axle inserted into the chuck, the platform's uncontrolled speed with no load was 10 feet per second. About 9 inches per second, corresponding to 60 rpm, seemed considerably more manageable.

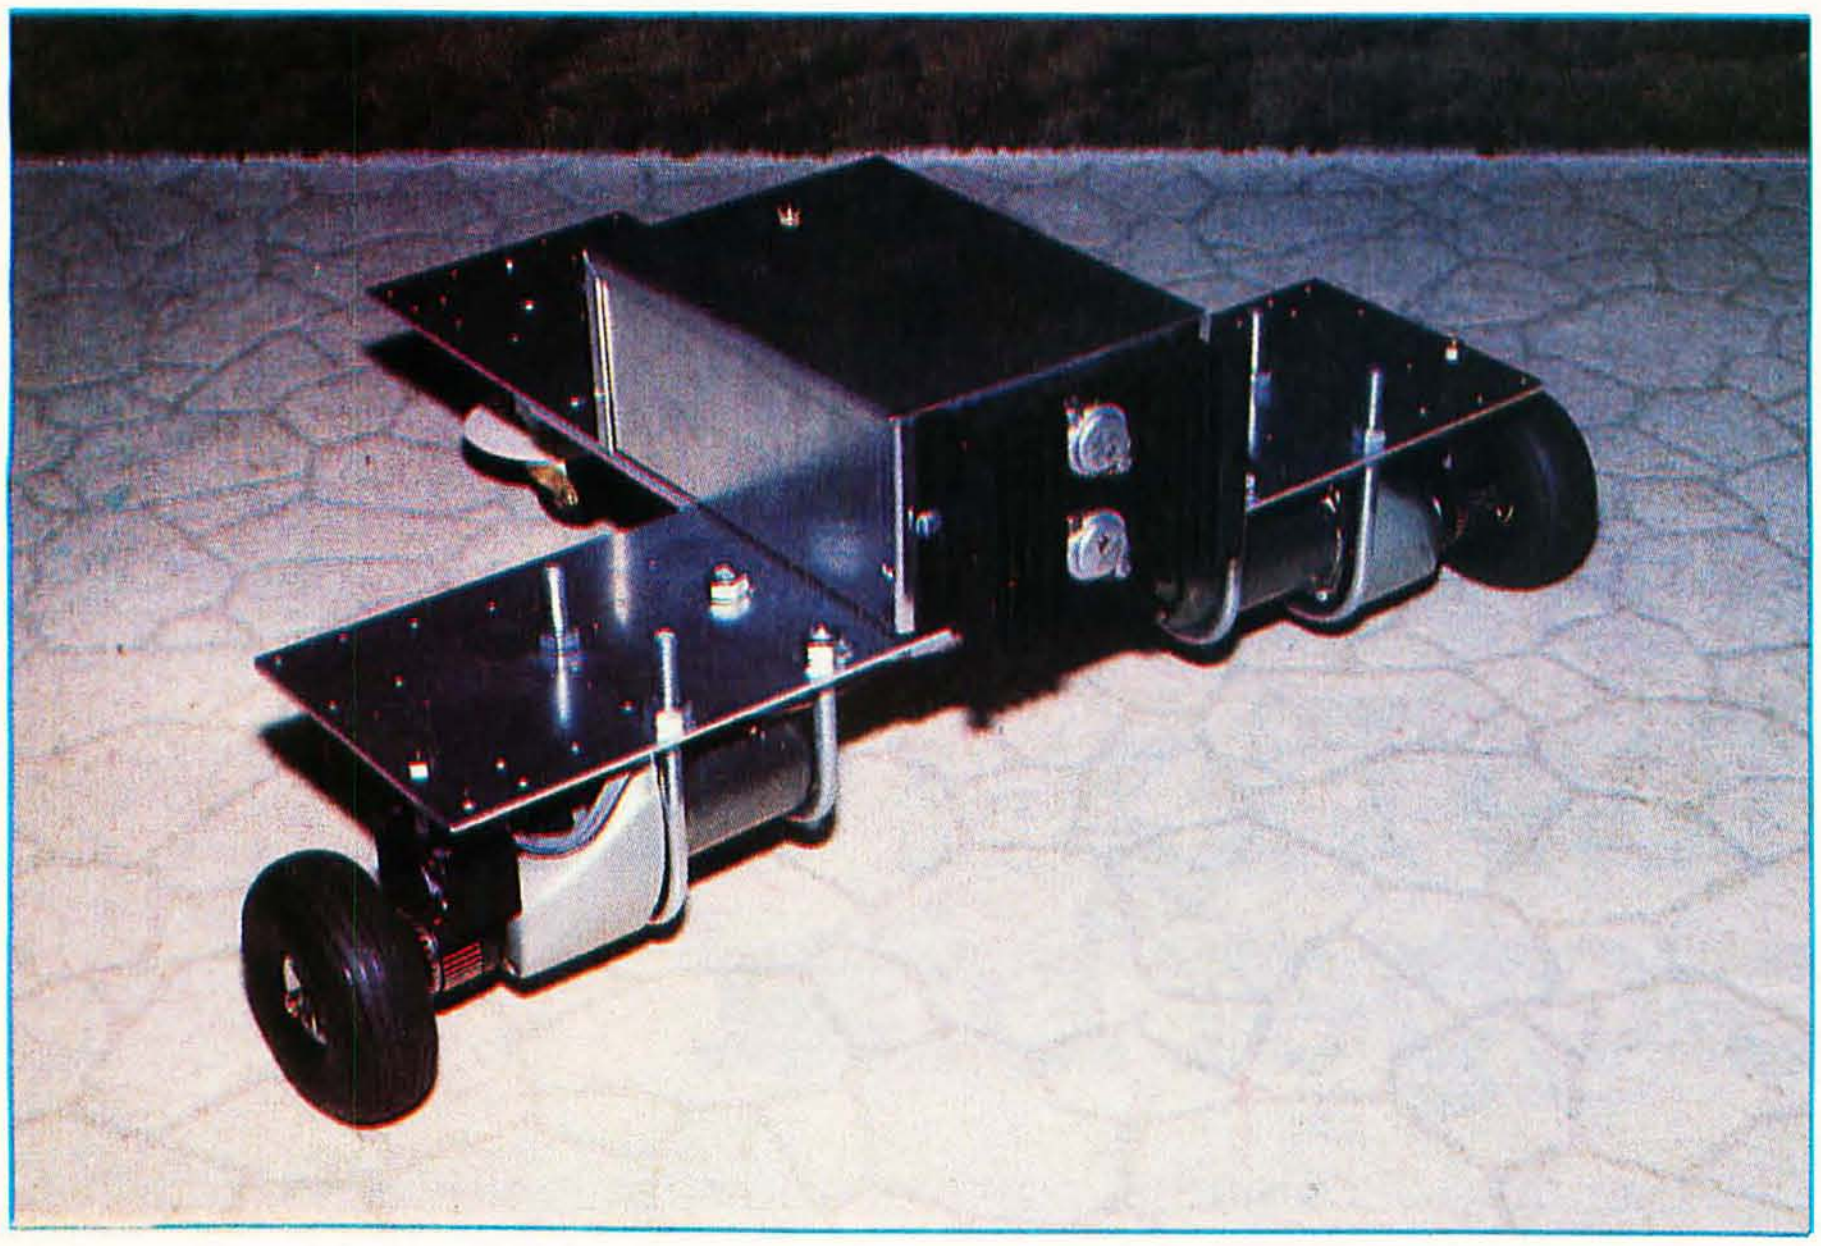

Photo 3: *A simple application of the DC motor controls presented in this article is to build a small mobile motorized platform. This one uses two battery-operated drill motors and a swiveling furniture caster. The T-shaped structure has complete mobility and can turn and pivot, as well as follow a straight line. The large box in the center of the platform contains the two motor controllers, relays, and batteries.*

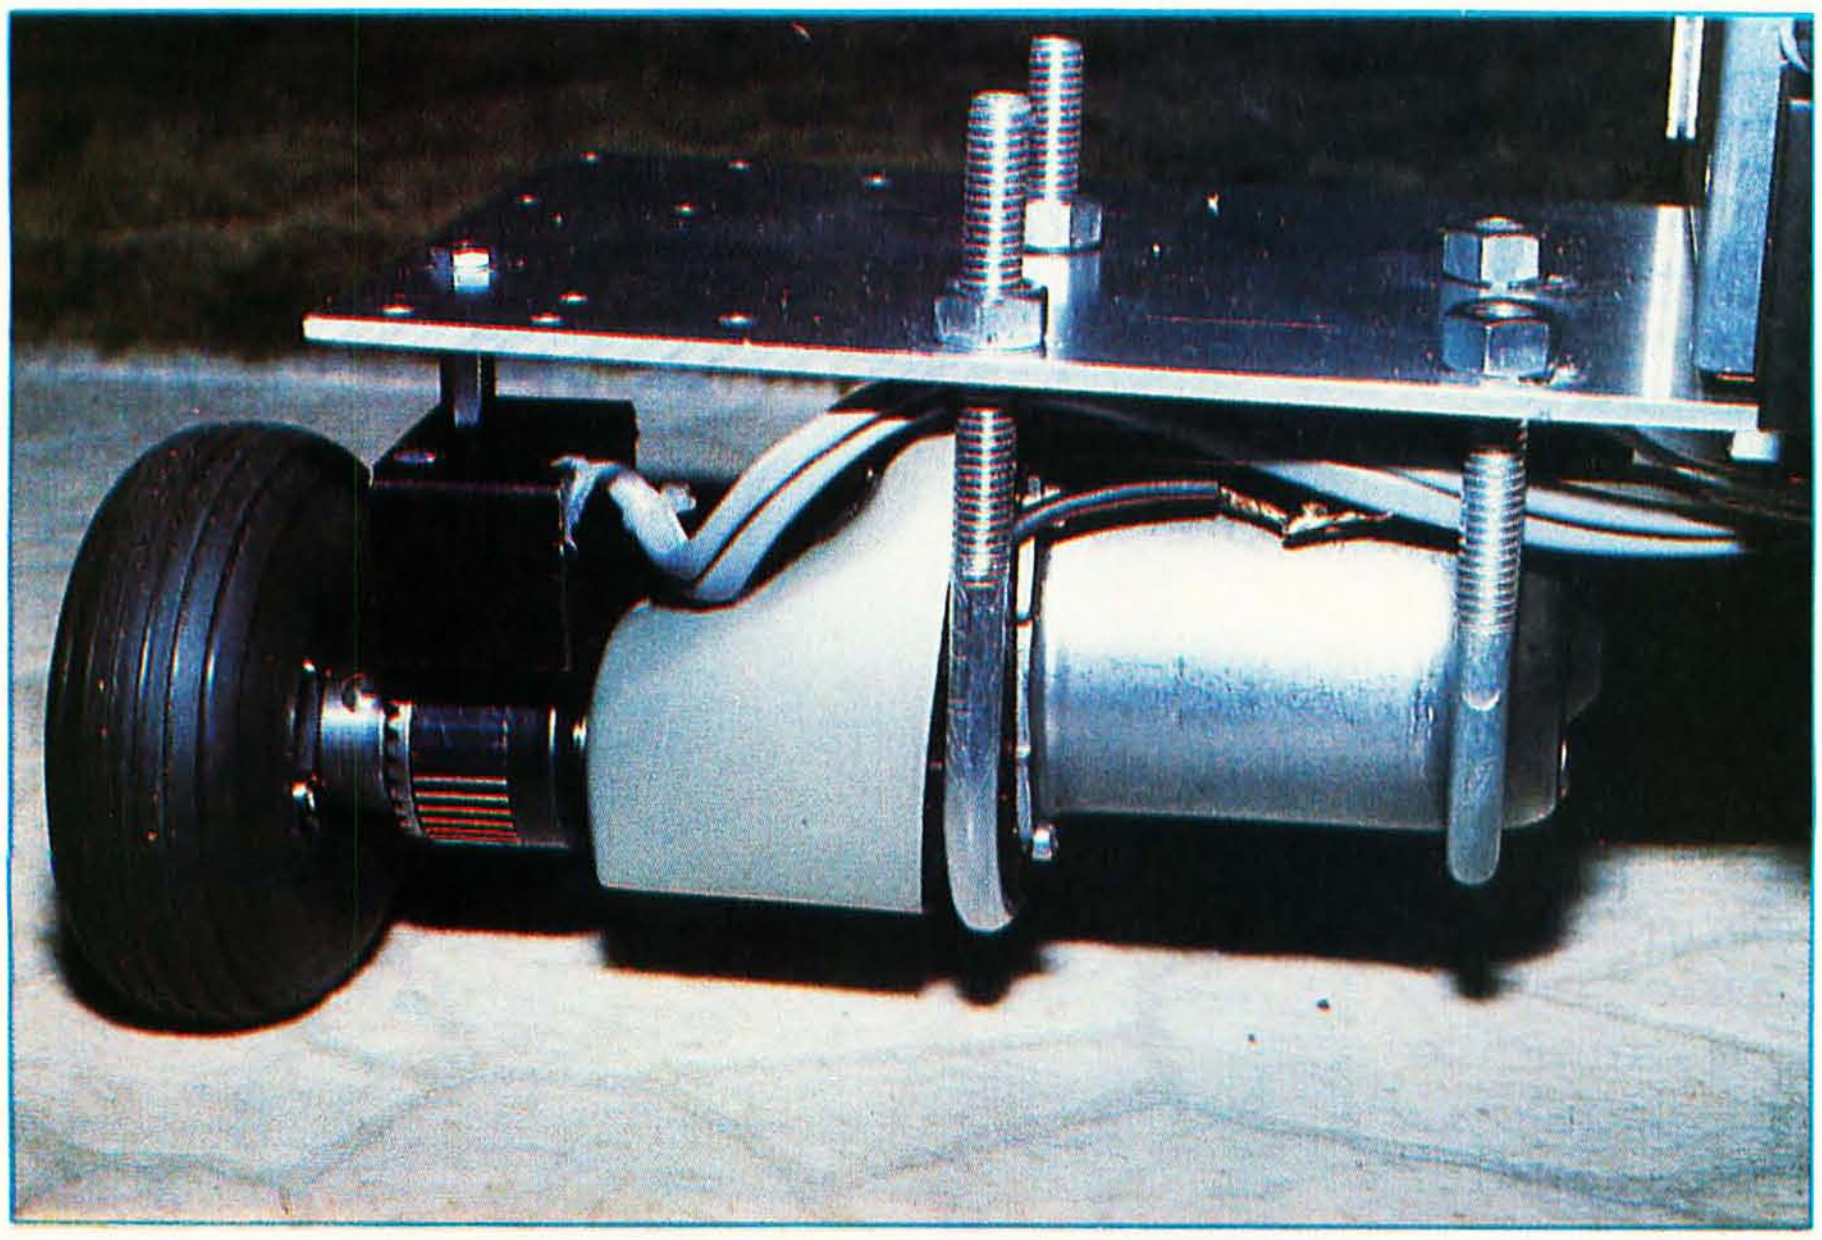

Photo 4: *Close-up of a drive motor on the platform. The motor is from a 4.8 V Black & Decker battery-operated ¼-inch drill. The drill's case and battery pack have been removed. It is secured to the aluminum T-frame with two U bolts. A 5/32-inch brass rod that serves as an axle is inserted into each drill chuck. The tires are air-filled 3¼-inch diameter rubber tires used on model airplanes.*

To attain this lower speed, an incremental-motion/PWM controller was designed. One controller is required for each motor. The schematic diagram is shown in figure 14 on page 96. Component values were experimentally determined for use with the Black & Decker PM motor specified. Other PM motors may not operate in exactly the same manner.

Basically, the circuit is a closed-loop controller, consisting of a comparator, driver amplifier, and speed-feedback sensor. The desired speed is selected through a ten-turn potentiometer. The set-point voltage so derived is compared to an integrated feedback voltage from an optical incremental encoder. If the speed is too slow, the pulses out of the comparator are made longer. If the speed is too fast, the pulses are cut shorter. A negative voltage applied to the driver input between pulses assures complete turnoff.

The low pulse-frequency rate required to keep the speed at or below 60 rpm results in an incremental-motion condition. The start pulse is at the full DC supply voltage, creating a high-velocity start-up. A reverse-step pulse is not necessary to stop the motor, however, due to the high mechanical load presented to the motor through the gears. They serve to immediately dampen any coasting. The result is smooth, low-speed rotation, in rapid discrete increments, at a predictable constant velocity.

Maintaining constant motor speed is imperative when the motors must run synchronously for forward and backward motion. Turns are not as critical, but you realize what happens when one motor runs faster than another.

The 60 rpm speed is too slow to use a tachometer-generator without considerable complication. Instead, an incremental encoder (shown in photo 6) generates pulses as the wheels turn. Ordinarily, I would have used a slotted or perforated disk interrupting a light beam, but it wouldn't fit in the space available. Instead, I wrapped reflective aluminized tape with black stripes parallel to the axis of rotation around the chuck. An LED (light-

Here's the easy way to write your own programs.

Heathkit Self-Study Courses give you a complete command of computer language, so you can write the programs that do your specific tasks. Choose from four programming languages.



Easy, step-by-step learning

You learn at your own pace, performing exercises on your computer and following a clearly written and illustrated text. Tests at the end of each unit assure your understanding before proceeding to the next unit. In most courses your reading is reinforced by cassette tapes, so you *see and hear,* for more thorough learning.

Hands-on programming exercises

You learn by doing, not just reading. Special exercises guide you through the steps of designing and writing your own programs for your computer. Upon completion of the courses you'll be able to tailor existing programs to your specific needs, or write your own original programs from scratch.

Recommended for college credit

Many Heathkit Courses are now recommended for college credit by the American Council on Education. If you can't go back to college, now you can bring college home to you.

Free Heathkit Catalog

Details and prices on the complete line of Heathkit Self-Study Courses on computer and electronics subjects are in the new, free Heathkit Catalog. Send for yours today or pick one up at your nearby Heathkit Electronic Center.

FOUR HEATHKIT PROGRAMMING COURSES

BASIC™: easiest-to-learn, hobbyist's language
PASCAL™: sophisticated, easy-to-use language
COBOL™: the businessman's language
ASSEMBLY: very efficient, very precise language
Coming soon: FORTRAN™ and Microsoft™ BASIC™

Write to Heath Co.,
Dept. 334-774,
Benton Harbor, MI 49022.

In Canada, write Heath Co.,
1480 Dundas Highway East,
Mississauga, Ontario, L4X 2R7.

Visit your Heathkit Store

Heathkit products are displayed, sold and serviced at 62 Heathkit Electronic Centers in the U.S. and Canada. See your telephone white pages for locations.

In the U.S., Heathkit Electronic Centers are units of Veritechnology Electronics Corporation.

Heathkit®

ED-15

emitting diode) and phototransistor sense the light and dark areas of the tape as the shaft rotates. The greater the number of divisions or stripes per inch, the greater the resolution of the feedback system. While I was able to set the same speed on both motors, more encoder divisions would have been better.

Ideas for Computer Control

This article wouldn't be complete unless I described how my motorized platform can be remotely controlled from the computer. Essentially, it requires three signals controlling one power-on/off relay and two forward/reverse relays (10 A contacts).

Text continued on page 98

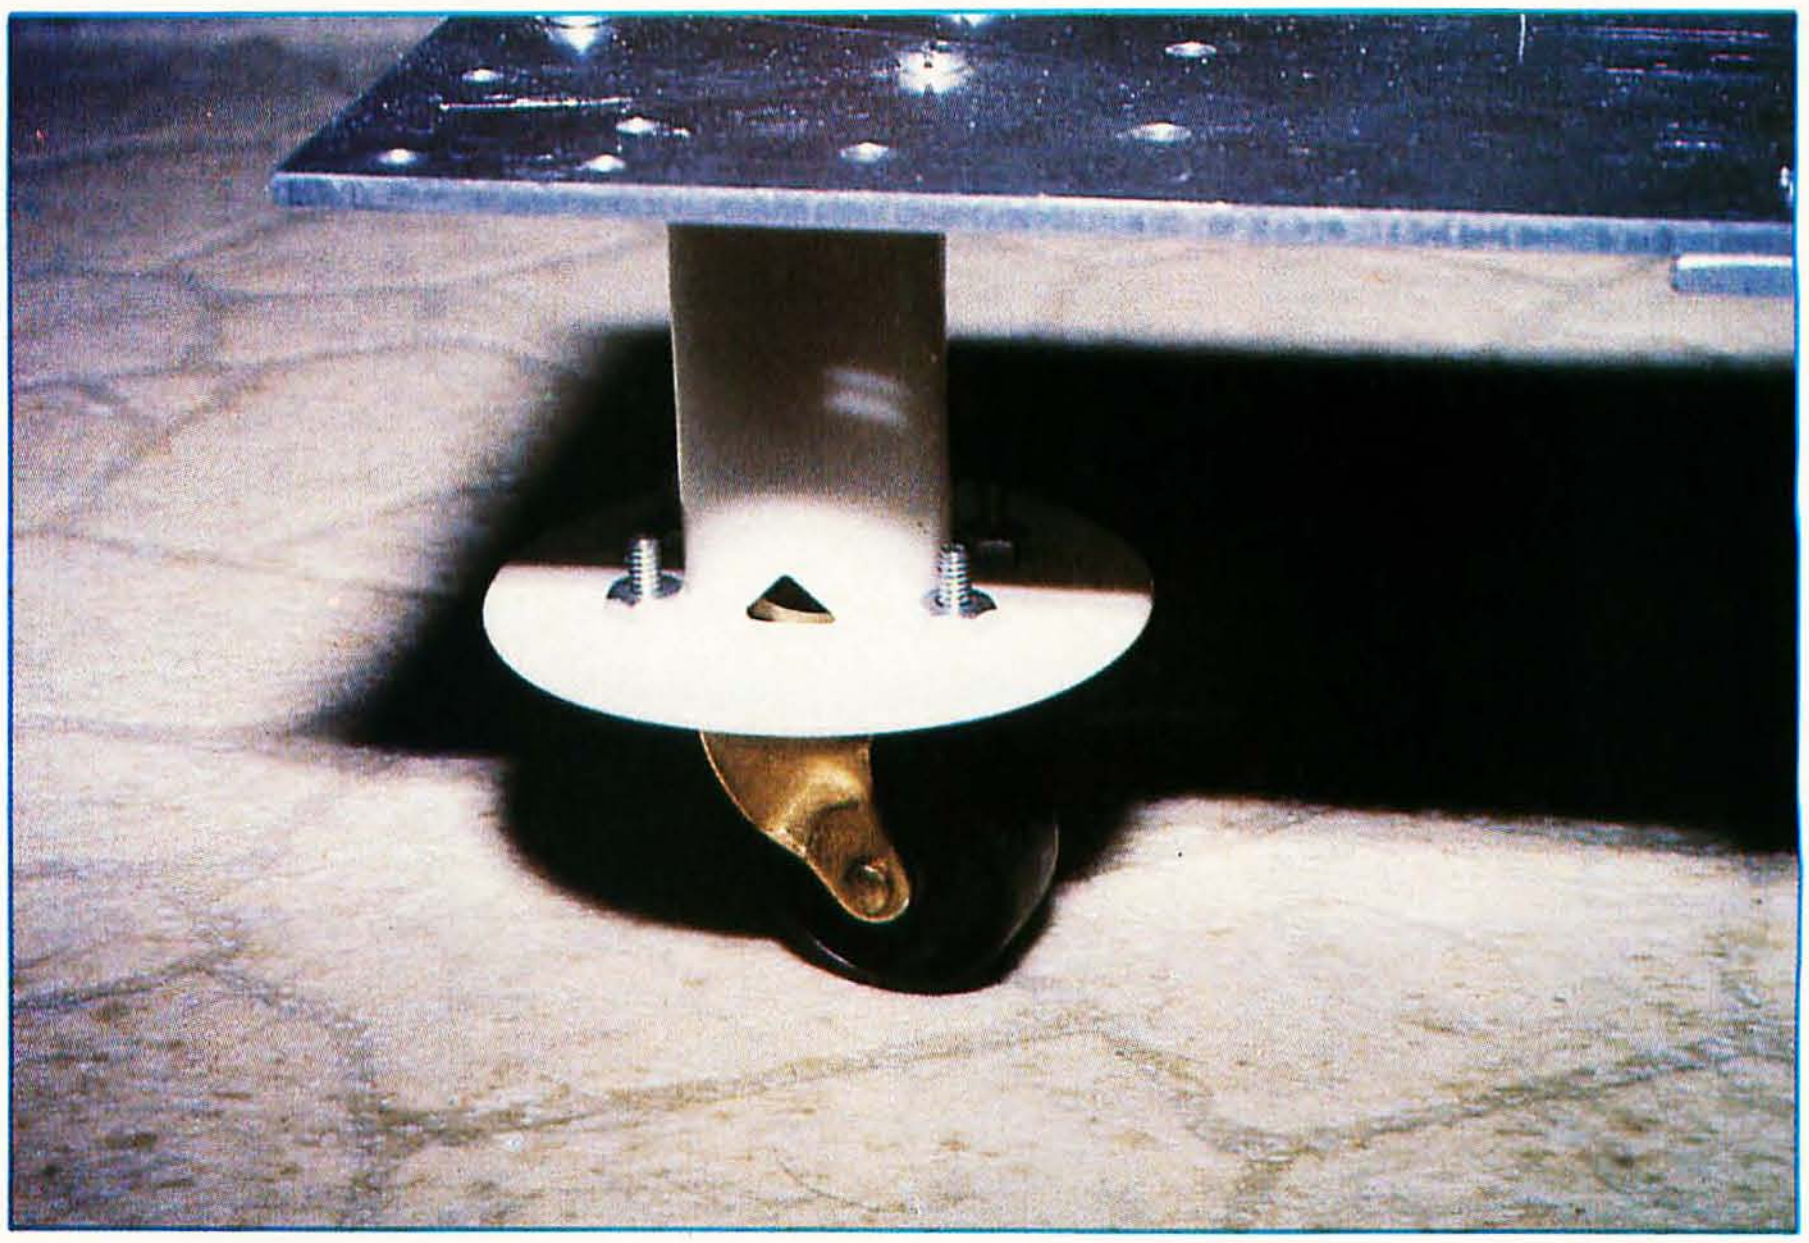

Photo 5: *The rear of the T-frame is supported on a furniture caster. This is a simple scheme allowing motion in any direction.*

Photo 6: *It was nearly impossible to fit the incremental-encoder disk of photo 2 between the motor and the wheel. Instead, a piece of reflective aluminized tape with black stripes was wrapped around the drill chuck. An infrared LED (light-emitting diode) and phototransistor are aimed at the tape so the light is reflected to the sensor. As the shaft turns, the light is interrupted much the same as the disk version.*

Circle 242 on inquiry card.

STRICKLY apple®

APPLE II PLUS:		YOU SAVE
16K	$1049	22%
48K	$1099	29%
64K	$1269	27%
Apple *///*	*Call*	

All are 1981 model with Apple RAM. 64K unit is 48K unit with Microsoft 16K RAM board.

IMPORTANT NOTE: We will repair all Apple equipment regardless of where you purchased it.

Disk II & 3.3 Controler	$ 499	23%
Disk II	$ 439	16%
Moniters, Sanyo 9" B&W	$ 169	30%
12" B&W	$ 249	21%
12" Grn.	$ 299	21%
13" Color	$ 449	20%
RF Modulator, M&R	$ 25	38%
Silentype printer	$ 499	22%
Qume Sprint 5 45RO	$2499	20%
Serial Interface Card	$ 129	35%
Apple Writer program	$ 59	21%
Visicalc	$ 119	21%
80 Column Video:		
Apple Smarterm	$ 299	17%
M&R, SupeRterm	$ 319	14%
Videx, Videoterm	$ 249	18%
Language/Pascal Sys.	$ 379	24%
Apple Plot	$ 55	21%
Microsoft:		
Z80 Softcard	$ 250	28%
16K RAM Card	$ 169	16%
Epson MX 80	$ 475	27%
" Interface & cable	$ 95	15%
" MX70	Call	Call
DC Hayes Micromodem	$ 299	23%
16K Expansion RAM Kit	$ 39	74%
10 Memorex 5" disks	$ 25	45%
10 Maxwell 5" disks	$ 39	33%
Accounting Sofware		
"Insoft Account"	$ 365	66%

(a full professional quality intergrated GL,A/R,A/P, Payroll package with hotline support). Send for free sample printouts.

Above prices for mail orders only. Mail Order Dept. located in Jacksonville, OR. Our store showroom is at 126 NE F St., Grants Pass, OR. Store prices include service and will differ. No mail order sales at store. CALL ORDER DESK:

(800) 547-1289

TECHNICAL & OREGON:
(503) 899-7297

ORDERING INFORMATION: Minimum order $100. Money Orders, Cashier Checks or Bank Wire Welcomed. Visa and MC orders add 3%. Personal checks accepted (allow up to **20 days** to clear). All orders add 3% for shipping, handling and insurance. Include your telephone number. No COD's. Prices subject to change without notice. Order desk hours are 9 to 6 PST, 10 to 3 Saturdays.

Computer Exchange

THE MAIL ORDER DEPARTMENT OF
THE MICRO COMPUTER STORE
P O BOX 1380
Jacksonville, OR 97530

Hayes Stack™

Microcomputer Component Systems

At Hayes, we don't believe in second best. Or planned obsolescence. We believe in taking the state of the art to the limit. Our new Smartmodem, for example, is the most sophisticated 300-baud originate/answer modem you can buy. And yet, it is perhaps the easiest-to-use modem ever.

RS-232C Compatible. Smartmodem lets any RS-232C compatible computer or terminal communicate by phone with other computers and time-sharing systems located *anywhere in North America.* You get full and half-duplex operation with both Touch-Tone* *and* pulse dialing.

Auto-Answer/Dial/Repeat. Smartmodem can answer the phone, dial a number, receive and transmit data, and then hang up the phone – automatically! If desired, Smartmodem will even repeat the last command. You can depend on Smartmodem for completely unattended operation.

Completely Programmable. Smartmodem can be controlled using *any* programming language. Over 30 different commands can be written into your programs or entered directly from your keyboard.

Smartmodem also includes several switch-selectable features that let you tailor performance to your exact needs. You can "set it and forget it" for the ultimate in convenience.

Built-in Audio Monitor. Thanks to an internal speaker, you can actually listen to your connection being made. You'll know immediately if the line is busy or if you reached a wrong number – *and you don't even need a phone!*

Status at a Glance. Seven LED's indicate Smartmodem's current operating mode: auto-answer, carrier detect, off hook, receive data, send data, terminal ready and modem ready. You're never left in the dark!

Direct-Connect Design. Smartmodem is FCC registered for direct connection to any modular phone jack – there's no acoustic coupler to cause signal loss and distortion.

Smartmodem, Smart Buy. Professional quality features. Versatile performance. A full two-year limited warranty. A suggested retail price of only $279.

What more could you want? Perhaps the matching Hayes Stack Chronograph, an RS-232C compatible calendar/clock system.

Check out the Smartmodem wherever fine computer products are sold. And don't settle for anything less than Hayes.

Hayes

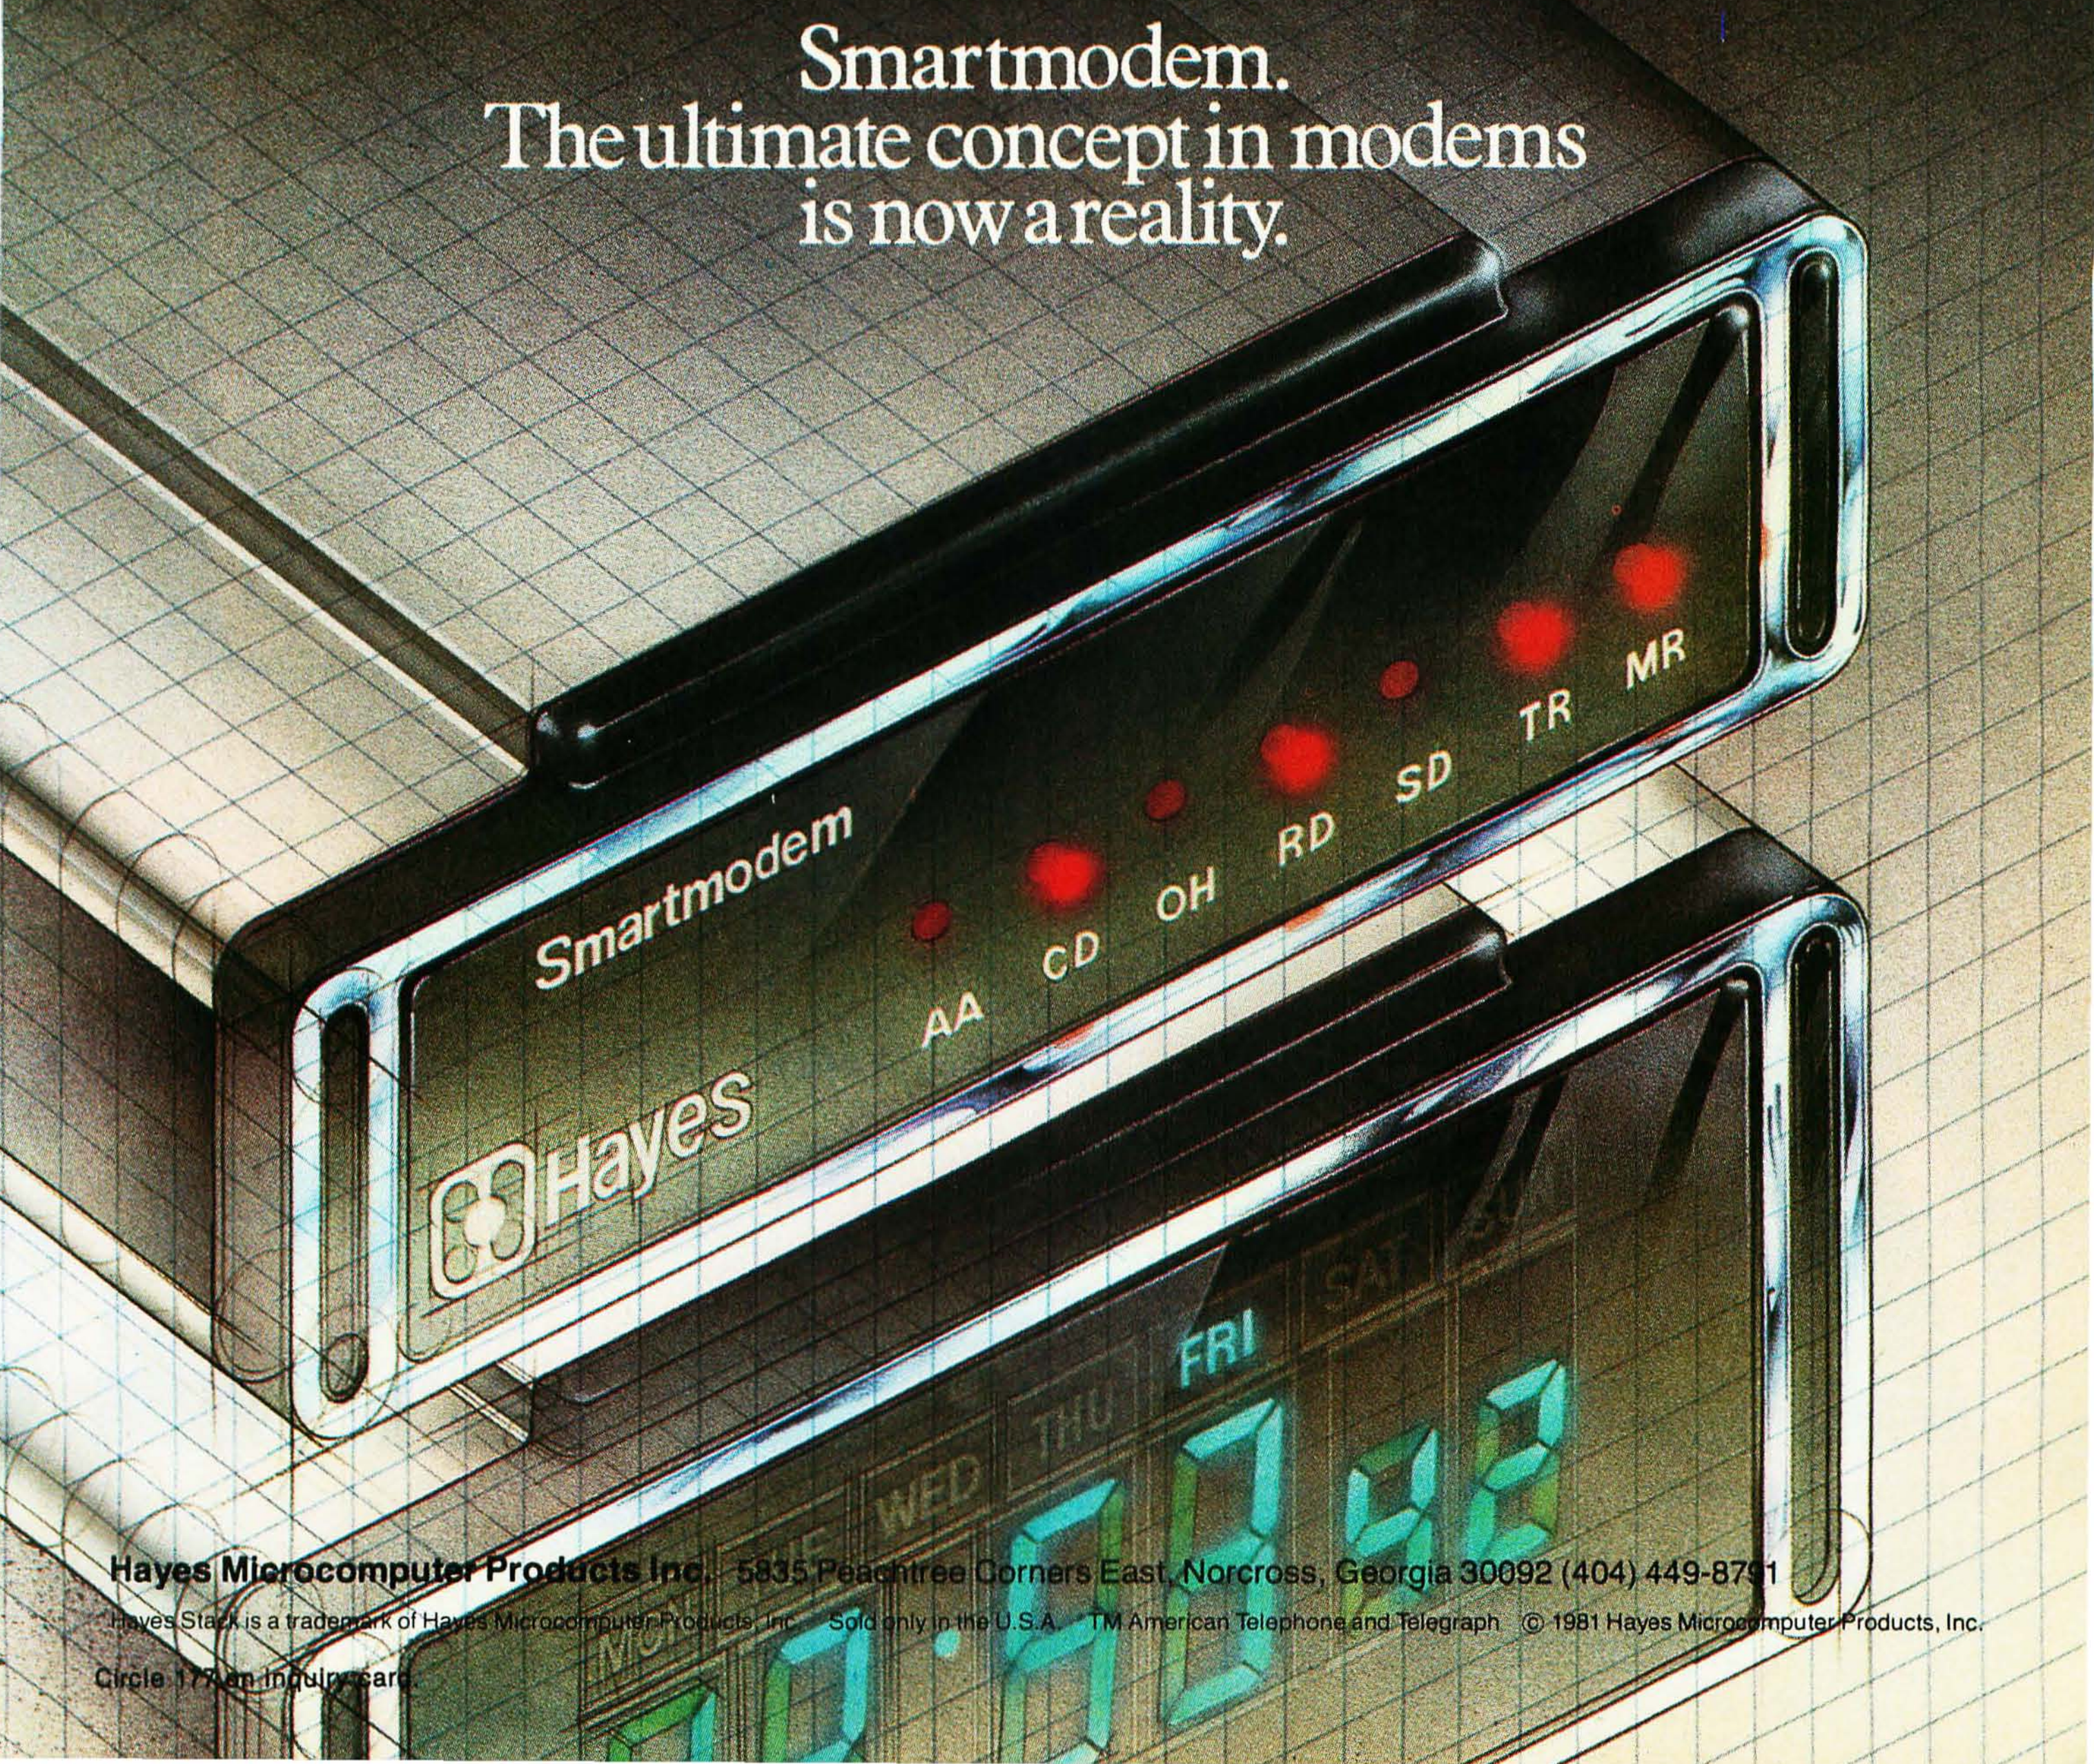

Hayes Microcomputer Products Inc. 5835 Peachtree Corners East, Norcross, Georgia 30092 (404) 449-8791

Hayes Stack is a trademark of Hayes Microcomputer Products, Inc. Sold only in the U.S.A. *TM American Telephone and Telegraph © 1981 Hayes Microcomputer Products, Inc.

Circle 177 on inquiry card.


NEC
Character Display
PULL ON VOL
Month
10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160
New Product (P) / Monthly R.O.I. ($000)
NEC I/O Unit PC-8012A
NEC PC-8001A

The end of the compromise.

Shake hands with the PC-8001A system from NEC AMERICA. It combines the most-wanted features of today's most popular microcomputers, together with some added wonders of its own.

To learn more, please see us in person at the NCC (Space 4720), the CES (Space 2069), or contact your authorized NEC AMERICA dealer.

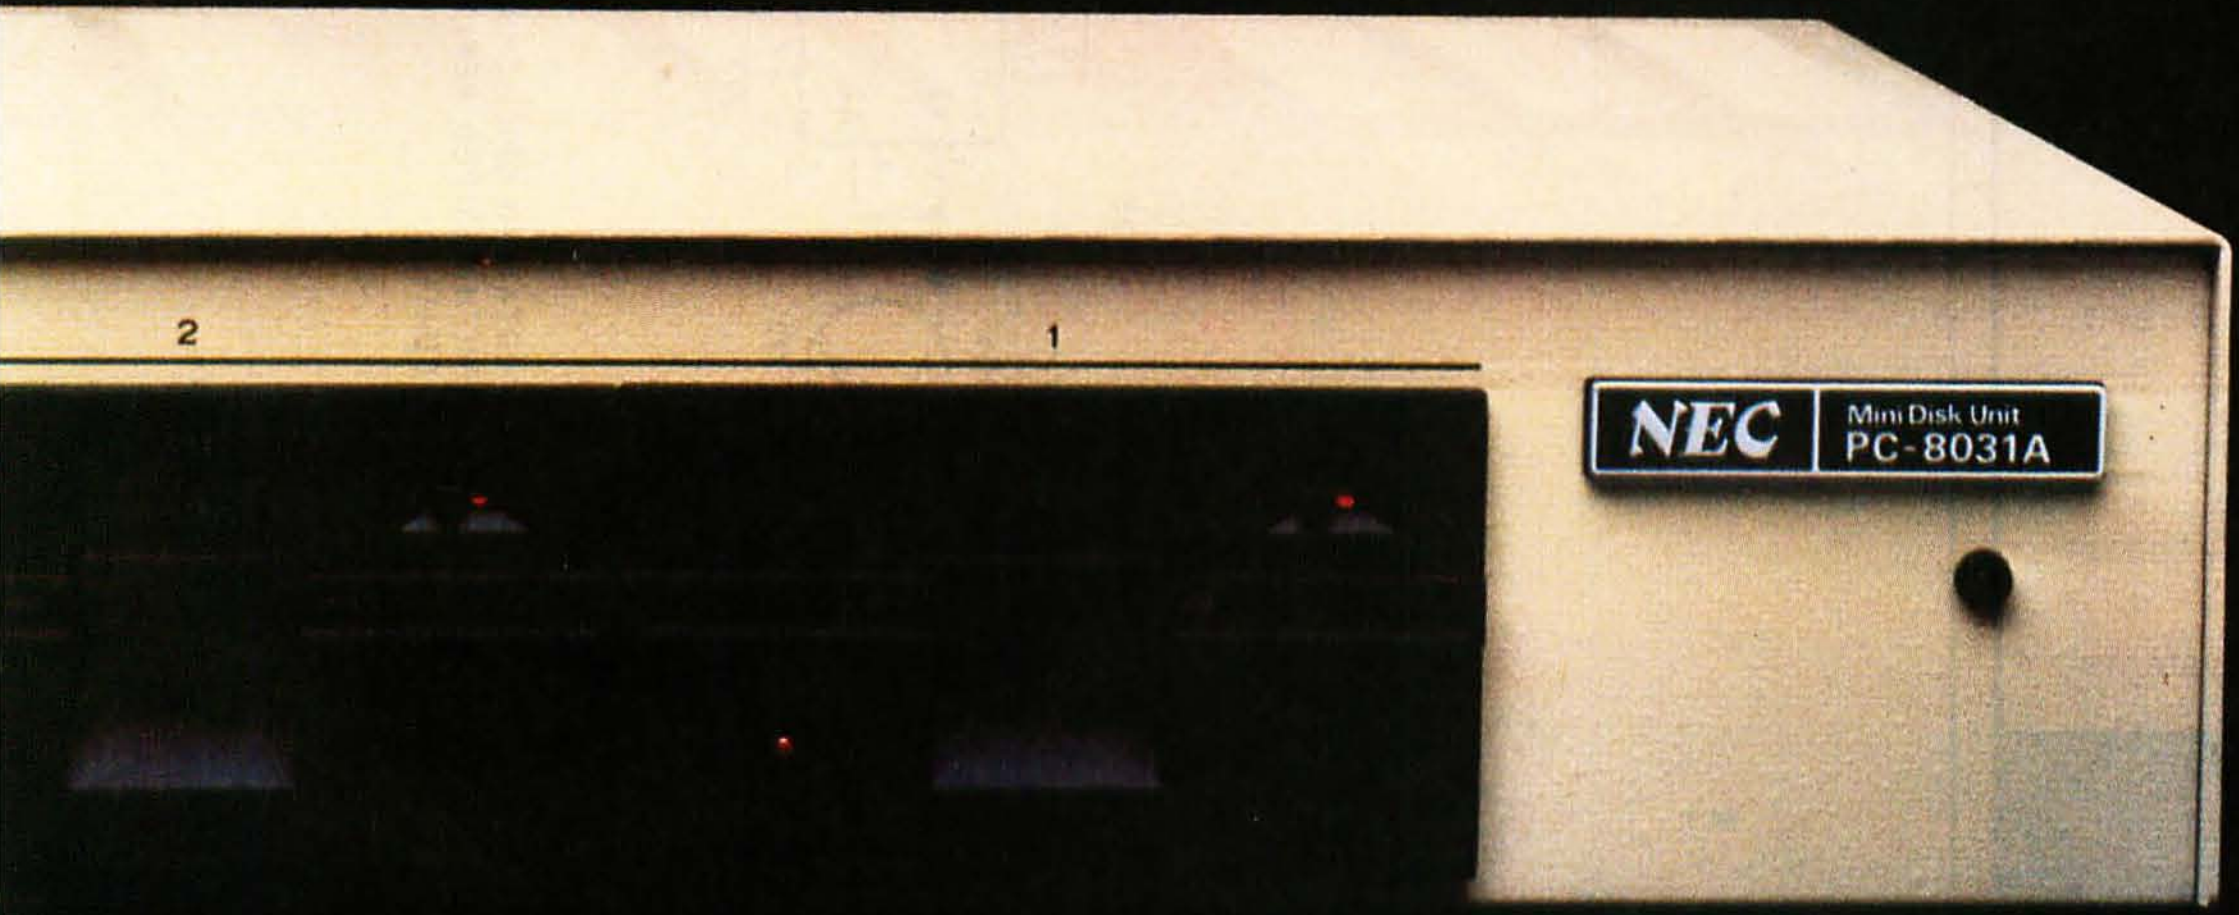

NEC

NEC America, Inc.
1401 Estes Avenue
Elk Grove Village, IL 60007

Circle 281 on inquiry card.

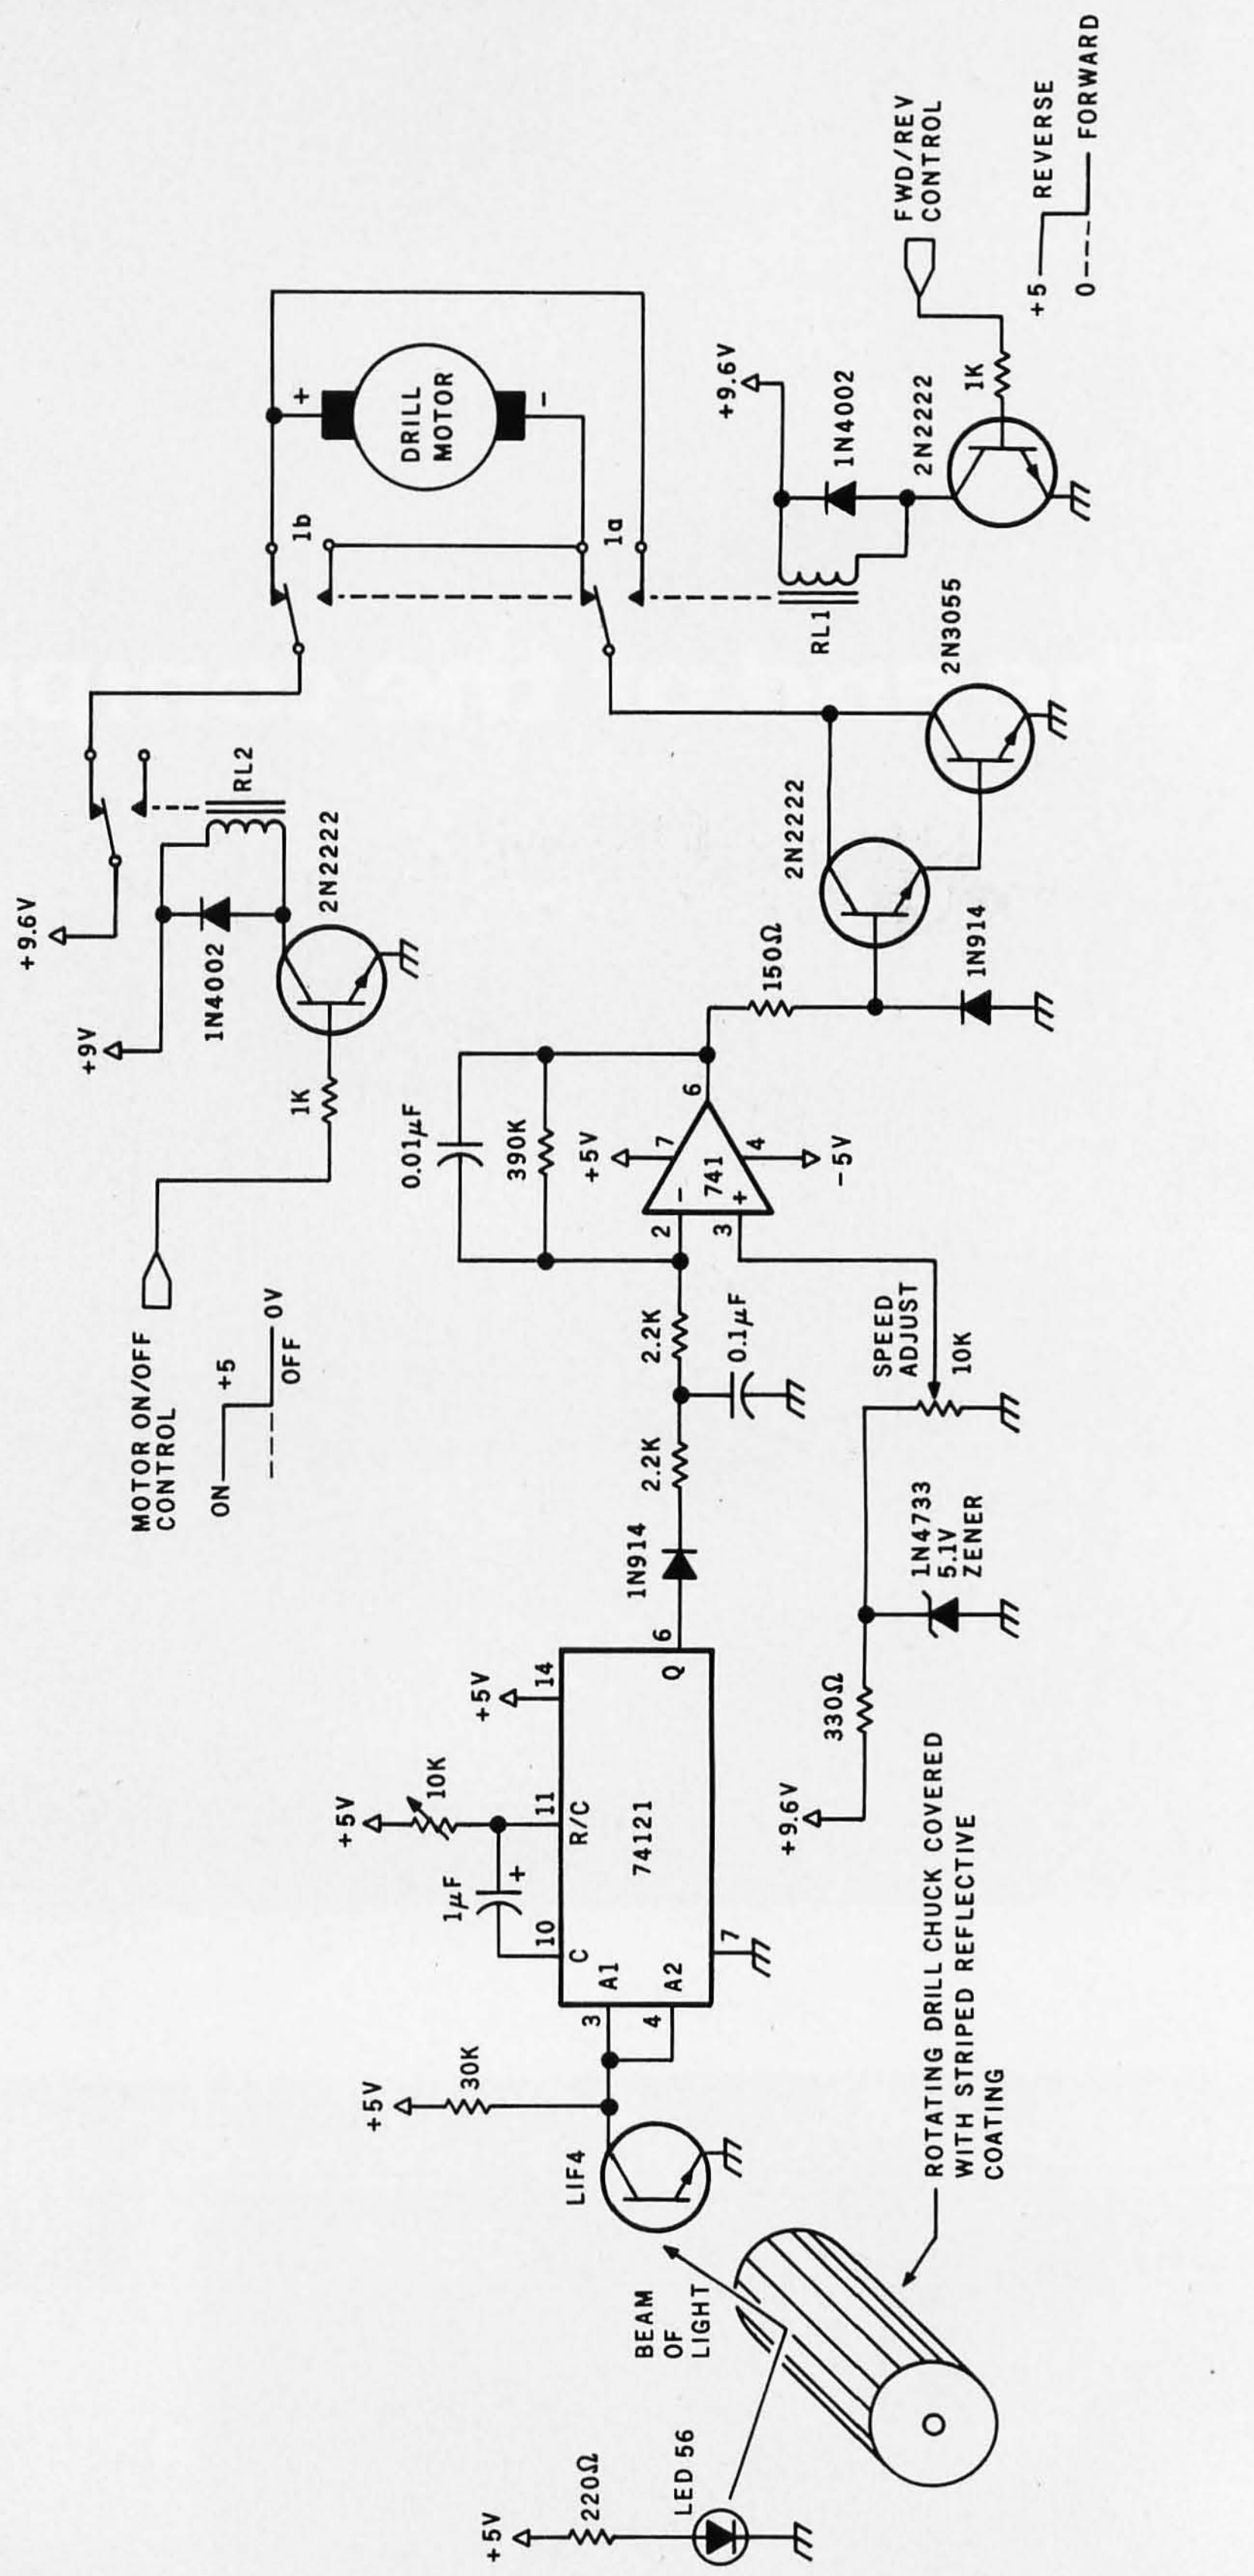

Figure 14: *The motor-control system of the platform, featuring incremental-motion control and reversing capability. Two such circuits were used, one for each motor. Values of the components were experimentally chosen for use with the motor from a Black & Decker Model 9001 portable drill. The 2N3055 transistor must be mounted on a heat sink. The L1F4 phototransistor is made by General Electric.*

SOLVE THE STORAGE SHORTAGE

with ten multi-user megabytes

CompuStar's 8-inch Winchester

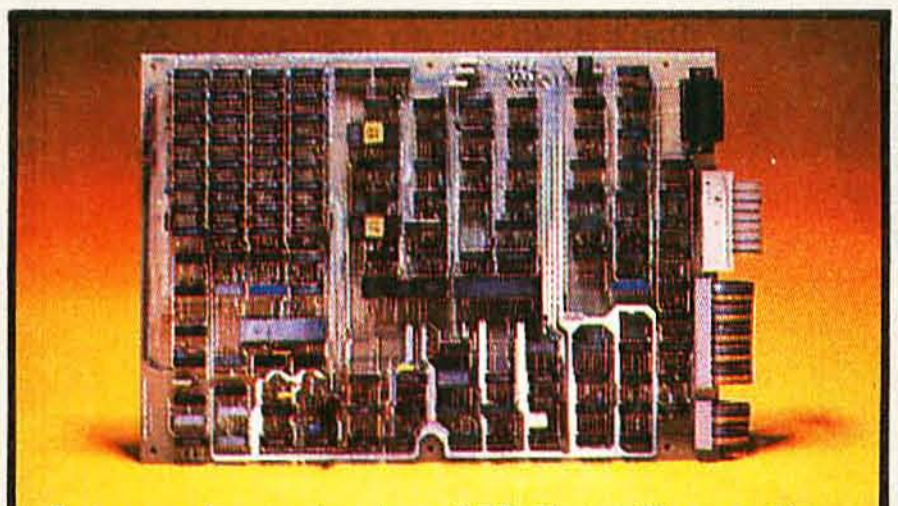

Intertec's exclusive 255 User Controller

CompuStar Cable Assembly

If you could think of just one way to improve our phenomenally popular SuperBrain, what would it be? More disk storage? Well, we already thought about it. And for only a few thousand dollars for a whopping 10 megabytes of lightning-fast storage, it's nothing short of another major breakthrough! From the company that wrote the book on price/performance . . . Intertec.

Our New CompuStar™ 10 Megabyte Disk Storage System (called a DSS) features an 8 inch Winchester drive packaged in an attractive, compact desktop enclosure. Complete with disk, controller and power supply. Just plug it into the Z80 adaptor of your SuperBrain and turn it on.* It's so quiet, you'll hardly know it's there. But, you'll quickly be astounded with its awesome power and amazing speed.

The secret behind our CompuStar DSS is its unique controller/multiplexor. It allows many terminals to "share" the resources of a single disk. So, not only can you use the DSS with your SuperBrain, you can configure multiple user stations using our new series of CompuStar™ terminals, called Video Processing Units or VPU's™.

Four CompuStar VPU's are available. At prices starting at less than $2,500. Some models are designed to operate as stand-alone microcomputers, with internal disk storage. Just like your SuperBrain. Each model features its own 64K of RAM and can be "daisy-chained" into a powerful multi-user network. Just connect one VPU into the next. Using easy-to-install cable assemblies. Connect up to 255 users in a single system. One at a time. As you need them.

Whether you need an extra 10 megabytes for your SuperBrain or an enormous multi-user network, the CompuStar™ DSS solves your storage shortage problems. Sensibly. And economically. Plus, your investment is protected by a nationwide service network with outlets in most major U.S. cities. Providing efficient on-site or depot maintenance.

Get a demonstration of this extraordinary new system today. Call or write now for the name and address of your nearest CompuStar dealer.

INTERTEC
DATA
SYSTEMS®
2300 Broad River Rd. Columbia, S.C. 29210
(803) 798-9100 TWX: 810-666-2115

---

*Some models require hardware/software modification.

Text continued from page 92:

The forward/reverse relays set the intended motor directions, and the power-on/off relay starts both motors. As long as the power is on, the platform goes in the direction set by the two forward/reverse relays.

Computer direction of the relays is accomplished with 3 control-signal bits from a parallel output port. For wireless remote-control operation, the communication control link presented in my article "A Computer-Controlled Tank" (BYTE, February 1981, page 44) can easily be adapted to this task.

In Conclusion

You may never see my contraption again. I don't consider this the start of a serious robot-building project. The total expense for the platform was under $50. It was just an experiment. I had always wanted to try using inexpensive electric-drill motors as servos. While I had mixed success, it did serve as a vehicle for a general article on DC-motor control.

Building the platform was the only way to truly test the theory. I was surprised that the final unit, weighing 10 pounds, had no problems with insufficient driving torque (unfortunately, the small batteries lasted only about 5 minutes in constant use). Even with an additional 5 pounds of payload (a bottle of Hennessy cognac and two heavy BYTEs), it worked well.

I don't expect many of you will try to build a motorized platform. I do, however, anticipate that more of you will consider using permanent-magnet DC motors for future designs where you thought only stepper motors could be used. If you already own a battery-operated drill, connect it to the control circuit of figure 6 or figure 9. You will be surprised at the capabilities it demonstrates.

Next Month:

Add a speech-synthesizer circuit-board assembly to your computer. ■

Editor's Note: *Steve often refers to previous Circuit Cellar articles as reference material for the articles he presents each month. These articles are available in reprint books from BYTE Books, 70 Main St, Peterborough NH 03458.* Ciarcia's Circuit Cellar *covers articles appearing in BYTE from September 1977 thru November 1978.* Ciarcia's Circuit Cellar, Volume II *presents articles from December 1978 thru June 1980.*

Many Circuit Cellar projects are available as kits. To receive a complete list, circle 100 on the Reader Service card.

References

1. Berger, R C. "Electric Motor Drive Controls." *Process Instruments and Controls Handbook*, D M Considine, editor. New York: McGraw-Hill Book Company, 1974.
2. *DC Motors, Servo Controls, and Servo Systems.* Hopkins MN: Electro-Craft Corporation, 1975.
3. Fitzgerald, A E and Charles Kingsley. *Electric Machinery.* New York: McGraw-Hill Book Company, 1952.
4. Gardner, Floyd M. *Phase-Lock Techniques.* New York: John Wiley and Sons, 1966.
5. McIntyre, R. *Electric Motor Control Fundamentals, Second Edition.* New York: McGraw-Hill Book Company, 1966.
6. Millermaster, R A, editor. *Harwood's Control of Electric Motors, Fourth Edition.* New York: John Wiley and Sons, 1970.
7. Sweer, Leon, Thomas Dwyer, and Margot Critchfield. "Controlling Small DC Motors with Analog Signals." BYTE, August 1977, page 18.
8. Walton, Robert L. "Controlling DC Motors." BYTE, July 1978, page 72.

Circle 156 on inquiry card. →

Pump Up Your TRS-80 with the ES/F Mass Storage System

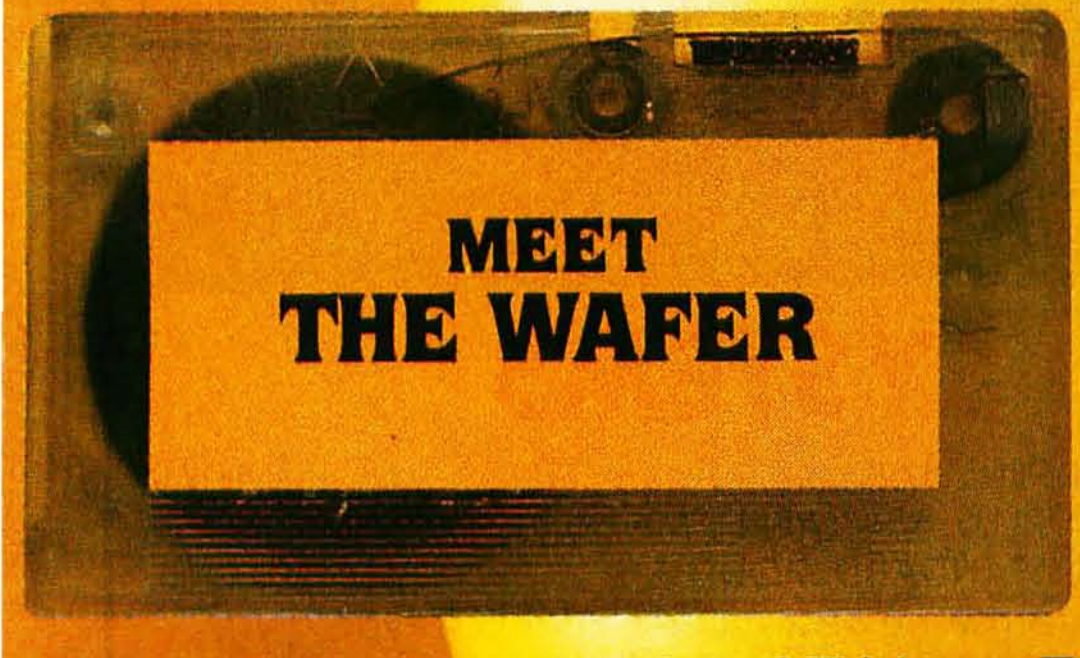

▲ Actual Size

Actual Thickness ▼

THESE FACTS SPEAK FOR THEMSELVES!

	CASSETTE	ES/F	MINI-DISK
SPEED (Seconds to load "Blackjack")	56	6 (5' wafer)	6½
CAPACITY (thousands of bytes)	38 (C-20)	64 (75' wafer)	59 (TRSDOS)
RELIABILITY (Designed for digital data?)	NO	YES	YES
SYSTEM COST (First unit plus interface)	$60	$250	$800
MEDIA COST (in quantities of ten)	$3.10 cassette	$3.00 wafer	$3.20 disk

Let's face it. Cassette players were not designed to store digital data and programs. That's why we designed a digital storage system using a continuous tape loop: the Exatron Stringy/Floppy (ES/F) and the Wafer. There's no expensive interface to buy—the ES/F comes ready to pump up your TRS-80.*

Once your TRS-80* is pumped up by our ES/F . . . you won't want to deflate it. We're so sure, that we offer an unconditional 30-day money-back guarantee and a one-year limited warranty. Over 2,000 TRS-80* owners have met the wafer . . . why don't you?

EXATRON'S STRINGY/FLOPPY...

SPEED, CAPACITY AND RELIABILITY FOR ONLY $249.50

CALL
OUR HOTLINE
(800)-538-8559

IN CALIFORNIA,
CALL (408)-737-7111

exatron, inc.
181 Commercial Street
Sunnyvale, Calif. 94086

*TRS-80 is a registered trademark of Tandy Corp.

consumer computers mail order

PRINTERS

	ANADEX DP-9500 W/2K BUFFER	1375
	ANADEX DP-9501 W/2K BUFFER	1450
	BASE 2 800-B	599
	C. ITOH STARWRITER 25 CPS	1750
	C. ITOH STARWRITER 45 CPS	2450
A.	CENTRONICS 737	825
	EPSON MX-70 W/GRAPHICS	449
B.	EPSON MX-80 132 col.	620
	PAPER TIGER IDS-445 W/DOT PLOT	749
C.	PAPER TIGER IDS-460 W/DOT PLOT	1195
	PAPER TIGER IDS-560 W/DOT PLOT	1495
D.	QUME SPRINT 5/45	2550
	SILENTYPE W/INTERFACE	549

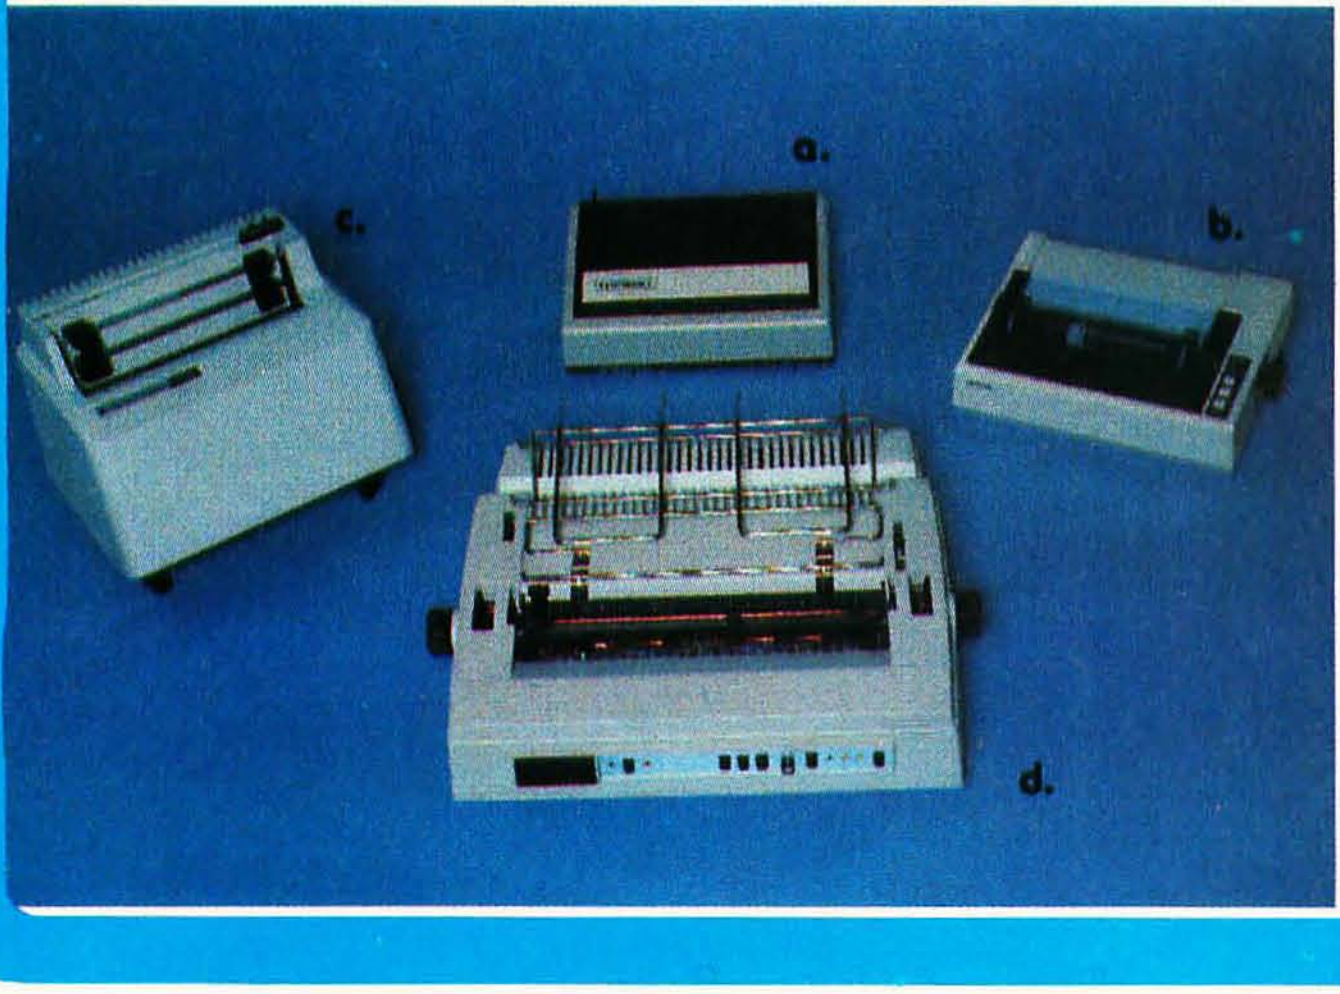

SYSTEMS

A.	APPLE II PLUS 16K	1049
	APPLE II PLUS 48K (APPLE Memory)	1189
	APPLE II STANDARD MODELS	CALL
	These are the newest models with FCC type approval to prevent RF interference.	
B.	DISK II DRIVE & CONTROLLER	529
	This model includes DOS 3.3 16 sector	
	DISK II DRIVE ONLY (ADD-ON)	445
C.	CHALLENGER 4P by OHIO SCIENTIFIC	699
	C4PMF (MINI FLOPPY SYSTEM)	1599
	CIP MODEL II	449
	SARGON II (DISK OR CASSETTE)	35
	FIG FORTH (DISK ONLY)	69
D.	PMC-80 THE 'TRS-80 WORKALIKE'	629
	16K LEVEL II W/PROGRAM RECORDER	
	CALL OR WRITE FOR MORE INFORMATION	
E.	EXIDY SORCERER II	CALL
	AVAILABLE IN 16K, 32K & 48K MODELS	
	S-100 EXPANSION UNIT	375
	WORD PROCESSING PAC	179
	DEVELOPMENT PAC	89
F.	ATARI 800 16K	799
	ATARI 400 16K	499
	810 DISK DRIVE	499
	410 PROGRAM RECORDER	69
	850 INTERFACE MODULE	175

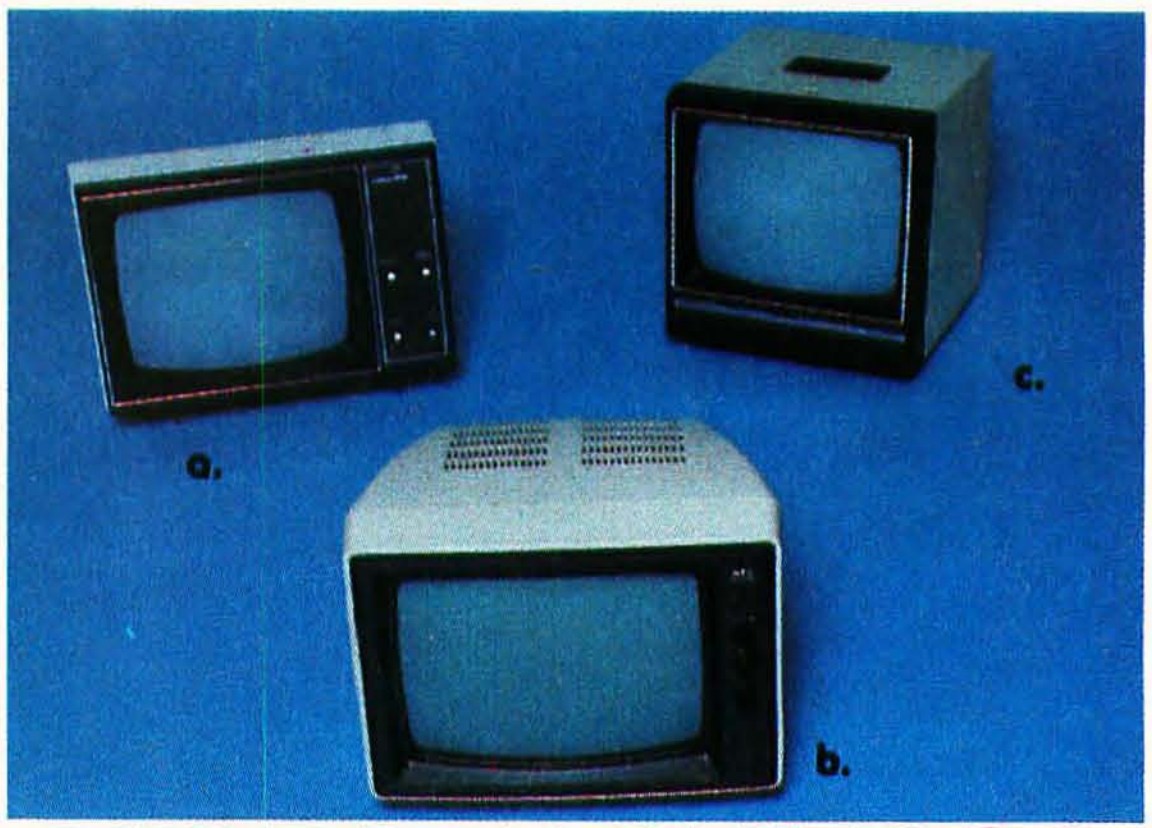

VIDEO MONITORS

A.	AMDEX/LEEDEX VIDEO-100 12" B&W	139
	HITACHI 13" COLOR	389
B.	NEC 12" P31 GREEN PHOSPHER	CALL
	PANACOLOR 10" COLOR	375
	SANYO 9" B&W	179
C.	SANYO 12" B&W	255
	SANYO 12" P31 GREEN PHOSPHER	295
	SANYO 13" COLOR	445

SHOPPING MAIL ORDER? CALL US TODAY!

We probably have what your're looking for in stock at an incredible price. Our company is an authorized dealer for sales and service for Apple Computer, Atari and Ohio Scientific. If you receive a defective product from us we will repair or replace (at our option) any product in warranty. Our Service Center will repair all Apple Computer products, in or out of warranty, whether it was purchased from us or another dealer. (call for more details)

PHONE ORDERS IN CALIFORNIA, ALASKA, HAWAII & FOREIGN	**(714)698-8088**
SHIPPING INFORMATION OR BACKORDERS PLEASE CALL	**(714)698-0260**
SERVICE CENTER AND FOR TECHNICAL INFORMATION	**(714)460-6502**

TELEX **695-000** ANS:BETA ATTN:CCMO

Order Dept.
Open Every Day
9 a.m. - 6 p.m.
P.S.T.

TOLL FREE ORDER LINE
800-854-6654

We honor these cards

APPLE HARDWARE

TOP FIVE SELLERS

LANGUAGE SYSTEM W/PASCAL	425
SILENTYPE PRINTER W/INTERFACE	549
HAYES MICROMODEM II	319
VIDEX VIDEOTERM 80 w/graphics	335
Z-80 MICROSOFT CARD	299

APPLE COMPUTER INC.

DISK II DRIVE ONLY	445
INTEGER OR APPLESOFT II FIRMWARE CARD	155
GRAPHICS TABLET	649
PARALLEL PRINTER INTERFACE CARD	155
HI-SPEED SERIAL INTERFACE CARD	155
COMMUNICATIONS INTERFACE CARD	185
SMARTERM 80 COLUMN VIDEO CARD	335

MOUNTAIN COMPUTER INC.

MUSIC SYSTEM (16 Voices)	479
A/D + D/A INTERFACE	319
EXPANSION CHASSIS	555
INTROL/X-10 SYSTEM	249
CLOCK/CALENDAR CARD	239
SUPERTALKER SD-200	249
ROMPLUS+ CARD	135
ROMWRITER CARD	155

CALIFORNIA COMPUTER SYSTEMS

CLOCK/CALENDAR MODULE	109
GPIB IEEE-488 CARD	259
ASYNCHRONOUS SERIAL INTERFACE CARD	129
CENTRONICS PARALLEL INTERFACE CARD	99
We carry all CCS hardware.	Please call

MISC. APPLE HARDWARE

16K RAM UPGRADE (Apple, TRS-80, Exidy)	189
16K RAM CARD MICROSOFT	189
ABT NUMERIC KEYPAD (old or new kybrd)	115
ABT BAR CODE READER WAND	179
ALF 3 VOICE MUSIC CARD	229
ALF 9 VOICE MUSIC CARD	169
ALPHA SYNTAURI KEYBOARD SYSTEM	1399
BIT 3 FULL VIEW 80 CARD	349
CAT NOVATION ACOUSTIC MODEM	169
CORVUS 10MB HARD DISK	CALL
LAZER LOWER CASE PLUS	50
MICRO-SCI DISK DRIVES	CALL
PAYMAR LOWER CASE (old or new kybrd)	55
RADCOM AMATEUR RADIO INTERFACE CARD	189
SPEECHLINK 2000 HEURISTICS	229
SSM AIO SERIAL/PARALLEL CARD A&T	189
SUP-R-TERMINAL 80 COL. CARD	339
SVA 8 INCH FLOPPY DISK CONTROLLER	345
VERSAWRITER DIGITIZER PAD	229
VIDEX KEYBOARD ENHANCER	115
We stock much more than listed.	Please call.

APPLE SOFTWARE

APPLE COMPUTER INC.

DOS TOOLKIT	65
APPLEPLOT	60
TAX PLANNER	99
APPLE WRITER	65
APPLE POST	45
DOW JONES PORTFOLIO EVALUATOR	45
DOW JONES NEWS & QUOTES REPORTER	85
APPLE FORTRAN	165
APPLE PILOT	129
DOS 3.3 UPGRADE	49
MUSIC THEORY	45
THE CASHIER Retail Mngmnt & Inv.	199
THE CONTROLLER Gen. Bus. Sys	519

MISC APPLICATIONS PACKAGES

VISICALC	125
DESKTOP PLAN II	169
CCA DATA MANAGMENT DMS	85
EASYWRITER WORD PROCESSOR	225
EASYMOVER MAIL SYSTEM	225
EASYMAILER LETTER WRITER	225
ASCII EXPRESS	65
MICROSOFT FORTRAN	185
MICROSOFT COBOL	695
MICROSOFT BASIC COMPILER	375
SUPER TEXT II	139
PROGRAMMA APPLE PIE	119
THE LANDLORD Apt Mngmnt package	649
PEACHTREE BUSINESS SOFTWARE	CALL
TAX PREPARER by HowardSoft	89
APPLEBUG ASSEM/DISASSM/EDITOR	75
3-D GRAPHICS By Bill Budge	53
SUPER FORTH	49

TOP TEN GAMES

APPLE GALAXIAN	23
FLIGHT SIMULATOR	34
THE WIZARD AND THE PRINCESS	32
COSMOS MISSION (SPACE INVADERS)	24
SARGON II CHESS	32
HI-RES FOOTBALL	39
COMPUTER QUARTERBACK	39
ADVENTURE BY MICROSOFT	27
PHANTOMS FIVE	39
REVERSAL (OTHELLO)	34

CALL OR WRITE FOR A COMPLETE SOFTWARE LIST

ORDERING INFORMATION: Phone Orders invited using VISA, MASTERCARD, AMERICAN EXPRESS, DINERS CLUB, CARTE BLANCHE, or bank wire transfer. Credit cards subject to service charge: 2% for VISA & MC, 5% for AE, DC & CB. Mail Orders may send credit card account number (include expiration date), cashiers or certified check, money order, or personal check (allow 10 days to clear). Please include a telephone number with all orders. Foreign orders (excluding Military PO's) add 10% for shipping, all funds must be in U.S. dollars. Shipping, handling and insurance in U.S. add 3% (minimum $4.00). California residents add 6% sales tax. We accept COD's under $500. OEM's, Institutions & Corporations please send for written quotation. All equipment is subject to price change and availability without notice. All equipment is new and complete with manufacturer warranty (usually 90 days). We cannot guarantee merchantibility of any products. We ship most orders within 2 days.

WE ARE A MEMBER OF THE BETTER BUSINESS BUREAU AND THE CHAMBER OF COMMERCE
SHOWROOM PRICES MAY DIFFER FROM MAIL ORDER PRICES.
PLEASE SEND ORDERS TO:
CONSUMER COMPUTERS MAIL ORDER 8314 PARKWAY DRIVE, GROSSMONT SHOPPING CENTER NORTH LA MESA CALIF. 92041

Circle 102 on inquiry card.

Improve TRS-80 Disk Operation

Add an External Data Separator

(1a)

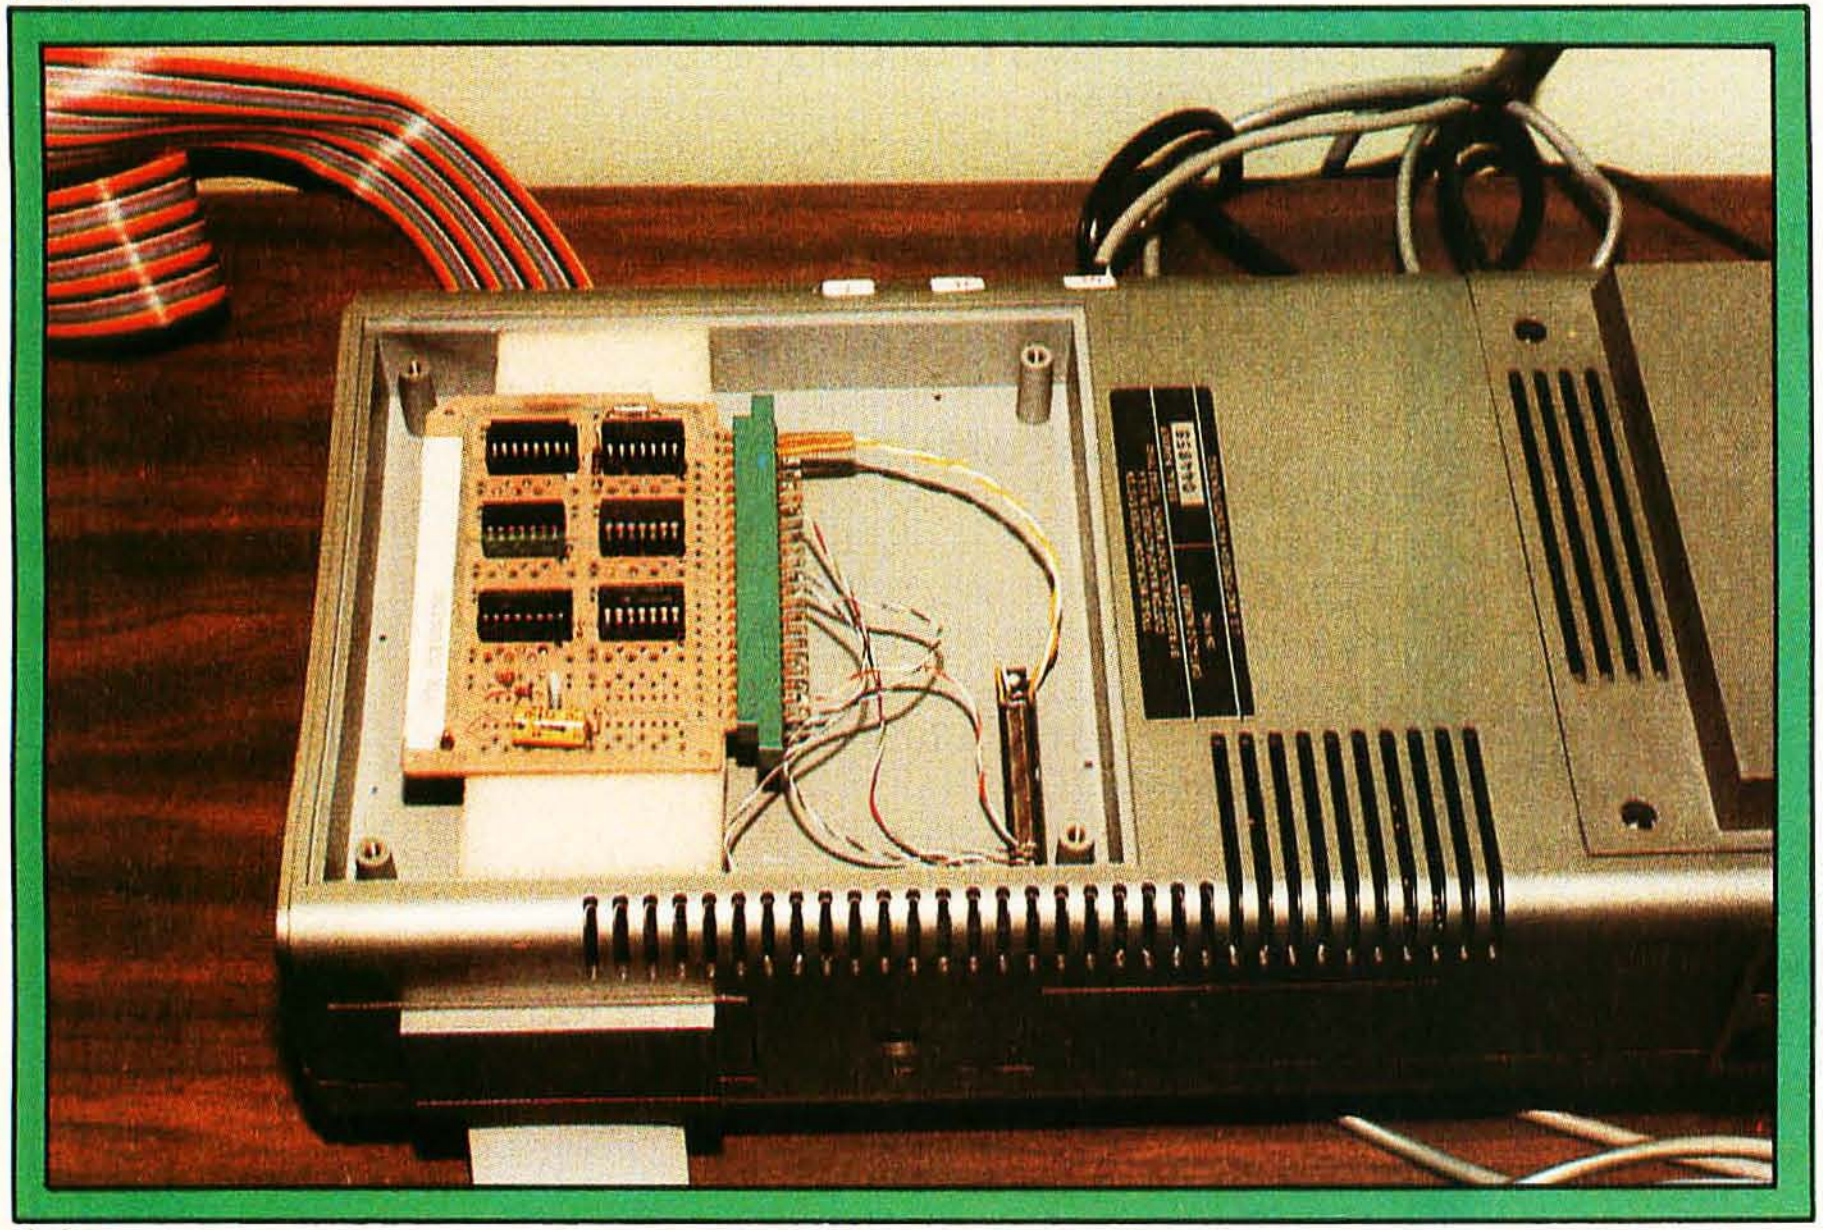

(1b)

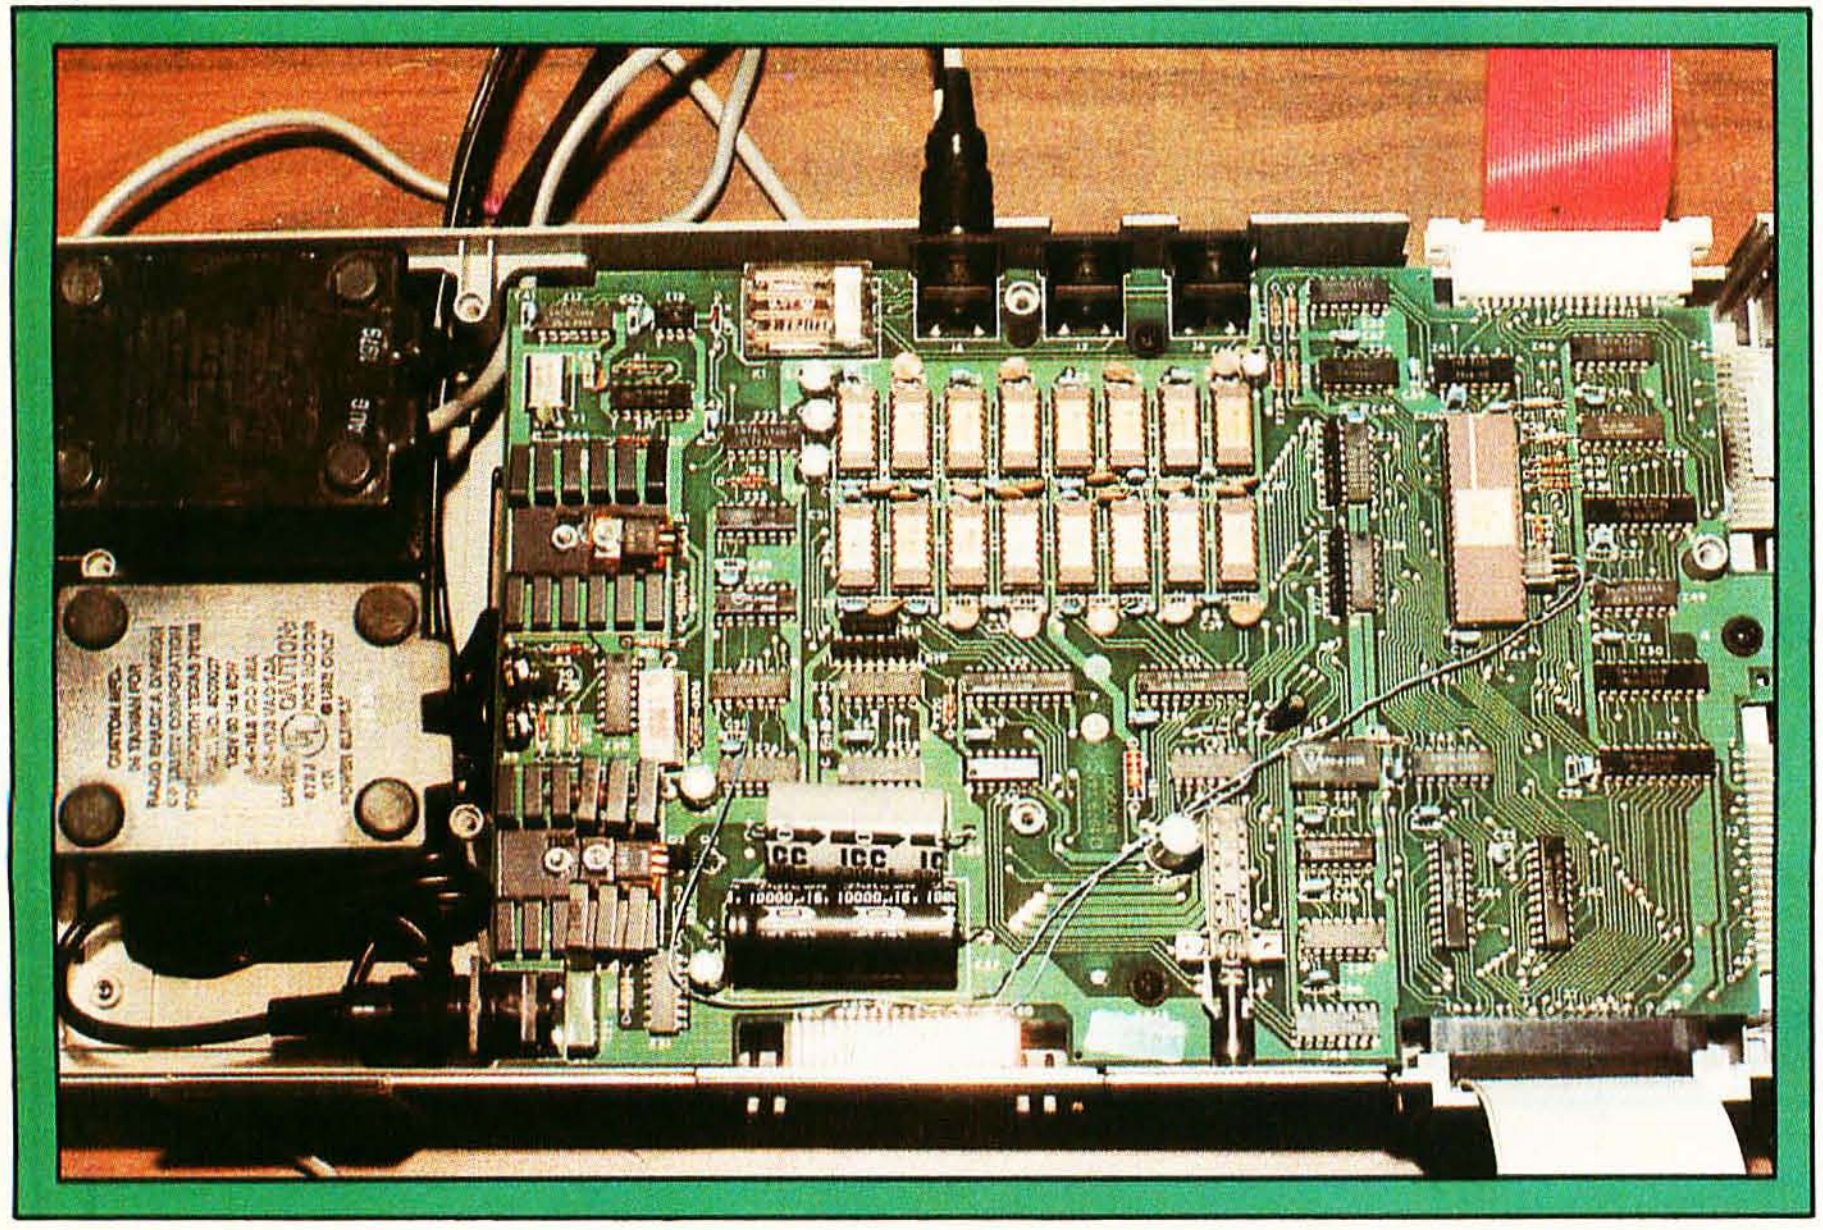

Photo 1: *External data separator circuitry as installed in the Radio Shack TRS-80 Expansion Interface. Most of the integrated circuits can occupy the space intended for the RS-232 interface (photo 1a). Irreversible changes can be avoided by bending a few pins on the FD1771 to obtain the necessary signals (see the wires leading from the FD1771, under the red cable, in photo 1b).*

Ken Kline
3821 Penitencia Creek Rd
San Jose CA 95132

When I first added a floppy-disk drive to my Radio Shack TRS-80 Model I computer, I was very disappointed in its operation. My records indicated that, on the average, I was getting an error for every four disk accesses. These errors were independent of the type of access (ie: they occurred while accessing programs, data files, utilities, and even the bootstrap loading routine). In desperation, I called the Tandy Corporation in Fort Worth, Texas, and was told to use a better grade of disk. I tried this and noticed an improvement (to one error in eight accesses), but the lack of reliability was intolerable.

Discussing my problem with owners of other home computer systems, I came to the conclusion that the FD1771-01 floppy-disk controller part was the culprit. Don't misunderstand, I am not downgrading the FD1771. If you have studied the specifications and application notes of the FD1771 as much as I have you will realize that it is quite a marvelous piece of silicon. However, quoting from Western Digital Corporation's *FD1771-01 Application Notes* (document Number A0104, page 2) "In order to maintain an error rate better than 1 in 10^8, an external data separator is recommended."

The data separator that I finally ended up with is shown schematically in figure 1. It is a modification of one of the external data separators recommended by Western Digital (as

BMC's best seller newly available with superb functional versatility

VIDEO DISPLAY
12 inch
80 ch × 25 line
80 ch × 20 line
40 ch × 25 line
40 ch × 20 line
Selectable by Programming
Color (8 colors)/Green
Smooth Scrolling

- **FUNCTION KEY**
  Programmable
  10 Keys
- **FLOPPY DISC**
  5 inch × 2 deck, 280 KB/deck
  Dual sided — Double density
- **SUPER FUNCTION KEY**
  Programmable
  10 Keys
- **PRINTER**
  Dot Impact
  80 ch/sec.
  80 ch/line, 40 ch/line
  Graphic Mode
  Alphabets (capital/small), Numerics, Katakana
  Various Symbols, Hiragana, Kanji
  Roll Paper/Sproket Paper
  3 Copies

Dimensions: 510W × 683D × 505H mm (Color)
510W × 608D × 505H mm (Green)
Input Voltage: AC 117V/220V ±10% 50/60Hz
Option: Light pen Rom Cartridge

BMC USA INC.

Suite 600, Union Bank Bldg.
11222 La Cienega Blvd., Inglewood CA 90304 USA
Tel: 213-641-4588, Telex: 182379 bmcing

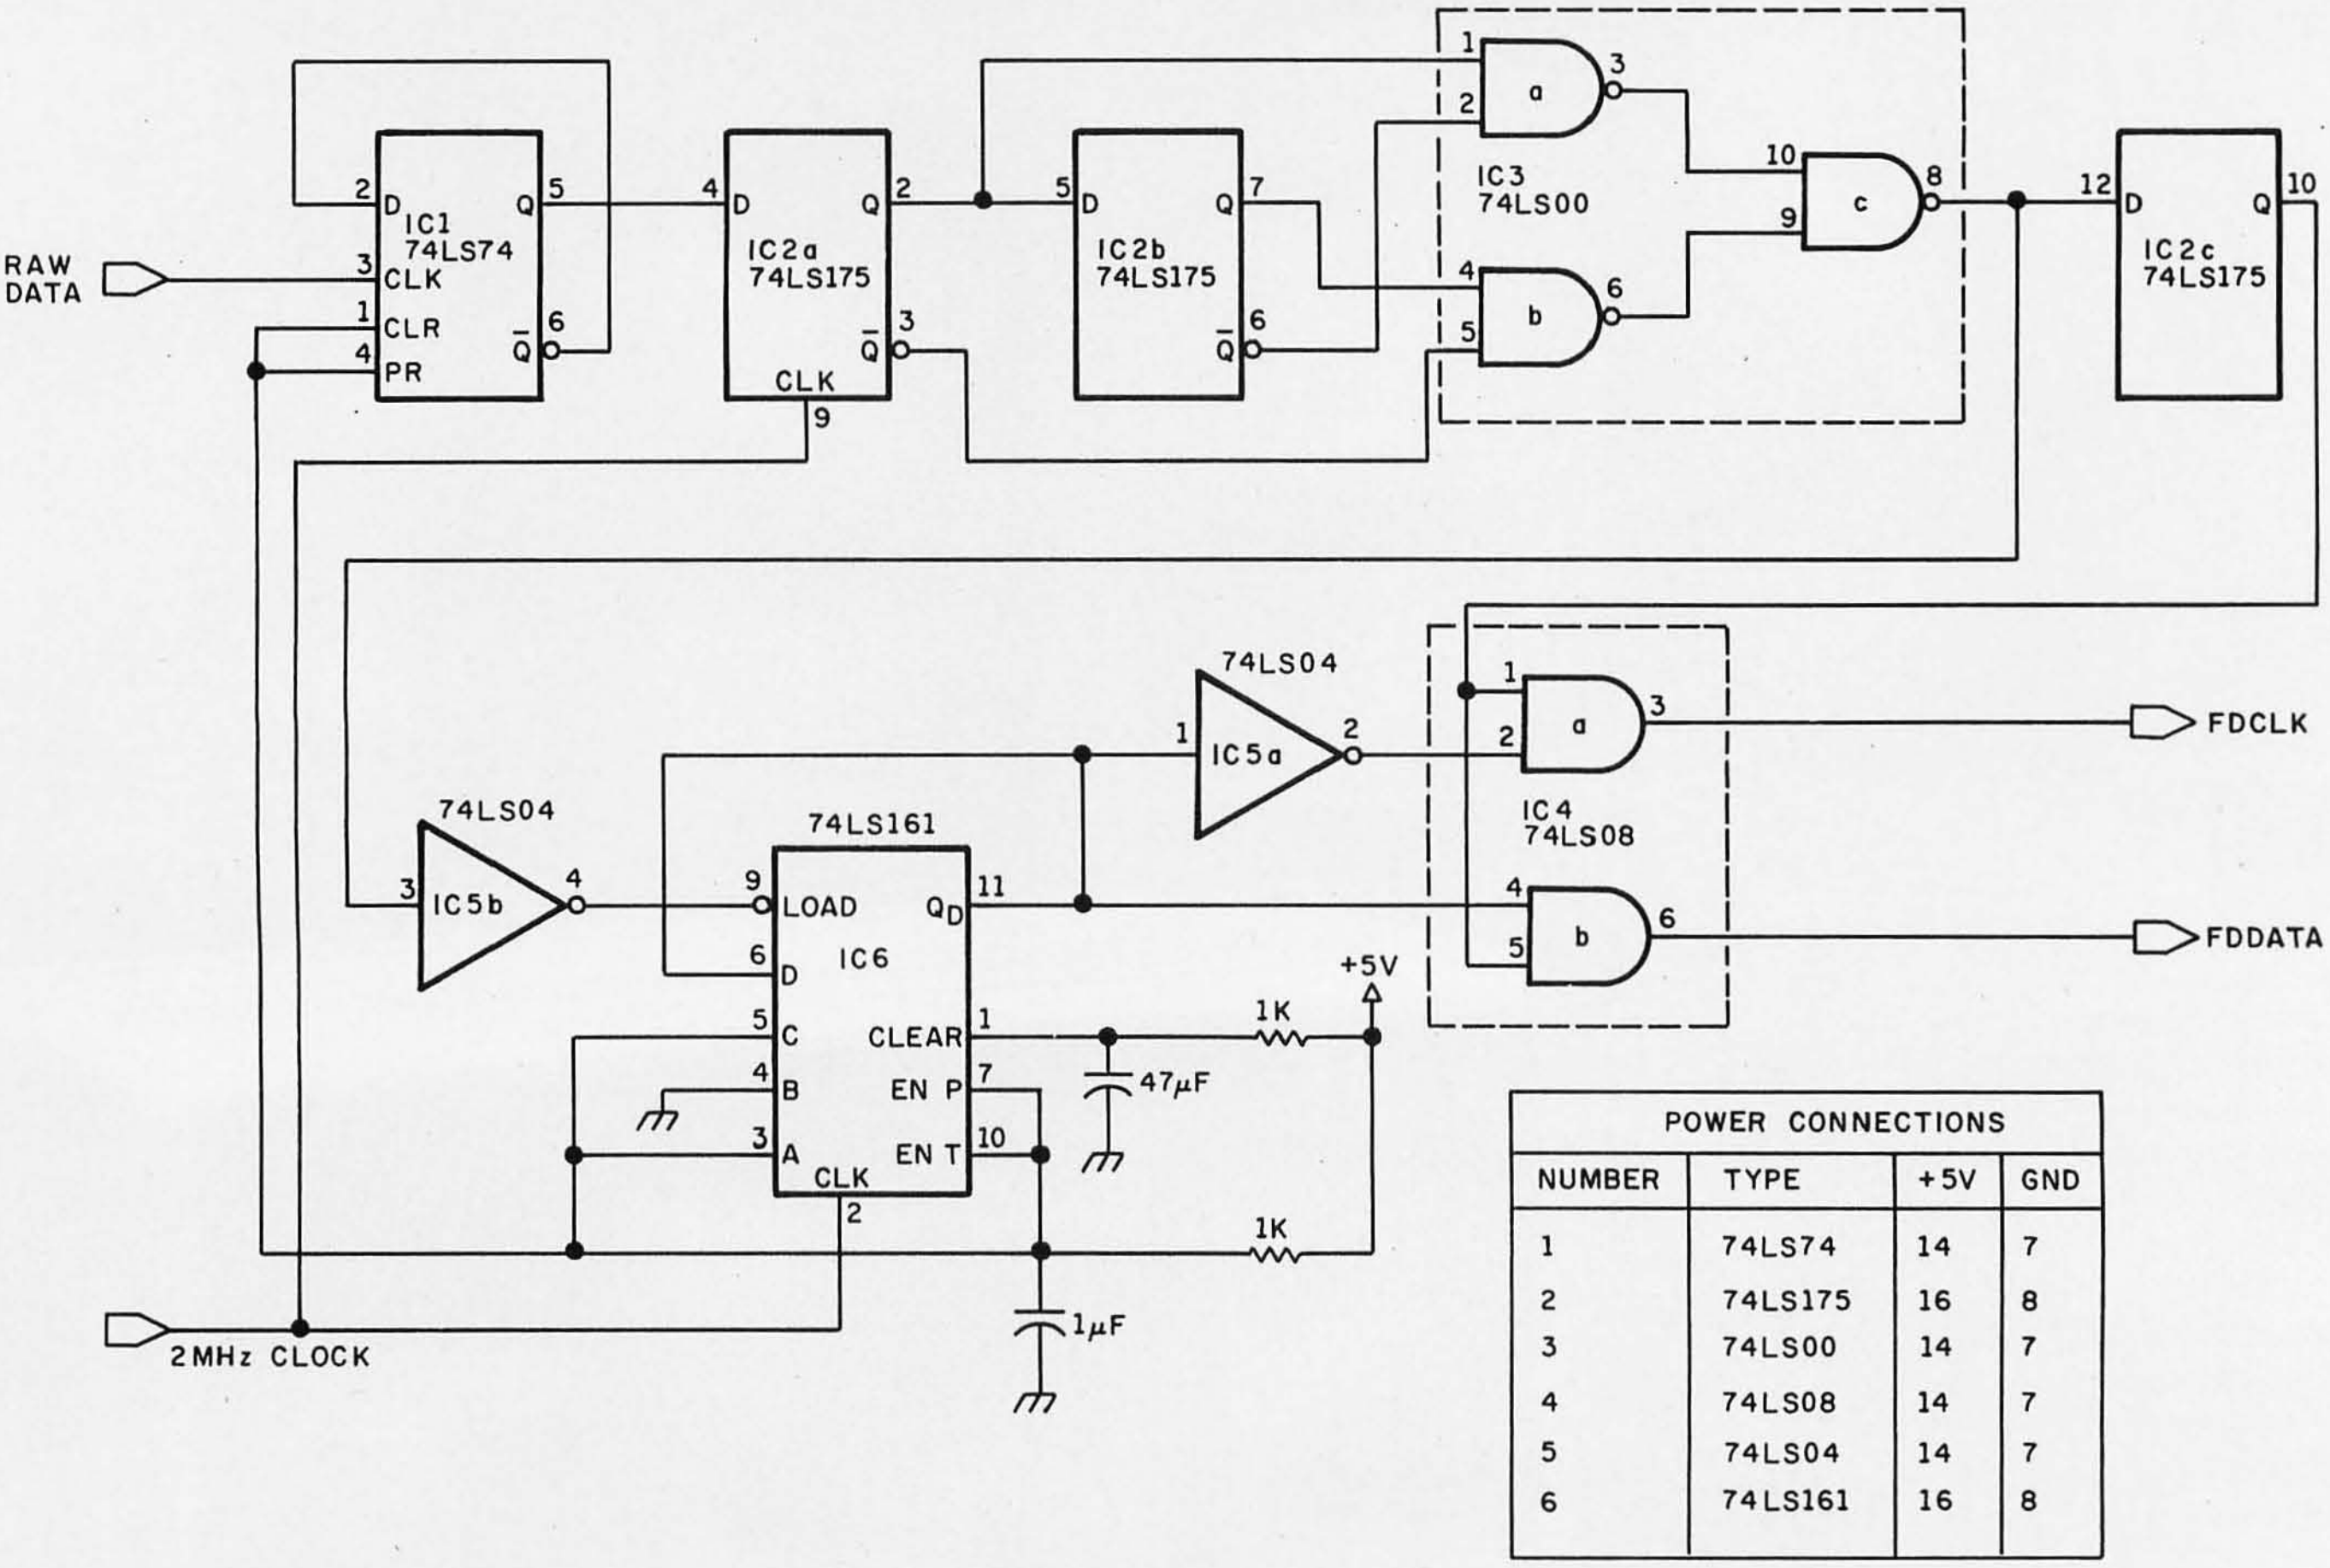

POWER CONNECTIONS			
NUMBER	TYPE	+5V	GND
1	74LS74	14	7
2	74LS175	16	8
3	74LS00	14	7
4	74LS08	14	7
5	74LS04	14	7
6	74LS161	16	8

Figure 1: *External data separator circuitry. This design was developed from one recommended by Western Digital in an applications note for its FD1771. This circuit adds a power-on reset feature.*

shown on page 5 of the same document). After adding the external data separator to my TRS-80, access errors virtually disappeared.

The data separator was constructed on an old printed-circuit board. It already had the voltage and ground connections run to all integrated-circuit-socket positions, and it had edge-card connections. The circuit board now resides in the compartment of the TRS-80 Expansion Interface reserved for the RS-232C interface or other extra circuitry (see photo 1).

This circuit varies from the one in the Western Digital application notes in the use of +5 V on some integrated circuit pins (through a 1 k-ohm pull-up resistor) and a resistor/capacitor network that provides a lag of about 45 ms on the 74LS161 counter's CLEAR input (IC6, pin 1) to insure that it is cleared on power-up.

In order not to make any irreversible changes in the printed-circuit board of the TRS-80 Expansion Interface, the three connections to the FD1771 floppy-disk controller can be made through a 3-pin length of a dip strip, a type of socket. Remove the 1771 from its socket and carefully bend pins 25, 26, and 27 out from their normal position. Then reinsert the 1771 into its socket and push the 3-pin dip strip onto the three pins sticking out.

Pin 25 must be connected to ground when using an external data separator (pin 25 is normally pulled up to +5 V for internal data separation). Pins 26 and 27 are the separated clock and data inputs to the 1771. The raw data from the disk drive to the external data separator is available at pin 8 of integrated circuit Z32 in the Expansion Interface, and the 2 MHz clock signal is picked up at pin 3 of Z25.

All signals are sent to Expansion Interface connector J1 and are available on the internal expansion connector inside the additional circuitry compartment. Ground is available on pins 41 and 42 of that connector, and +5 V is available on pins 39 and 40 (see the right edge of the second page of the Expansion Interface schematic, page 41, in the Radio Shack Expansion Interface manual).

I measured the current required to operate the external data separator (using LS-type integrated circuits) and believe that the 40 mA it draws is certainly less burden on the Expansion Interface power supply than the RS-232C interface that might use this position.■

Play with a full deck.

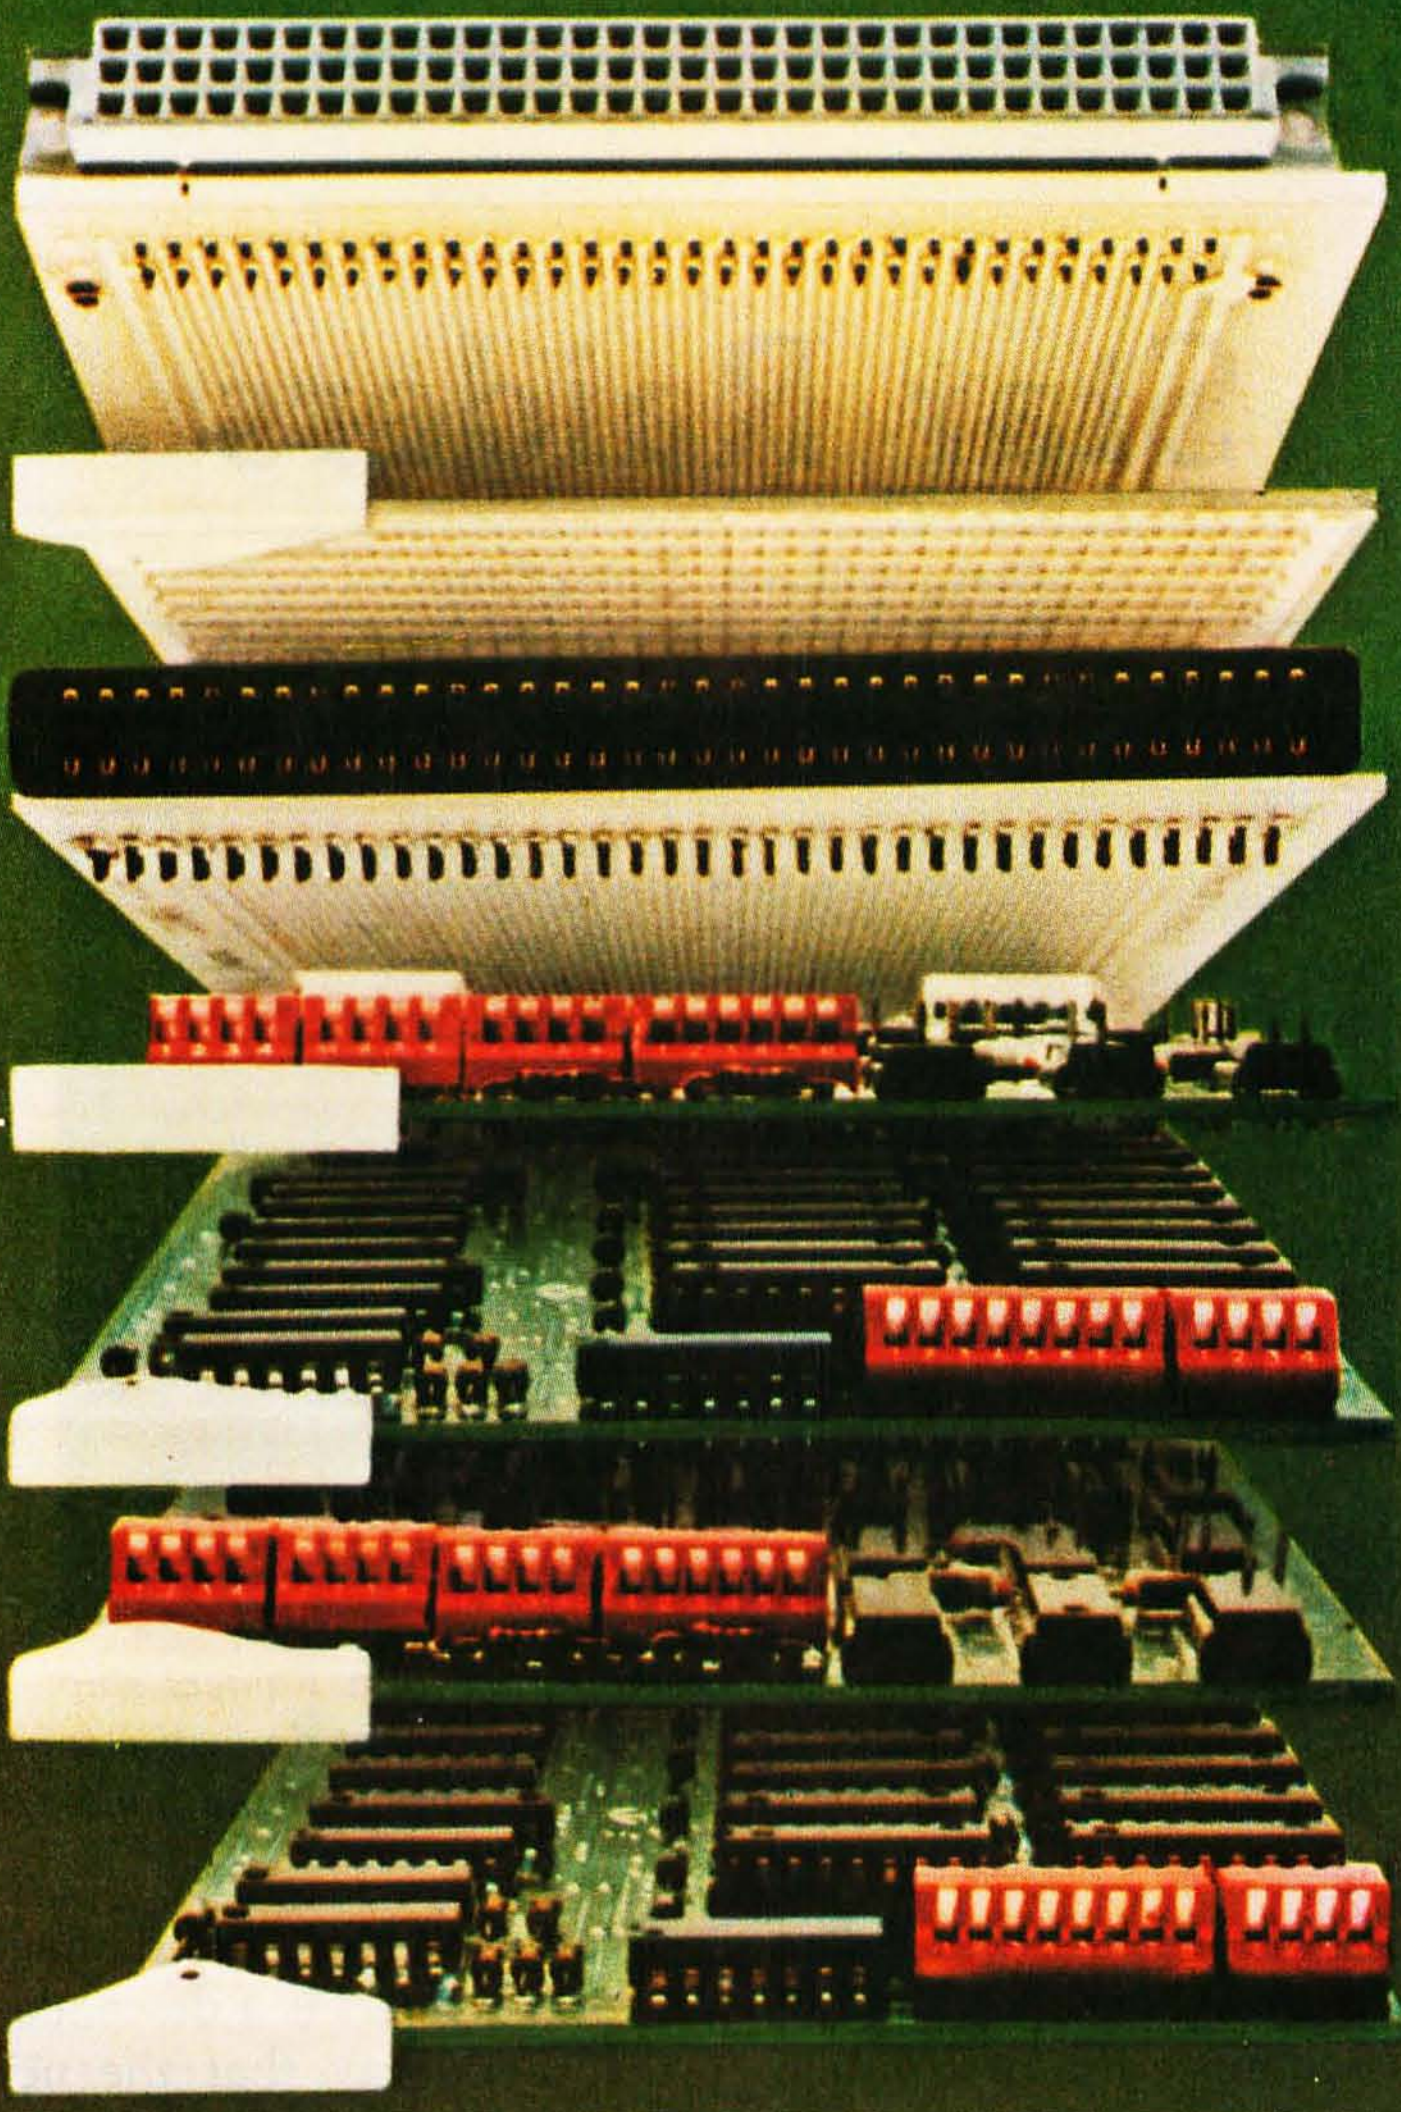

Introducing the RM 65 line of microcomputer boards.

The RM 65 line gives you the options and flexibility to design precisely the microcomputer systems you need.

And you can do it quickly and economically. Because you're offered so many design alternatives.

Application software for the RM 65 line, for example, can be programmed in a number of languages: BASIC, PL/65, FORTH and Assembly Language.

RM 65 uses a motherboard interconnect concept so any card will fit any slot.

You can choose either edge connector or Eurocard versions.

And a set of card cages allows a broad variety of packaging options.

Single Board Computer Module
R6502 CPU, 2K bytes static RAM, 16K bytes PROM/ROM capacity, an R6522 VIA and support circuitry on a single RM 65 module.

Memory Modules
- *8K Static RAM*
- *32K Dynamic RAM*
- *16K PROM/ROM*

Input/Output Modules
- *GP I/O and Timer*
- *ACIA (RS232C)*

Intelligent Peripheral Controller Modules
- *IEEE-488 Bus Interface*
- *Floppy Disk Controller*
- *CRT Controller*

Accessories
- *4 and 8-slot Card Cages*
- *Design Prototyping Module*
- *Extender Module*
- *Single-Card AIM 65 Adaptor*
- *Adaptor/Buffer Module*

Rockwell. Your systems source.

Your functional system can be economically developed on the AIM 65 Advanced Interactive Microcomputer. At less than $500, AIM 65—based on the high performance R6502 microprocessor—is the lowest cost development tool available for any board level system.



Rockwell stands ready with the system and application assistance your project requires. Call Rockwell for more literature. Or to schedule time at one of Rockwell's system development centers.

Rockwell International,
Electronic Devices Division,
P.O. Box 3669, Anaheim,
CA 92803. (800) 854-8099
(In California 800-422-4230).

Rockwell International

...where science gets down to business

RM 65 MODULES

BYTE'S ARCADE

Star Raiders

Gregg Williams, Senior Editor

What can you say about a game that takes your breath away? There are not enough superlatives to describe Star Raiders. Just as the VisiCalc software package from Personal Software has enticed many people into buying Apple II computers, I'm sure that the Star Raiders software cartridge from Atari Inc has sold its share of Atari 400 and 800 computers.


HYPERWARP ENGAGED

Photo 1: *The view from the bridge of the Star Raiders ship during a hyperspace jump. A static photo cannot do justice to the excitement you feel as stars streak by prior to the jump.*

What is Star Raiders? It's a video arcade game that isn't hungry for quarters. I first saw Star Raiders at the West Coast Computer Faire in May 1979, and in the two years that have passed since the first public viewing of the game, no one—I repeat, no one—has created either a home-computer game or a coin-operated video game that is better than Star Raiders. (This fact is even more surprising when you consider the speed with which new standards are set in this industry.)

For the people who haven't seen Star Raiders in action, I'll attempt a brief description. Star Raiders is loosely modeled on the "Star Trek"-type game that has been running on micro- and larger computers for the past eight years. You, as commander of a starship, must search out and destroy all enemy spaceships in the galaxy (which is subdivided into a rectangular array of units called "sectors"). Of course you have only a certain amount of energy, and when you fight an enemy ship that is in the sector you occupy, it can fight back and damage your ship.

Star Raiders is a descendant of this kind of game in the same way that the new pocket computers are descendants of a four-function mechanical adding machine. The many innovations in Star Raiders make you feel that you are actually piloting the spaceship instead of just typing in commands (and endlessly pressing the ubiquitous RETURN key).

Star Raiders has color, sound, and joystick input to make the game more realistic, but the feature that gives it life is its real-time animation. When you patrol a sector, you see a field of stars passing you in all directions, as if you were actually moving through a three-dimensional field of stars. When you steer the ship using your joystick, the stars outside your ship veer realistically in the opposite direction. Enemy ships (called Zylons) appear from above or below, receding in size as they speed past. A battle claxon sounds when you enter a sector containing enemy ships. Attacking Zylons shoot balls of energy at your ship; if they hit, your shields flicker and you hear a destructive crash. And the hyperspace effect (used to

Why spend all those quarters on arcade games? With a microcomputer and a few weeks' worth of arcade money, you can enjoy at home microcomputer games that are just as good as (and sometimes identical to) the popular coin-operated video arcade games. BYTE's Arcade is an occasional feature that reviews the best of these fast-action games. If you would like to review or give an opinion of a favorite microcomputer game of this type, please write to: BYTE's Arcade Editor, POB 372, Hancock NH 03449.

"Pascal-1 helps our customers meet complex, real-time needs."

Don Cutler, Chief Systems Engineer,
Electro Scientific Industries, Inc. (ESI), Portland, Oregon

More than 125,000 microcircuit resistors per hour can be adjusted by ESI's PDP-11/04 controlled laser trimming systems. The Pascal-1 compiler has given ESI fast, precise control since 1976. ESI's Don Cutler says, "Pascal-1 offers two big advantages—real-time performance and real problem-solving power."

Left: Pascal-1 controls ESI's laser trimming system. The laser repairs semiconductor memory chips, replacing faulty cells with alternates.

Below: ESI dominates the industry in the computer-controlled laser adjustment of microcircuits. Pascal-1 programming flexibility gives ESI access to many different markets.

Precise control in milliseconds.

Controlling a laser beam 4 to 8 microns in diameter, the ESI system moves the laser beam positioner at accelerations up to 3.5 G's, directs a trim cut, and decides where to go next, fast enough to trim 35 resistors per second. The Pascal-1 programs directly control all aspects of the trimming system. Some ESI customers use the laser trimmer to adjust the circuits of such devices as air flow transducers, audio filters, and heart pacers, with the microcircuit activated to simulate operation. Pascal-1 handles these processes with speed and precision.

Easy-to-follow programming.

Writing correct code is easy because of the logical structure and clarity of the language. ESI engineers save design and debugging time by writing control software in Pascal-1. ESI's customers also apply Pascal-1 to their own specialized production processes.

Free case study.

Read why ESI, one of Oregon Software's 1700 customers, chose Pascal-1. Order your free copy of this eight-page case study by calling Oregon Software collect at (503) 226-7760 or by using the reader service card.

Oregon Software

2340 Southwest Canyon Road
Portland, Oregon 97201
(503) 226-7760 • TWX 910-454-4779

DISTRIBUTORS: **Australia:** Network Computer Services, Sydney/Tel: 290-3677 **England:** Real Time Products, London/Tel: 01-588-0667 **Holland:** N.H.C.S., B.V., Haarlem/Tel: 023-234951 **Japan:** Rikei Corporation, Tokyo/Tel: 345-1411 **West Germany:** AC Copy, Aachen/Tel: 0241-506096 **West Germany:** Periphere Computer Systems GmbH, Munchen/Tel: 089-681021

Circle 303 on inquiry card.

```
GALACTIC CHART

WARP ENERGY:0230
TARGETS:3 DC:PESCLR
STAR DATE:00.20
```

Photo 2: *The Star Raiders Galactic Chart. Each square represents a sector of space. The star symbols represent sectors containing starbases; all other squares marked with symbols represent sectors containing Zylon enemy ships. Your ship is located in the square near the center, marked by a small dot.*

```
V:01 K:02 E:7858 T:1
θ:-01 Φ:+01 R:+023
```

Photo 3: *The view from the bridge during combat. "Star Trek" games were never like this! When you occupy the same sector as enemy ships (here, top and bottom center) their size will increase and decrease as you move toward or away from them.*

At a Glance

Name
Star Raiders

Type
Arcade-style game

Manufacturer
Atari Inc
Consumer Division
1195 Borregas Ave
Sunnyvale CA 94086
(408) 745-2000

Price
$59.95

Author
Doug Neubauer

Format
Game cartridge

Language
6502 machine language

Computer
Atari 400 or 800

Documentation
10 pages, 22 by 28 cm
(8½ by 11 inches)

move you from one sector to another) must be seen to be believed!

I could continue to describe the intricacies of Star Raiders, but words cannot evoke the sensation of actually playing the game. To Doug Neubauer of Atari, who wrote Star Raiders, my unbounded thanks. To all software vendors, this is the game you have to surpass to get our attention. And to Atari, I can only say that if you offer us games like this, we can't refuse. ■

Super Nova

Bob Liddil, POB 66, Peterborough NH 03458

Arcade video games are extremely popular throughout the world. It would seem natural, therefore, that these games would take hold in the TRS-80 marketplace, where good graphics programs are in short supply. There is, to be sure, a good deal of mediocrity on the market, such as early versions of Space Invaders. Super Nova, however, is an example of how well a program can be created if its designer takes enough time and care with it.

The instant the program (a standard machine-language system tape) is loaded, Super Nova spins into a stunning

Circle 41 on inquiry card. →

INTRODUCING A REVOLUTIONARY DOT MATRIX PRINTER WITH JUST ONE HAMMER. AT AN INCREDIBLE PRICE – JUST $399.

The Uni-Hammer Replaces Seven... or More.

Revolutionary? We don't know what else to call it. An impact printer with a single rugged hammer, rather than the seven or more individual solenoids and print wires found in conventional dot matrix printers.

At an incredible unit price of $399!

Because of the unique Uni-Hammer design, the GP-80M is smaller and simpler than other dot matrix printers yet costs considerably less. Which makes it a natural for OEMs needing compact, reliable, low cost printers for system use, and also for the personal or small business user who wants a quality impact printer at the lowest possible price.

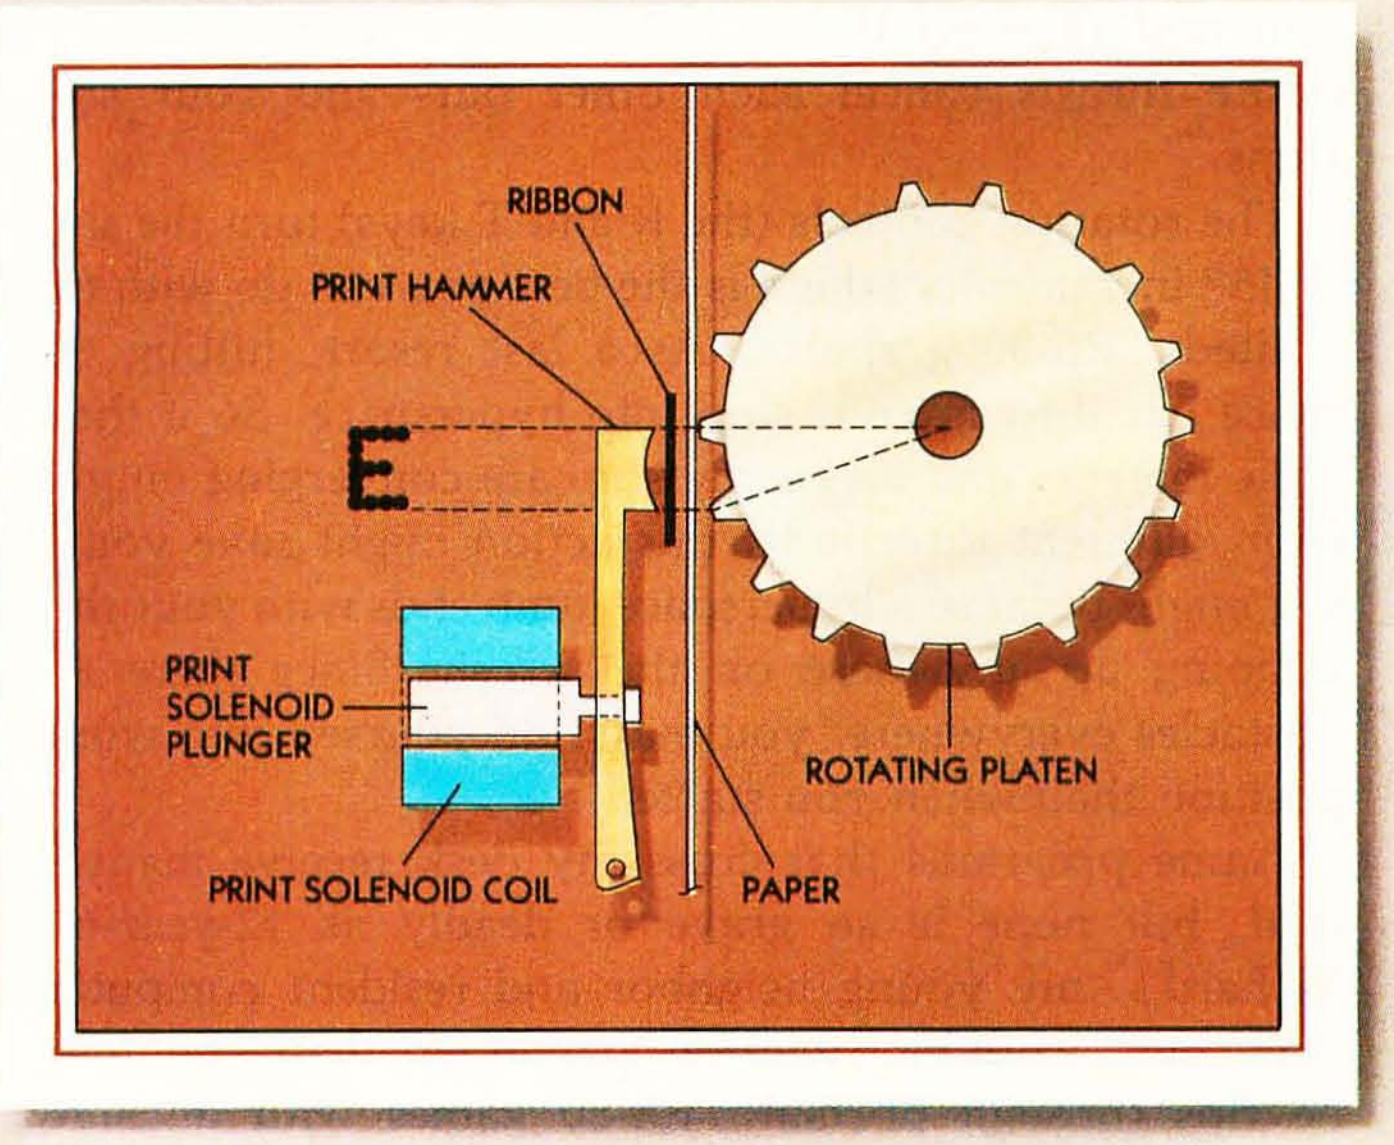

A Product of the Seiko Group

The GP-80M is manufactured by Seikosha and exclusively distributed in the USA by Axiom. It took a company such as the Seiko group, world's largest watch manufacturer, with vast experience in the design of small, intricate, precision products, to come up with a totally new concept in dot matrix printing.

How the Uni-Hammer Works

The GP-80M, which prints both graphics and alphanumerics, uses a rotating platen with protruding splines positioned behind the paper (see diagram). The character or graphics image is created by multiple hammer strikes in rapid succession as the print head advances across the paper. The precision gear train assures exact positioning of the print hammer relative to the splines on the platen, to provide excellent print quality.

A Complete Printer

The GP-80M has features comparable to printers selling for thousands of dollars. These include upper/lower ASCII character sets, ribbon cartridge, 80 columns at 12 characters per inch, adjustable tractor feed, original and 2 copies, 30 characters per second, and full graphics with a resolution of better than 60 dots per inch in both horizontal and vertical axes.

Plenty of Interfaces

Interfaces include Centronics parallel, RS232C, serial TTL, 20mA current loop, IEEE-488, Apple, TRS-80, PET, HP-85... and more.

See the GP-80M in action at your local computer store, or write for the distributor in your area.

AXIOM

AXIOM CORPORATION

1014 Griswold Avenue • San Fernando, CA 91340
Telephone: (213) 365-9521 • TWX: 910-496-1746

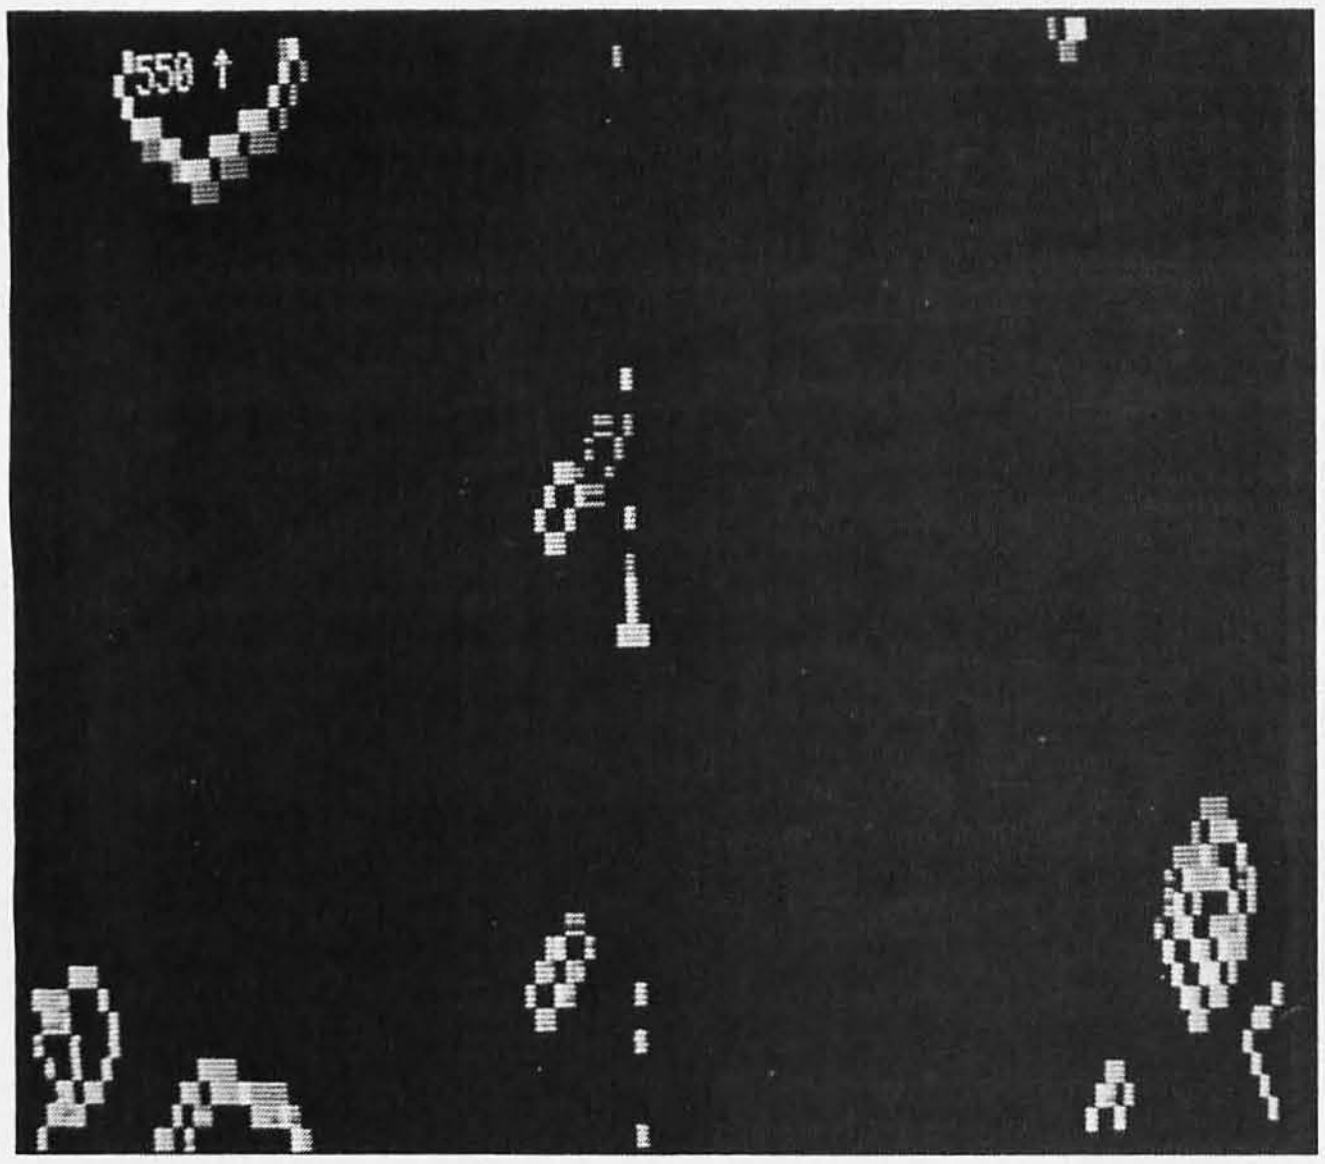

Photo 1: *The Super Nova game in play.*

At a Glance

Name
Super Nova

Type
Arcade-style game

Manufacturer
Big Five Software
POB 9078-185
Van Nuys CA 91409

Price
$14.95

Format
Cassette

Language
Z80 machine code

Computer
TRS-80 Model I with 16 K bytes of memory and Level I or Level II BASIC

Documentation
1-page insert sheet

three-dimensional starburst display that looks so real it makes you dizzy. The depth of field is absolutely startling. This is the most striking high-speed animation I have ever seen (with the possible exception of the hyperdrive display of Atari's Star Raiders. The graphics work in Super Nova is fast, stunning, and very uncharacteristic of TRS-80 games.

As with its coin-operated counterpart, Atari's Asteroids game, the object of Super Nova is to destroy objects that appear on the screen while avoiding your own destruction. Meteors, of all shapes and sizes, make up the bulk of these targets. When you hit the larger asteroids, they shatter into smaller and smaller chunks, and, if you're lucky or skillful, they finally disintegrate. It should be noted that the supply of meteors is unlimited.

Not content to menace the player with mere rocks hurtling through the void, Super Nova thoughtfully provides missile-firing alien spaceships. Three less-dangerous craft appear when there are six or less meteors on the screen. Two larger ships, worth more as targets, appear when you reach a score of 10,000 points.

Some of the aliens have special shields that allow them to pass harmlessly through meteors. Not so for your fighter—touch something, anything, and you're destroyed. The game ends when you have lost three ships.

Super Nova has a well-thought-out keyboard setup that enhances the playability of the game. Five keys control your ship's action in a fashion similar to the buttons supplied in coin-operated video games. The R and T keys turn the ship counterclockwise and clockwise, respectively. The O key applies engine thrust in whatever direction the ship is pointing, and the P key fires your missiles. Finally, the space bar launches the ship into hyperspace. The keys are located so that you play the game with the first two fingers of each hand touching the keys and either thumb working the space bar.

Super Nova would be an enjoyable game if it had only the features I've described so far, but it offers even more. This game has refinements that distinguish a truly great computer game from a good one. The propulsion formula used to control the behavior of your ship, for example, is Newtonian in nature, closely simulating the actual response you would expect from a real spaceship. Going too fast or too far? Turn your ship in the opposite direction and increase thrust just enough—remember, opposite thrusts cancel each other out—and your ship stops.

The rotation controls (the R and T keys) turn the ship in 45° increments, which is the best you can do with the limited TRS-80 graphics. As a last resort, hitting the space bar throws your ship into hyperspace. So if three large meteors and an enemy ship are converging on you from different directions, this action might save you. I say *might* because a hyperspace jump ends with your ship popping up anywhere on the screen. Since there are obstacles everywhere, you may find yourself in a worse position than when you started.

Game programs that cross my desk receive many a trial, but none is so grave or deadly as 12-year-old Richard's, my young neighbor and resident computer-game buff. With his attention span of less than 5 minutes, he rips through normal TRS-80 games with uncanny speed. His response to Super Nova, however, was an enthusiastic "Excellent!" He stayed with it for 3 hours, until his mother appeared to drag him away for homework. There is no higher recommendation available.

In summation, Super Nova is fast, entertaining, and professional. It is well worth its $14.95 price tag. I fully agree with Richard—Super Nova is excellent! ■

Circle 122 on inquiry card. →

The next generation of business software

If you are still searching for quality software for your small business computer, search no more. *Designer Software*™ is pleased to announce *PHOENIX*™, the first line of microcomputer software to include *professional* word processing and general accounting.

WORD PROCESSING

We know word processing. A year-and-a-half ago the owners of *Designer Software*™ wrote a well-known word processor for another company. In the last 18 months we've learned about other features you want in a word processing package. *PHOENIX*™ Word Processing reflects our experience. It is more powerful and flexible than other word processing packages you can buy. And since we designed "human engineering" into *PHOENIX*™ Word Processing from the beginning, it can compete, feature for feature, with expensive dedicated word processors.

Many people have remarked that the user's manual we wrote earlier was the best ever for microcomputer software. Even so, we felt that we could have made it more accessible to the non-technical user. With *PHOENIX*™ Word Processing we have a separate Training Manual with beginning, intermediate and advanced levels. By allowing you to work at your own level, we have made the learning process easier and less intimidating.

ACCOUNTING

All five *PHOENIX*™ general accounting packages (General Ledger, Accounts Receivable and Payable, Payroll and Inventory) were designed by CPA's based on similar packages from mini and mainframe computers. The programs are COBOL with an integral assembly-language data base. They are fully integrated to allow automated posting to the General Ledger. An internal screen handler permits full-screen data entry for speed and ease of use. Although we made cosmetic enhancements prior to distribution, the basic programs have been user-tested for at least eighteen months.

PHOENIX™ Accounting also includes a growing number of specific application packages. We have completed or scheduled for completion Fixed Assets, Tenant Processing, Mail Management, Financial Projections and Time/Billing. Each package stands alone, but many also work in conjunction with other *PHOENIX*™ packages. For example, *PHOENIX*™ Mail Management will work very well by itself, but we also designed it to fit in easily with the merging capabilities of *PHOENIX*™ Word Processing.

With *PHOENIX*™ Accounting we have, as always, given special attention to documentation. Not being content to describe which buttons to push, we have taken the time to explain the accounting principles behind the programs and how each package fits into an automated office. To this end we created the fictional town of Smallville with a fictional company, Moustache Manufacturing. By seeing how Mr. Small and his employees use *PHOENIX*™ Accounting at 2M, you learn to apply it to your office as well. The Smallville sections are amusing as well as informative, and you will likely read the manual just to find out what Sidney, Mr. Small's incompetent brother-in-law, will do next.

Designer Software™
HOUSTON

If you want to know what PHOENIX™ *Word Processing and accounting can do for your business, call, write, telex or use The Source to request more information.*

3400 Montrose Blvd • Suite 718 • Houston, Texas 77006
(713) 520-8221 • Telex 790510 • Source TCU671

Designer Software and PHOENIX are trademarks of Palantir, Inc.

Tranquility Base

Robin Moore, Warner Hill Rd, RFD 5, Derry NH 03038

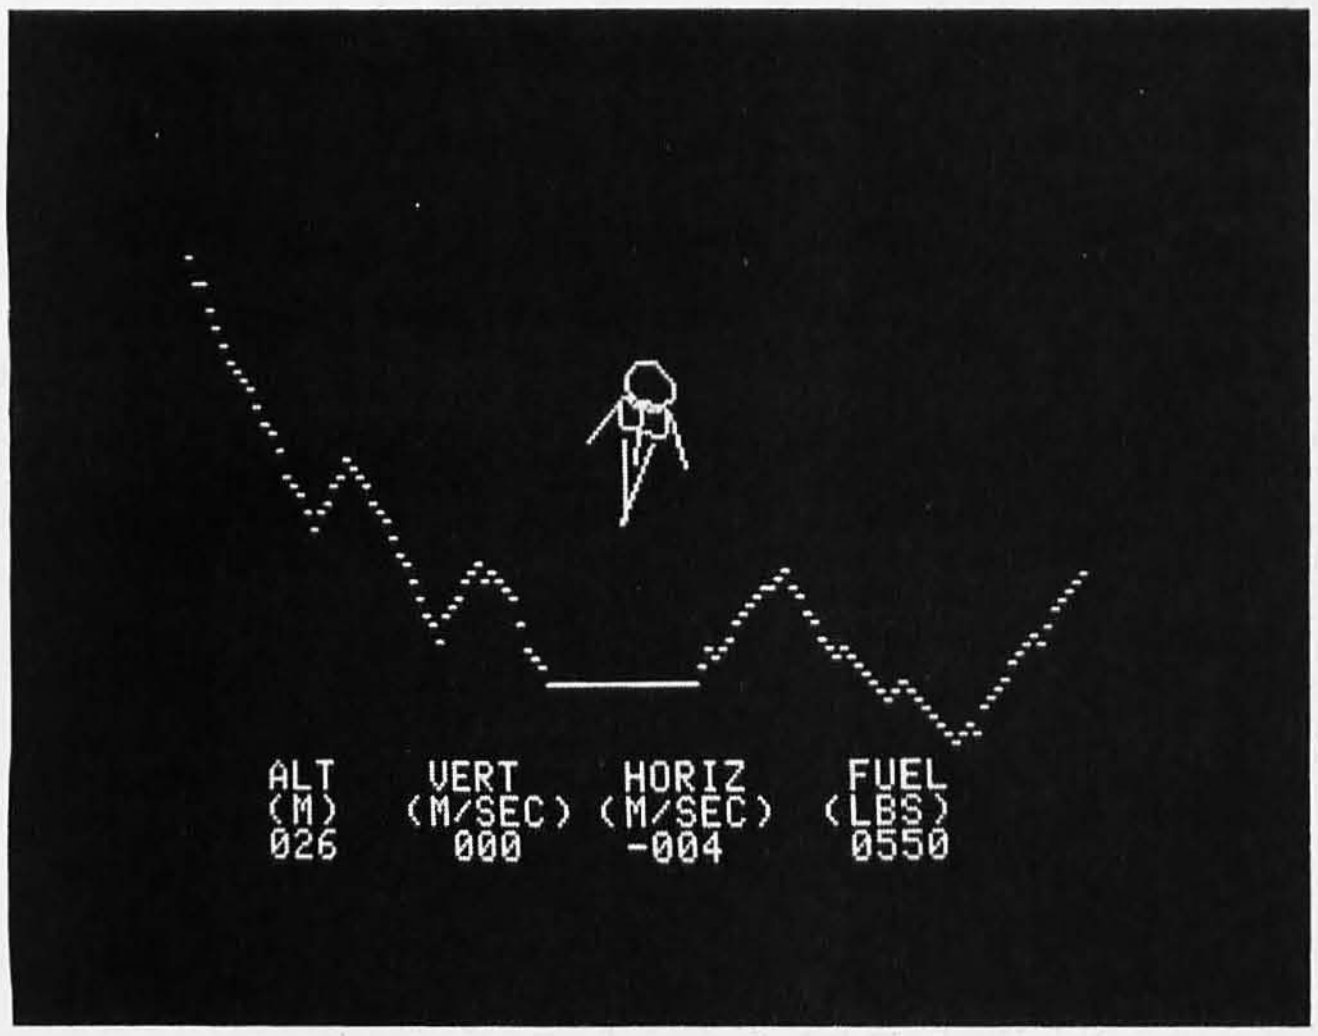

```
ALT   VERT    HORIZ   FUEL
(M)  (M/SEC) (M/SEC) (LBS)
026   000     -004    0550
```

Photo 1: *The Tranquility Base game in progress.*

Bill Budge has written a lunar-lander-style arcade game for the Apple II. Called Tranquility Base, the game uses Apple high-resolution graphics to portray the lunar-lander module and the moonscape below. The player attempts to bring the lunar module out of orbit and land it safely on one of several flat areas on the lunar surface. A fixed amount of fuel is provided, and the score is based on the number and quality of successful landings.

Playing the Game

The game is simple, although not necessarily easy to play. A key is pressed to start the action, and the lunar-lander module appears, orbiting from left to right over a detailed moonscape. The rockets are controlled with the Apple II's game paddle 0, while the "1" and "2" keys on the keyboard adjust the rotational attitude of the lander. Each keypress rotates the ship slightly in one direction or the other. There are no steering rockets, so the lander's horizontal motion must be controlled by rotating the ship and using the main rockets.

It is difficult to make a successful landing. The landing areas are never much larger than the width of the ship, and the rocket control is quite sensitive, so you might cause the ship to take off just as you are gently touching down. If the lunar module touches anything except a flat landing area, it crashes and explodes. Landing too quickly can also cause a crash and an explosion. The score for each successful landing is derived from the horizontal and vertical velocities of the ship when it touches down.

Graphics and Sound

Consistently excellent graphics are a hallmark of Bill Budge's games, and the Tranquility Base graphics are no exception. From the title display that shows the lunar module, moonscape, and starfield (with little apples as planets) to the final module explosion, the graphics are great. The lunar module is nicely detailed, and when it explodes, pieces fly off and tumble in various directions. Even the rocket flame is detailed: it flickers realistically and provides visual feedback by smoothly changing size as the rocket thrust is varied.

When the lunar module orbits off the right edge of the screen, a new section of scenery snaps into view below, and the lander orbits in from the left. Tranquility Base also provides a close-up view of the lander and the moonscape when the lander is a certain distance from the ground: this will help you make a smooth landing. Fuel

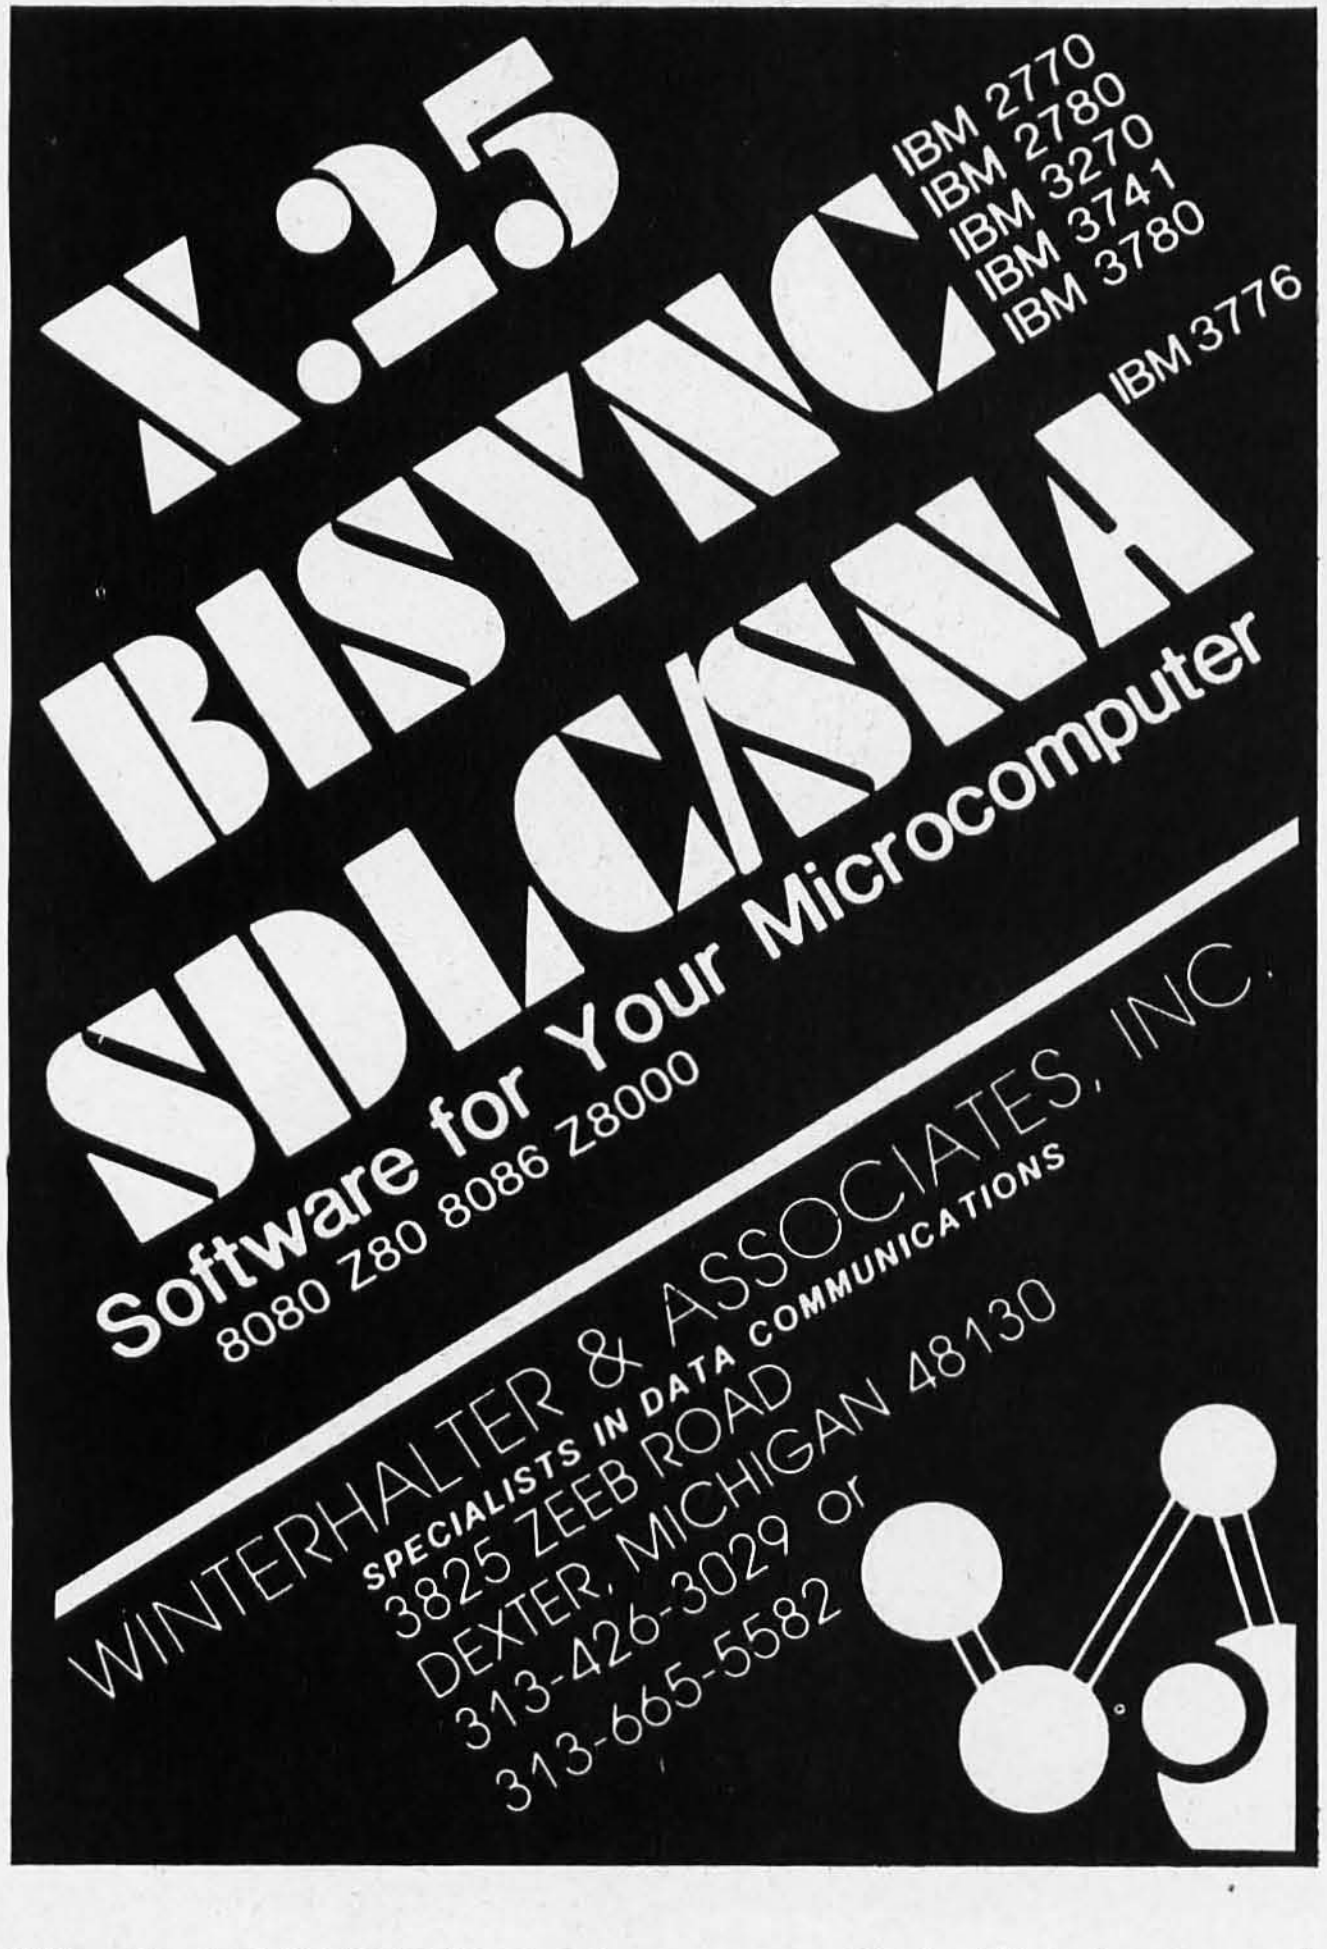

EXTRA. EXTRA.

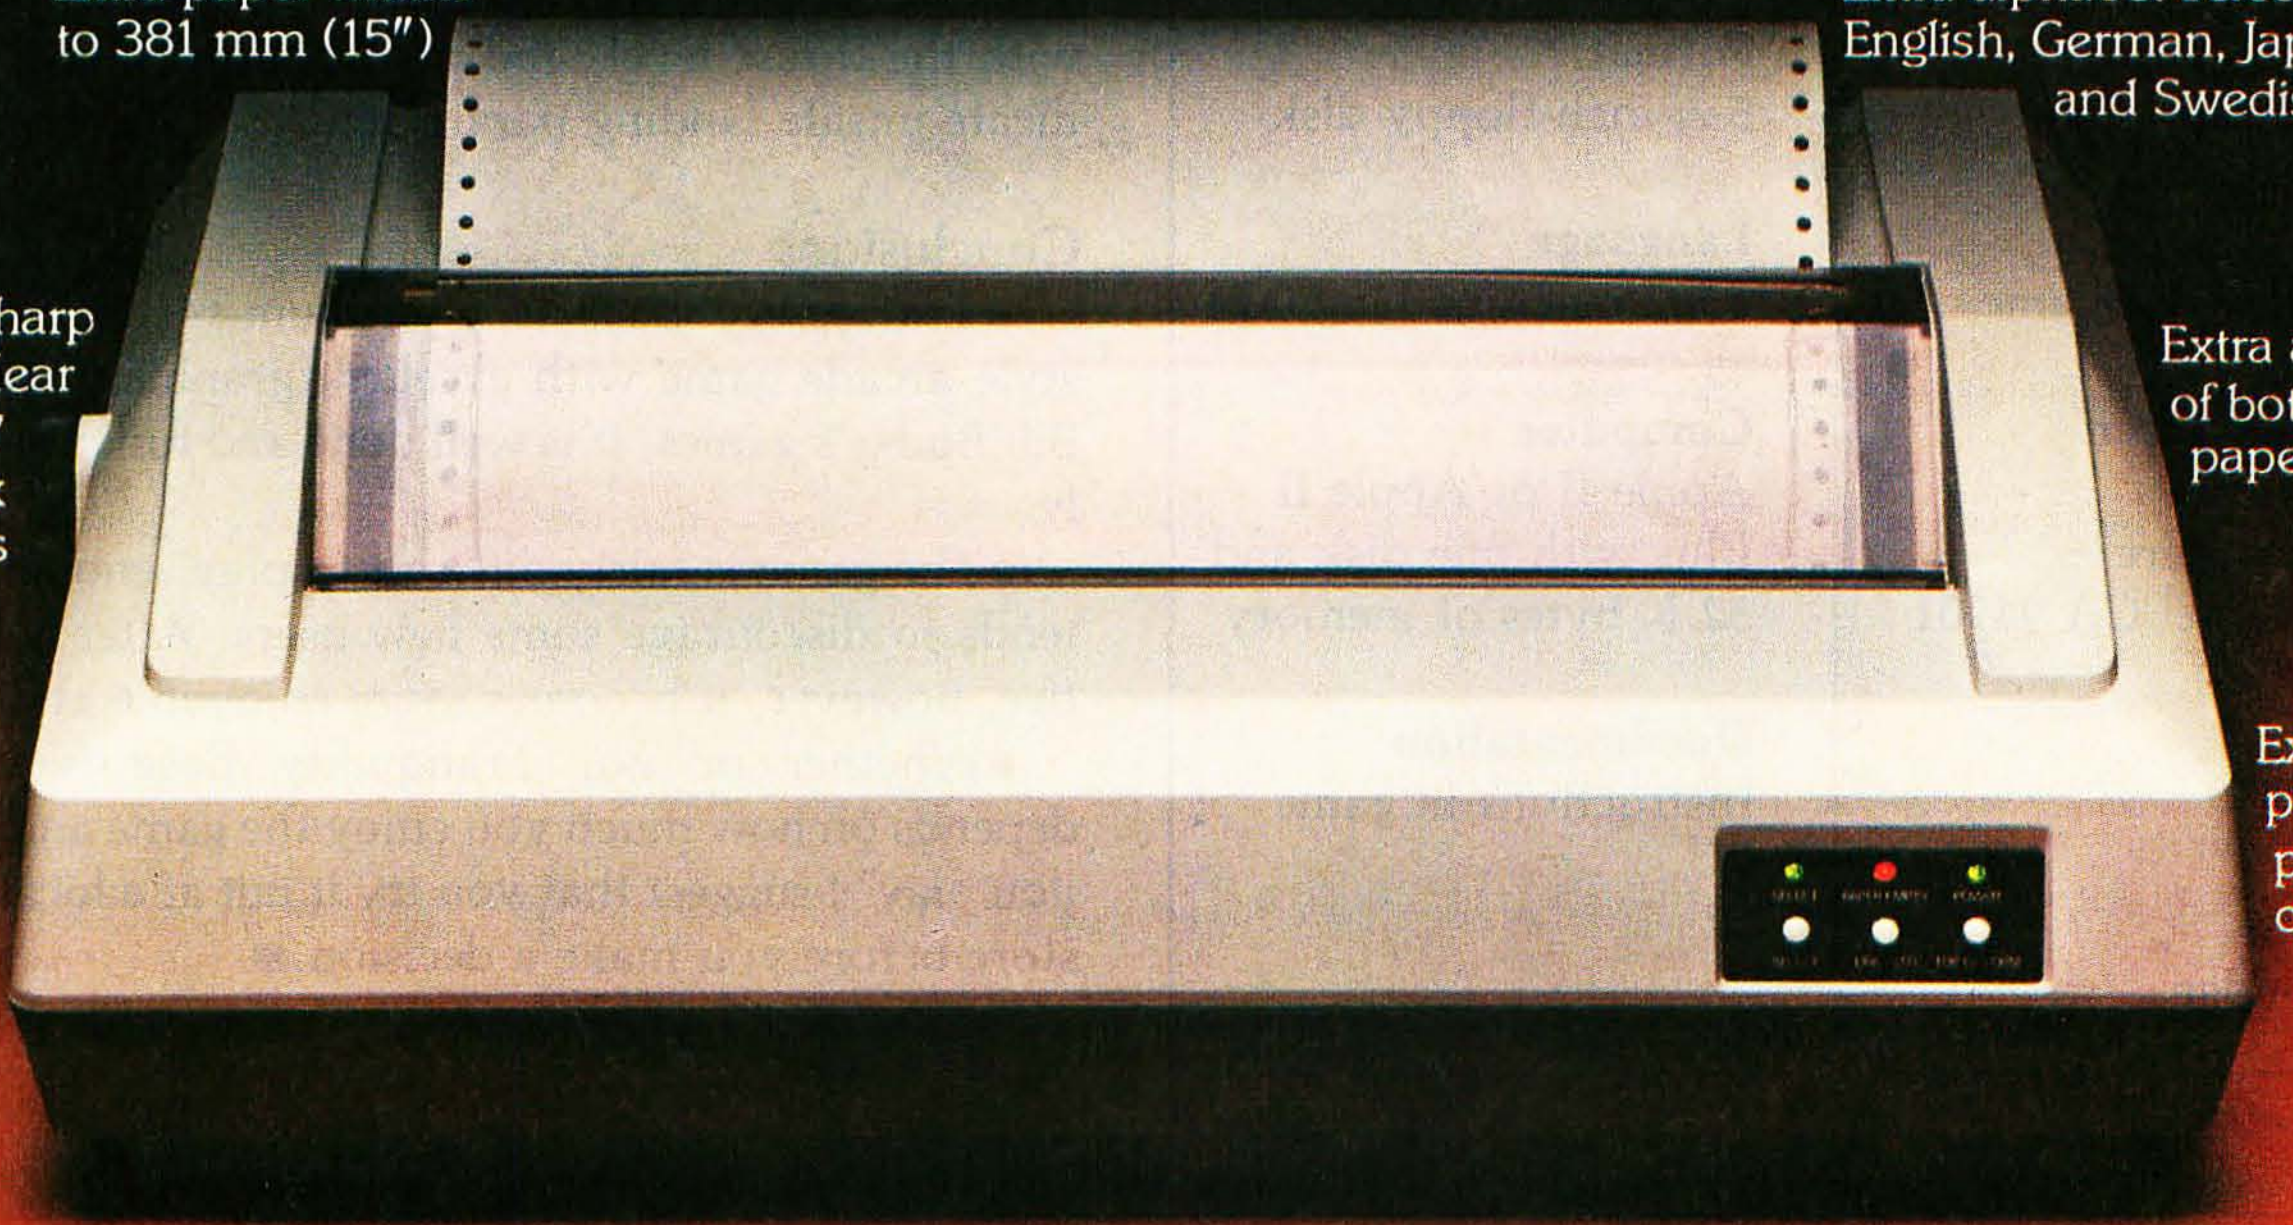

Now you get more extras when you pick the new dot matrix printers by C. Itoh. Choose the Comet 80-column printer and get the extra benefits of four character sizes and paper-saving print compression. Choose the Comet II 136-column printer and receive the added extra of a full-width computer size printer that accommodates paper widths to 381 mm (15").

Both the Comet and Comet II also offer the rare combination of low cost and high performance. Both models operate at an efficient 125 cps bidirectional print speed and in a 9 x 7 dot matrix.

C. Itoh's Comet series has the extra advantage of a unique multilingual capability with a selection of four, different alphabets: English, German, Japanese and Swedish. Other special characteristics include a programmable VFU (Vertical Format Unit) plus self-test diagnostics. For your operator's convenience, there's easy bottom or back paper loading, and both Comets use a standard low-cost nylon ribbon. Plus our printers already meet 1981 Class A FCC, UL, and fire safety requirements.

If all that wasn't enough, Comet and Comet II are plug-compatible with all major printers in the industry, meeting standard parallel serial interface specifications. Our printers are backed by C. Itoh's warranty and a nationwide field service organization.

And as a final, all important extra, when you choose either printer from C. Itoh you get immediate off-the-shelf delivery.

So if you want the highest quality at the best price, look into the extras the C. Itoh Comet and Comet II printers offer. You'll get a lot more than you bargained for. For more information, contact C. Itoh Electronics, Inc., 5301 Beethoven Street, Los Angeles, CA 90066; Tel. (213) 306-6700. Chicago Office: 240 E. Lake Street, Suite 301-A, Addison, IL 60101; Tel. (312) 941-1310. New York Office: 666 Third Ave., NY, NY 10017; Tel. (212) 682-0420. Dallas Office: 17060 Dallas Pkwy., No. 108, TX 75248; Tel. (214) 931-0177 C. Itoh represented in Canada by Canadian General Electric.

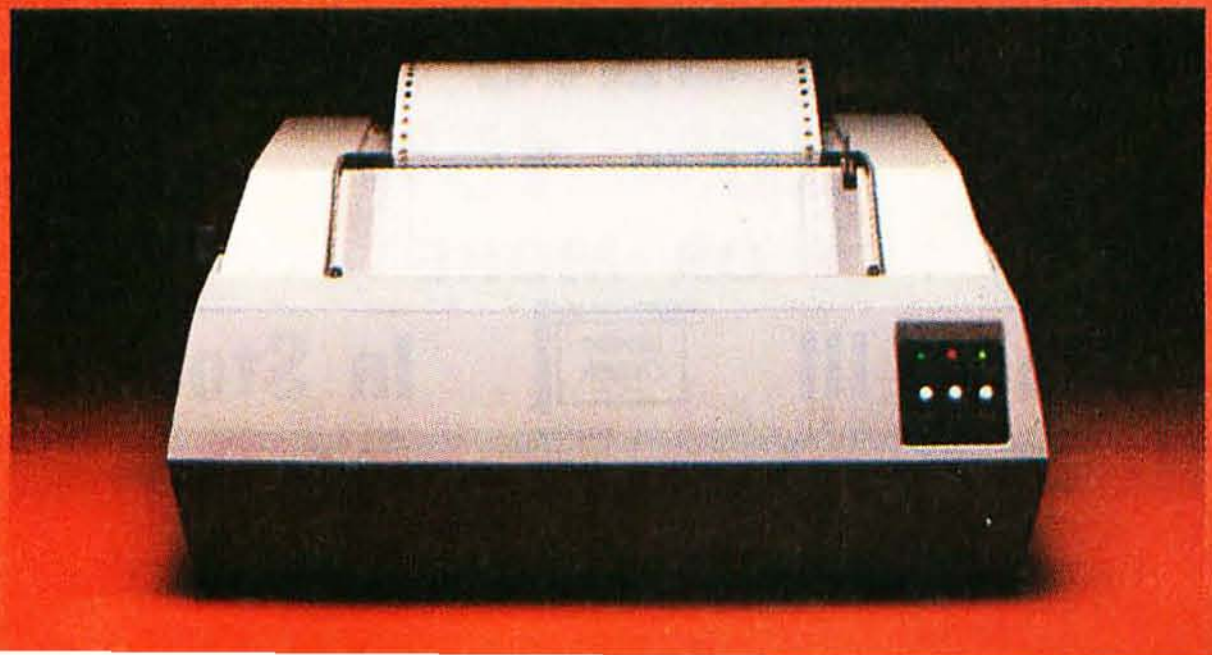

C. ITOH
ELECTRONICS, INC.
One World of Quality

See us at NCC—BOOTH 645

level, horizontal and vertical velocities, and altitude are displayed in text form below the graphics display. This aspect might have been improved by using analog displays simulated with graphics.

At a Glance

Name
Tranquility Base

Type
Arcade-style game

Manufacturer
Stoneware
50 Belvedere
San Rafael CA 94901

Price
$24.95

Author
Bill Budge

Format
5¼-inch floppy disk

Language
6502 machine language

Computer
Apple II or Apple II Plus with one disk and 32 K bytes of memory

Documentation
Instructions in game

Most arcade-type games make extensive use of sound effects to enhance the realism of the simulation. Unfortunately, Tranquility Base takes little advantage of the Apple II's sound capabilities. Sound is used when the lander crashes and explodes, but it is not very realistic. I would have preferred some rocket-motor sounds varying with the thrust level, and perhaps a warning tone to indicate unsafe landing parameters.

Conclusions

- Tranquility Base is a medium-speed lunar-lander-style arcade game with excellent graphics. Like most of Bill Budge's games, it is well done and functions flawlessly.
- The game is fairly difficult to play, enough so that it tends to discourage some new users. After a little practice, however, it becomes more enjoyable and exciting.
- Whether or not Tranquility Base is worth $25 depends on how much you enjoy the game and how often you play. I suggest that you try it out at a local computer store before you make a decision. ■

APPLE • ARMCO • ATARI • BANK OF LOUISVILLE • BAYLOR UNIVERSITY • BECHTEL • BELL TELEPHONE • BOEING • BORDEN • BYTE MAGAZINE • CALIFORNIA D.O.E. • CENTRONICS • CHASE MANHATTAN BANK • COMPUSHOP • CONSUMER COMPUTER MARKETING • COX CABLE TV/SPOKANE • DUKE UNIVERSITY MEDICAL CENTER • EASTMAN KODAK • GEN RAD • HARRIS SEMICONDUCTOR • HARVARD UNIVERSITY • IBM • ITT SEMICONDUCTOR • JONES & LAUGHLIN STEEL • LOYOLA UNIVERSITY • MATADOR PIPELINE • MICHIGAN STATE UNIVERSITY • MOUNTAIN HARDWARE • NATIONAL EYE RESEARCH FOUNDATION • NCR • ORTHO PHARMACEUTICAL • PACIFIC BANCORPORATION • PEABODY MUSEUM/HARVARD • SAVIN • SENTRY INSURANCE • SOUTHWEST FILM LAB • SWEETHEART PLASTICS • TEAM • THRIFT-WAY FOOD SERVICE • TOSHIBA INTERNATIONAL • U.S. COAST GUARD • U.S. FOREST SERVICE • UNIVERSITY OF MIAMI • WALTER REED ARMY MEDICAL CENTER • WASHINGTON UNIVERSITY • WESTINGHOUSE • WILSON GAS PROCESSING • WORLD WILDLIFE FUND • XEROX CORPORATION • YALE UNIVERSITY

Hardheaded Software.

The folks on this list are not exactly impulse buyers. In fact, before they buy anything it's usually subjected to painstaking research and evaluation. Each one chose software from High Technology.

In less than thirty minutes your dealer can show you why our software would be just right for you, too. To see the infinite variety of applications for your Apple II*, from inventory control to education, ask for a demonstration today.

High Technology

High Technology Software Products, Inc., P.O. Box B-14665, 8001 Classen Boulevard, Oklahoma City, Oklahoma 73113 (405) 840-9900

*Indicates trademark of Apple Computer, Inc.

Circle 184 on inquiry card.

Asteroids in Space and Planetoids

Oliver Holt
Old Nashua Rd
Amherst NH 03031

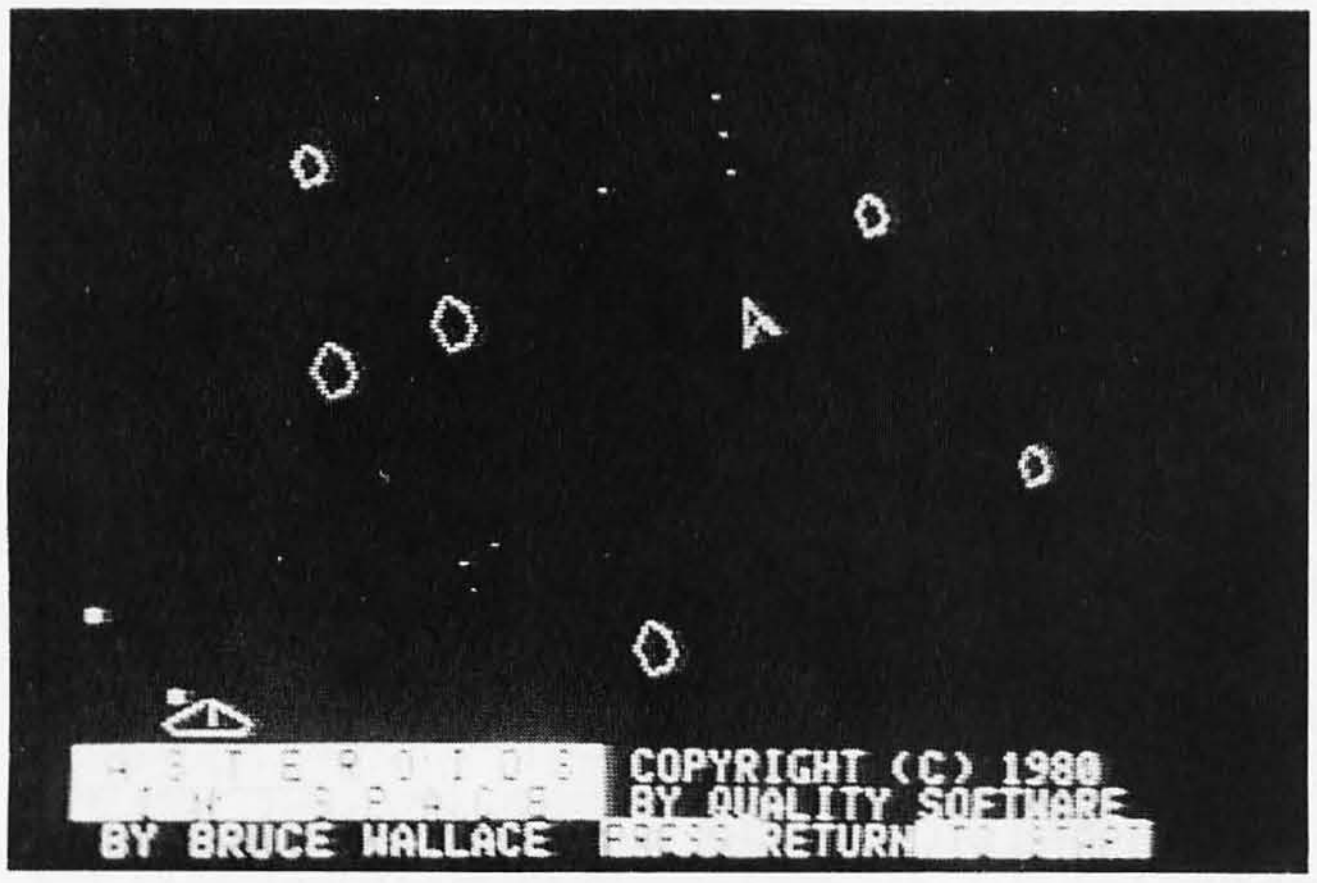

Photo 1: *Asteroids in Space is the title of the Asteroids game for the Apple from Quality Software. It is similar to the actual arcade game; the spaceship is controlled via the game paddles.*

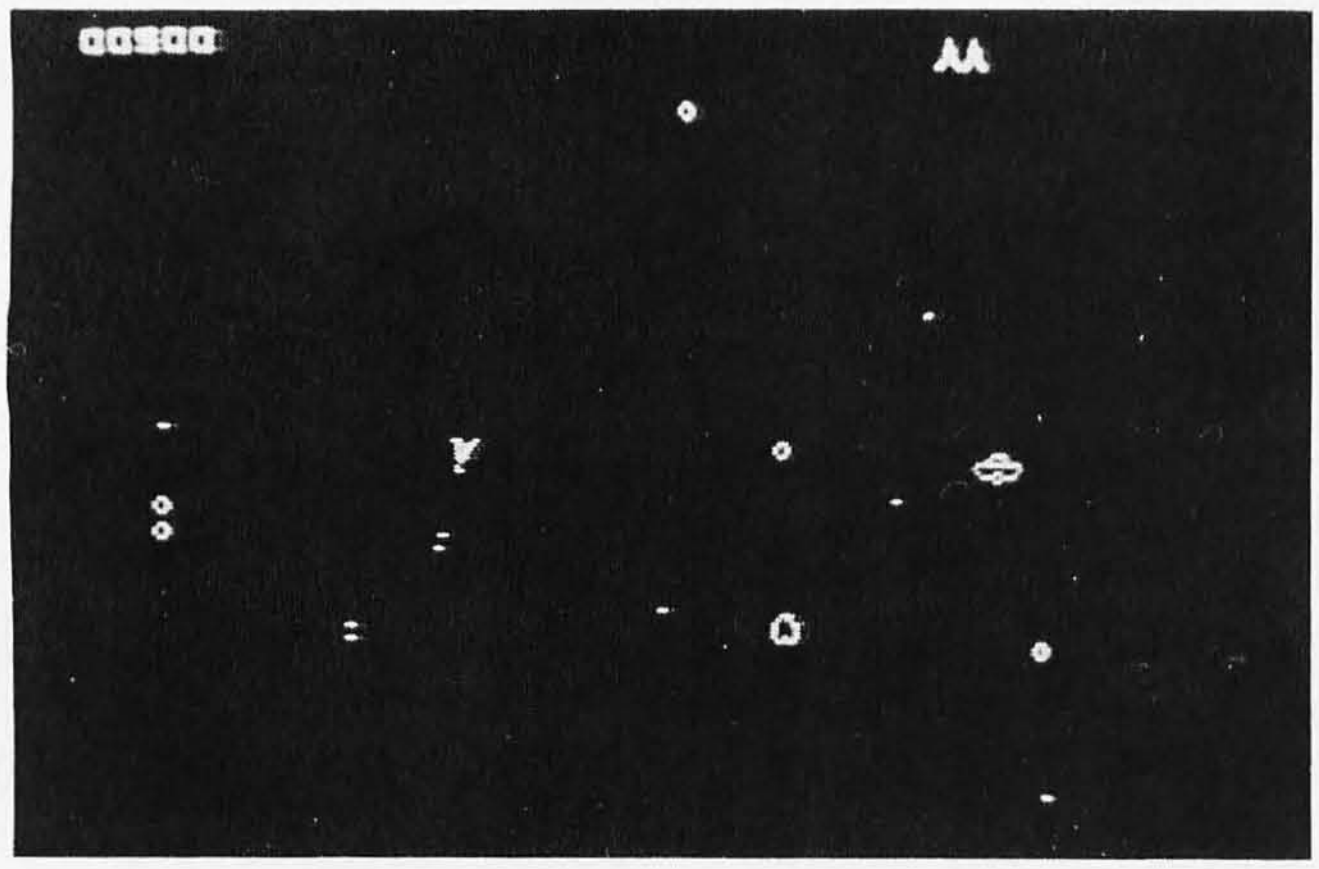

Photo 2: *Planetoids is Adventure International's offering. The use of machine-language programming combined with high-resolution graphics results in smooth action without a jittery picture.*

Asteroids by Atari Inc is certainly one of the most popular arcade games in this country, inspiring people of all ages to deposit their quarters with devotion. Due to this popularity, it was only a matter of time before a home-computer version was developed. Asteroids in Space (by Quality Software, referred to as QS) and Planetoids (by Adventure International, or AI) both closely simulate the Atari game, in which a player must destroy asteroids and alien ships by accurately firing a laser. An off-target laser shot or slow response is fatal. The Apple's high-resolution graphics capabilities allowed the authors to reproduce almost exactly the display features of the original game. Both games skillfully employ realistic sound effects. The two versions use game paddles to control the motion of a spaceship and to fire lasers, but because of differences in the method of control used each game has a unique feel.

Planetoids

On start-up, Planetoids (from AI) displays a menu that includes several levels of play. This menu is part of a HELLO disk program written in both Integer and Applesoft BASIC, allowing use in either an Apple II or an Apple II Plus. The options in this menu give a choice of easy, regular, or hard modes of play, as well as a demo mode to display how the game works.

In the easy mode everything on the screen is very explosive. Every planetoid particle has the potential to destroy your spaceship unless your laser beam gets to the particle first. (Points are based on the number of planetoids you destroy.) The regular mode is supposed to be an emulation of the actual arcade game, but it does not appear to be significantly different from the easy mode. In the hard mode, the planetoids behave differently; they migrate toward your ship as if pulled by gravity. This characteristic becomes particularly annoying when one of your ships is destroyed and you still have other ships left to play. At this point, the planetoids gather around

When You Have To Face A Deadline

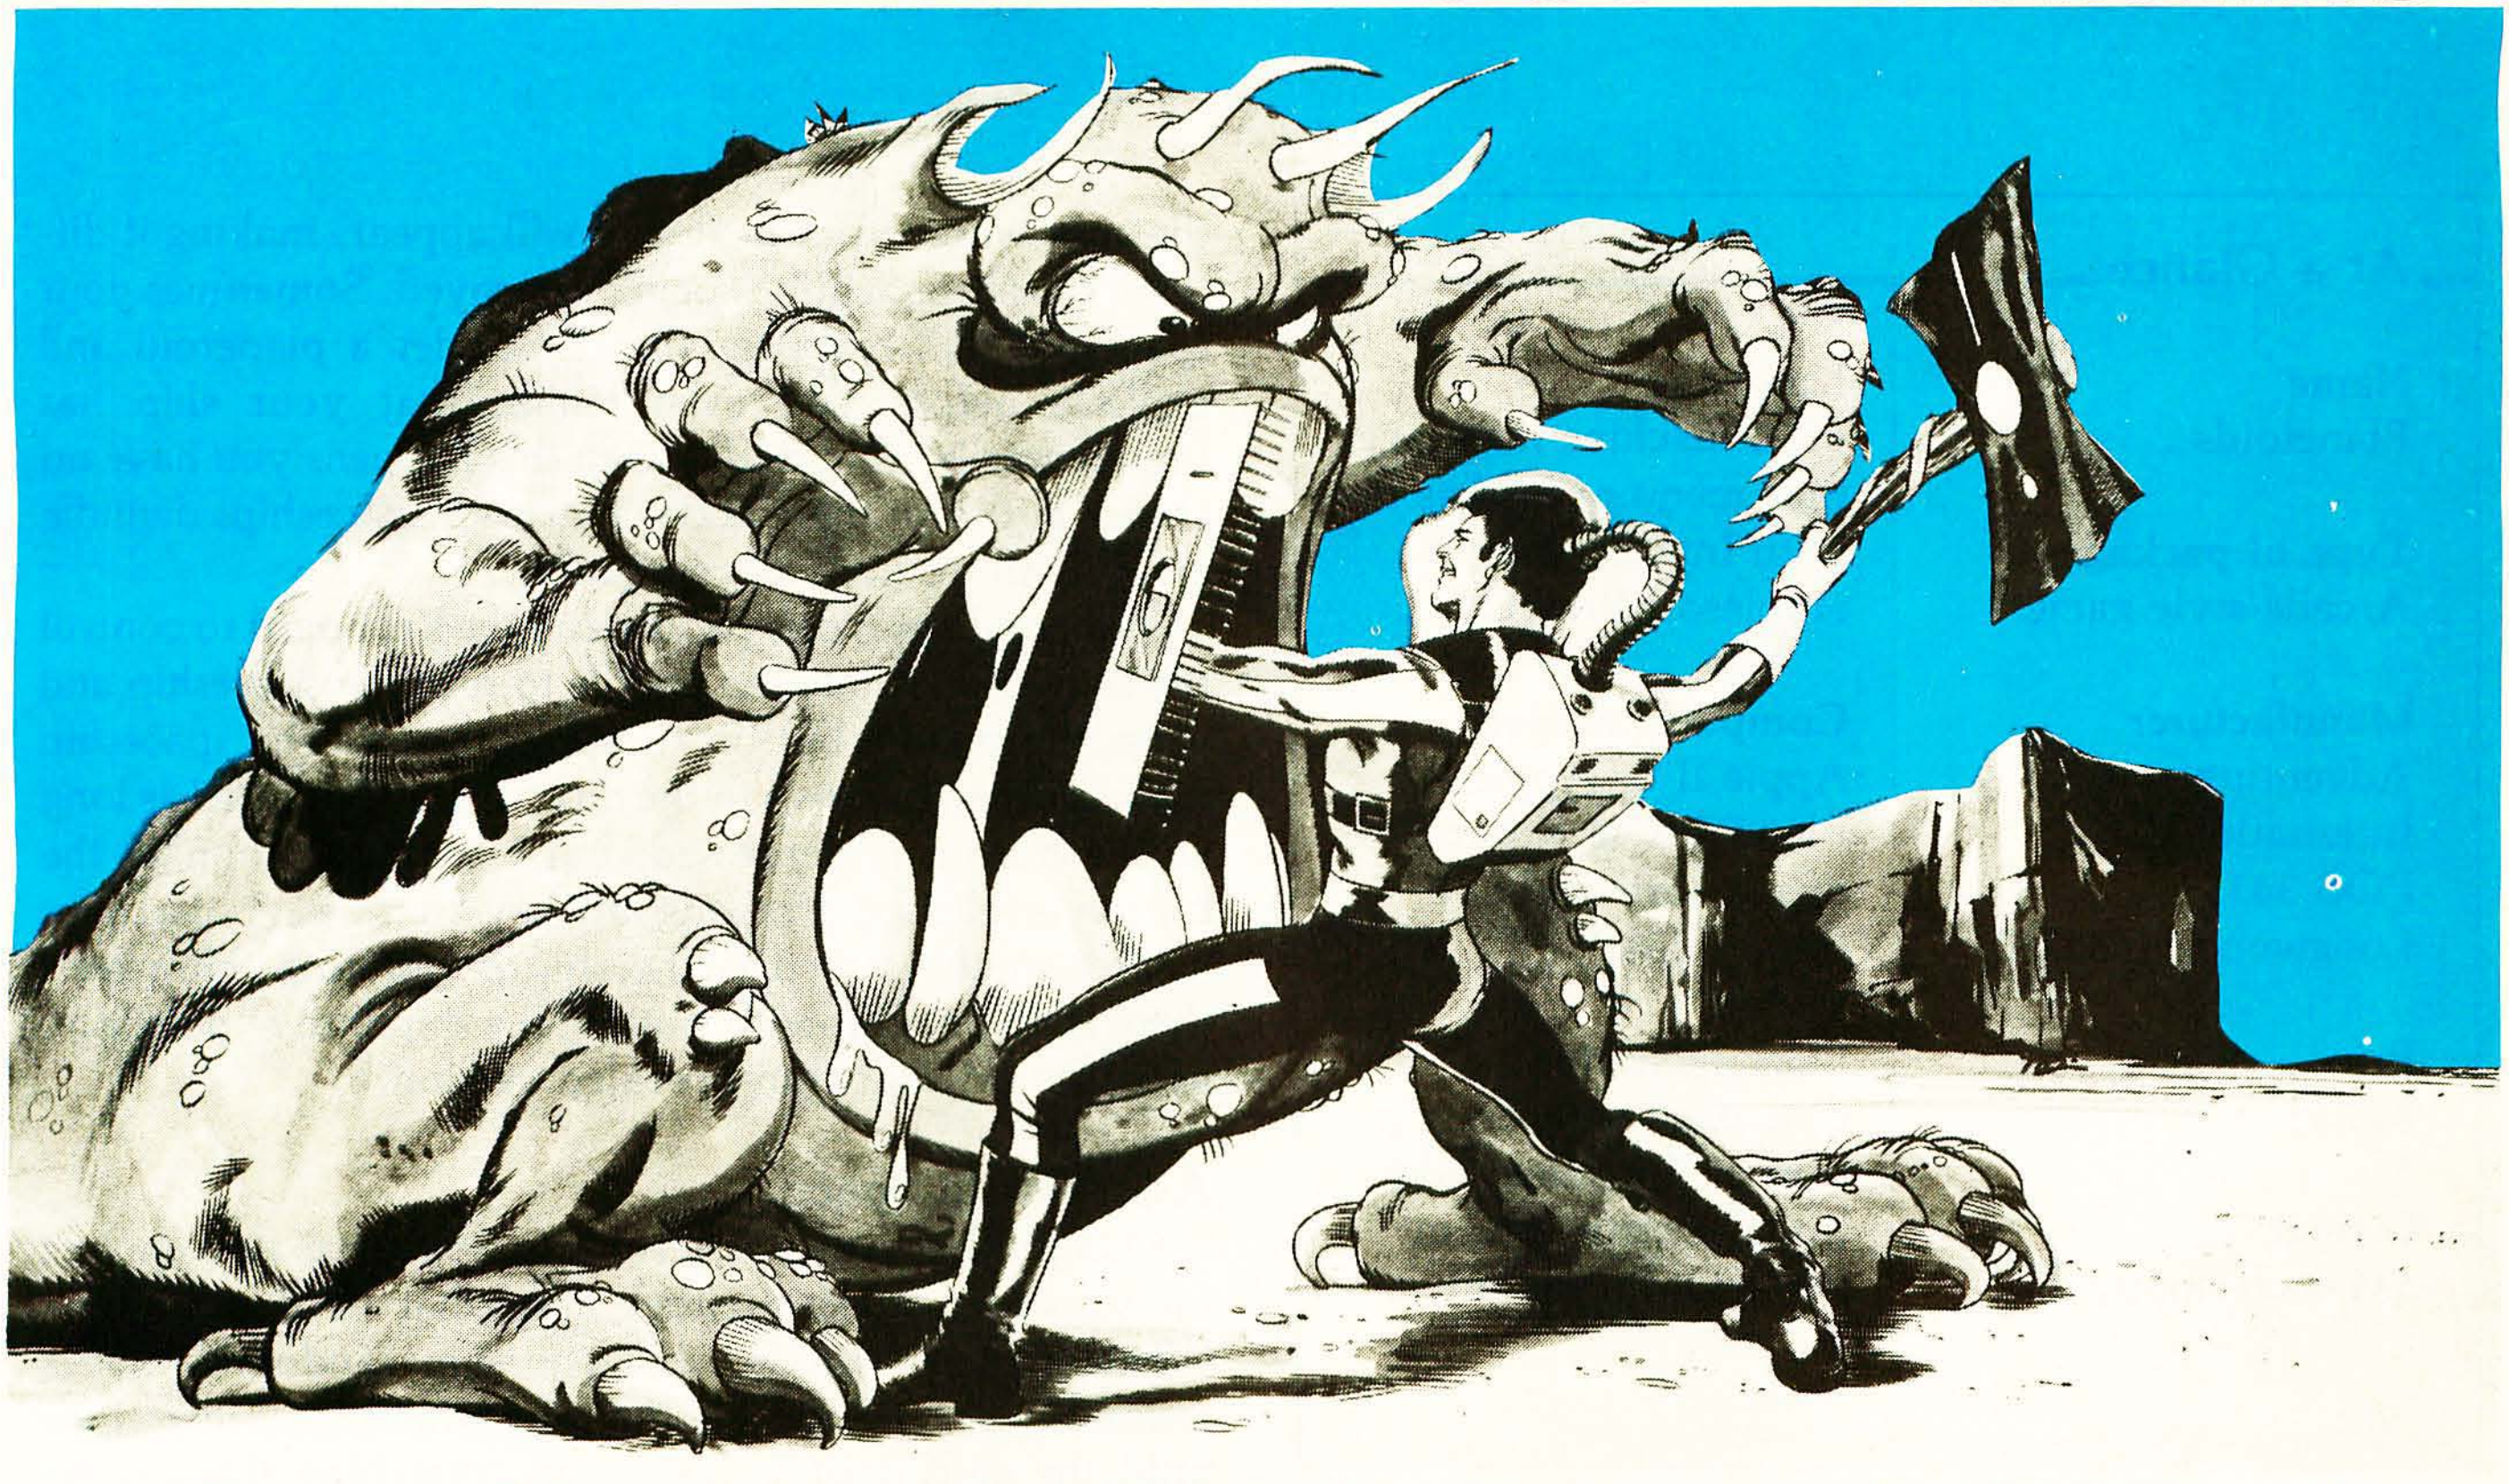

Arm Yourself With Pascal/MT+®

NOW! THE PACKAGE INCLUDES OUR EXCLUSIVE PASCAL ORIENTED SCREEN EDITOR.

You know what a monster a deadline can be if you have to face it without the proper tools. Arm yourself with an integrated set of programs, designed from the beginning for production use, all tuned to the single goal of producing reliable software. **Pascal/MT+** is a fully integrated program production system including our compiler, debugger, disassembler and linker.

Used by many companies, large and small, **Pascal/MT+** produces high quality reliable products in an amazingly short amount of time. Our run-time library contains all the tools needed to begin program construction immediately. **Pascal/MT+** produces efficient, small native machine code demanded by today's product developers. All of our library routines and features work exactly the same on 16-bit systems as they do on 8-bit systems so you can increase your capability without rewriting any of your software. Your production quality products demand production quality tools. Order **Pascal/MT+** now, call us today!

Pascal/MT+ Features:

An International Standard:

Pascal/MT+ conforms to the ISO Standard for Pascal, our competition doesn't even come close! A report on the performance of **Pascal/MT+** on the Pascal validation suite is included with each compiler.

Modular Program Compilation:

The **Pascal/MT+** modular compilation mechanism allows construction of fully coupled modules and programs allowing the modularization of large programs without any sacrifice in either space or time efficiency.

Efficient Native Code:

All versions of **Pascal/MT+** produce efficient, compact NATIVE OBJECT CODE. In an independent benchmark **Pascal/MT+** outperformed all other Pascal compilers on our target machines. In addition it produced the smallest final programs by including only the minimum run-time overhead necessary.

Totally Portable:

Pascal/MT+ has been designed from the beginning to generate code for many different microprocessors. **Pascal/MT+** programs you create today can be re-compiled to run on a more powerful machine tomorrow. All of the extended language features are present in every version of the compiler. This means you won't have to start over when the customer demands more, more and more.

Extensions:

Pascal/MT+ has many extensions to the Pascal language too numerous to describe in detail here. Our 160 page user's guide describes the features and gives examples of how to use them. A short summary of features is listed below: dynamic strings, BCD and Floating point reals, AMD9511 support, bit, byte and unsigned word manipulation, I/O port access, a full implementation of the NEW and DISPOSE heap and many others.

Target Machines:

Available now . . . 8080, 8085 and Z80
Available soon 8086, 8088
Requires CP/M or CP/M86

Payment Terms:

Cash, Check, UPS, C.O.D.,
Mastercard, VISA,
Company P.O.

MT Micro SYSTEMS

1562 Kings Cross Drive
Cardiff, California 92007 (714) 755-1366

Pricing:

8080/Z80	$475.00
Others	Call

Communication Arts, Huntington Beach, CA

At a Glance

Name
Planetoids

Type of package
Arcade-style game

Manufacturer
Adventure
International
POB 3435
Longwood FL 32750

Price
$19.95

Format
5¼-inch floppy disk

Language
6502 machine language (has menu programs in both Integer and Applesoft BASIC)

Computer needed
Apple II or Apple II Plus with 48 K bytes of memory and one floppy-disk

Documentation
One page with description of the game; additional instructions in the actual program.

the spot where your next ship will appear, making it difficult to escape without being destroyed. Sometimes your spaceship will reappear directly under a planetoid and explode before you even realize that your ship has (momentarily) returned. When this happens you have no choice but to sit there and watch your spaceships dwindle away with no hope of retaliation.

Planetoids uses one paddle and the keyboard to control the ship. You rotate the paddle to turn the spaceship and press the paddle button to apply thrust. The spaceship will continue to move in the direction it is pointed as long as the button is depressed, but it stops as soon as the button is released. Pressing any key on the keyboard fires a laser in the direction the ship is pointing. However, there is no provision for putting the ship into hyperspace, as in the original coin-operated version.

Asteroids in Space

Quality Software's Asteroids in Space has two choices on start-up, offering either a normal or demo game. When in demo mode, the spaceship randomly moves around in space shooting the laser beam in all directions until the ship itself is destroyed. Watching this can be useful if you have never played this kind of game before, but most users will want to go directly to the normal mode. This mode of play offers separate choices for either normal or fast lasers and asteroids. According to the documentation, higher scores may be obtained with either fast lasers or fast asteroids, or both. The game's difficulty increases, however.

Both game paddles are used to control the action in this version. One paddle controls the movement of the spaceship, rotating it by turning the paddle, and thrusting it by pushing the button. However, this game incorporates momentum into the action of the spaceship, requiring you to use the thrust to slow the ship or to change its direction of movement. [*I have trouble playing this version because I spend all my time trying to stop my ship from moving....*GW] Unlike the AI game, your ship can move in one direction while it fires in another. Lasers are fired using the game button on the other paddle. This method of control is harder to mentally and physically coordinate, making the game more challenging and frustrating. This game, like Planetoids, does not have the hyperspace feature of the original Atari version.

Scoring for both games is determined by the number of alien spaceships and asteroids (or planetoids) you can destroy. The QS version awards from twenty to thirty points for larger asteroids, more for smaller ones. Alien spaceships are worth up to 300 points. The AI game allows only ten points for the planetoids and up to fifty for the alien ships.

The graphics in both games are very good, very similar to the original arcade game. All the objects move

NEW DISK SYSTEM POLISHES APPLE™

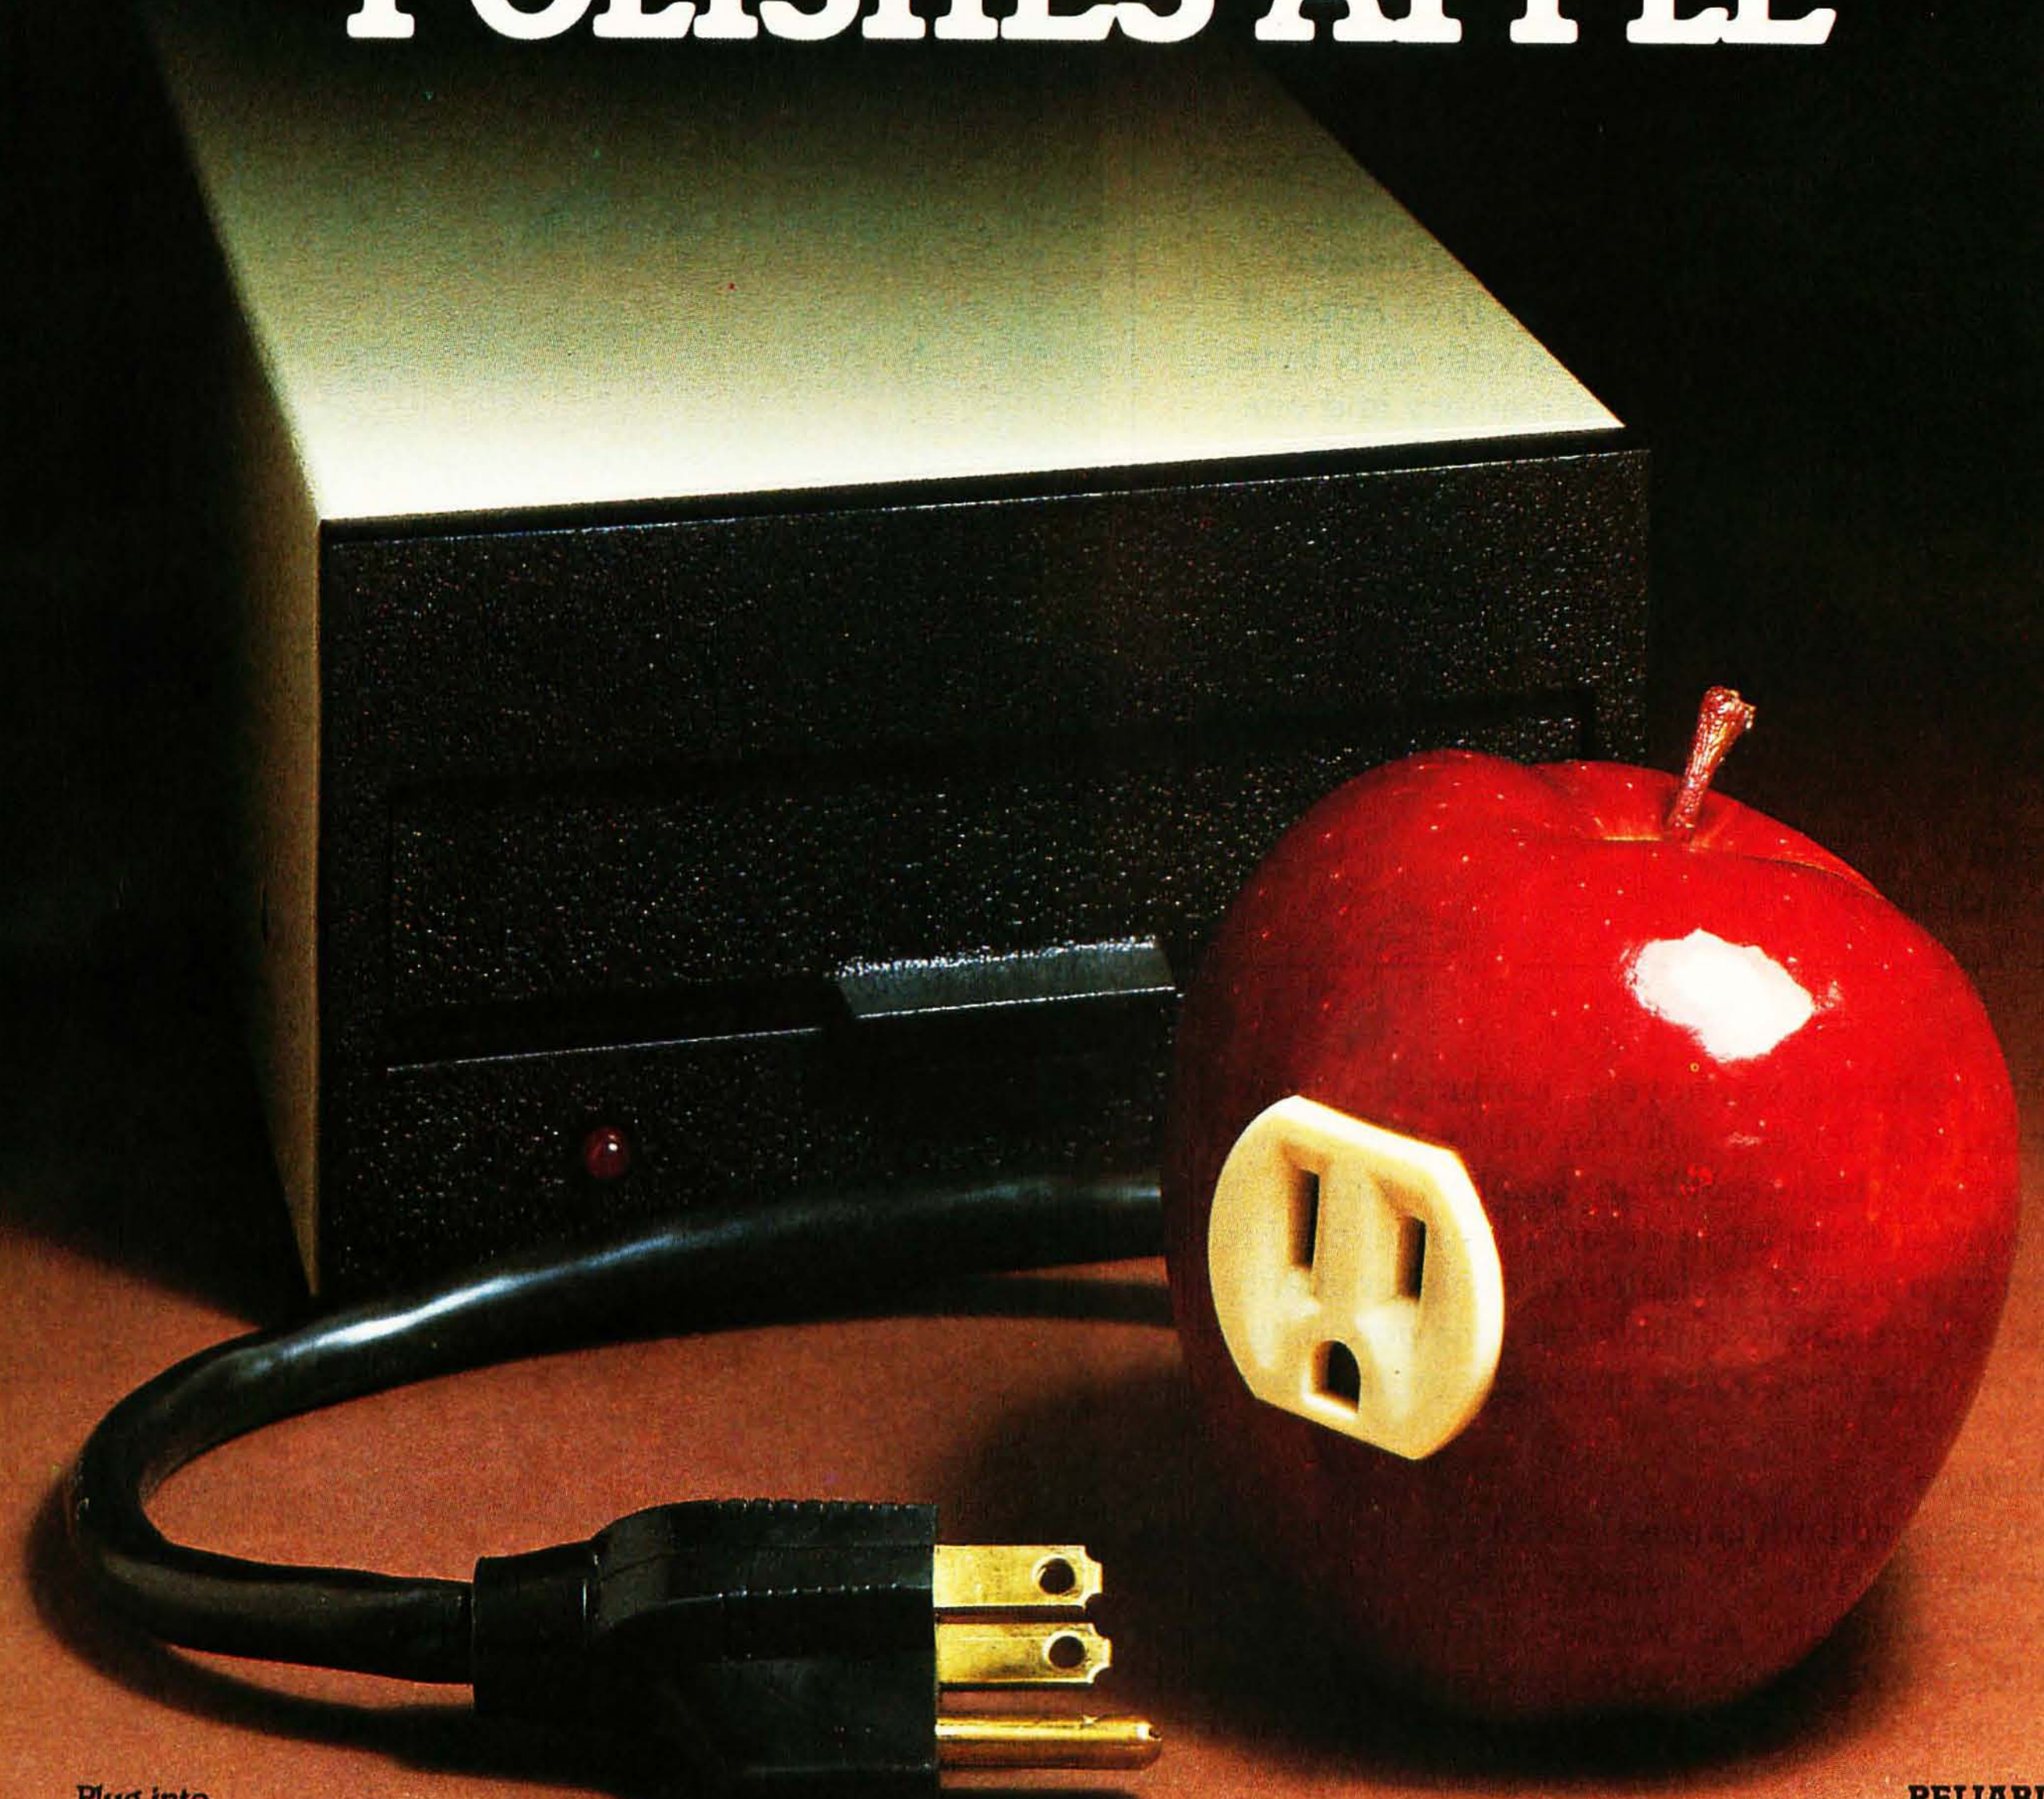

Plug into your Apple II or Apple II-plus with a Micro-Sci disk system, and you get Apple software compatibility, PLUS: Increased capacity, improved performance and higher reliability. And you save money, too!

COMPATIBILITY:

With thousands of programs currently available in Apple format—and many more being released every day—the ability to read and write diskettes interchangeable with the Apple disk II system is a MUST. The Micro-Sci disk subsystems offer this compatibility and more. Our disk system has a jumper-selectable boot PROM to move from DOS 3.2 to DOS 3.3, or to the language system at your fingertips.

CAPACITY:

The Micro-Sci A-40 system provides 40 tracks of storage (versus the Apple disk II system which offers only 35 tracks). The A-40's 5 extra tracks give you an additional 20,000 bytes of storage. And for even greater capacity, check out our A-70 system which offers a full 70 tracks of storage—exactly DOUBLE the storage capacity of the Apple disk II system!

PERFORMANCE:

Micro-Sci's disk systems' abbreviated track-to-track access time of 5msec (versus 15msec for the Apple disk II) means improved random disk access performance.

RELIABILITY:

Micro-Sci disk systems incorporate band-actuated head positioners for faster access and more accurate head positioning. Each disk system features Micro-Sci's improved media centering system which provides uncommonly accurate diskette registration, and virtually eliminates damage to the media centering hole.

PRICE:

The Micro-Sci A-40 drive, with controller, is priced at only $549; the second A-40 drive is only $449. The large-capacity A-70 disk drive with controller is only $699, with the second drive priced at only $599.

Call or write us today to order your new Micro-Sci disk system.

µ-SCI

17742 Irvine Boulevard, Suite 205, Tustin, California 92680 / Phone: 714/731-9461 / Telex: 910-346-6739

Apple and Apple II are registered trademarks of APPLE COMPUTERS INC., SAN JOSE, CALIFORNIA

At a Glance

Name
Asteroids in Space

Type of package
Arcade-style game

Manufacturer
Quality Software
6660 Reseda Blvd
Suite 105
Reseda CA 91335

Price
$19.95

Format
5¼-inch floppy disk

Language
6502 machine language

Computer needed
Apple II or Apple II Plus with 48 K bytes of memory and one floppy-disk drive

Documentation
One page with description of the game; additional instructions in the actual program.

smoothly without the annoying "jumping" or jitter effect predominant in lower-resolution video games and some of the poorer high-resolution graphics games. Sound effects were also similar to the arcade game, but I felt the QS version to be more realistic and of higher quality. The AI sounds were barely audible over the pounding of the keyboard while I was firing at objects on the screen.

Conclusions

Having played both games, I feel it's difficult to choose between them. The QS version offers different speed variations, while the AI version offers three levels of play. I like the AI version better because it can be slightly easier to play and there are three distinct variations to the game. The more astute game player might prefer the greater physical dexterity and mind/eye coordination required by the QS version. However, the games are different enough to entice most people to own both. ■

A Public Service of This Magazine & The Advertising Council

Ad Council

Need help? Call us.

Red Cross is counting on you.

The PASCAL SERIES By The Denver Software Company... A Breakthrough In Software Development.

PASCAL TUTOR™

A step-by-step introduction for learning the basic Pascal programming language. Presented in a simple format and logical order, the PASCAL TUTOR™ uses clear examples to ensure complete comprehension and progress for the beginning Pascal programmer.

The PASCAL TUTOR™ is a computer-paced course of study, that includes two diskettes and a comprehensive tutorial manual. The manual provides instructions and the computer verifies the work, enabling the user to learn basic Pascal syntax and structured programming as quickly and efficiently as possible.

PASCAL PROGRAMMER™

Save time and concentrate your efforts on application design rather than detail programming. The Denver Software Company has designed pre-tested, ready-to-use programs and routines which drastically reduce the effort normally associated with coding, testing and debugging.

The PASCAL PROGRAMMER™ is a collection of linked intrinsic modules written in UCSD Pascal* which gives you a wide variety of functions that can be easily modified for specific applications.

Five categories of modules are supplied: General Utility (for direct interaction between user and application), Sorting and Searching, Disk File Access, Report and Display, and Disk Copying.

The PASCAL PROGRAMMER™ comes complete with a comprehensive user's manual containing source listings and examples, ideas and instructions for modifications and all needed operating instructions. The included diskettes have demonstration and utility programs, source code, and ready-to-use library units.

Because complete program listings are included in the manual, the PASCAL PROGRAMMER™ can be applied to any Pascal-based computer and used with either diskettes or hard discs.

Suggested retail price, $90.

*UCSD Pascal is a trademark of the Regents of the University of California.

THE DENVER SOFTWARE COMPANY
MANUFACTURERS OF MICROCOMPUTER SOFTWARE

36 Steele Street, Suite 19 • Denver, Colorado 80206
Dealer inquiries welcome. 303 321-4551.

"Finally...Space Technology Has Come Of Age, To The Benefit Of Us All."

Wally Schirra

Captain Schirra, one of the first Astronauts, flew all three missions—Mercury, Gemini and Apollo—during his 295 hours in space. His contribution to the application of microcomputer technology plus his expert knowledge and experience are valuable assets in his role as adviser to The Denver Software Company.

The Denver Software Company is a manufacturer of microcomputer application software for business and home use; emphasizing ease-of-use, quality, and economy of time and investment. DSC's business applications are developed with the advice of the Big Eight accounting firm, Peat Marwick Mitchell & Co.

Products of
The Denver Software Company include:
The FINANCIAL PARTNER™, an accounting system for small business and home use that features a self-teaching bookkeeping manual.
The PASCAL TUTOR™ and The PASCAL PROGRAMMER™.
See details on facing page.

THE DENVER SOFTWARE COMPANY

MANUFACTURERS OF MICROCOMPUTER SOFTWARE

36 Steele Street, Suite 19 • Denver, Colorado 80206
Dealer inquiries welcome. 303 321-4551.

Circle 121 on inquiry card.

Programming Quickies

Using Page Two with Apple Pascal Turtle Graphics

**Bruce Wallace, 333 Escuela
Ave #316, Mountain View CA 94040**

So, you have Pascal up on your Apple and you're ready to use the built-in turtle graphics. One of the first things you probably notice is that the Pascal manuals never mention which high-resolution graphics page you are working with. In fact, the manuals don't even mention that a second page exists. Well, it does. And, it turns out to be fairly simple to use the unit TURTLEGRAPHICS on either page. There are three things to be considered:

1. reserving the page two memory space
2. getting TURTLEGRAPHICS to plot on page two
3. getting the Apple to display page two

Before we get into graphics, we'll need a technique for PEEKing and POKEing. This can be done with the help of the following declarations:

```
TYPE byte = 0..255;
     pab = PACKED ARRAY[0..1] OF byte;
     multitype = RECORD
                   CASE integer OF
                     1 : (int:integer);
                     2 : (ptr:↑pab);
                     3 : (dptr:↑integer)
                   END;
```

A variable declared to be of type "multitype" can be referred to as either an integer or a pointer variable. This leads to the following definitions:

```
PROCEDURE poke(addr:integer; value:byte);
VAR local:multitype;
BEGIN
   local.int := addr;
   local.ptr↑[0] := value
END;

FUNCTION peek(addr:integer):byte;
VAR local:multitype;
BEGIN
   local.int := addr;
   peek := local.ptr↑[0]
END;
```

Now that we can access memory directly, we need to reserve the memory space for high-resolution page two; otherwise, Pascal might try and use it for stack or heap space. The UCSD extension routine RELEASE will do the trick for us. Assume that "save" is declared to be of type "multitype." The code segment:

```
save.int := 24576;
release(save.dptr);
```

will reserve all of low memory up to address hexadecimal 6000 (24 K). This is done once at the beginning of your program.

Next, inform TURTLEGRAPHICS which page it is to use. Do this by placing a 2 or a non-2 value into a particular memory location for page-two or page-one plotting, respectively. A pointer to this location resides as the eighth entry in a pointer table. The table itself is pointed to by the contents of absolute locations 254 and 255 decimal. This leads to the following routine, which sets the page to be plotted on:

```
PROCEDURE setdraw(page1:boolean);
VAR local:multitype;
BEGIN
   local.int := 254;
   local.int := local.dptr↑ + 14;
   IF page1 THEN local.dptr↑ := 1 ELSE
        local.dptr↑ := 2
END;
```

Finally, we must be able to switch the page that Apple is displaying. After we are in the high-resolution mode via a call to GRAFMODE, we simply PEEK or POKE as we would in BASIC. Using the above PEEK or POKE routines, access −16299 or −16300 for page two or page one, respectively.

In general, INITTURTLE only works with page one, and, in fact, it even resets the display mode to page one. Use FILLSCREEN to clear page two. Also, the turtle position is not moved when changing the high-resolution page via "setdraw" above. For example, if you left off plotting at *x,y* position 50,50 with an angle of 45°, that's where you will start plotting on the other page.

Armed with these handy code segments, you can now get smooth animation by flipping from page to page. This should open up new possibilities for Apple Pascal graphics users.■

Lifelines.

The serious publication for the serious software user.

WHAT LIFELINES READERS READ ABOUT IN APRIL

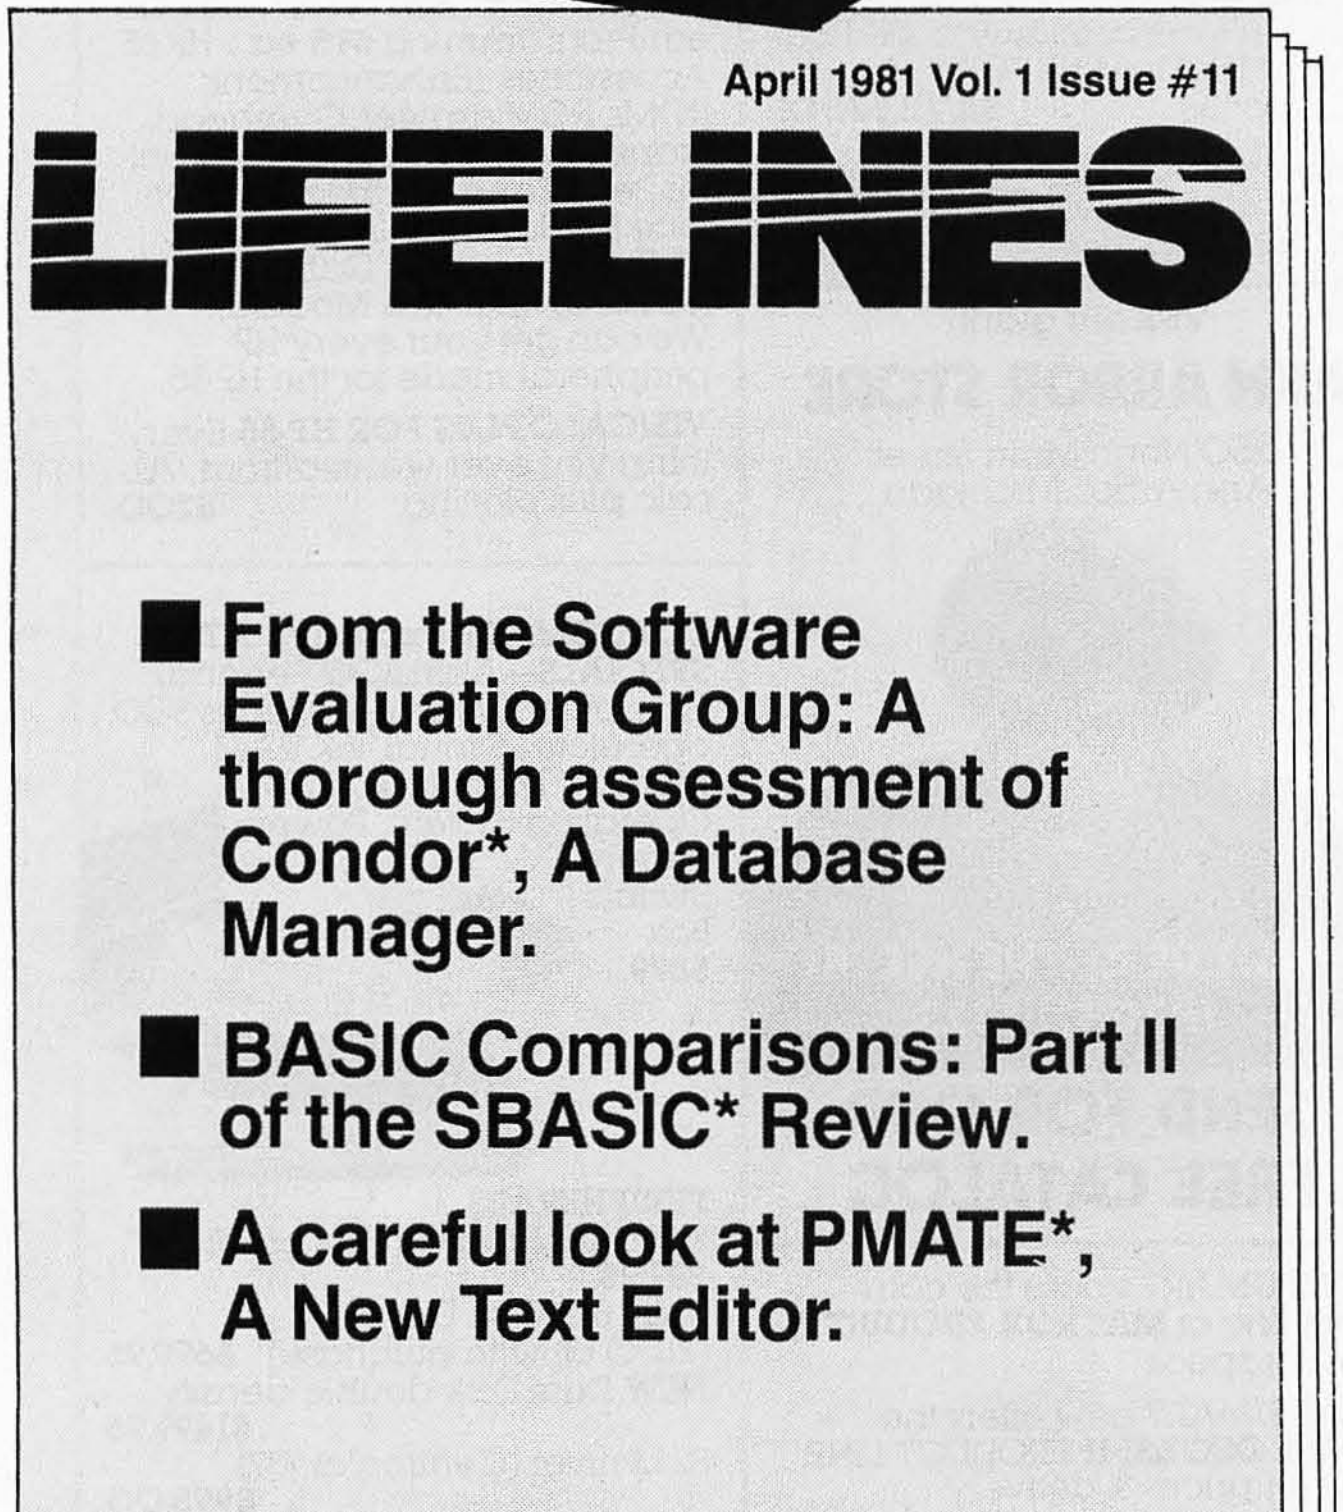

April 1981 Vol. 1 Issue #11

LIFELINES

- **From the Software Evaluation Group: A thorough assessment of Condor*, A Database Manager.**
- **BASIC Comparisons: Part II of the SBASIC* Review.**
- **A careful look at PMATE*, A New Text Editor.**

Lifelines is the publication dedicated to keeping you up-to-date on happenings in the explosive micro-computer world.

Lifelines specializes in news about software for CP/M* and similar operating systems.

Lifelines does it with a guarantee of high level, in-depth analysis of software uses and capabilities.

Lifelines does it with valuable information necessary to make intelligent software buying decisions.

Lifelines does it with the latest information on The CP/M Users Group.

Lifelines does it with thought provoking discussions on many of the more controversial issues facing computer users.

How can you live without Lifelines?

Subscribe Now!

$18.00 for twelve issues: U.S., Canada, and Mexico.
$40.00 for twelve issues: all other countries.
$2.50 for each back issue: U.S., Canada, and Mexico.
$3.60 for each back issue: all other countries.

All orders must be pre-paid by check to: LIFELINES, 1651 Third Avenue, New York, N.Y. 10028—Checks must be in U.S. $, drawn on a U.S. bank. Or use your VISA or MASTERCARD. Call (212) 722-1700

LIFELINES

VISA MasterCard

*Condor is a trademark of Condor Computer Corporation.
*SBASIC is a trademark of Topaz Programming.
*PMATE is a trademark of Phoenix Software Associates, Ltd.
*CP/M is a trademark of Digital Research, Inc.

Circle 217 on inquiry card.

10 DAY FREE RETURN

APPLE II
We carry the most complete inventory of Apple computers, peripherals, and software. CALL!

Our Best Selling Apple System: Save over $250 on our most popular Apple System. System includes a 48K Apple II. Apple Disk, DOS3.3, & Controller, and a Sup R. Mod RF Modulator.

List:	$2209.00
COMPUMART Sale Price:	$1895.00

SOFTWARE FROM APPLE

Apple Plot. The perfect graphic complement for Visicalc.	**$70.00**
Dow Jones News & Quotes	**$95.00**
Adventure (Uses 48K)	**$35.00**
DOS Tool Kit	**$75.00**
Apple Fortran	**$200.00**
Tax Planner	**$120.00**

FROM PERSONAL software

Visicalc	**$149.00**
Desk Top Plan	**$99.00**
NEW FROM MUSE	
The Voice	**$39.95**
Super Text	**$150.00**
Address Book	**$49.95**

Miscellaneous Apple II Accessories.

Easy Writer (80 col. need a Videx)	**$249.00**

NEW from Apple for the Apple II:

DOS 3.3 Convert disks to 16 sector format for 23% more storage and faster access	**$60.00**

NEW for the Apple II

From MicroSoft	
16K RAM Board	**$195.00**
FORTRAN	**$175.00**
COBOL	**$750.00**
Card Reader from Mountain Hardware	**$1,195.00**
HI-Res Dump for 460 Printer from the Computer Station	**$49.95**
Trend Spotter—Statistical graphics program. Works with Visicalc.	**$275.00**

Exclusive—Magic Wand for the Apple—Required Videx, Z-80 soft-card **complete system $925.00** (Requires 48K Apple and disk.)



HARDWARE ACCESSORIES FOR APPLE

Silentype Printer w/x face	**$635**
Super Sound Generator (mono) **$159** (stereo)	**$259**
Light Pen	**$249**
X-10 Controller (plugs into paddle port)	**$49**

Mountain Computer—Expansion accessories for your Apple

Introl—10 System	**$289**
Super Talker	**$299**
The Music System	**$545**
ROM plus board w/Keyboard filter	**$199**
Clock Calendar	**$280**
Apple Expansion Chassis	**$650**
ROM Writer	**$175**
16 Channel A to D Converter	**$350**

From VIDEX!—Video Term.
80 Col. x 24 line, 7 x 9 Matrix plug in compatible board for the Apple II. Price **$325** without graphics EPROM. With graphics EPROM **$350.**

S.S.M. Serial & Parallel Apple Interface	**$225**
ABT's Numeric Key Pad	**$110**
California Microcomputer Keyboard	**$195**

Save $200 on Apple Accessories with purchase of an Apple II. Order accessories for your Apple, and we will give you $200 off the purchase price of those accessories. **SAVE $200**

APPLE III IS IN STOCK—CALL!
APPLE III Information Analyst Package—128K Apple III, Black and White Monitor 12", and information analyst software. **Price $4740.**

CompuMart carries the entire Commodore line of computers, peripherals, and accessories—call our sales force today for complete prices and specs.

The CompuMart/Commodore Word Processing System
Get crisp, letter quality output and ease of operation that's unsurpassed. This system includes a Commodore 8032 32K CPU, a 4040 Dual Disk, a C-Itoh printer and X/face, and Word Pro 4 Plus (all cables included). Call for details and low prices. List $5685. **COMPUMART $4995.**

A complete system including a Dual Disk Drive, Tractor Printer, and an 80 column 32K CPU for under $4,000. No interfaces needed. Cables included. List $3,985. **CompuMart $3635**

New accessories from Commodore for Commodore

Visicalc	**$199**
Word Pro 4	**$299**
Ozz the Information Wizard	**$395**
Wordcraft 80	**$395**
Tax Preparation Planner	**$495**
Dow Jones Portfolio Mgmt System	**$149**
Personal Tax Calculator	**$69**
Assembler Development Package	**$99**

SAVE $200 on Commodore Accessories with purchase of a 32K PET. When you buy a 16K PET, apply $100 toward PET accessories. **SAVE $200!**

Educators Take Note!! Commodore has extended its 3 for 2 deal until 6-30-81.

PM65 Expansion Accessories for the Aim-65
Call for specs and prices.

Forth for Rockwell AIM-65	**$195.00**

ROCKWELL AIM 65

Our AIM system includes 4K AIM with BASIC interpretor assembler. Power Supply. Cassette recorder & Enclosure	**$799.00**
4K AIM-65	**$499.00**
PL65 High Level Language	**$125.00**
Paper for the Aim (roll)	**$2.50**
Rockwell's 4-slot Motherboard (**sale**)	**$175.00**
Fourth for Rockwell AIM-65	**$175.00**
850 Interface w/Cable	**$249.95**

NEW SUPER SPECIALS—

HP83 Basic System—Includes HP-83, ROM Drawer, Mass Storage ROM, 5¼" Single Master Flexible Disc Drive, HP-IB Interface Module, 2 meter HP-IB cable. **$4249.**

HP-85 System—Save $400 on HP-85 Accessories with purchase of an HP-85. Order accessories with your HP-85 and we will save you $400 off the purchase price of those accessories. **SAVE $400!**

HP-85 ACCESSORIES—We carry HP Peripherals (Disk Drives to Graphics Plotters) Enhancements: (BASIC Training, General Statistics, Financial Decision, Math, Linear Programming **$95 ea.**); HP-85 Accessories; (Enhancement ROMs, ROM drawer, Overhead Transparency Kit); Supplies: (Plotter Pens, Tape Cartridges); Interface Modules (HP-IB Interface, HP-IB Interconnect Cables, Serial (RS-232C) Interface Module). We can get your every HP peripheral made for the HP-85.

VISICALC PLUS FOR HP-85 Everything you ever wanted from Visicalc plus plotting. **$200.**

Super Selling Terminals
We have the following **Lear Siegler** Terminals in stock at prices too low to print—Call for quotes.

ADM—3A Industries favorite dumb terminal for some very smart reasons.

ADM—3A + **NEW** from Lear Siegler. CALL!

IT IS HERE!—It is the **new** Intermediate Terminal from Lear Siegler. Call for details.

Dysan Diskettes—Single side, Single density, Hard or Soft Sector **$5. ea.**

Memorex 3401's—5¼ discs **$3.25** with hub ring for Apple **$3.50.**

Memory Integrated Circuits—Call for qty. discounts when ordering over 50 units.
Motorola 4116 (200 Nanosecond, Plastic) **$4.50 ea.**
Fairchild 2114 (Standard Power, Plastic) **$4.50 ea.**



HP-41C Calculators $199.00

Memory Modules. For storing programs of up to 2000 lines of program memory **$29.95**

"Extra Smart" Card Reader. Records programs and data back onto blank magcards. **$199.00**

The Printer. Upper and Lower case. High resolution plotting. Portable Thermal operation **$355.00**

Application Modules **$29.95**

HP 41CV Plus Card Reader & Printer **$799.00**

Quad RAMS for the 41-C (Equivalent to four Memory Modules all packed into one.) **$95.00**

Visit our giant

ANN ARBOR STORE

1250 North Main Street
Ann Arbor, Michigan

VISIT US AT THE NCC '81
BOOTH 1623

SEND FOR OUR FREE CATALOG

COMPUMART stocks the complete line of **MATROX PRODUCTS.** Call for specs.

COMPUMART now offers the ENTIRE **DEC LSI-11** PRODUCT LINE. Call for prices & delivery.

NOVATION CAT^{tm} ACOUSTIC MODEM
Answer Originate, 300 Baud, Bell 103 **$169.00**

NEW! D-CAT
Direct Connect Modem from Novation. **$199.**

COMPUMART exclusive ATARI SPECIALS—Atari 800 Personal Computer System—Includes 800 operators Manual, 16K RAM Memory Module, 10K ROM, Operating System, Power Supply, TV Switch Box **$899.**



PERIPHERALS

Atari 410 Program Recorder	**$89.95**
Atari 810 Disk Drive ($100 off with purchase)	**$699.95**
NEW Dual Disk double density	**$1499.95**
825 Printer (Centronics 737)	**$995.00**
RS232 Interface w/Cable	**$249.95**
NEW! Light Pens	**$74.95**
NEW! Visicalc for Atari	**$199.00**

Educators Take Note. Atari has extended its 3 for 2 deal until 6-30-81. Any educational institution that buys two Atari 800's will receive an Atari 400 computer absolutely **FREE.** Call our sales dept. for complete details.

IMPORTANT ORDERING INFORMATION All orders must include 4% **shipping and handling.** Mass. residents add 5% sales tax. Michigan residents 4% for sales tax. **Phones** open from 8:30 a.m. to 7:00 p.m., Mon.-Fri.; 11:00 a.m. to 4:00 p.m. Sat. **P.O.'s** accepted from Dun & Bradstreet rated companies—shipment contingent upon receipt of signed purchase order. **Sale prices** valid for month of magazine date only—all prices subject to change without notice. Our Ann Arbor retail store is open 11:00 a.m. to 7:00 p.m. Tues.-Fri., 10:00 a.m. to 5:00 p.m. Saturdays.

EXCLUSIVE from COMPUMART! Special Offer. Zenith Color Video Monitor for $379!

NEW FROM SANYO—Four Great Monitors at Low COMPUMART Prices. Sanyo's new line of CRT data display monitors are designed for the display of alphanumeric or graphic data.

9″ Sanyo Monitor B/W	**$179.**
12″ Sanyo Monitor B/W	**$289.**
12″ Sanyo Monitor with green screen	**$299.**

THE NEC MONITOR—Composite video using BNC connectors. 8-pin connector for VCR/VTR video loop, In/Out and television reception. **$599.**



CENTRONICS PRINTERS
The incredible Model 737. The closest thing to letter quality print for under $1,000. 737-1 (Parallel Interface)
List Price $899. **SPECIAL $795.**
730-1 **Sale Price $695.**



NEW FROM INTEGRAL DATA
THE IDS 560 PRINTER. All the exciting features of the 400 series plus 14½″ paper capacity, 132 col. graphics printer.
Price $1695.

IDS 445. Priced lower than the 440 and equipped with a better print head. IDS 445 w/graphics **$894.** IDS 445 w/o graphics **$795.**

IDS 460 $1,295
The 460's features include: Correspondence quality printing, high resolution graphics capability, programmable print justification.

Omni Printers from Texas Instruments
The 810—List $1895. **SALE! $1795.**
The 820 (Ro) Package—Includes machine-mounted paper tray and cable. A compressed print option and device forms control are standard features. **$2,155.**
The 820 (KSR) Package—Includes full ASCII Keyboard plus all of the features of the RO **$2395.**

COMPUMART FEATURES TYPEWRITER QUALITY PRINTERS:

C-ITOH STARWRITER: LETTER QUALITY PRINTING FOR UNDER $2,000!
This daisywheel printer gives high quality at a low price. 25 cps. Parallel and serial interfaces available. **Price $1895.**

For this month only COMPUMART will give **10% off** on any word processing package when you buy one of the above letter quality printers from us.

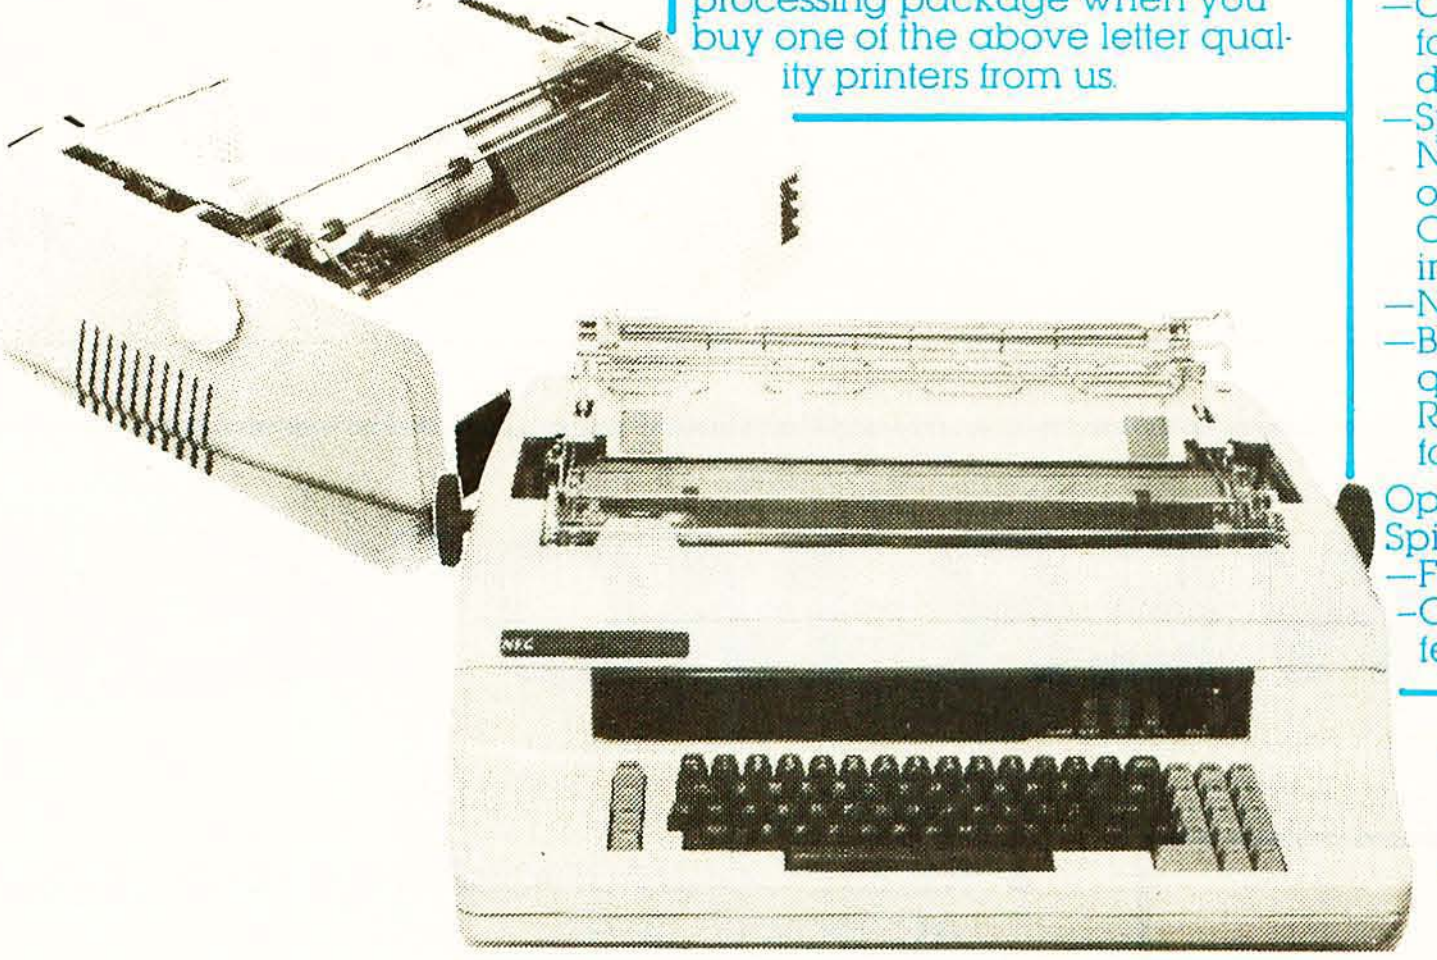

NEC THE FIRST NAME IN LETTER QUALITY PRINTERS
COMPUMART offers beautiful print-quality with NEC Spinwriter terminals. Both KSR and RO versions give unsurpassed hard copy output. CALL

NEC Spinwriters include these special features:
- One of the highest reliability factors in the industry. Less down time.
- Spinwriters utilize the unique NEC design thimble as opposed to the daisywheel. Capable of 30 million impressions.
- National Service.
- Both thimbles and ribbons are quickly and easily changed. Ribbons come in a cartridge for stain free removal.

Options Available for NEC Spinwriters:
- Field installable tractor feed
- Can be ordered with cut sheet feeder installed at factory.

	COMPUMART PRICE	List Price
5510	**$2749.**	$3055.
5515	**$2849.**	$3135.
5520	**$3149.**	$3415.
5525	**$3249.**	$3455.
5530	**$2749.**	$3055.

SPECS
5510 Receive—Only (RO), Friction feed platen, copy control, impression control, bidirectional, 10-12 pitch, 6-8 lines per inch, autofeed, ribbon-out, cover open switch, and self-test.
5515 RO unit, specs. same as 5510s. Diablo compatible.
5520 KSR with numeric keypad. Specs same as 5510.
5525 KSR with numeric keypad. Diablo compatible, specs same as 5510.
5530 RO unit, same specs as 5510 Centronics parallel interface.

NEC AND C-ITOH!

COMPUMART has been serving the computer needs of industry since 1971.

We stock, for immediate shipment, only those products from the finest micro-computer manufacturers.

And any product, except software, can be returned within 10 days for a full refund—even if you just change your mind.

We also honor all manufacturers' warranties.

Our expert technicians will service any product we sell that cannot be better, or faster, serviced by the manufacturer's local service center.

Call us for more information on products, product configuration and service. Our phones are open Monday thru Friday, 8:30 a.m. to 7:00 p.m. and Saturday 11:00 a.m. to 4:00 p.m.

We have a staff of highly knowledgeable sales people waiting to hear from you, and to help.

Because service is what we're all about.

800-343-5504
In Mass. Call 617-491-2700

SYSTEMS Customized

COMPUMART
65 BENT STREET, DEPT. 1105 , P.O. BOX 568
CAMBRIDGE, MA 02139

Circle 75 on inquiry card.

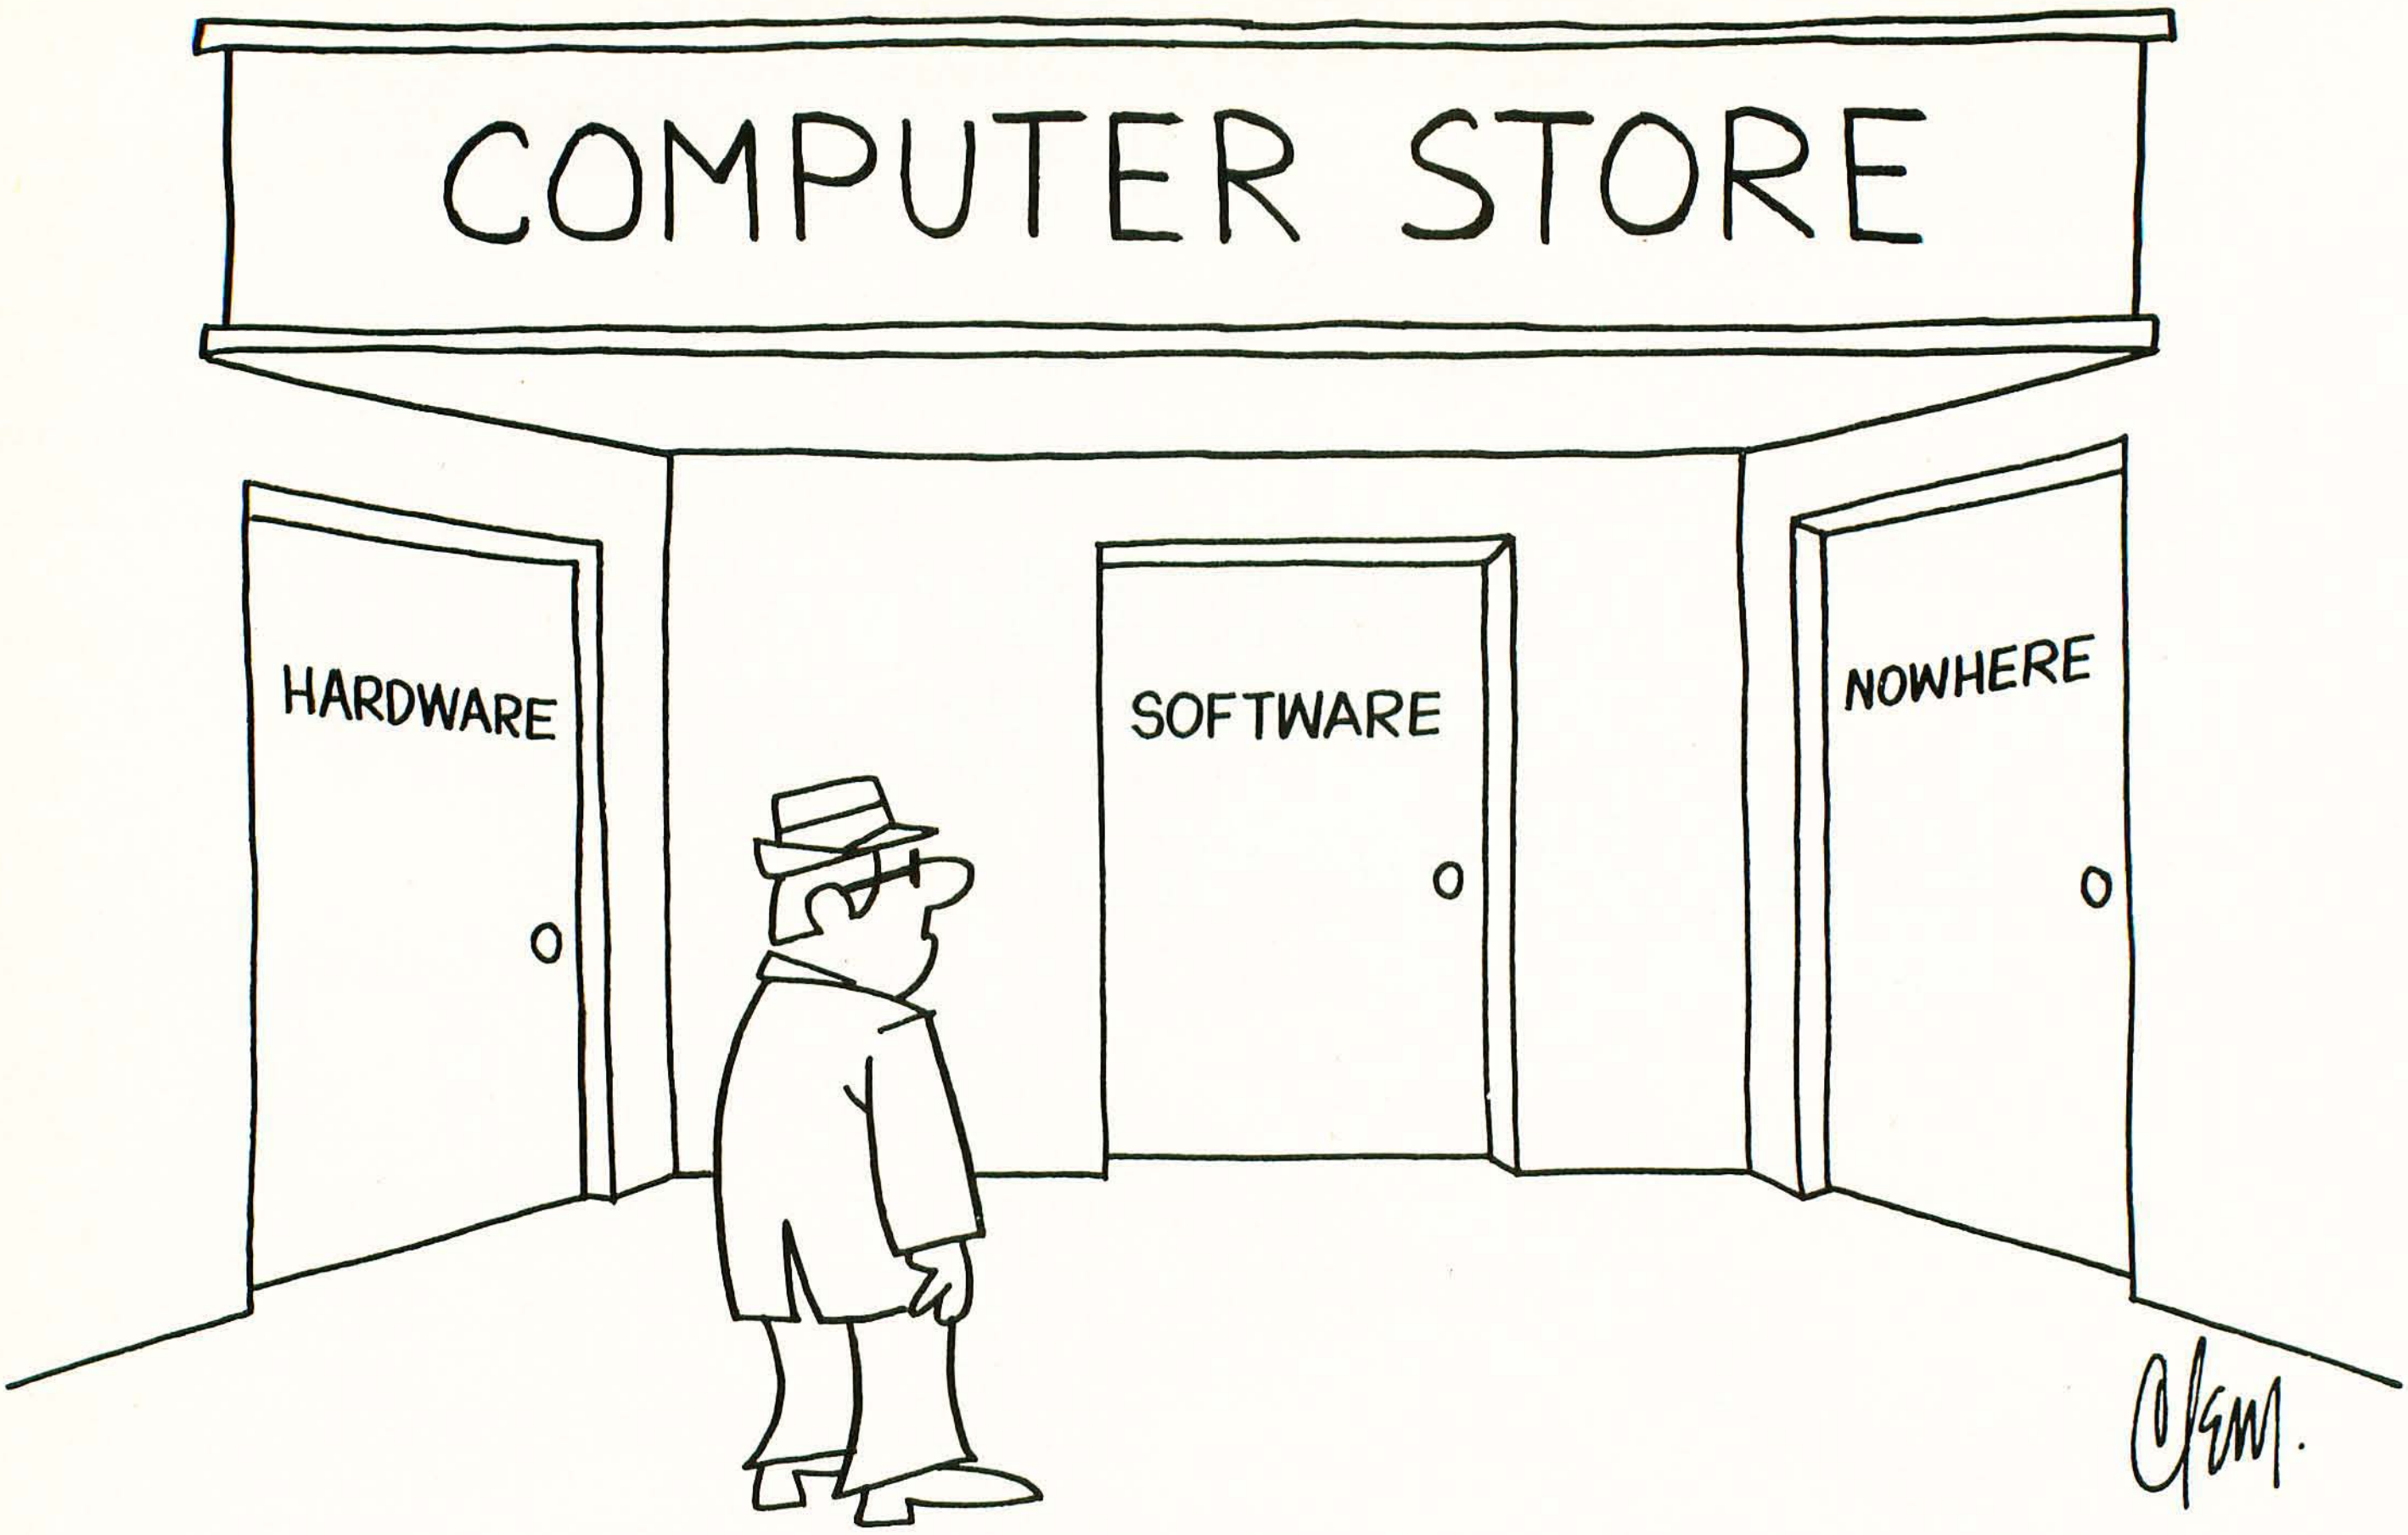
COMPUTER STORE
HARDWARE
SOFTWARE
NOWHERE
Clem.

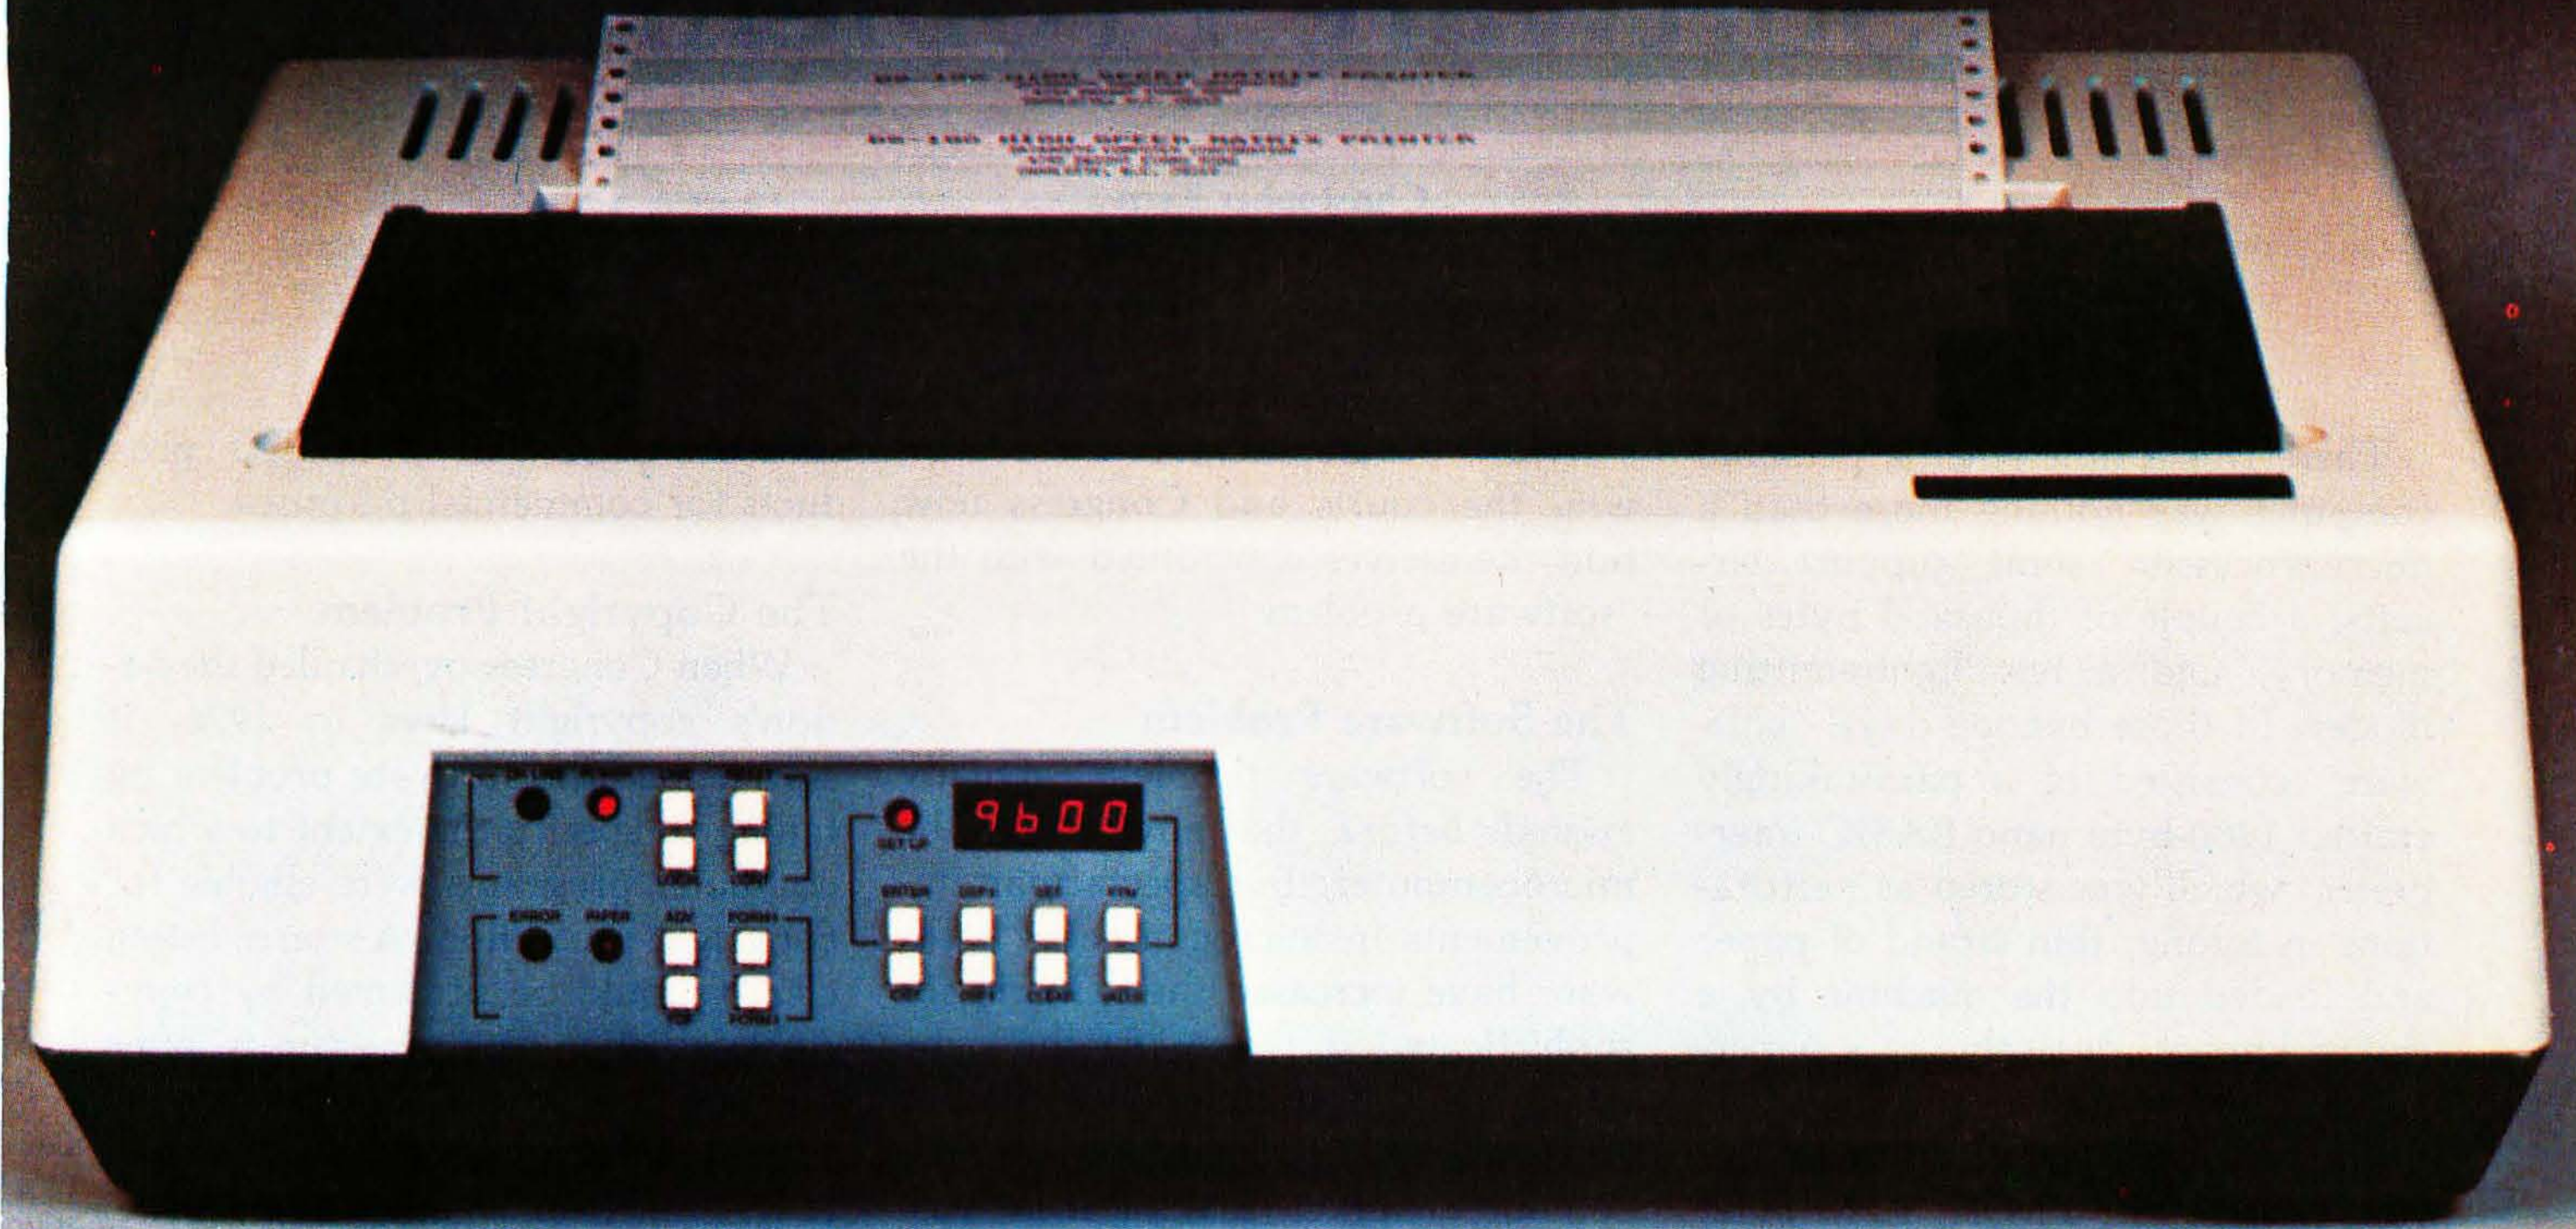
9600

Washington Tackles the Software Problem

Christopher Kern
201 I St SW, Apt 839
Washington DC 20024

There was a time when a personal computer was nothing more than a microprocessor, some support circuits, a couple of thousand bytes of memory, and a few light-emitting diodes. In those bygone days, "software" consisted of a painstakingly crafted 1280-byte nano-BASIC interpreter, which was stored as perforations in a long, thin strand of paper and loaded into the machine by a device known, quaintly, as a paper-tape reader.

Today, all you have to do to get your new 16-bit, 8 MHz, 12 M byte, 512-by-512 pixel, hand-held color widget going is to break the cellophane. And as long as you haven't managed to clobber the widget's sophisticated mega-tasking, ultra-user operating system, or the various editors, high-level language compilers and interpreters, and powerful application programs that come as standard equipment, you are up and running.

All that fancy software is as much a part of the widget as the hardware that it runs on, and the attempt by the Widgetizer Corporation and others like it to protect their investment in software development is the reason why the courts and Congress now find themselves confronted with the "software problem."

The Software Problem

The software problem actually existed *before* the advent of the microcomputer, but spectacular improvements in microcomputer hardware have increased the demand for sophisticated software. At the same time, reduced production costs for hardware have radically enlarged the computer market, making it increasingly difficult to control software piracy.

Most microcomputer products are based on one of a relatively small set of microprocessors, so it is technically as well as economically practical to copy software, moving it from one hardware environment to another. Within the hobby market, this typically takes the form of one hobbyist copying commercial programs for a few friends. At the least, this is probably a violation of the purchaser's contractual obligation to the software vendor; it is certainly the moral equivalent of larceny. But although this practice is obviously a serious matter for those who sell software to the home market, its relative economic significance is fairly small. The real problem is the commerical duplication—often entirely legal—of software and software-based products for commercial purposes.

The Copyright Problem

When Congress overhauled the nation's copyright laws in 1976, it sidestepped the software problem by failing to specify the extent to which computer programs were eligible for copyright protection. A source listing clearly could be protected by copyright; a listing of a program is, after all, just a text. But what about the program as it appears in other forms? It was not clear whether object code, stored as a series of binary electronic impulses in memory or as magnetic fields on a mass storage device, was also subject to the creator's copyright.

One notorious illustration of the problem involved a microcomputer chess game sold by a Florida company called Data Cash Systems. The Data Cash game appeared on the market in 1977 and sold for $169. A year later, JS & A Group Inc of Chicago introduced a competitive chess game for $99. The program it used was identical to the one used in the Data Cash machine.

Although the two programs were unquestionably the same, Data Cash lost its copyright infringement suit on the grounds that the law, as it then existed, did not protect software in object-code form. The trial court rul-

About the Author

Christopher Kern is a lawyer by training, a journalist by trade, and a computer programmer just for the fun of it.

"And in conclusion, I'll only use my exceptional powers for the good of mankind."

"That's a vow all we Vector 3005s make. And it's not one we make lightly.

"After all, being the only product on the market with a Vector 3 terminal, a 5¼" floppy, and a 5¼" Winchester rigid disk drive that provides 5 megabytes of storage is quite a responsibility. It used to take 20 floppies to give you that kind of capacity.

"Our powers don't stop there, however. Each 3005 also comes with a 32-bit error-correcting code – the first time sophisticated IBM-style technology has been available on a small business system. This lets us detect and correct errors, and almost completely eliminates data loss on disks due to dirt, wear, or damage.

"All this makes us pretty awesome, all right. But there's more. When coupled with Vector's MEMORITE III and EXECUPLAN software packages, we give you a 30,000 word dictionary, the ability to create your own phrase library, a teaching manual right on the screen, pass word security, plus a host of other word processing capabilities as well as financial planning, forecasting and basic accounting.

"And we're reliable. Our powers won't diminish, our abilities won't fade, and dedication to mankind won't weaken.

"For more information and your nearest dealer, call Vector at 800-423-5857. In California, call 800-382-3367. Or write to them at 31364 Via Colinas, Westlake Village, CA 91362.

"Thank you all for coming today. And I hope we'll have the chance to do business together in the future."

VECTOR
VECTOR GRAPHIC INC.

COMPUTERS FOR THE ADVANCEMENT OF SOCIETY.

Circle 425 on inquiry card.

Supreme Court Takes a Softer Look at Software

> *"A claim drawn to subject matter otherwise statutory does not become nonstatutory simply because it uses a mathematical formula, computer program, or digital computer."*
>
> Justice William Rehnquist, Majority Decision, *Diamond* v. *Diehr,* March 1981

With this somewhat cryptic remark, the Supreme Court has, in the words of software and patent expert Morton C Jacobs, "removed the shackles from the software innovator." The *Diamond* v. *Diehr* decision (described in the accompanying article) was the culmination of years of court cases involving the patentability of software.

The key word in the above quote is "statutory." According to patent law, an invention is statutory if it is a "process," "machine," "article of manufacture," or "composition of matter." All other inventions are said to be nonstatutory. For example, computer programs or mathematical algorithms are currently considered to be nonstatutory by the court. In the *Diehr* case, the Supreme Court decided for the first time that an invention does not become *ineligible* for a patent simply because of the presence of a computer program in the invention. However, an invention must still fall in a statutory category and must pass the traditional tests for merit: it must be "novel," "useful," and "unobvious."

The court has yet to take the final step and say that software is patentable, but this important decision points in that direction.

Jacobs feels that now small businesses can afford to once again become innovators in the software field. Small-business entrepreneurs need patent protection to raise venture capital to bring their ideas to fruition.

Ruth M Davis, former director of the Center for Computer Services and Technology of the National Bureau of Standards, agrees that "there is a small-business potential to innovate in the software field...the patent system is important in stimulating [this] technological innovation."

The closeness of the 5 to 4 decision in the *Diehr* case has led some observers to conclude that the court is evenly divided on the software issue, but Jacobs is quick to point out that the court is becoming progressively more and more "pro-software" in its recent decisions. Further, the Supreme Court has had the benefit of advice and testimony from computer experts over the years, and the growing sophistication of its decisions reflects this.

Of course, the answers aren't all in yet. For example, what if an enterprising inventor puts a new program in a computer so that he can claim the novelty of the entire machine? This effectively preempts the algorithmic content of the program. The courts have balked at this approach in the past. Even so, the day may soon come when a program residing on a floppy disk will be granted a patent...**CM**

ing was affirmed by the US Court of Appeals for the Seventh Circuit, and precipitated considerable concern within the data-processing industry. It appeared that in the future, the only realistic defense against software piracy would be strict enforcement of licensing agreements. But a licensing agreement binds only those who are party to it. It has no legal effect on a pirate who obtains the software without signing an agreement.

The copyright problem was resolved by the Computer Software Copyright Act of 1980, which was passed in the waning days of the 96th Congress and signed by President Carter just before he left office. The Act amends the 1976 copyright statute by defining a computer program as "a set of statements or instructions to be used directly or indirectly in a computer to bring about a certain result." The word "directly" refers, of course, to the object code. But while the new copyright law protects both the source statements and the sequence of machine instructions in the program, it does not protect the underlying logic of the program—the operations that the software is designed to perform.

The Patent Problem

The most effective way to prevent unauthorized use of computer programs would be to patent them. A patent would protect the *process* that a program carries out, regardless of its specific form. True, the duration of a patent is short (17 years), but in a rapidly changing industry that disadvantage is only theoretical; for practical purposes, the protection afforded by a patent borders on the absolute.

Several attempts have been made to get the Supreme Court to recognize the patentability of computer software. In *Gottschalk* v. *Benson* (1972), the Court unanimously rejected a patent claim for an algorithm that converted numerical data in binary-coded-decimal form to pure binary. In his opinion for the Court, Justice William O Douglas started with the long-established proposition that "an

SPEND $62.40 TO READ THIS ADVERTISEMENT.*

A salesman generating 1.5 million dollars in sales annually for his company does so at the rate of $12.48 per minute. That's expensive time—should it really be used in rummaging through filing cabinets, writing long reports or talking to dozens of people looking for one small, crucial piece of information?

Of course not, so you hire an accounting staff, customer support personnel, and marketing people to support the business and let your salespeople sell. But the overhead takes a large slice of that $12.48.

A Delta system can do the work of a swarm of secretaries, a fleet of filers, a ton of telephones—simultaneously. It's a highly developed work processing system that can maintain files, generate reports, process orders and do all routine office work with speed and accuracy. It lets your people get on with the business of making money.

We at Delta Products have spent five years designing the most reliable, efficient Z80 based microcomputer available on the marketplace. It's fast—some models use multi processors to eliminate the delays associated with other multi user systems. It's expandable, allowing your Delta system to grow with your company's growth and change with your company's needs. And it's rugged; requiring a minimum of service or maintenance.

But the soul of any computer system is the software; therefore, having perfected the hardware techonology, Delta is now dedicated to the development of application packages designed to warm the cockles of a corporate executive's heart. Our "Uni-form", for example, will keep purchase orders, account statements, sales and shipping orders indexed, cross-indexed and filed in any manner required.

And when your Delta system has helped your business grow, it's ready to grow right along with you—every Delta System is completely expandable and configurable.

You have spent five minutes reading this advertisement, at a cost of $62.40 in potential sales. Have you calculated what a Delta system can save your company? (Hint: a Delta system can pay for itself in less than 24 hours of time saved.)

Call us today for the name of your nearest Delta distributor.

*(and save thousands later)

DELTA PRODUCTS

Delta Products
15392 Assembly Lane
Huntington Beach, CA 92649
Telephone (714) 898-1492
TELEX: 681-367 DELTMAR HTBH

Circle 119 on inquiry card.

"BEST PRINTER VALUE IN THE WORLD"

Check our prices on THE ULTIMATE IN QUALITY

Epson Printers

APPLE & MOST OTHER COMPUTERS

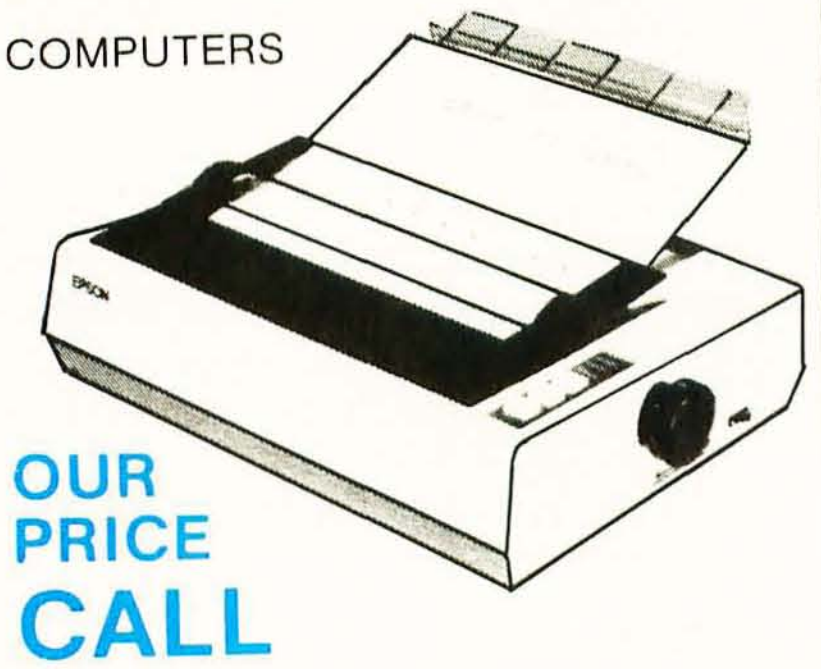

NEW! MX80
40, 80, 132 columns
LIST ~~$645~~
TX 80 w/Graphics
LIST ~~$799~~
Apple Controller & Card & Cable
LIST ~~$110~~

OUR PRICE CALL

- Most reliable small printers ever sold!
- Uses standard printed paper.
- Graphics option transfers screen image directly to paper.

ATARI 800

PERSONAL COMPUTER SYSTEM

$798

IF ATARI® MAKES IT, WE SELL IT

Assembler/Editor	45
Atari 400 Computer	439
Atari 820 Printer	429
Atari 810 Disk Drive	499
Atari 410 Program Recorder	69
Atari 16K RAM Module	149
Atari Basic ROM	45
Atari Visicalc	180
Basketball	30
Video Easel	30
Super Breakout	30
Music Composer	45
Computer Chess	30
Star Raiders	39
3D Tic-Tac-Toe	30
850 Interface	169
825 Printer	795

PRINTERS, MONITORS, DISCS

Anadex DP8000	850
Anadex DP8000AP	850
Color Monitor	375
Daisy Wheel Printer	1795
MPI 88T	595
NEC Spinwriter #5510	2595
Paper Tiger 445G w/Graphics	725
Paper Tiger 460 w/Graphics	1195
Silentype w/interface Cd.	540
Sanyo 9" B&W	169
Sanyo 15" B&W	259
NEC Green Screen 12"	239
Dysan disks (pkg. 10)	50
Memorex disks (pkg. 10)	40
Opus disks (pkg. 10)	35
Televideo 912C	699
Televideo 920C	749
Verbatim disks (pkg. 10)	30

LEEDEX VIDEO 100
12" Black & White $119

*** MONTHLY SPECIALS ***

CENTRONICS 737
cable extra **$737**

THE POPULAR INTERTEC

SUPERBRAIN

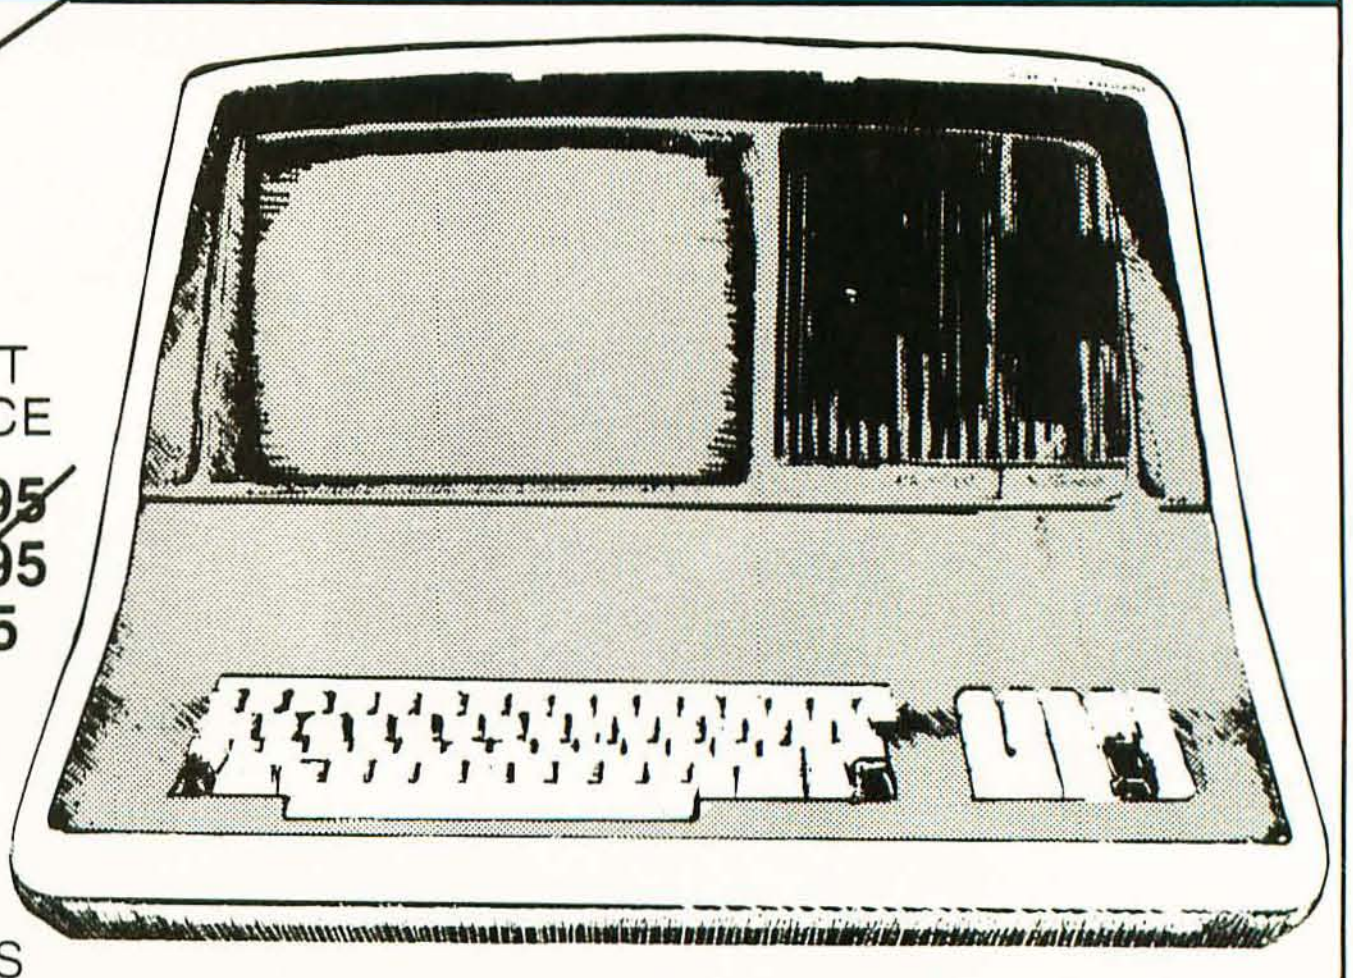

LIST PRICE

32K Double Density	~~2995~~
64K Double Density	~~3495~~
64K Quad. Density	~~3995~~

OUR PRICE CALL

MEMBER BETTER BUSINESS BUREAU

LARGE STOCK OF SOFTWARE & ACCESSORIES

VISA®

TO ORDER: Phone orders invited using Visa, Mastercard, or bank wire transfers, Visa & MC credit card service charge of 2%. Mail orders may send charge card number (include expiration date), cashiers check, money order, or personal check (allow 10 business days for checks to clear). Please include phone number. Include 3% ($5.00 minimum) shipping, handling, and insurance in USA. Shipments within Calif. add 6% sales Tax. Foreign orders include 1% handling — shipped freight collect. Foreign orders over $1000 allow 6 weeks extra and include $25 license fee. All equipment is in factory cartons with the manufactures warranty. Equipment is subject to price change and availability. We ship the same day on most orders. No C.O.D.s or P.O.s accepted. Retail store prices differ from mail order prices.

master charge
THE INTERBANK CARD

(714) 579-0330 • MAIL TO: 1251 BROADWAY, EL CAJON, CA. 92021

AUTHORIZED
APPLE
SALES &
SERVICE

COMPUTER CS SPECIALTIES

DIV. OF
COMPUTER
METRICS
INC.

EXCITING DISCOUNTS

DISK with CONTROLLER
NEW DOS 3.3 $535
without . . . $446
Nearly Everything
for Apple

apple® II
16K computer

$1099

APPLE II 48K
$1199

WE WILL BEAT ANY ADVERTISED PRICES ON MOST ITEMS IF MERCHANDISE IN STOCK

APPLE SOFTWARE

ALS Smarterm	324
Adventure by Microsoft	29
Apple Bowl	19
Apple Stellar Invaders	19
Assembler/Disassembler	69
Applebug Debugger	29
AppleGraph & Plot Sys.	59
Applepost Mailing List Sys.	44
Applesoft Cassette Demos	29
Applesoft Util. Prog. — Hayden	29
Applewriter Word Processor	65
Asteroids in Space	19
Autostart ROM Pkg.	59
Battleship Commander	19
Bill Budges Space Game Album	39
Bill Budges 3-D Graphics/Tool	39
Bill Budges Trilogy of Games	29
Cashier Retail Mgmt. Sys.	199
Checkbook Cassette	19
Contrib. Vols. 1-5 w/man.	29
Controller Bus. Pkg.	514
Cosmos Mission/Disk	25
CCA Data Mgmt. Sftwe.	84
3-D Animation Pack	55
Desktop Plan Sftwe.	79
DOS Tool Kit	65

DOS 3.3 Upgrade	49
Dow Jones Portfolio Evaluator	45
Fastgammon	23
Forth II by Softape	45
Fortran for Language Sys.	159
Head-on	25
Integer Basic Cassette Demos	29
Lazer Systems Lower Case + Plus	59
Microsoft 16K Ramcard	179
PASCAL Language Sys.	459
Sargon II Chess Game disk	34
Shell Games	29
Single Disk Copy Routines	35
Space Invader	25
Star Cruiser	24
Stellar Trek	23
Sub-Logic FS-1 Flt. Sim./disk	34
Tax Planner	99
The Correspondent	35
Tranquility Base	24
Visicalc by Personal Sftwe.	119
Complete Peachtree Business Package for Apple	

AND MUCH MORE . . .

APPLE COMPUTER INTERFACE CARDS

HiSpeed Serial Int. Cd.	155
Applesoft II Firmware Cd.	149
Centronics Interface Cd.	179
Apple Clock/Calendar Cd. by Mtn. Comp.	225
Comm. Cd. & DB25 Cable	179
Integer Basic Firmware Cd.	149
Parallel Printer Cd.	139
CCS Parallel Print Cd. 7720A	155
ROMPLUS w/keyboard filter	165
ROMPLUS (keyboard filter extra)	159
SSM AIO Serial/Parallel I/O Assembled & Tested	189
Serial Interface Cd.	139
CCS Asynchronous 7710A	139

ACCESSORIES

Apple Joystick	47
ABT Numer. Input Keyboard A or B	114
A/D D/A Board by Mtn. Comp.	319
Arith. Processor 7811 A or B	339
Clear Cover for Apple Computer	25
COPYROM by Mtn. Comp.	51
Corvus 10MByte Disk w/pwr. supp.	4395
Dan Paymar L.C. Kit 1 or 2	59
Extender Board	27
GPIB by CCS model 7490A	259
Graphics Input Tablet	649
Hayes Micromodem*	319
Introl X-10 Remote Control Sys.	239
Introl X-10 Controller Only	169
M&R Sup-R-Term 80 column board	329
Microsoft Z-80 Soft Card	295
Novation Cat Modem	159
Programmable Timer CCS 7440A	159
Prototyping Hobby Card	22
ROMWRITER by Mtn. Comp.	149
Speechlink 2000/64 Word Vocab.	215
SuperTalker Speech Synthesizer	239
Symtec Light Pen	214
Versa-Writer Digitizer Drawing System	209
Videx Videoterm	319

CALL 1-800-854-2833
PHONE ORDERS
MON. - SAT. 8 to 6 P.S.T.

Circle 88 on inquiry card.

AUTHORIZED APPLE SALES & SERVICE

computer specialties

DIV. OF COMPUTER METRICS INC.

idea of itself is not patentable," and concluded that granting a patent for the BCD-to-binary algorithm would amount to giving the applicant exclusive ownership of a mathematical abstraction.

At the same time, Douglas disclaimed any intention of foreclosing patent protection for computer programs altogether. He hinted that it would be best if Congress would resolve the issue of patentability of computer software. But his opinion suggested that until Congress acted, the Court would avoid any sweeping ruling on the patent law and allow its interpretation to evolve on a case-by-case basis.

The protection afforded by a patent borders on the absolute.

The Flook Decision

A few years later, in *Parker* v. *Flook* (1978), the Supreme Court addressed an attempt to circumvent its ruling that an algorithm could not be patented. The case involved an application for a method of determining when a catalytic conversion process had exceeded certain predefined parameters. A computer program calculated *alarm limits*, which indicated when an inefficient or dangerous condition existed. While the applicant admitted that an algorithm was crucial to the patent application, he argued that he had tied its use to a specific industrial process—the catalytic chemical conversion of hydrocarbons.

The Supreme Court rejected Flook's contention by a vote of 6 to 3, holding that the only novel part of the process was the algorithm embedded in the computer program. The algorithm itself, under *Benson*, was of course not patentable. In his opinion for the Court, Justice John Paul Stevens said that both the chemical and mechanical processes involved were well known, and concluded that the patent application "simply provides a new and presumably better method for calculating alarm limit values." For patent purposes, mathematical algorithms, like laws of nature, were to be treated as though they had previously been known, even though in fact they were newly discovered by the applicant. "Respondent's process is unpatentable," Justice Stevens wrote, "not because it contains a mathematical algorithm, but because once that algorithm is assumed to be within the prior art, the application, considered as a whole, contains no patentable invention."

A Recent Interpretation

Was the *Flook* decision a fluke? Recent cases suggest it may have been. In the case of *Diamond* v. *Chakrabarty* (1980), the Court considered a patent claim for a laboratory-created bacterium. Superficially, computer programs and man-made bacteria have little in common (program bugs belong to a different species). Yet computer software and genetic engineering are alike in two respects: (1) Congress was unaware of either one when it wrote the basic patent

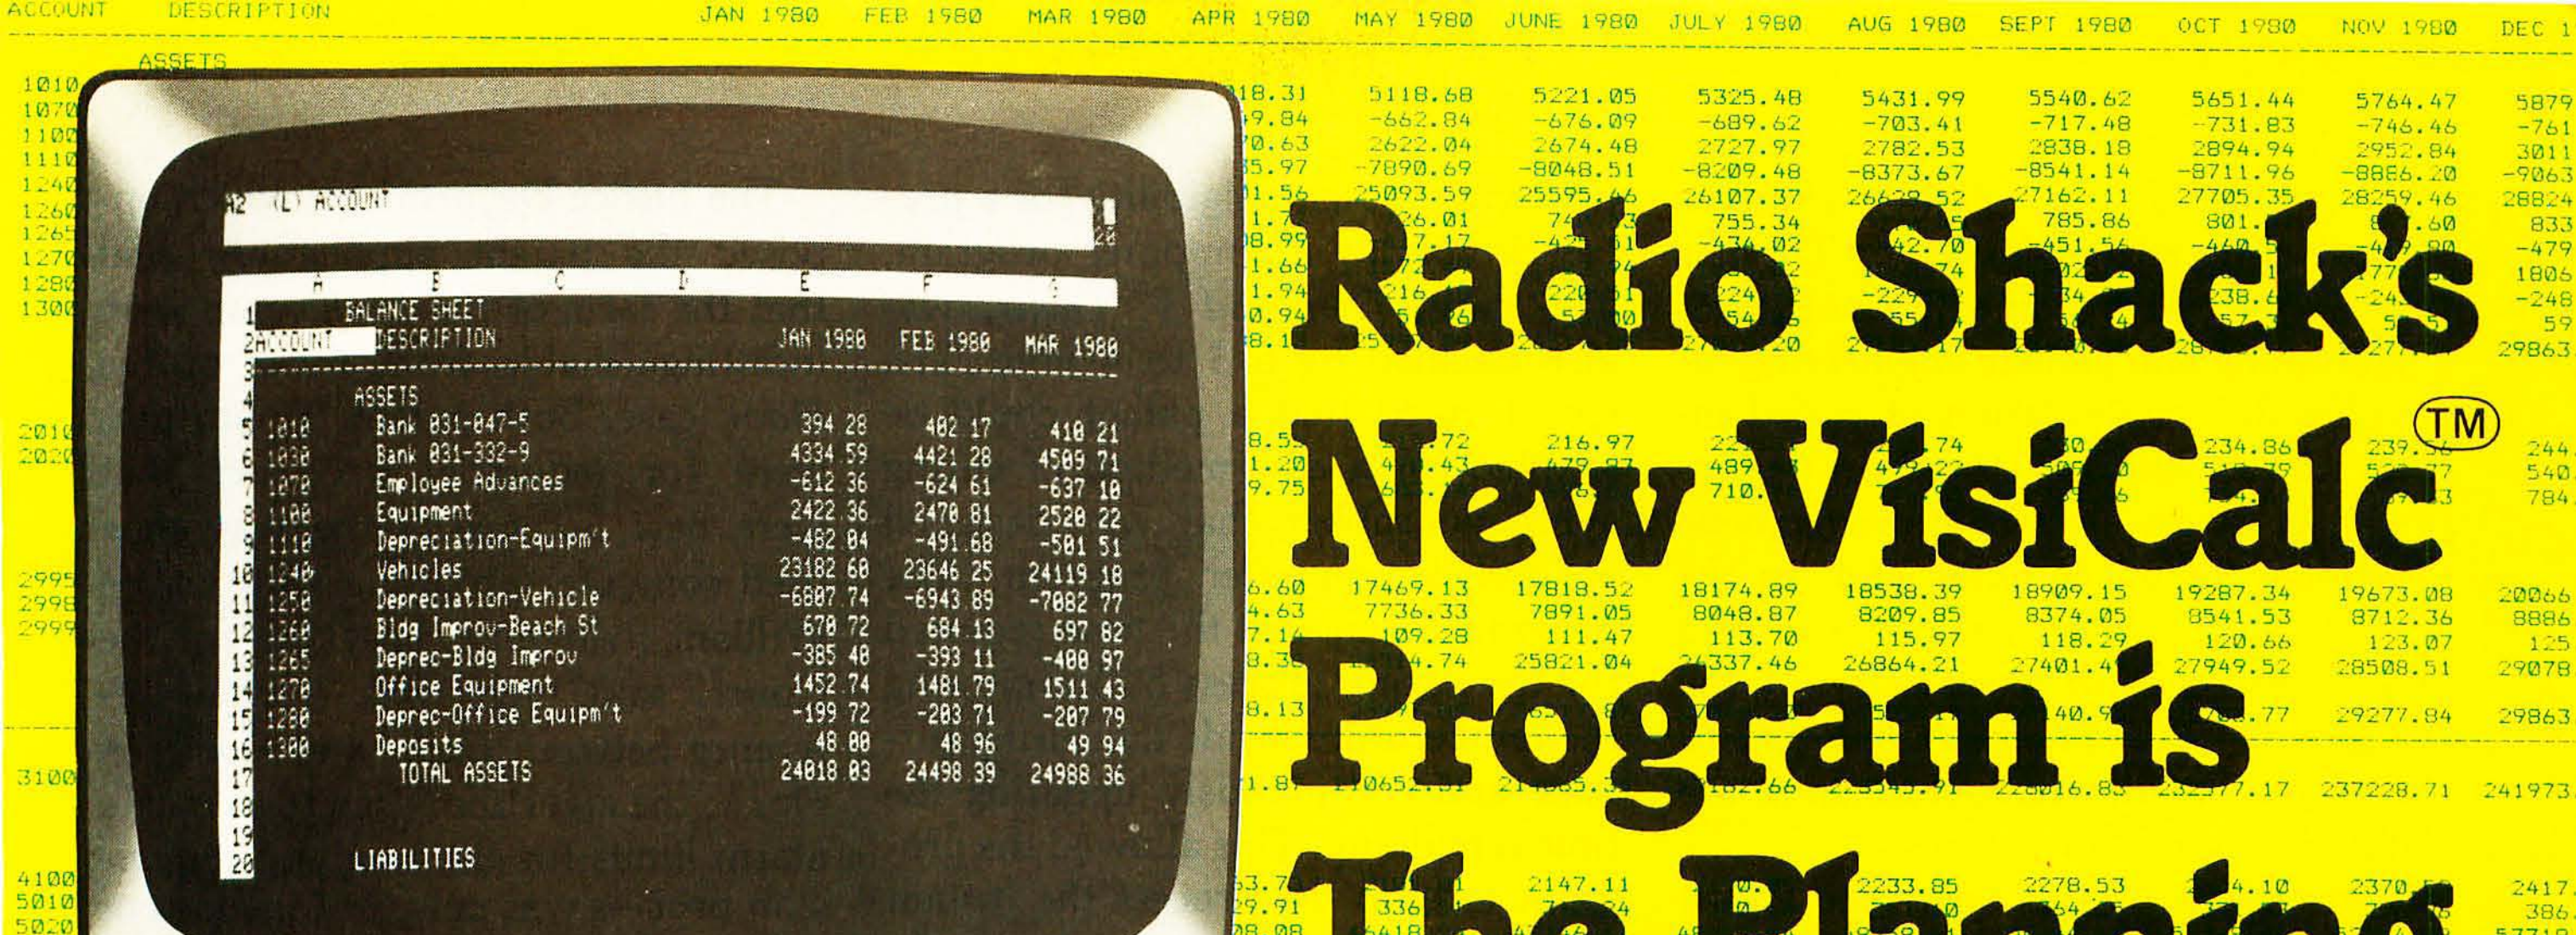

```
A2  (L) ACCOUNT
        A           B           C           D           E           F           G
 1              BALANCE SHEET
 2ACCOUNT       DESCRIPTION                         JAN 1980    FEB 1980    MAR 1980
 3-------------------------------------------------------------------------------
 4              ASSETS
 5 1010           Bank 031-047-5                       394.28      402.17      410.21
 6 1030           Bank 031-332-9                      4334.59     4421.28     4509.71
 7 1070           Employee Advances                   -612.36     -624.61     -637.10
 8 1100           Equipment                           2422.36     2470.81     2520.22
 9 1110           Depreciation-Equipm't               -482.04     -491.68     -501.51
10 1240           Vehicles                           23182.60    23646.25    24119.18
11 1250           Depreciation-Vehicle               -6807.74    -6943.89    -7082.77
12 1260           Bldg Improv-Beach St                 670.72      684.13      697.82
13 1265           Deprec-Bldg Improv                  -385.40     -393.11     -400.97
14 1270           Office Equipment                    1452.74     1481.79     1511.43
15 1280           Deprec-Office Equipm't              -199.72     -203.71     -207.79
16 1300           Deposits                              48.00       48.96       49.94
17                  TOTAL ASSETS                     24018.03    24498.39    24988.36
18
19
20              LIABILITIES
```

Radio Shack's New VisiCalc(TM) Program is The Planning Tool for Scientists, Engineers and Managers!

Use It with TRS-80(TM) Computer Models I, II, and III

Designed for the Decision Maker, VisiCalc is so effective that if no other computer program existed, VisiCalc alone would justify your owning a TRS-80. It's an all-purpose planning and modeling program that dramatically changes the way you make calculations. Ideal for scientists, chemists, engineers, even businessmen — anyone wanting to solve, examine and revise complex, formula-oriented computations with just a few simple keystrokes!

The "Electronic Worksheet." Think of VisiCalc as a giant columnar pad divided into as many as 63 columns and 254 rows (there are some restrictions depending on amount of available memory). This huge worksheet with its built-in calculator easily adapts to your special numerical problems — big or small. Simply insert the numbers and the formulas needed to perform the desired calculations. Then VisiCalc automatically performs all computations and instantly displays the results!

Here's Where the Magic Begins. Suppose you have a set of complex design equations. VisiCalc lets you define and store them, then see the effect of changing any variable. With every change, VisiCalc instantly recalculates all affected parameters updating the entire worksheet. This makes "What If . . ." forecasting a snap. You can predict and analyze the result of changing circumstances more quickly and accurately than ever before possible! Built-in transcendental, statistical and special functions, plus 11-digit accuracy and scientific notation make VisiCalc perfect for a wide range of engineering and scientific applications. Special screen formats allow you to specify your requirements for accuracy, and its graphing capabilities are ideal for easy analysis of variables.

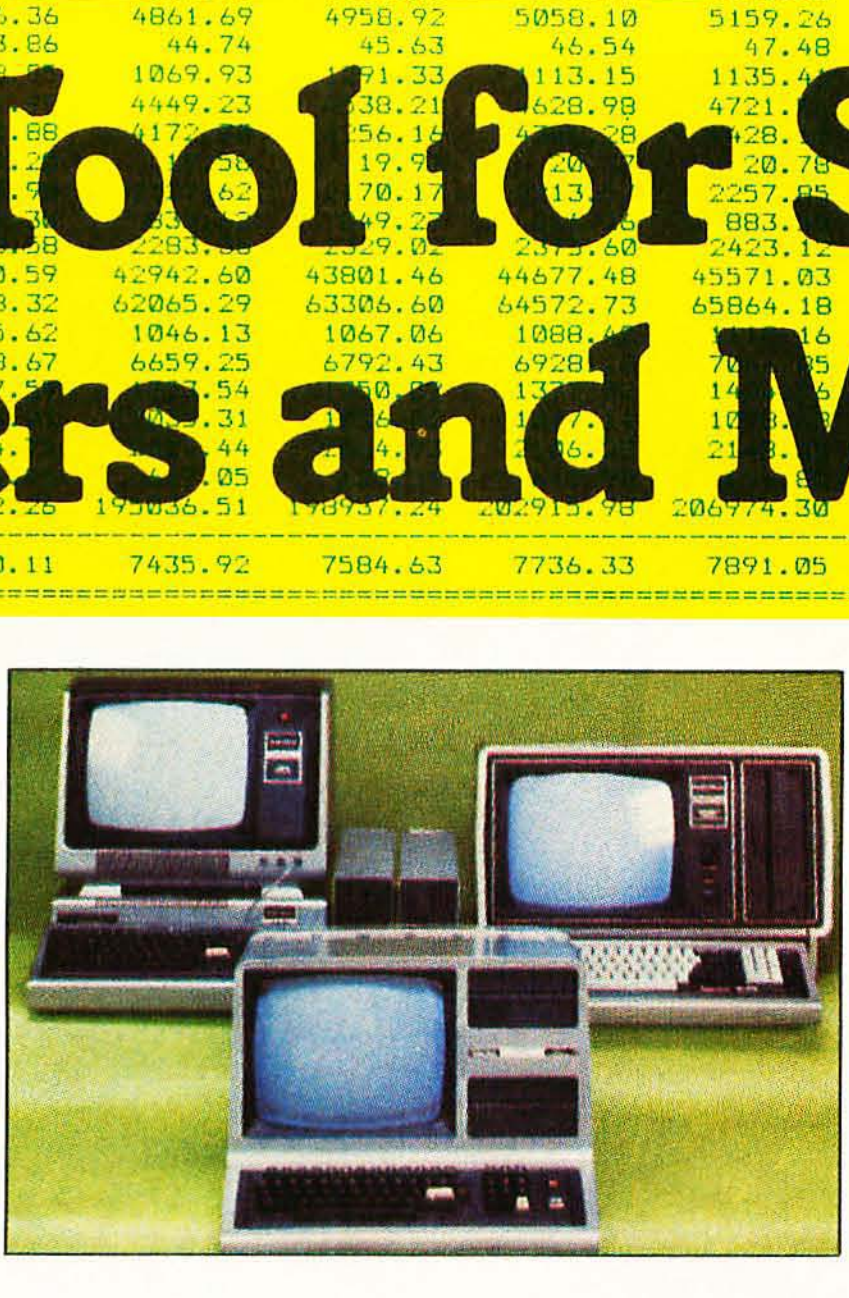

Amazing Versatility. VisiCalc is a powerful and versatile tool for everything from engineering analysis to interpretation of statistical results to cost projections — and hundreds of other time-consuming chores. The possible applications are almost limitless. In fact, "special" studies can be developed since the computations can be saved to disk for access by your computer programs. What's more, you can easily print specified portions of your worksheet with an optional printer. You get the speed, storage, and printout capabilities of the computer — without the programming work!

And It's So Affordable. VisiCalc programs are priced from just $99.95 to $299, and are available for all TRS-80 computer systems (starting as low as $2495). Available at over 6100-plus Radio Shack stores, dealers, and Computer Centers nationwide. Leasing and credit plans available. Come see what VisiCalc can do for you today!

Radio Shack®

The biggest name in little computers(TM)

Retail prices may vary at individual stores and dealers. Special order may be required initially.

(TM)VisiCalc is a Trademark of Personal Software, Inc.

Send For More Information on VisiCalc or TRS-80 Computers

Radio Shack 81-A-300
1300 One Tandy Center
Fort Worth, Texas 76102

NAME ______________________

STREET ______________________

CITY ______________ STATE ______

ZIP ______________ PHONE ______

RADIO SHACK DIVISION OF TANDY CORPORATION • 6100 STORES AND DEALERS, 123 COMPUTER CENTERS AND 135 SERVICE CENTERS NATIONWIDE

Circle 348 on inquiry card.

law, which is only slightly changed from the language drafted by Thomas Jefferson in 1793, and (2) both programming and genetic engineering involve the manipulation of coded information which is stored (in one instance, in the electronic or magnetic memory of a computer and, in the other, in the molecular memory of a cell). But a 5 to 4 majority of the Supreme Court ruled in *Chakrabarty* that man-made microorganisms are indeed eligible for patents.

In March of this year, the Court cited its reasoning in *Chakrabarty* as justifying patent eligibility for a process involving a computer program. The case, *Diamond* v. *Diehr*, was also decided by a 5 to 4 vote. The Court ruled that a patent could be granted for a new method of curing synthetic rubber that was designed around a computer program. The program calculated the time required for the curing process by monitoring the temperature inside the curing furnace and continuously updating the time remaining. This allowed the program to stop the process the instant the rubber had been properly cured.

The Justice Department, which opposed the patent application, said that the facts of the *Diehr* case were indistinguishable from those of the *Flook* case. Both patent applications were for industrial processes that were new because of the way they used computer programs. But Justice William Rehnquist, speaking for the Court, said there was a vital difference between *Diehr* and *Flook*. In *Flook*, the algorithm used to calculate alarm limits for the catalytic conversion process was new, but the idea of calculating alarm limits was not. In *Diehr*, the entire *process* was new; the essence of the patent application was that no one had ever successfully monitored the temperature inside the furnace and then used a computer program to continuously calculate when to stop the curing process.

Prospects

At this point it is difficult to tell whether or not the Supreme Court is in the process of reversing direction on the issue of software patentability. The most that can be said with any assurance is that the narrow majorities that have decided the recent cases indicate a deep division in the Court. A stinging dissent in the *Diehr* case by Justice Stevens, who was the author of the *Flook* opinion and who opposes any extension of patent protection for software, makes it clear that the debate is a long way from being resolved.

The Court was expected to take the case law one step further in its current term. It had agreed to rule in the case of *Diamond* v. *Bradley*, which involved a patent application for read-only memory routines used in the central processor of a computer for machine control. The Court of Customs and Patent Appeals, which has tended to be well ahead of the Supreme Court in authorizing patent protection for computer programs, held that the application should be granted. The Patent Court ruling was affirmed, but only because Chief Justice Warren Burger removed himself from the case (as is customary, he gave no explanation for his decision not to participate), leaving the other members of the Court evenly divided.

Learn how to use a computer for $249. And keep the computer.

Introducing the Computer Learning Lab, with the Sinclair ZX80 personal computer.

The Sinclair ZX80 is a powerful, personal computer already in use in tens of thousands of homes and businesses.

Now, for just $249*, the Computer Learning Lab will teach you and your children how to use this complete, expandable computer right in your own home. And when you're done, you get to keep the computer!

The Computer Learning Lab is a self-paced course that teaches the ins and outs of computers. It cuts away jargon and mystique, taking you straight into BASIC—the most common, easy-to-use computer language. And the computer itself does the teaching.

100 LESSONS MAKE LEARNING EASY.

You just take the ZX80 out of the box, connect it to your TV and an ordinary cassette recorder (connectors are provided), and slip in the pre-programmed Learning Lab cassettes. There's nothing extra to purchase.

You'll be working with the computer your very first day!

The cassettes take you through 100 experiments that teach you how to solve problems with the ZX80.

You learn by doing. By actually working with the computer.

And the lessons are designed to be fun and involving. You create your own programs for games, code breaking, interest calculation, and other topics. Then you can apply the principles you've learned to more complex problems.

In fact, you'll be a master of the ZX80. To use in your business, for home budgeting, or just for fun.

We'll also send you a catalog full of ready-to-use programs—from Loan Amortization to Lunar Lander—available for as little as $6.95.

THE ADVANCED DESIGN OF THE ZX80.

The ZX80 is the world's first truly portable computer. It features a touch-sensitive keyboard and a 32-character by 24-line display.

And it performs like a much larger and more expensive computer. Single keystroke entries make typing programs fast and easy. An automatic error detection feature tells you if you make mistakes. And program editing helps you correct them. Yet the complete Computer Learning Lab, including computer, is still several hundred dollars less expensive than any comparable computer alone.

The Computer Learning Lab is a family learning aid. Children 10 and above will quickly understand the principles of computing—and have fun learning.

The ZX80 is backed by a 10-day money-back guarantee and a 90-day limited warranty with a national service-by-mail facility. Extended service contracts for the ZX80 are available for a minimal charge.

The complete package includes the ZX80, a 128-page guide to computing, a workbook, six program cassettes, and two blank cassettes for storing your own programs.

sinclair

To order call toll free: 800-543-3000. In Ohio call: 800-582-1364. Ask for operator #508. Phones open 24 hours a day, 7 days a week.

To: SINCLAIR RESEARCH LTD., ONE SINCLAIR PLAZA, NASHUA, NH 03061.

Please send me ______ Computer Learning Lab(s) with the ZX80 personal computer at $249 each (U.S. dollars).

Please send me ______ ZX80 computer(s) only, without the Learning Lab, at $199.95* each.

I enclose check/money order payable to Sinclair Research Ltd. for $______ (Add $5.00 for shipping.)

Name ______

Address ______

City ______ State ______ Zip ______

Occupation ______ Age ______

Intended use of ZX80: ______

Have you ever used a computer? ☐ Yes ☐ No Do you own another personal computer? ☐ Yes ☐ No 05BY

While such a split leaves the lower court ruling intact, it has no value as legal precedent.

Object code is now clearly subject to copyright laws.

What Does This Mean to Us?

For those of us with a recreational interest in the computer industry, there is little to lose and potentially something to gain from the change Congress has made in the copyright law and the possibility that the Supreme Court will increase the patent protection afforded computer software. True, now that object code is clearly subject to copyright, you will be breaking the law if you copy your commerical BASIC interpreter for a friend. But the added protection provided by the new copyright amendments may encourage more software development, giving experimenters a wider selection of software products. It is even possible that vendors will begin to sell source code for microcomputer system programs (some even withhold information about useful program entry points) because the code will be protected by copyright.

It is not clear to what extent the personal-computer market, a relatively small part of the overall microcomputer market, would be affected by a Supreme Court ruling that would enlarge the patent protection already granted to software-based industrial processes. But I suspect that any change in the patent laws that encourages innovation will increase the industry's interest in sources of innovation—that includes the tinkerers who develop potentially marketable software purely for their own amusement.■

New Technology Clashes With Old Laws

Over the decades, different laws have been developed to protect different kinds of creative works. But computer software is not quite like anything that has preceded it. On the one hand, a software package may be thought of as a work of authorship. On the other hand, it is functionally mechanistic. Things are further complicated by the fact that it has become remarkably easy to copy large amounts of information quickly. Of course, the easier it is to reproduce a protected work, the harder it is to protect it.

The United States Constitution, in listing the powers of Congress, specifies that Congress shall have the power "to promote the progress of science and useful arts, by securing for limited times to authors and inventors the exclusive rights to their respective writings and discoveries" [Article I, Section 8]. Congress has exercised this power by enacting patent and copyright laws.

Patent law is set forth in Title 35 of the United States Code. It affords strong protection, for a period of 17 years, to demonstrably useful, novel, and nonobvious inventions. Whereas copyright is designed to protect the "expression" of an idea or process, a patent is designed to protect inventions, which are products or processes in themselves.

Although patents have *been awarded to software, the rigid standards of novelty and nonobviousness have made application difficult.*

Similar confusion has existed with regard to the applicability of copyright laws. The disagreement among those caught up in the necessity of applying old laws to new phenomena was brought into focus during the 1970s as Congress attempted to overhaul the 1909 copyright laws.

Concurrent with the activity in Congress, a commission was formed in 1975 to address the copyright problems of data processing. CONTU (the National Commission on New Technological Uses of Copyrighted Works) examined various existing laws that could, presumably, be modified to protect data bases and software. In 1978, CONTU issued its Final Report, *a study that recommended appropriate changes to the copyright law, based on the results of its research. (*Final Report, *stock number 030-020-00143-8, is available from the US Government Printing Office.)*

Although a new Copyright Act was passed in the fall of 1976 (effective January 1, 1978), Congress decided that the implications of data processing and reproduction technology had to be further clarified before they could be properly reflected in the new law. Accordingly, a stop-gap paragraph was inserted which indicated that the old laws, though ambiguous, still pertained. Subsequent revision (most particularly the Computer Software Copyright Act of 1980) continues to provide inadequate protection.

*An interesting historical parallel to the debate over software protection occurred in 1908, when the Supreme Court held that a piano roll was not a "copy" of music because it was not, for most purposes, humanly readable (*White-Smith Music Publishing Co v. Apollo Co, *209 US 1). For similar reasons, it has been argued that a program in object code lacks communicative potential and might therefore be constitutionally uncopyrightable. But, as CONTU points out, copyright protection has been extended by the courts to such diverse works of authorship as freight tables, interest tables, and lists of similarly meaningless five-letter code "words." These works of authorship, like computer programs, are valued for their utility, rather than their artistic merit.*

Ross Olmsted
58 Grand Ave, #20
Oroville CA 95965

WRITE FOR OUR CATALOG WITH FULL PROGRAM DESCRIPTIONS AND SPECIFICATIONS.

Product List NO. 20

The largest selection of software from the world's largest software publisher.

DISK OPERATING SYSTEMS

- CP/M CONFIGURED FOR:
  - APPLE II
  - DIGITAL MICROSYSTEMS FDC3
  - DURANGO F-85
  - HEATH H8 AND H89
  - ICOM MICRO DISK
  - ICOM 3712
  - ICOM 3812
  - ICOM 4511/PERTEC D3000
  - INTEL MDS
  - MICROPOLIS FLOPPY DISK
  - MITS/ALTAIR
  - MOSTEK MDX
  - NORTH STAR
  - OSI C3
  - PRO-TECH HELIOS
  - TRS-80 MODEL I
  - TRS-80 MODEL II
  - TRS-80 MODEL III
  - ZENITH Z89
- MP/M FOR INTEL MDS

HARD DISK INTEGRATION MODULES

- CORVUS WITH APPLE II SOFTCARD
- CORVUS WITH S100 AND TRS-80 MODEL II
- ICOM 4511/PERTEC D3000
- KONAN PLUS CDC PHOENIX
- XCOMP SM/S PLUS CDC PHOENIX
- XCOMP DFC10 FOR PERTEC D3000

SYSTEMS TOOLS

- BUG AND uBUG
- DESPOOL
- DISILOG
- DISTEL
- EDIT
- EDIT-80
- FILETRAN
- IBM/CPM
- MAC
- MACRO-80
- PASM
- PLINK
- PMATE
- RAID
- RECLAIM
- SID
- TRS-80 MODEL II CP/M CUSTOMIZATION DISK
- UNLOCK
- WORD-MASTER
- XASM-18
- XASM-48
- XASM-65
- XASM-68
- XMACRO-86
- ZDT
- Z80 DEVELOPMENT PACKAGE
- ZSID

TELECOMMUNICATIONS

- BSTAM
- BSTMS

LANGUAGES

- ALGOL-60
- APL/V80
- BASIC-80 (COMPILER)
- BASIC-80 (INTERPRETER)
- BDS C COMPILER
- CBASIC-2
- CIS COBOL
- COBOL-80
- FORTRAN-80
- KBASIC
- muLISP
- muSIMP
- NEVADA COBOL
- PASCAL/M
- PASCAL/MT
- PASCAL/MT+
- PASCAL/Z
- PL/I-80
- SMAL/80
- S-BASIC
- TINY C
- TINY-C TWO
- W'SMITHS C COMPILER
- XYBASIC

LANGUAGE AND APPLICATION TOOLS

- BASIC UTILITY DISK
- DATASTAR
- FABS
- FORMS 1 FOR CIS COBOL
- FORMS 2 FOR CIS COBOL
- MAGSAM III
- MAGSAM IV
- MDBS.DRS
- MDBS.RTL
- M/SORT FOR COBOL-80
- PEARL
- QSORT
- STRING BIT
- STRING/80
- SUPER-SORT
- ULTRASORT II

WORD PROCESSING SYSTEMS AND AIDS

- MAGIC WAND
- LETTERIGHT
- MICROSPELL
- SPELLGUARD
- TEX
- TEXTWRITER III
- WORD-STAR
- WORDINDEX

DATA MANAGEMENT PACKAGES

- CONDOR
- HDBS
- MDBS
- MDBS.QRS
- WHATSIT?

GENERAL PURPOSE APPLICATIONS

- CBS
- SELECTOR III-C2
- SELECTOR IV

MAIL LIST APPLICATIONS

- MAILING ADDRESS (PTREE)
- MAIL-MERGE FOR WORD STAR
- NAD
- POSTMASTER

BUSINESS APPLICATIONS

- ACCOUNTS PAYABLE (PTREE)
- ACCOUNTS PAYABLE (SSG)
- ACCOUNTS RECEIVABLE (PTREE)
- ACCOUNTS RECEIVABLE (SSG)
- GENERAL LEDGER II (CPAIDS)
- GENERAL LEDGER (PTREE)
- GENERAL LEDGER (SSG)
- GLECTOR FOR SELECTOR III-C2
- INVENTORY (PTREE)
- INVENTORY (SSG)
- PAYROLL (PTREE)
- PAYROLL (SSG)

PMATE: EDITOR-IN-CHIEF

"This new-generation text editor is bristling with features previously unavailable on microcomputers, making it ideal for virtually any program or data file editing. **PMATE'S** command set includes expression evaluation, conditional branching, I/O with prompting, and other programming language constructs. **PMATE** makes use of 11 buffers for storage, and includes commands permitting work on more than one text at a time. Unique to **PMATE** is the facility for customizing. Keystroke functions can be redefined, and sequences can be programmed to directly execute macros. Video commands can be changed, and macro functions can be written to emulate another editor, such as WORDSTAR™ or ELECTRIC PENCIL™. **PMATE** provides full side-scrolling, and can be used with virtually ANY video terminal on the market. **PMATE** is an extraordinary editor, combining the power of TECO™ with the convenience of WORDMASTER™. IF you use an editor, you need **PMATE!**"

PMATE $195

MICROSPELL SPELLING CORRECTION PROGRAM AVAILABLE FOR $295.

NUMERICAL PROBLEM-SOLVING TOOLS

- ANALYST
- FPL
- muMATH
- STATPAK
- T/MAKER

OTHER SPECIALIZED APPLICATIONS

- DATEBOOK
- ESQ-1
- MASTER TAX
- PAS-3 DENTAL
- PAS-3 MEDICAL
- PROPERTY MANAGEMENT (PTREE)
- STANDARD TAX

BOOKS AND PERIODICALS

- APL—AN INTERACTIVE APPROACH
- ACCOUNTS PAYABLE & ACCOUNTS RECEIVABLE-CBASIC
- 8080/Z80 ASSEMBLY LANGUAGE
- THE CP/M HANDBOOK
- THE C PROGRAMMING LANGUAGE
- FIFTY BASIC EXERCISES
- GENERAL LEDGER-CBASIC
- LIFELINES
- PASCAL USER MANUAL AND REPORT
- PAYROLL WITH COST ACCOUNTING-CBASIC
- STRUCTURED MICROPROCESSOR PROGRAMMING
- USING CP/M—A SELF-TEACHING GUIDE

ACCESSORIES

- DC 300 DATA CARTRIDGE
- HEAD CLEANING DISKETTE
- FLIPPY DISK KIT
- FLOPPY SAVER

Program names and computer names are generally trademarks or service marks of the author or manufacturing company.
All software products have specific requirements for hardware and additional associated software (e.g. operating system or language).
All Lifeboat software requires CP/M unless otherwise stated.
All products are subject to terms and conditions of sale.

The list of available formats is subject to change without notice. In case of uncertainty, call to confirm the format code for any particular equipment.
Prices and specifications are subject to change without notice.

Ordering Information

COMPUTERS SUPPORTED WITH MEDIA FORMAT ORDERING CODES.

ADDS Multivision	RT
AVL Eagle	RB
Altair 8800	B1
Altos	A1
Apple CP/M 13 Sector	RG
Apple CP/M 16 Sector	RR
BASF System 7100	RD
Blackhawk Micropolis Mod II	Q2
Blackhawk Single Density	Q3
CDS Versatile 3B	Q1
CDS Versatile 4	Q2
COMPAL-80	Q2
CSSN Backup	T1
Cromemco System 3	A1
Cromemco Z2D	R6
Delta Systems	A1
Digi-Log Microterm II	RD
Digital Microsystems	A1
Durango F-85	RL
Dynabyte DB8/2	R1
Dynabyte DB8/4	A1
Exidy Sorcerer + Lifeboat CP/M	Q2
Heath H8 + H17/H27 disk	P4
Heath H89 + Lifeboat CP/M	P4
Heath H89 + Magnolia CP/M	P7
Helios II	B2
ICOM 2411 Micro Floppy	R3
ICOM 3712	A1
ICOM 3812	A1
ICOM 4511 5440 Cartridge CP/M 1.4	D1
ICOM 4511 5440 Cartridge CP/M 2.2	D2
IMS 5000	RA
IMS 8000	A1
IMSAI VDP-40	R4
IMSAI VDP-42	R4
IMSAI VDP-44	R5
IMSAI VDP-80	A1
ISC Intecolor 8063/8360/8963	A1
Intertec Superbrain DOS 0.1	R7
Intertec Superbrain DOS 0.5	RJ
Intertec Superbrain DOS 3.x	RK
Intertec Superbrain QD	RS
Kontron PSI-80	RF
MITS 3200-3202	B1
MSD 5.25 in	RC
Meca Delta-1 5.25 in	P6
Micromation	A1
Micropolis Mod I	Q1
Micropolis Mod II	Q2
Morrow Discus	A1
Mostek	A1
North Star Single Density	P1
North Star Double Density	P2
North Star Quad Density	P3
Nylac Micropolis Mod II	Q2
Nylac Single Density	Q3
Ohio Scientific C3	A3
Onyx C8001	T2
Pertec PCC 2000	A1
Processor Technology Helios II	B2
Quay 500	R0
Quay 520	RP
RAIR Single Density	R9
RAIR Double Density	RE
Research Machines 5.25 in	RH
Research Machines 8 in	A1
Rex	Q3
SD Systems 5.25 in	R3
SD Systems 8 in	A1
Sanyo 7000 5.25 in	RQ
Spacebyte	A1
TEI 5.25 in	R3
TEI 8 in	A1
TRS-80 Model I STANDARD	R2
TRS-80 Model I + FEC Freedom	RN
TRS-80 Model I + Micromation	A4
TRS-80 Model I + Omikron 5.25 in	RM
TRS-80 Model I + Omikron 8 in	A1
TRS-80 Model I + Shuffleboard	A1
TRS-80 Model II	A1
TRS-80 Model III	RU
Vector MZ	Q2
Vector System B	Q2
Vista V-80 5.25 in. Single Dens	R8
Vista V200 5.25 in. Double Dens	P6
Zenith Z89 + Heath CP/M	P7
Zenith A89 + Lifeboat CP/M	P4
Zenith Z89 + Magnolia CP/M	P7



Lifeboat Associates, 1651 Third Avenue, N.Y., N.Y. 10028
(212) 860-0300 Telex: 640693

Circle 445 on inquiry card.

In Germany,
Intersoft GmbH, Schlossgartenweg 5,
D-8045 Ismaning **Telephone 089/966-444 Telex: 5213643 isof**

In Switzerland,
Lifeboat Associates GmbH, Aegeristr. 35, CH6340 Baar,
Telefon: 042/31 2931, Telex: 865265 MICO CH

Legal Protection for Computer Hardware and Software

Stephen A Becker
Lowe, King, Price & Becker
Suite 209
2001 Jefferson Davis Hwy
Arlington VA 22202

Picture the following:

Tinkering at your home, you develop a program or hardware innovation that, you believe, can be sold for a handsome sum. When you consider marketing your development, justifiable paranoia strikes, as it becomes painfully apparent that an unscrupulous competitor could easily copy your program (by exact reproduction) or hardware (by duplicating the schematic diagram or by employing *reverse engineering*).

Question: How can a hobbyist or small businessman, with limited resources, guarantee that the law will provide protection against such unfair competition?

Answer: There are no guarantees.

Patents, copyrights, and *trade secrets* are the three basic forms of legal protection that are primarily applicable to computer-related innovations. Unfortunately, there is no single form of protection for all the different varieties of hardware and software that is entirely satisfactory to the small businessman. In fact, this also applies to large businesses with virtually unlimited resources.

About the Author

Stephen A Becker has a master of science degree in electrical engineering. He has been granted two patents for his work in electronic control systems while working as a research engineer. After obtaining a law degree in 1975, he entered the field of patent law. Attorney Becker specializes in the protection of intellectual property innovations, with particular emphasis on computers, and is a partner in the patent law firm of Lowe, King, Price & Becker.

The following discussion provides some general legal background on a very complex and growing subject. However, I encourage you to confer with a patent attorney (registered with the United States Patent and Trademark Office) who specializes in all forms of intellectual property protection, prior to entering the marketplace. Also remember that this discussion concerns US law only. If you have an international market, professional advice is even more essential.

Patents

Patents provide a formidable protection for innovations that meet the rather stringent legal requirements of patentability. The right to a patent is fragile and can be lost by certain avoidable acts, such as public disclosure or an offer for sale more than one year before the patent is applied for. A patent, once granted, gives the patent owner the exclusive right to make, use, or sell the patented innovation in this country for 17 years. The patent owner has the right to stop others from infringement and collect damages even if the infringer later developed the same invention independently. After the 17-year period has expired, the innovation is considered to be in the public domain and available to all without limitation.

In order to qualify for a patent, the invention must be *new, useful,* and *unobvious* in view of existing technology. In fact, before a patent is granted by the United States Patent and Trademark Office, a patent examiner conducts technological research to determine whether the invention is adequately different from the existing technology to merit an award of "Letters Patent." About one dozen patent examiners, who specialize in computer technology, work for The Patent and Trademark Office.

Unfortunately, the procedure of applying for a patent is very expensive. In most cases, a patent attorney or agent must be retained to prepare a patent application and to submit arguments in favor of patentability before the Patent and Trademark Office during the approximately 18-month period of examination. During this time no patent protection exists. Patent rights are created only when a patent is actually issued. Furthermore, there is no guarantee that you will receive a patent. The Patent and Trademark Office may rule that the invention does not qualify for patent protection. They may do this for one of two reasons: because the invention is not the type that patents are designed to protect (eg: mathematical algorithms) or because the invention is simply too close to existing technology to be considered "unobvious."

It is definitely possible to obtain a patent on hardware innovations, such as peripherals, interface circuitry, or construction techniques. There is considerable uncertainty, however, concerning what types of computer software, if any, can be protected by a patent. In 1972 and 1978, Supreme Court litigation between patent applicants and the Patent and Trademark Office resulted in denials of patent protection on programs that

COMPUTER WAREHOUSE

CALL TOLL FREE 1-800-528-1054

International Dealer & Personal Inquiries Invited, Prices May Vary. Tlx (0) 668382 (MCB)

ATARI

Special 32K 800 System 800 w/32K, recorder star raiders, joystick	**$970**
800 (16K)	**$770**
400	**Call**
810 Disk Drive	**Call**
825 Printer	**$710**
850 Interface	**$155**
410 Recorder	**$70**
830 Modem	**$140**
Star Raiders	**$ 45**
16K Memory	**$ 90**
32K Memory	**$150**
Software	**From $ 10**

MODEMS

Novation	
CAT	**$155**
D-CAT	**$155**

SOFTWARE

Centa Systems	
CBASIC	**Call**
CP/M	**Call**

VIDEO TERMINALS

Adds	
Viewpoint	**Call**
Soroc	
IQ 120	**Call**
IQ135	**Call**
IQ 140	**Call**
Televideo	
912 B	**$699**
912 C	**$699**
920 B	**$749**
920 C	**$749**
950	**Call**
Zenith - Z - 19	**$789**

PRINTERS

Centronics	
737 Serial	**Call**
737 Parallel	**Call**
Citoh	**Call**
Diablo	**Call**
Epson	
MX-80	**Call**
MX-70	**Call**
MPI-88G	**Call**
NEC	
5510	**$2672**
5520	**$2955**
Okidata	
Microline 80	**$420**
Microline 82	**$620**
Microline 83	**$923**
Qume	
5/45 RO	**$2684**
5/45 KSR	**$3081**
5/55 RO	**$2863**
5/55 KSR	**$3144**
Texas Instruments	
810 Basic	**$1516**
810 Loaded	**$1739**
820 KSR Basic	**$1732**
820 KSR Package	**$1916**

Prices & availability subject to change without notice.

COMPUTERS

Altos	**Call**
Northstar	**Call**
Intertec Data	
Superbrain 64K D/D	**$2777**
Commodore	
8032	**$1498**
8050	**$1498**

DISKETTES

Memorex		**Call**
BASF		**Call**
Scotch		
5¼-0, 10, 16 Sector	(Qty 100)	**$250**
8"-0, 32 Sector	(Qty 100)	**$260**

MONITORS

APF - 9" Monitor	**$115**
Sanyo - 9" Monitor	**$165**

We Buy and Sell Used Equipment

Experienced Equipment

Centronics 779	**$450**	**Comprint 912**	**$275**
Teletype Model 40 (New)	**$2750**	**Atari 820 printer**	**$400**
		Soroc	**$500**
Hazeltine 1510	**$650**	**TI 810 Basic**	**$1200**
Hazeltine 1420	**$600**	**Diablo, NEC, Qume**	**from $2100**
Centronics 730	**$375**	**Axiom 801 HS**	**$250**

MasterCard VISA

COMPUTER WAREHOUSE

2222 E. Indian School Rd.
Phoenix, Arizona 85016
(602) 954-6109
1-800-528-1054

Personal checks will delay shipping two weeks. **Store Hours: Tues.- Friday 10-6 MST Saturday 10-5 MST**

Prices reflect 3% cash discount. Product shipped in factory cartons with manufactures warranty Add 2%, a minimum of $5, for shipping and handling.

are essentially mathematical algorithms, such as numerical conversion.

But in more recent cases (in 1980 and 1981) the Supreme Court begged the question of whether or not other types of software may be patentable. The Court of Customs and Patent Appeals (CCPA), which reviews Patent and Trademark Office decisions and is highly regarded for its competence in patent matters, has held that certain other types of software may be patentable. Issuance of patents has been denied by the CCPA only on software that is essentially algorithmic in nature. Thus, it is still unclear what types of software will ultimately be considered patentable if and when that broad issue is considered by the Supreme Court.

On the other hand, the courts have held that inventions are not unpatentable merely because they involve programming. For example, consider a microprocessor-based system that is programmed to operate with an array of sensors to monitor a physical parameter in a unique way and to process sensor-generated data in accordance with a stored program, generating machine-control signals. This system is patentable if it satisfies the three basic criteria of novelty, usefulness, and non-obviousness. Thus, patent protection is available to computer-related innovations involving programming so long as the invention is in the overall system and not solely in the program.

Because the costs involved in obtaining patent protection are high and the law of software protection is still uncertain, I do not recommend patents as an avenue of protection of programming by the personal computer experimenter or small businessman. However, if the invention involves more than just programming (eg: a complete system involving programming, or a new piece of hardware) and there is a significant commercial potential associated with the invention, then Letters Patent should be considered to increase the likelihood of success in the commercial environment.

Copyrights

A copyright is essentially the right of an author to control the copying of his or her work by others. It is applicable to computer software but not hardware. A copyright is easy and inexpensive to obtain. It must include the following comment at the start of the program:

© <name of copyright owner> <date of first publication>,

© John Doe 1979

In order to perfect the copyright, as is necessary before a copyright infringer can be sued, the copyright must be registered with the Copyright Office by filling out a FORM TX. (The address is: United States Copyright Office, Library of Congress, Washington DC 20559.) After you fill it out, mail it with two copies of the program as originally published (or publically disseminated) and a $10 registration fee.

If the program is on magnetic tape or other non-readable form, a printout must also be deposited. Even if you do not register the copyright, you are required to deposit copies with the Copyright Office within three months of the date of first publication of the program with the copyright notice.

As a practical matter, however, there is no penalty for non-deposit in the absence of registration, unless the Copyright Office specifically demands a deposit. Details on software registration can be obtained directly from the United States Copyright Office or from an attorney specializing in intellectual property law.

The term of a copyright extends throughout the lifetime of the author plus 50 years. In the case of a work made for hire, the term is the earlier of two periods: 75 years from the year that the work (ie: program) was published, or 100 years from the year that the program was written.

Although the cost and effort of obtaining a copyright on software are minimal, and although there is virtually no time delay or uncertainty (as in patents), a copyright offers substantially less protection than a patent. First, the copyright covers the "expression" (ie: program listing) of software but not the idea, procedure, or concept underlying the software. A competitor could, for example, use the copyright owner's basic procedure or method of solution without infringing the copyright if a different but equivalent program is developed. Also, the copyright owner is provided no protection against competitors

Development Software For Texas Instruments TM990 Micro Modules

> **"After having worked with PDOS and EXPRES for the past three months I have found them to be a powerful and versatile combination. The true multi-user, multi-tasking capability has made it a pleasure to use in our labora tory environment where programs are being used simultaneously for controlling laboratory apparatus taking and reducing data. . . We are enthused by the product. . ."**
>
> Tom Ochs
> Assistant Research Professor
> Desert Research Institute

Eyring Research Institute, Inc., authors of TI's POWER BASIC™ and UNIVERSITY BASIC™, is pleased to release development software for use on the TM 990 microcomputer modules. PDOS/EXPRES™ is a powerful multi-user, multi-tasking operating system designed for development, scientific and industrial applications.

The PDOS/EXPRES™ system includes:

- 8k byte PDOS multi-tasking operating system
- Advanced EXPRESS BASIC language interpreter
- Stand alone run module support

PDOS supports up to 16 concurrent user tasks with prioritized round robin clock swapping. Up to 32 contiguous or non-contiguous files can be simultaneously open in sequential, random, shared and read only access modes. Large or small floppy disks, bubble memory, hard disks and extended memory capabilities of up to 256k bytes are handled by the operating system. Named files on 256 directory levels are easily accessible from EXPRES BASIC and assembly language programs. Disk files are time stamped with date of creation and last update. I/O drivers are a simple extension to the PDOS file structure.

The EXPRES BASIC interpreter uses advanced interpreting techniques which approach execution speeds of common threaded code compilers while maintaining the highly advantageous interactive approach to program development. Other features include:

- Multi-line recursive functions with local variables
- Variable names of unlimited length
- Reverse Polish pseudo-source token storage

PDOS/EXPRES™ is available for either an EPROM based system or a RAM based system. A handsome 250 page Operator Reference Manual walks you through the features and use. All for an attractive price of $1500.00*.

Order your PDOS/EXPRES™ software from your nearest authorized Texas Instruments distributor or contact Eyring Research Institute, Inc. for further information and a free color brochure. Write or call Eyring Research Institute, Inc., Software Marketing Dept., 1455 West 820 North, Provo, Utah 84601, phone (801) 375-2434.

© Eyring Research Institute, Inc.

*U.S. price, subject to change without notice

Circle 159 on inquiry card.

who independently develop the same program; a copyright offers protection only against actual copying.

This may be enough protection for many computer programs. But the form of expression of a program is often critical and modification of that expression often destroys or substantially reduces its utility. I recommend that programmers routinely include the copyright notice in a comment statement at the start of each program prior to distribution, and postpone registration of the copyright until a lawsuit for copyright infringement is contemplated.

A word of caution concerning copyrights: there is presently some uncertainty whether, and to what extent, computer programming is a proper subject for copyright protection. An early attitude was that programs could not receive copyright protection because they are part of a machine rather than a literary work. Present sentiments, however, are that at least the "expression" of the program should be protectable by copyright. This issue may soon be settled because Congress is expected to consider subcommittee recommendations to amend the Copyright Act.

(**Editor's Note:** *Source listings are unequivocably covered by copyright laws, but the extent of copyright protection as it is applied to programs in other forms is less clear. For further explanation, and a discussion of Supreme Court rulings regarding software patents, see "Washington Tackles the Software Problem," page 128.)*

Trade Secrets

A trade secret is commonly defined as a formula, process, mechanism, compound, or compilation of data, not patented, but known only to certain individuals using it in business to obtain a commercial advantage. In order for there to be a trade secret that will be enforced by the courts, a secret must exist and there must be a duty on the part of all persons who learn the secret not to disclose it. Confidential relationships are generally established between employers and employees or between businesses cooperating in a technical development by a type of contract known as a confidential disclosure agreement. For example, if you, a small businessman, wish to submit your unpatented innovation to a corporation for evaluation you may request that a corporate officer sign a confidential disclosure agreement. Such an agreement states that the corporation agrees to use your disclosure only for the purpose of evaluation and to disclose it outside the company only with your express written approval. The agreement will require the company to bind all its employees to confidentiality. However, the agreement must not be too restrictive to prevent the company from properly evaluating your innovation. Some companies may not be willing to sign a confidential disclosure agreement and, in fact, may even require you to agree to non-confidentiality before they will review an outside innovation.

A trade secret automatically exists between a patent applicant and the Patent and Trademark Office during the period of examination of the patent application. The Patent and Trademark Office is required by law to maintain the application in secrecy.

The Coca-Cola formula is an example of a successful trade secret which has never been patented and is known only to some internal personnel. For a trade secret to exist the subject matter must, in fact, be maintained in secrecy. But trade secrets are easy to lose. Once the secret becomes public, for example, legal protection is lost. It may become public through your own carelessness or through commonplace and legal competitive means, such as reverse engineering. A trade secret is not lost, however, if a competitor obtains the secret by unfair means, such as industrial espionage. The courts are filled with lawsuits involving piracy of trade secrets—including cases that involve theft of software and data by such means as tapping communication lines.

One advantage of trade secrets, in contrast with either patents or copyrights, is that the trade secret exists as

Software Professionals

At General Electric we're using computers in ways no one thought of before.

If you are looking for exciting technical challenges coupled with excellent growth opportunities join General Electric's Space Systems Division. Help us develop large scale, distributed, information processing systems requiring innovative design approaches. You will be working in the following Data Processing Environments:

- 3033
- 3081
- VAX 11/780
- MVS
- JES 2
- ACF/NCP
- ADABAS

Entry level and Sr. positions available for:

MVS Systems Programmers

Perform SYSGENs, maintain and tune MVS. Select and install program products. Develop MVS enhancements, H/W–S/W interfaces, and 3705 telecommunications applications.

Math Analysts

Perform modeling for simulation of complex command and control systems. Solve operational research problems and develop algorithms in systems and vehicle flight dynamics and orbit mechanics. Develop computer programs to generate study data to aid analysis and trade-offs.

Computer Systems Architects

Responsible for requirements analysis in the design of large scale Computer Systems to support on-line information management applications. Duties include selection and specifications of:

- Computer Hardware
- Operating Systems
- Data Management Systems
- Telecommunications Systems

Data Base Designers/Administrators

Perform data base design-administration and implementation tasks for large scale data systems using state-of-the-art data base management tools. Analyze data base requirements. Design and select file structures, access methods, and data management techniques. Install, maintain and tune vendor supplied Data Base Management packages. Provide Data Base support and technical interface for Data Base definition, design, query and update utilities.

Data Base Analysts

Responsible for data requirements analysis and subsequent selection of appropriate data management approaches including Data Base Management Systems evaluations.

Scientific Programmer/Analysts

Perform start-to-finish, state-of-the-art S/W development for large scale, high technology programs. Develop geometric and operations research related designs that involve challenging data handling requirements. Growth opportunities available include entry level to Project Leader positions for those with demonstrated leadership/technical skills.

For your convenience, a postage-paid reply card has been provided. One of our Technical Managers will contact you promptly.
Or, if you prefer, you may respond by sending a resume or letter to: Mr. William E. Sarno, Dept. VF-31-E, General Electric Space Systems Division, Valley Forge Space Center, Goddard Blvd., King of Prussia, PA 19406.

Applying computers to make our most important product: Progress

GENERAL ELECTRIC

GE takes pride in being an equal opportunity employer, m/f

long as the secret is maintained; it does not expire after a predetermined finite lifetime. There are no formal procedures, applications to fill out, or government fees to pay to establish a trade secret. Furthermore, there are no delays because the trade secret becomes enforceable as soon as it exists.

Unless you are in a position to maintain your software in secrecy and to bind all parties involved in confidentiality by contract, a trade secret is apt to be lost through inadvertence or by acceptable competitive efforts. For example, in the absence of restrictive licensing, there are no legal means to prevent a competitor from purchasing your software for the purpose of reproducing it for sale to his own customers. Of course, if the printout carries the copyright notice and the program is copied by the competitor verbatim, you will have a claim for copyright infringement following registration of your copyright with the Copyright Office.

Trade secret protection is at best very risky and can be lost for any number of reasons both inside and outside your control. In addition, there is some conflict between copyright law and trade-secret law since copyright protection is based upon publication, whereas trade-secret protection prohibits publication. Therefore, care must be taken to indicate that there is no presumption of publication of programs carrying the copyright notice that are distributed under restrictive licenses or confidential disclosure agreements. Even then, once the program is deposited with the Copyright Office, trade-secret protection may be lost.

Protection

The type or types of protection that should be considered for programs and computer-related developments depend upon several factors. These are:

- the nature of the development, that is, whether it is basically a mathematical algorithm of some other type of program or computer-based system merely involving programming
- the commercial importance of the invention
- the commercial lifetime of the invention
- the importance of exclusivity in the marketplace

Patent protection should be considered for hardware, or for computer-based systems, when the novelty involves more than merely the programming, if there is significant commercial potential and there is a commercial lifetime of at least several years.

Software should bear the copyright notice, despite uncertainties in the law, and I even recommend applying the copyright notice to printed-circuit boards to protect direct copying of circuit layouts. Trade secrets should be relied upon only when you are in a position to actually maintain your software or hardware systems in secrecy and bind your employees to secrecy and customers by contract; this is generally not practical where public sales are made. An old practice for maintaining circuitry in secrecy has been to embed the circuitry in epoxy, to prevent reverse engineering by inspection. It may even be necessary to embed small metal particles in the epoxy to prevent inspection by X-ray photography. Obviously, this approach is impractical for the small businessman working in the public market.

Whenever possible, software should be sold under restrictive licenses between you and your customers. Under the license terms, the software remains your property, while the customer is permitted to use it but not reproduce the program for use by others. A patent attorney will be able to draft a restrictive license to meet your particular requirements.

Most patent attorneys are also engineers who specialize in all areas of intellectual property, such as patents, trademarks, copyrights, and trade secrets; they are in a position to develop a portfolio of intellectual property protection suitable to your particular needs. I strongly recommend that you consult one before you attempt to market any product.■

The talk of the town!

General Instrument's new VSM2032 has made speech synthesis the talk of the town. In fact it speaks so well we named it Orator.™

The VSM2032, a complete speech system, is immediately available. It needs only a power source and speaker to start talking...in less than an hour you can hear it speak, fluently, with a 32 word calculator/clock vocabulary that combines to form over one billion phrases.

You can use the Orator module as a stand alone voice system or interface it with industrial equipment, vending machines, instrumentation, arcade games, computers or warning devices.

More than the spoken word.
With Orator you get a lot more than talk. General Instrument's state-of-the-art technology utilizes Linear Predictive Coding (LPC) for speech data compression with minimum ROM support. And to obtain truly natural speech, a 12 pole cascade filter is used to implement a mathematical model of the human vocal tract so that Aunt Mary sounds exactly like Aunt Mary and not like Uncle Walter.

Now. Talk's cheap.

Simplified digital interfacing... immediate availability...high voice quality...low price...make Orator VSM2032 an attractive and feasible way to make your product speak. At a cost of $99 (significantly less in production quantities), you can't afford not to hear Orator! And you can choose from standard vocabularies or your own vocabulary for orders of 250 or more modules.

The final word is up to you. The VSM2032 is available *now* from these distributors, Advent, Anthem, Arrow, Diplomat, Future, Hallmark, Pioneer and VSI. Or write Module Products Dept., Microelectronics Division, General Instrument Corporation, 600 West John St., Hicksville, New York 11802.

We help you compete.®

GENERAL
INSTRUMENT

Dancing Demon from Radio Shack

**Elizabeth Cooper and
Yvon Kolya
POB 22
Peterborough NH 03458**

Radio Shack's latest addition to its games line is a fantastic graphics and sound game called Dancing Demon. The author of this well-designed gem is Leo Christopherson—the creator of Snake Eggs and Bee Wary, those wonderfully graphic but nonsensical games.

Dancing Demon is a fairly sophisticated music-generating program which uses carefully synchronized moving graphics and impressive sound.

Written in BASIC, the game places you in the role of agent/operator of an ex-devil called the Dancing Demon. As his agent you must choreograph his dance steps to music you compose.

The documentation is careful to explain that the demon is rather dimwitted and understands only a special code for the music and dance steps. This code assigns one note to each letter of the alphabet. Covering a full two octaves (25 notes total) the "A" key equals low C and the "Y" key is equal to high C. The "Z" key is reserved for rests between notes.

After selecting the demon's music, you are given the opportunity to choose his dance steps. (If you wish, you can select the dance steps first; the order is up to you.) The same simplistic approach is also used for this procedure. The letter "A" represents Step 1, the letter "B" represents Step 2, and so forth to the letter "Z," a total of 26 different steps.

The instructions are clear and to the point; at times, they are clearly geared towards young children.

The program is as easy to understand and the documentation is clearly written. After CLOADing it and typing RUN, you see the main program menu. The menu options are:

1. Compose your own music
2. Create your own dance routine
3. Make the demon perform the pro gram in memory
4. Save your show to tape
5. Load a show from tape
6. Make the demon perform the first preset show
7. Make the demon perform the second preset show

The last two options are usually the first ones chosen. These two opening numbers give a good example of the capabilities of the demon and are quite entertaining.

Continuing up the menu in reverse order, you have the option to LOAD (from tape) a show previously composed, or to save to tape a show you have just perfected. Both of these options are arranged simply so children should experience little difficulty.

Option three lets you play the show currently in memory. You are asked two questions: The first question asks for a speed factor, which determines how fast the music plays, and how fast the demon executes the dance routine. Any number between 1 (super fast) and 255 (very slow) may be entered.

The second question asks how many performances of this routine you wish to see. Again, you may answer with a number between 1 and 255.

After you've answered the questions the screen displays the theater stage, the curtain rises, and the demon starts his performance.

Option two lets you program the dance steps to be used by the demon. The steps have enough variety to be entertaining and yet the differences are subtle enough so that any combination of steps will result in a credible dance routine. Since the steps are designated by letters of the alphabet, you can amuse yourself by typing in actual sentences and watching how these are translated into movements by the demon. You can even type in the words to the song you've just

At a Glance

Name of software package
Dancing Demon

Type of package
Game

Manufacturer
Radio Shack
1600 Tandy Center
Fort Worth TX 76102

Price
$9.95

Format
Cassette tape

Language used
BASIC

Computer needed
TRS-80, Level II BASIC, 16 K programmable memory

Documentation
13 pages, 8½ by 11 inches

Of interest to
Children, parents and grown-ups who are kids at heart

A RAINBOW OF APPLICATIONS

FOR YOUR APPLE COMPUTER FROM US TO YOU...

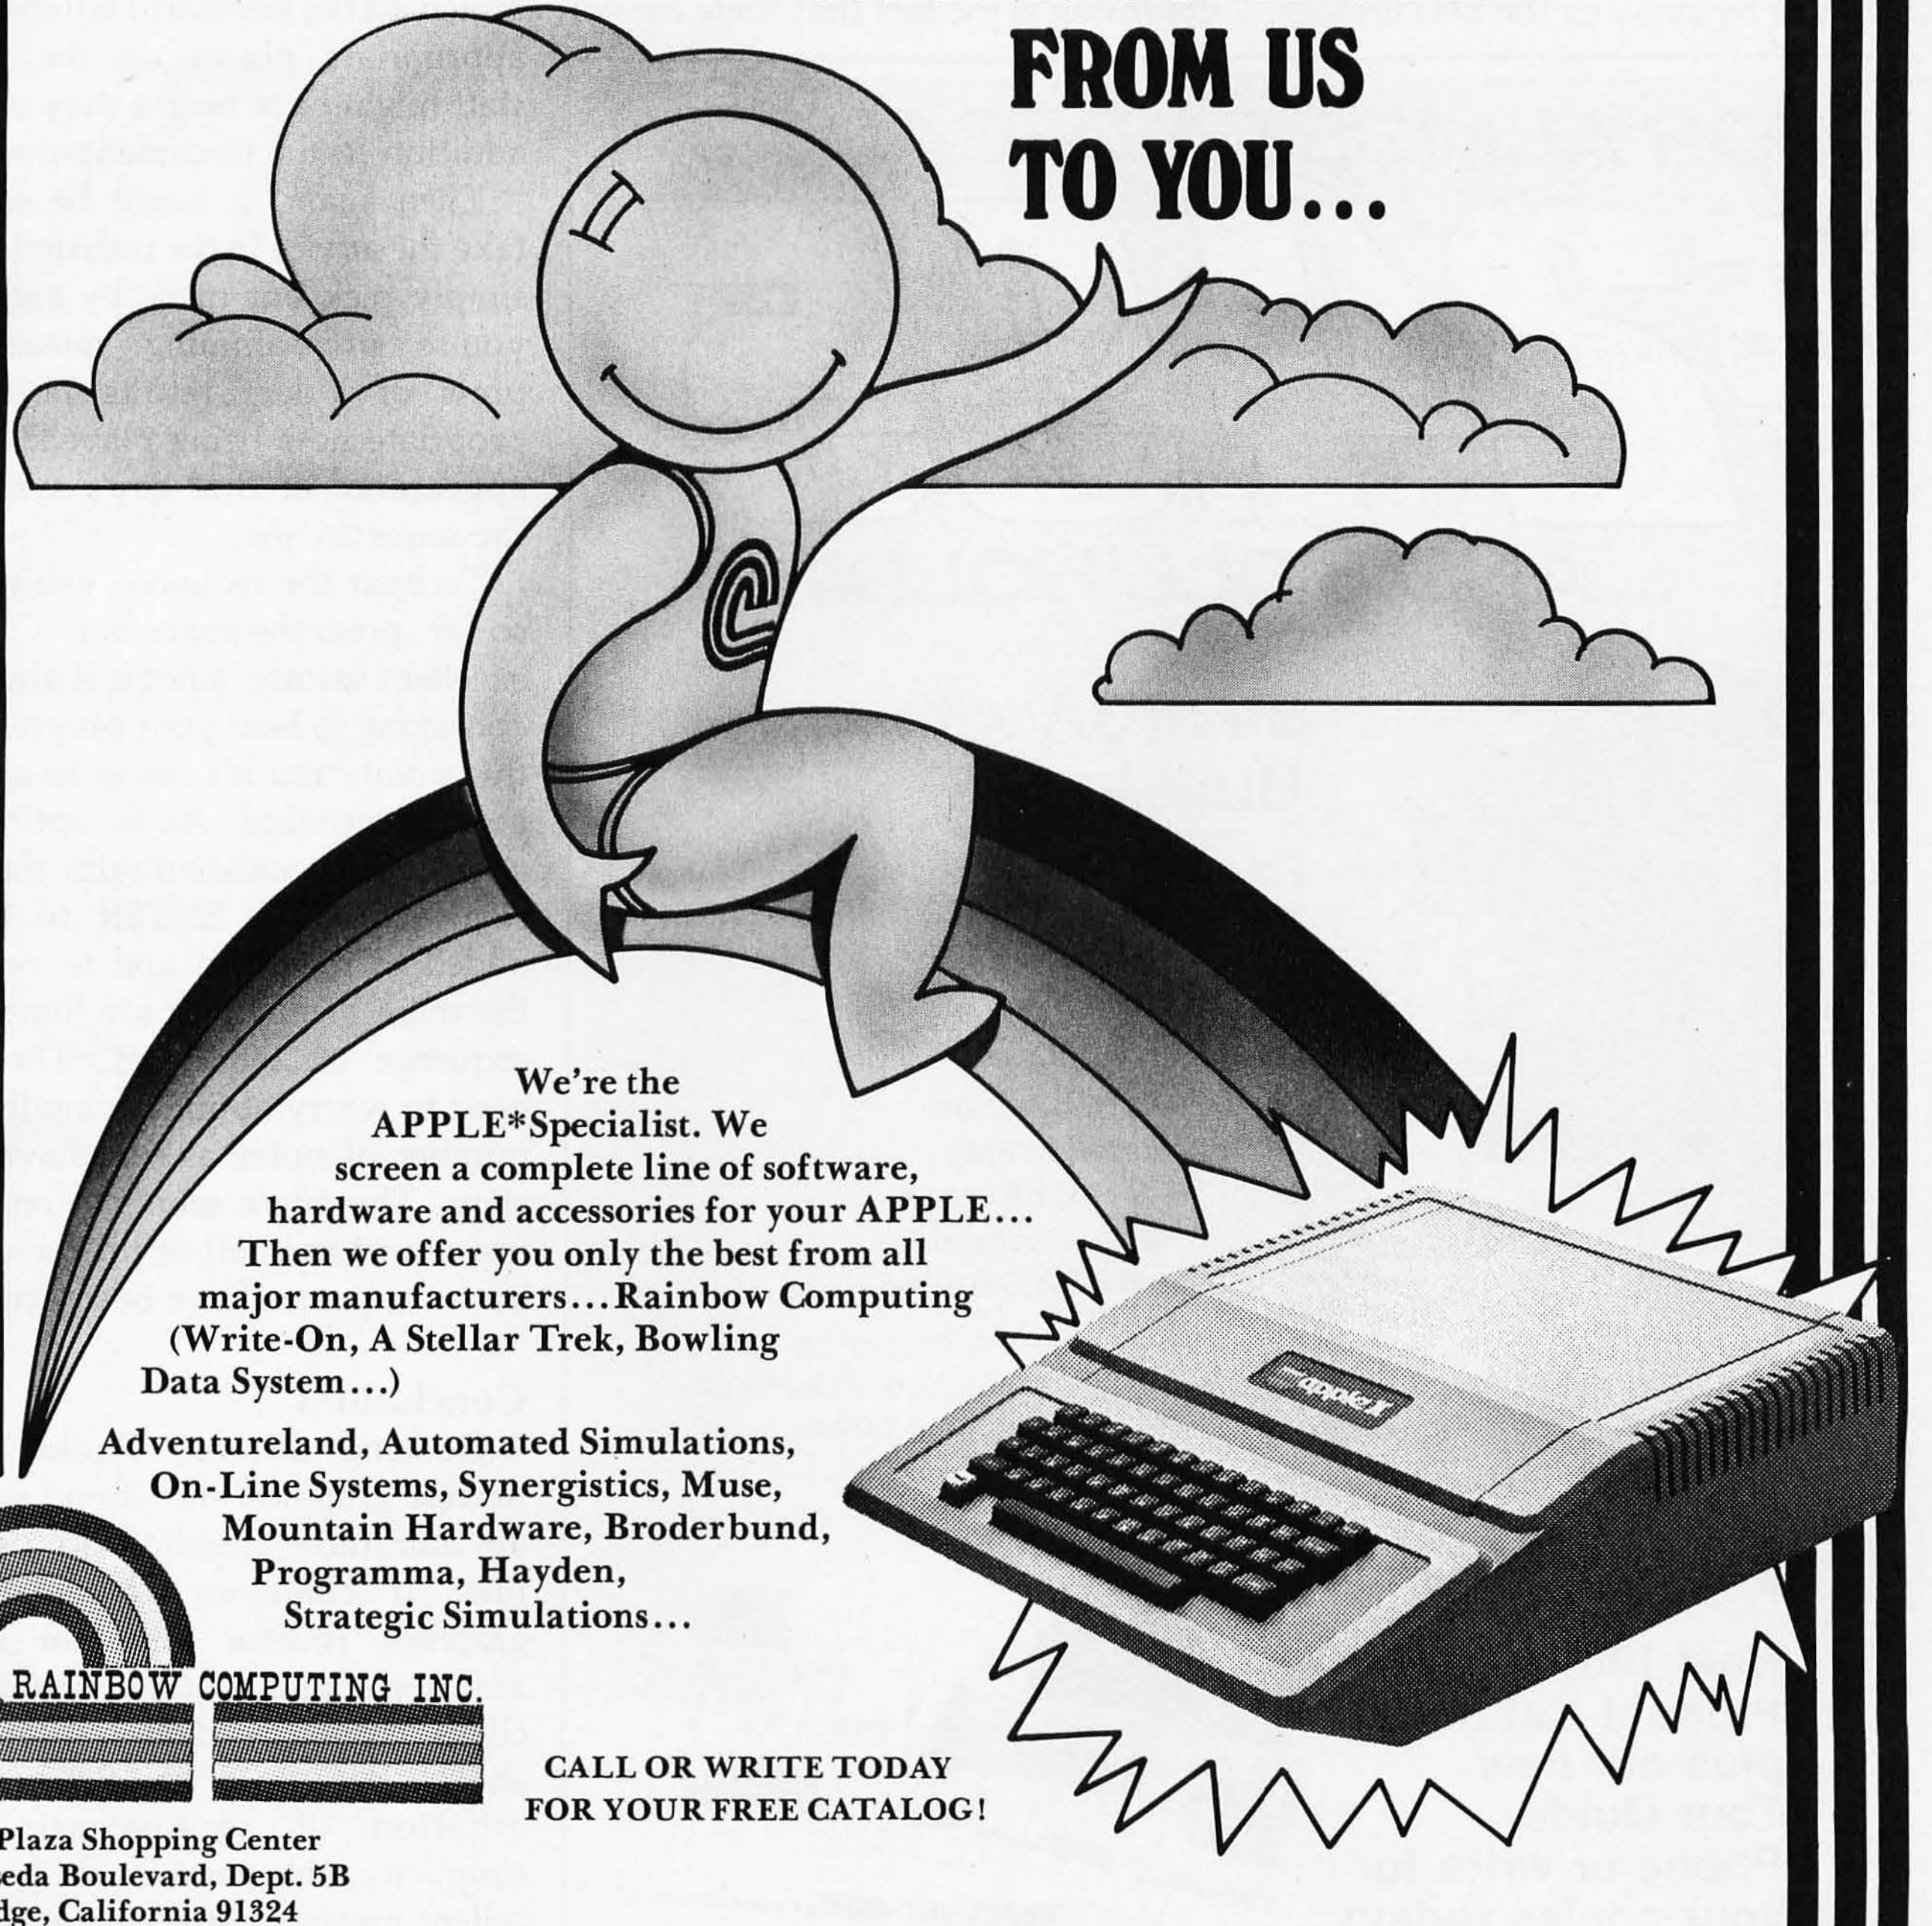

We're the
APPLE*Specialist. We
screen a complete line of software,
hardware and accessories for your APPLE...
Then we offer you only the best from all
major manufacturers...Rainbow Computing
(Write-On, A Stellar Trek, Bowling
Data System...)
Adventureland, Automated Simulations,
On-Line Systems, Synergistics, Muse,
Mountain Hardware, Broderbund,
Programma, Hayden,
Strategic Simulations...

RAINBOW COMPUTING INC.

CALL OR WRITE TODAY FOR YOUR FREE CATALOG!

Garden Plaza Shopping Center
9719 Reseda Boulevard, Dept. 5B
Northridge, California 91324
Phone U.S.A. (except Calif.) (800) 423-5441
California and Foreign (213) 349-0300

Open Tuesday to Friday 10 AM to 5 PM

apple® computer inc.

*APPLE IS THE REGISTERED TRADEMARK OF APPLE COMPUTER INC.

entered into the music section of the program.

One very nice feature is the "preview." By pressing the space bar you can see the demon dance the routine as you have entered it so far. If you don't like it, you can easily change it. The only restriction is that you are limited to a maximum of 248 dance steps in the routine.

Once you're satisfied with the dance routine performed by the demon, you enter it into "permanent" memory by pressing the ENTER key. This also returns you to the main menu. Finally, option number one lets you enter the music to which you want the demon to dance.

While the basic idea of the musical accompaniment seems quite simple, in actuality, it is considerably more difficult to create (or recreate) a musical melody than it is to design a workable dance routine. As with the dance steps, each note is designated by a letter of the alphabet. To include a rest, the "Z" key is used. What's confusing is the fact that there cannot be a direct correspondence between the letters of the keyboard and the letters of the musical scale. This is because the sharps, flats, and octaves (ie: the notes low C, low C#, high C, etc) cannot all be matched to the keyboard letter "C"; instead, they are matched to the keyboard "A," "B," and "M" keys, respectively. Even for someone who already plays music of a more conventional sort, it's like learning an entirely new instrument. For those who read music, a chart matching the keyboard letters to their appropriate places on the musical staff might have been a very welcome addition to the documentation.

Then again, it might be easier to take the advice in the instructions and simply pick out tunes by ear. When you're programming music, each press of a key results in the appropriate note being played, and the appearance of that key's symbol on the sequence list.

To hear the sequence you've input so far, press the space bar. This is an excellent feature, since it is always encouraging to hear your progress up to this point, and it's easier to spot and correct mistakes. As in option two, when you're satisfied with the music sequence, press ENTER to have it added to memory, and to return to the main menu. You are limited to a sequence of 248 notes. There's no need to worry about having the same number of notes as you have dance steps. The music sequence repeats (if necessary) until all of the dance steps in the sequence have been executed.

Conclusions

Dancing Demon, Radio Shack's newest graphics and sound game, is an admirable addition to its game line. It combines an entertaining graphics routine with an equally amusing sound routine (including the clicks from the demon's tap-dance shoes). Because of the unusual combination of sophistication and simplicity, this game could be an excellent means of sparking and fostering the creativity of children.

The game sells for $9.95 and, we feel, it should be purchased by anyone with children. We heartily recommend it.■

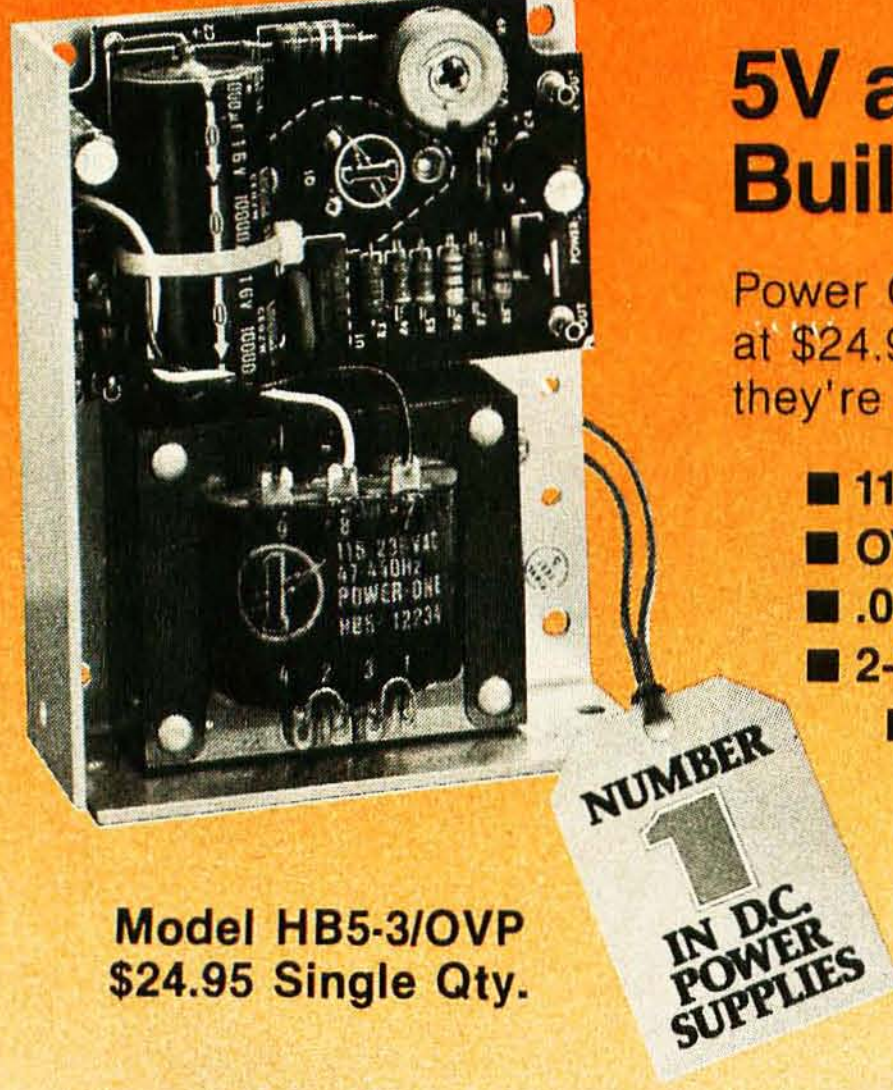

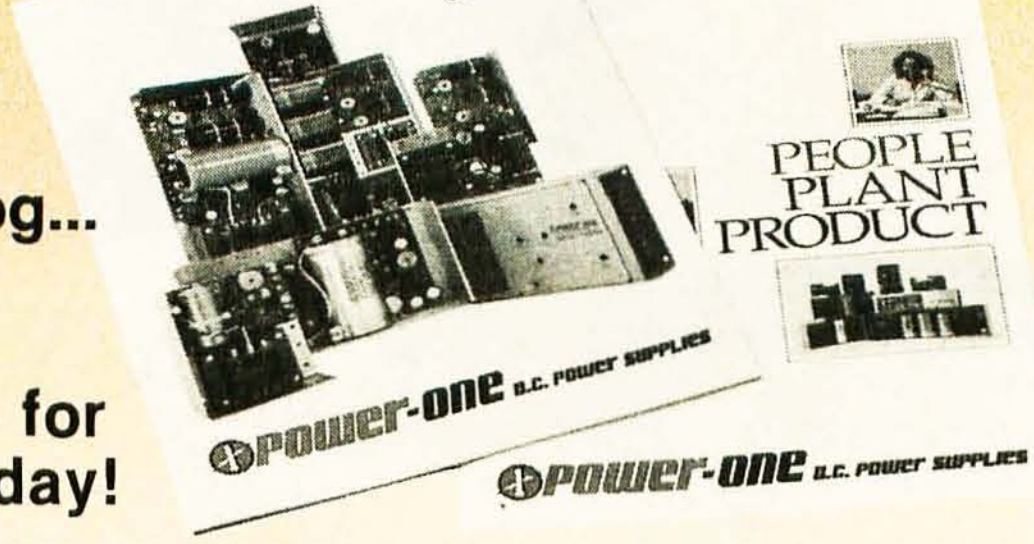

THE HARD EDGE

IN SYSTEM PERFORMANCE...

ADES

31 MByte Formatted Capacity

The ADES S33 MByte Hard Disk Subsystem is the *HARD EDGE* in System Performance. The S33 transforms your S100 computer from a slow, floppy-bound machine into a high performance system. The S33 is a complete subsystem which includes the ADES PS100 S100 compatible hard disk controller card, the Priam DISKOS (TM) 3350 hard disk, an attractive desktop cabinet, power supply, CP/M* BIOS software, and ribbon cable. With its 31MB formatted capacity and a CP/M data transfer rate greater than 40K bytes/second the S33 can instantly increase the performance of any S100 computer system.

S33 FEATURES. The PS100 single card controller, which is IEEE-S100 compatible, contains an on-board processor, a 528-byte host interface RAM, and the hard disk interface. It has a fifteen command repertoire, on-board CRC to guarantee data integrity, user selectable base address, bank select feature, phantom RAM disable, and full S100 interrupt capability. It controls up to four Priam drives. In addition, the S33CBIOS software package allows easy integration into most CP/M systems. Application notes cover CBIOS integration and system boot directly from the hard disk.

EXPANDABILITY. With the S33 subsystem, you have freedom to grow in two different directions. First, the PS100 controller supports all Priam 8- and 14-inch hard disk drives, including the 68 MByte and 158 MByte models. As your database expands, so does your system's capability. Second, one PS100 controller handles up to four drives of any size and in any combination, providing a full range of capacities.

The S33 is only the first in the expanding line of ADES mass storage products. When you need an edge on your competition or more power in your personal system, look to ADES for the "*HARD EDGE* in System Performance."

*CP/M is a registered trademark of Digital Research.

ADES

ADAPTIVE DATA & ENERGY SYSTEMS
2627 Pomona Boulevard • Pomona, CA 91768
Phone: (714) 594-5858

Circle 4 on inquiry card.

Wire-Wrapping and Proto-System Techniques

Adolph Mangieri
POB 384
New Kensington PA 15068

The cost of microprocessor, memory, and peripheral devices has plummeted, while the details of computer circuit theory and design have become widely available. In combination, these conditions are enticing a greater number of hobbyists to build and experiment with computer circuits. However, the process of translating published circuits and personal circuit designs into functioning hardware can create unusual problems.

Whether you build a system from the ground up or expand an already-existing system, your initial choice of wiring and prototyping techniques will have a substantial impact on both the effort required and the success of the project. Plugboard systems break a computer system into manageable and easily documented circuit blocks. For rapidity in wiring, assembling, and later modification of the project, wrapped-wire techniques best serve the computer hobbyist.

Wrapped-Wire Connection

A *wrapped-wire* connection is made up of six closely spaced turns of solid copper wire wrapped, under tension, around square, sharp-edged metal posts. Both the wire and wrap-post edges become indented, forming a number of gas-tight contacts with a total resistance of less than three milliohms. An additional turn of the insulated wire at the start of the wrap process prevents wire breakage under conditions of extreme vibration, and also reduces the possibility of a short circuit from the lowest turn of exposed wire to a nearby trace or ground plane on the circuit board.

The wrapped connection is made with a metal tube that has a central hole in one end for a wrap post and a smaller hole (alongside the first) that accepts a piece of wire. In conventional insulated wire wrapping, a piece of wire is cut to length and the ends are stripped of insulation. One end is inserted into the wire hole in the wrapping tool, and the tool is then placed over a wrap post. As the tool is rotated, wire is pulled from the hole at a 90 degree angle and wrapped around the post, creating enough drag and tension to make a good contact. This method requires a separate wire for every connection. It is also possible to connect a number of posts with a single unbroken strand of uninsulated wire— a process known as *chaining*. However, bare-wire chaining is suitable only for installation of ground buses or isolated jumper connections.

Fortunately, *insulated* wire chains can be made with special wrapping tools recently introduced by Vector Electronics.

Wire-Wrapping Tools

The Vector Electronics model P180 Slit-N-Wrap is a high-speed chain-wrapping tool that eliminates wire cutting and stripping. A top-mounted wire spool holds 100 feet of #28 gauge nylon-polyurethane insulated wire (available in four colors). Wire exits the wire hole, and a sharp cutting edge slits the insulation to expose a portion of bare wire as you form the wrapped connection. The tool is supplied with two spools of wire and a P183 chisel knife and wire-forming tool, for routing wire and nipping off the beginning end-tail.

The nylon-polyurethane insulated wire resembles magnet wire, and it may be wrapped around an odd-sized terminal and soldered directly through the insulation. (However, you should exercise caution in avoiding the dragging or binding of wire against sharp wrap-post edges.) The thin but tough wire insulation barely increases wire diameter or stiffness, and as a result, the tool maneuvers smoothly on dense wire-wrap boards.

A similar high-speed tool, the Vector model P184 Tefzel Slit-N-Wrap, chain-wraps #28 gauge Tefzel insulated wire. This tool is supplied with two 50-foot spools of wire in different colors. Tefzel insulation is relatively thick, allowing carefree wire wrapping and eliminating any chance of a short circuit, but the wire also handles somewhat more stiffly. Both Slit-N-Wrap tools must be rotated clockwise to slit the wire insulation, and both wrap their wire type conventionally.

The Vector P160-2A Dual-Way Wrap-N-Strap is a conventional tool that wraps #30, #28, and #26 gauge wire. Bare-wire chaining or strapping is possible by feeding wire down through the hollow handle. The

Circle 239 on inquiry card. ⟶

THE SOLUTION STORE℠

. . . Makes The Difference!

MicroAge Computer Stores sell solutions to your professional, business and household-management problems, not just hardware. That's what makes the MicroAge difference! From systems integration to easy-to-understand application software, research and development to warranty service and repair, systems consulting to training and installation. In all these, we offer the latest, most innovative approaches. That's why we are the forerunners . . . the pioneers in the microcomputer industry.

But don't just take our word for it. Visit the MicroAge Computer Store nearest you and see the difference solutions make. We have differences you'll experience with every time and money-saving idea. The difference that will keep you satisfied now and for years to come!

MicroAge.
COMPUTER STORE
"Where Vision Becomes Reality"

9530 Viscount
El Paso, Texas
(915) 591-3349

611 Rockville Pike
Rockville, Maryland
(301) 762-7585

5742 E. Broadway
Tucson, Arizona
(602) 790-8959

2760-S South Havana
Aurora, Colorado
(303) 696-6950

1707 Monroe Avenue
Rochester, New York
(716) 244-9000

1220 Melbourne Drive
Hurst, Texas
(817) 284-3413

2675 Mayfair Road
Milwaukee, Wisconsin
(414) 257-1100

2065 El Camino Real West
Mountain View, California
(415) 964-7063

2525 N. Scottsdale Road
Scottsdale, Arizona
(602) 941-8794

1490 W. Spring Valley Rd.
Richardson, Texas
(214) 234-5955

83 South 10th Street
Minneapolis, Minnesota
(612) 338-1777

4550-50 E. Cactus
Phoenix, Arizona
(602) 996-2910

24 W. Camelback
Phoenix, Arizona
(602) 265-0065

Coming soon to:
Houston, Texas
Salt Lake City, Utah
St. Louis, Missouri
Indianapolis, Indiana

2591 Hamilton Road
Columbus, Ohio
(614) 868-1550

Lincoln, Nebraska
Witchita, Kansas
San Diego, California
Portland, Oregon

FOR FRANCHISE OPPORTUNITY INFORMATION CALL (602) 967-1421



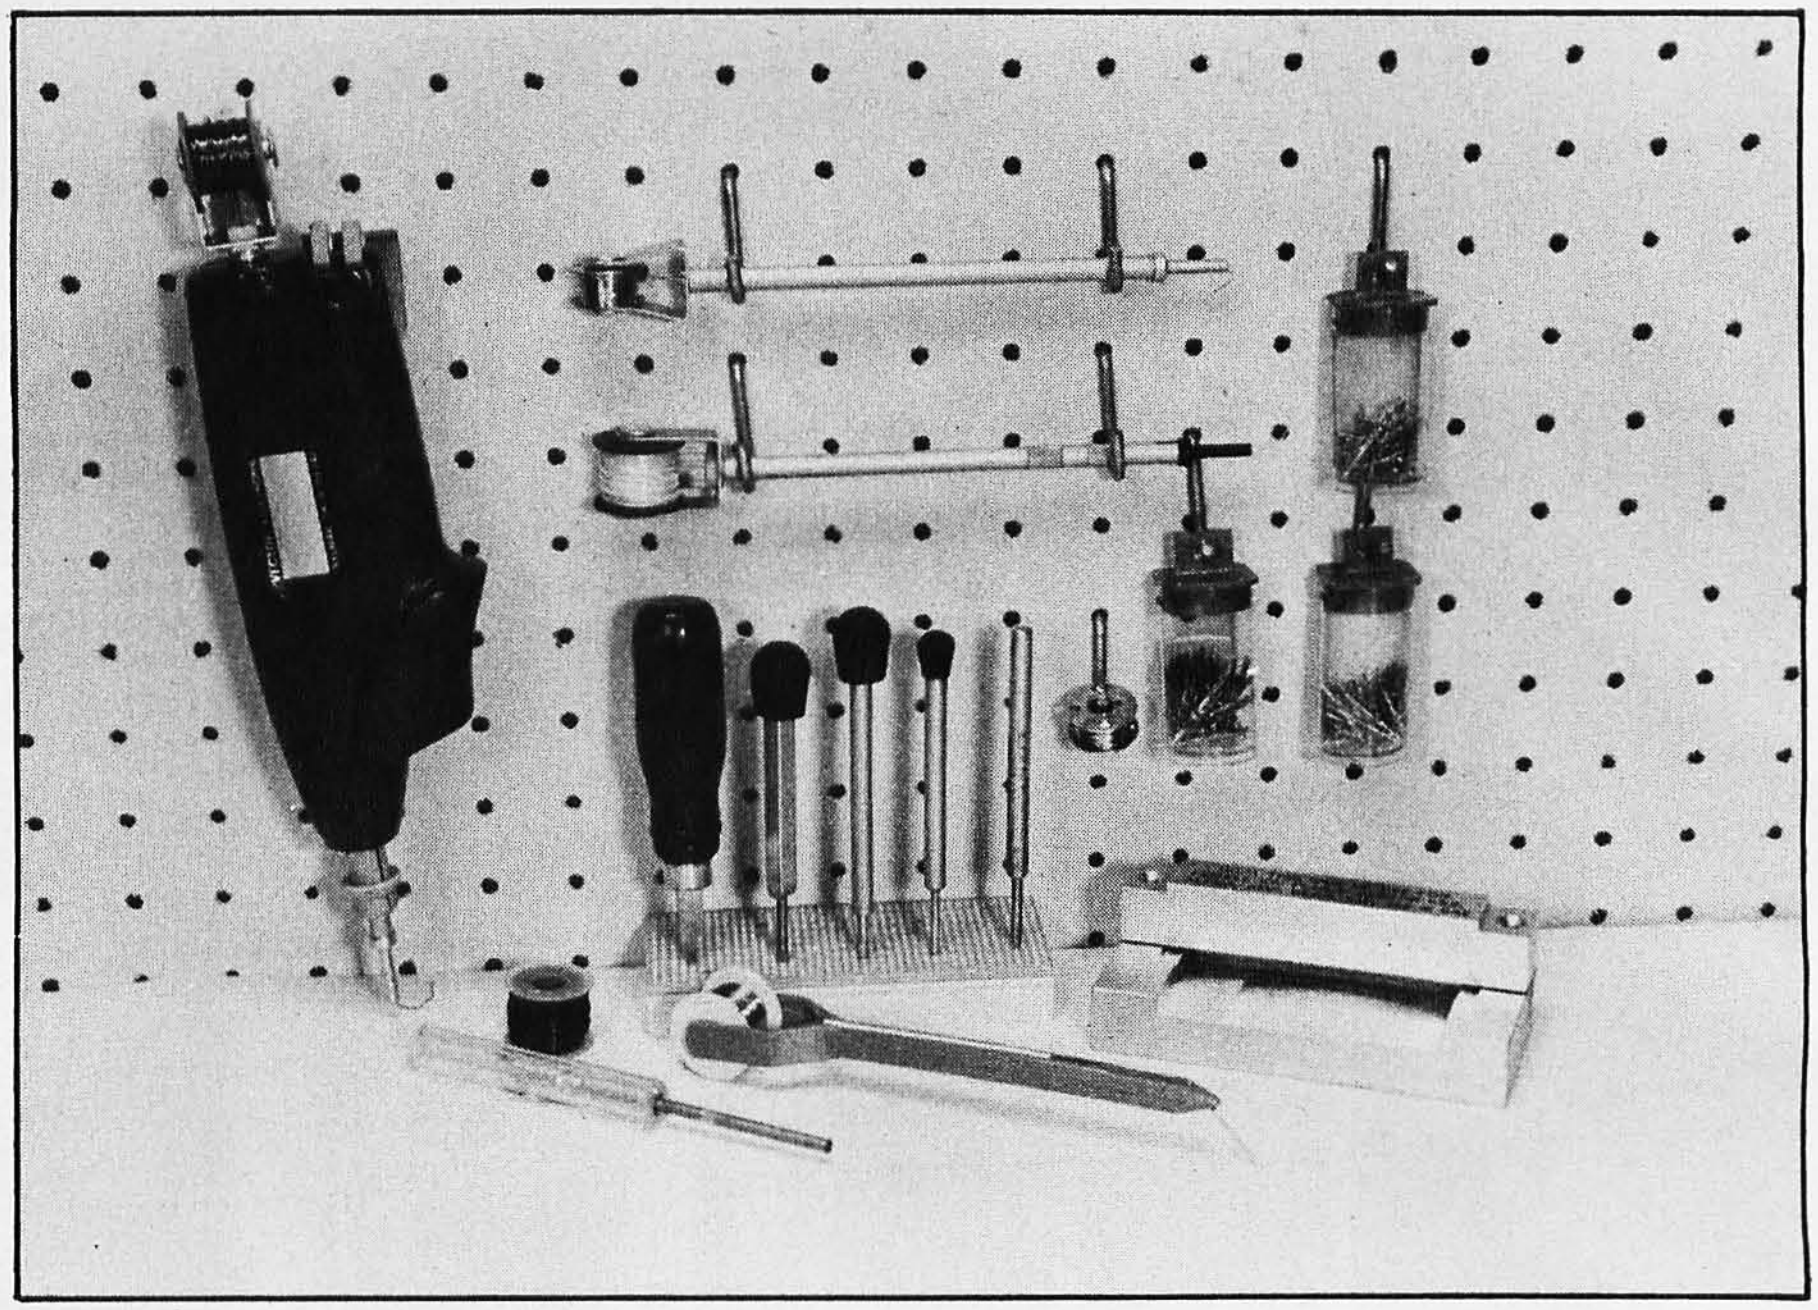

Photo 1: *Available wire-wrapping tools include the Vector P180 Slit-N-Wrap, installed in a P160-4R cordless driver unit (left), the P160-2A-1 Dual-Way Wrap-N-Strap (top center), and the P184-Tefzel Slit-N-Wrap (below). The stand (center) displays five different pin-insertion tools. In the foreground (left to right) are the P160-1A Dual-Way unwrapping tool, P178-1 wiring pencil, and the P187 IDC fixture for assembling IDC ribbon cables.*

P160-2A-1 wrapping tool is a similar instrument, but it has a top-mounted spool to hold the bare wire. Both tools offer a solution to the problem of inserting wire (especially the remaining end of a very short wire) into the wire hole. Each tool has a recessed tip with a cross-slot that allows wire insertion without up-ending the tool or fumbling about on the board. The Vector P160-1A Dual-Way unwrap tool has a retractable hood that catches the unravelled wire when you unwrap a connection.

Even chaining can become tedious if you wrap a large backplane or motherboard, but a powered wrapping tool can make this kind of operation less tiresome. Powered wrappers are versatile hand-held units that contain an electric motor and a hollow main spindle that accepts the handles of various manual Vector tools. These electrical tools can make a single wrap in seconds; chains can be wrapped as quickly as the tool is moved to the next wrap post. However, the powered wrappers are bulkier and less easy to handle when routing wire on a densely populated circuit board. The Vector model P160-4R wrapper (see photo 1) is powered by rechargeable nicad batteries. The newer model P160-4R3 has a hand-fitting pistol grip. The P160-4T1, supplied with the P180 wrapping tool installed, is similar in design, but it operates off 110 V AC lines. The battery-operated P184-4T model, and the line-operated P184-4T1 Electro-Wrappers are supplied with the P184 Tefzel wire-wrapping tool installed.

Another recently developed wiring technique uses a wiring pencil. The pencil dispenses solder-thru insulated wire from a top-mounted wire spool. Instead of wrapping a connection, you simply loop several turns around a terminal and begin to solder. This technique permits assembly of low-profile plugboards with low-profile solder-tail sockets. The Vector model P178-1 wiring pencil dispenses either #36 gauge or #32 gauge solder-thru wire and #30 bare tinned wire. The tool is supplied with one 400-foot bobbin of #36 gauge wire (available in three colors).

Wrap Posts and Accessories

Vector can supply wrap posts in many styles, along with DIP (dual in-line pin) wrap-post sockets of all

Orange Micro

"THE COMPUTER PRINTER SPECIALISTS"

UP TO 25% DISCOUNTS! — SAME DAY SHIPMENT!

CENTRONICS 737 (RADIO SHACK LINE PRINTER IV)

Word Processing Print Quality

• 18 x 9 dot matrix; suitable for word processing • Underlining • proportional spacing • right margin justification • serif typeface • 50/80 CPS • 9½" Pin Feed/Friction feed • Reverse Platen • 80/132 columns

CENTRONICS 737-1 (Parallel)	(List $995)	**$765**
CENTRONICS 737-3 (Serial)	(List $1045)	**$815**

VISTA — C. ITOH

Daisy Wheel Letter Quality



• 25 CPS (Optional 45 CPS) • Typewriter quality • Centronics parallel • RS 232 Serial (Optional) • Proportional spacing • Bidirectional • Programmable VFU • Self test • Diablo compatible • Friction feed (Optional tractors) • 136 printable columns. • Manufactured by C. ITOH.

VISTA V300 (C. ITOH)	(List $1895)	**$ Call**

EPSON MX80/MX70

OUR BEST BUY!

Low-Priced Professional Print Quality



• 9 x 9 dot matrix • Lower case descenders • 80 CPS • Bidirectional, Logic seeking • 40, 66, 80, 132 columns per line • 64 special graphic characters: TRS-80 Compatible • Forms handling • Multi-pass printing • Adjustable tractors

EPSON MX80	(List $645)	**$Call**
EPSON MX 70 Dot graphics, 5 x 7 matrix	(List $450)	**$Call**

ANACOM

Low Cost, High Speed, Wide Carriage

• 9 x 9 dot matrix • Lower case descenders • Wide carriage • Adjustable tractors to 16" • 150 CPS, Bidirectional, Logic Seeking

ANACOM 150	(List $1350)	**$ Call**

ANADEX

Dot Graphics, Wide Carriage

• 11 x 9 dot matrix; lower case descenders • Dot resolution graphics • Bi-directional, logic seeking • Up to 200 CPS • RS 232 Serial & Parallel • Forms control • X-ON/X-OFF • Up to 6 part copy.

ANADEX 9501	(List $1650)	**$1350**

OKIDATA MICROLINE SERIES

TRS-80 Graphics Compatibility, Friction Feed



• 9 x 7 dot matrix • 80 CPS • 80, 132 columns — 64 shapes for charts, graphs & diagrams • Double wide characters • 6/8 lines per inch • Up to 3 part copy • Friction & pin feed • 200 M character head warranty

OKIDATA MICROLINE 80	(List $800)	**$520**
OKIDATA M82 Bidirectional, Forms handling	(List $960)	**$750**
OKIDATA M83 Wide carriage, 9 x 9 dot matrix	(List $1260)	**$1050**

NEC SPINWRITER

High Speed Letter Quality

• 55 CPS • Typewriter quality • Bidirectional • Plotting • proportional spacing.

5510-5 RO, Serial, w/tractors	(List $2995)	**$2625**
5530-5 RO, Parallel, w/tractors	(List $2970)	**$2599**

TELEVIDEO CRT'S



AT DISCOUNT PRICES!

TVI 912C
TVI 920C
TVI 950

Please Call Toll Free Prices are too low to advertise

QUANTITY PRICING AVAILABLE

IDS PAPER TIGERS

Dot Resolution Graphics, quality print, speed



• 7 wire printhead (445); 9 wire printhead (460) with lower case descenders • Over 150 CPS • bi-directional, logic seeking (460) • 8 character sizes; 80-132 columns • Adjustable tractors • High-resolution dot graphics • Proportional spacing & text justification (460).

IDS 445G 7 wire printhead, graphics	(List $895)	**$ 750**
IDS 460G 9 wire printhead, graphics	(List $1394)	**$1150**
IDS 560G 9 wire, wide carriage, graphics	(List $1794)	**$1590**

PRINTERS

MALIBU 165 wide carriage, graphics, letter quality	(List $2495)	**$ 1975**
QUME 5/45 typewriter quality	(List $2905)	**$ 2559**

INTERFACE EQUIPMENT

CCS APPLE PARALLEL Interface & cable		**$ 150**
APPLE II - EPSON MX80 parallel interface board & cable		**$ 100**
SSM AIO BOARD Apple Serial/parallel interface	(List $225)	**$ 175**
MICROTRONICS Atari parallel interface		**$ 69**
ATARI 850 Interface module, serial/parallel		**$ 199**
TRS-80 CABLES to keyboard or Exp. interface		**$ Call**
NOVATION D-CAT direct connect modem		**$ Call**

CALL FOR FREE CATALOG

(800) 854-8275

CA, AK, HI (714) 630-3322

At Orange Micro, we try to fit the right printer to your application. Call our printer specialists for free consultation.

TELEPHONE ORDERS: Mon.-Fri. 8:30 - 5:00
The Orange Micro Printer Store (Retail):
Mon.-Fri. 10:00 - 6:00, Sat. til 4:00

Phone orders WELCOME; same day shipment. Free use of VISA & MASTERCARD. Personal checks require 2 weeks to clear. Manufacturer's warranty included on all equipment. Prices subject to revision.

Orange Micro, Inc.
3150 E. La Palma, Suite I
Anaheim, CA 92806

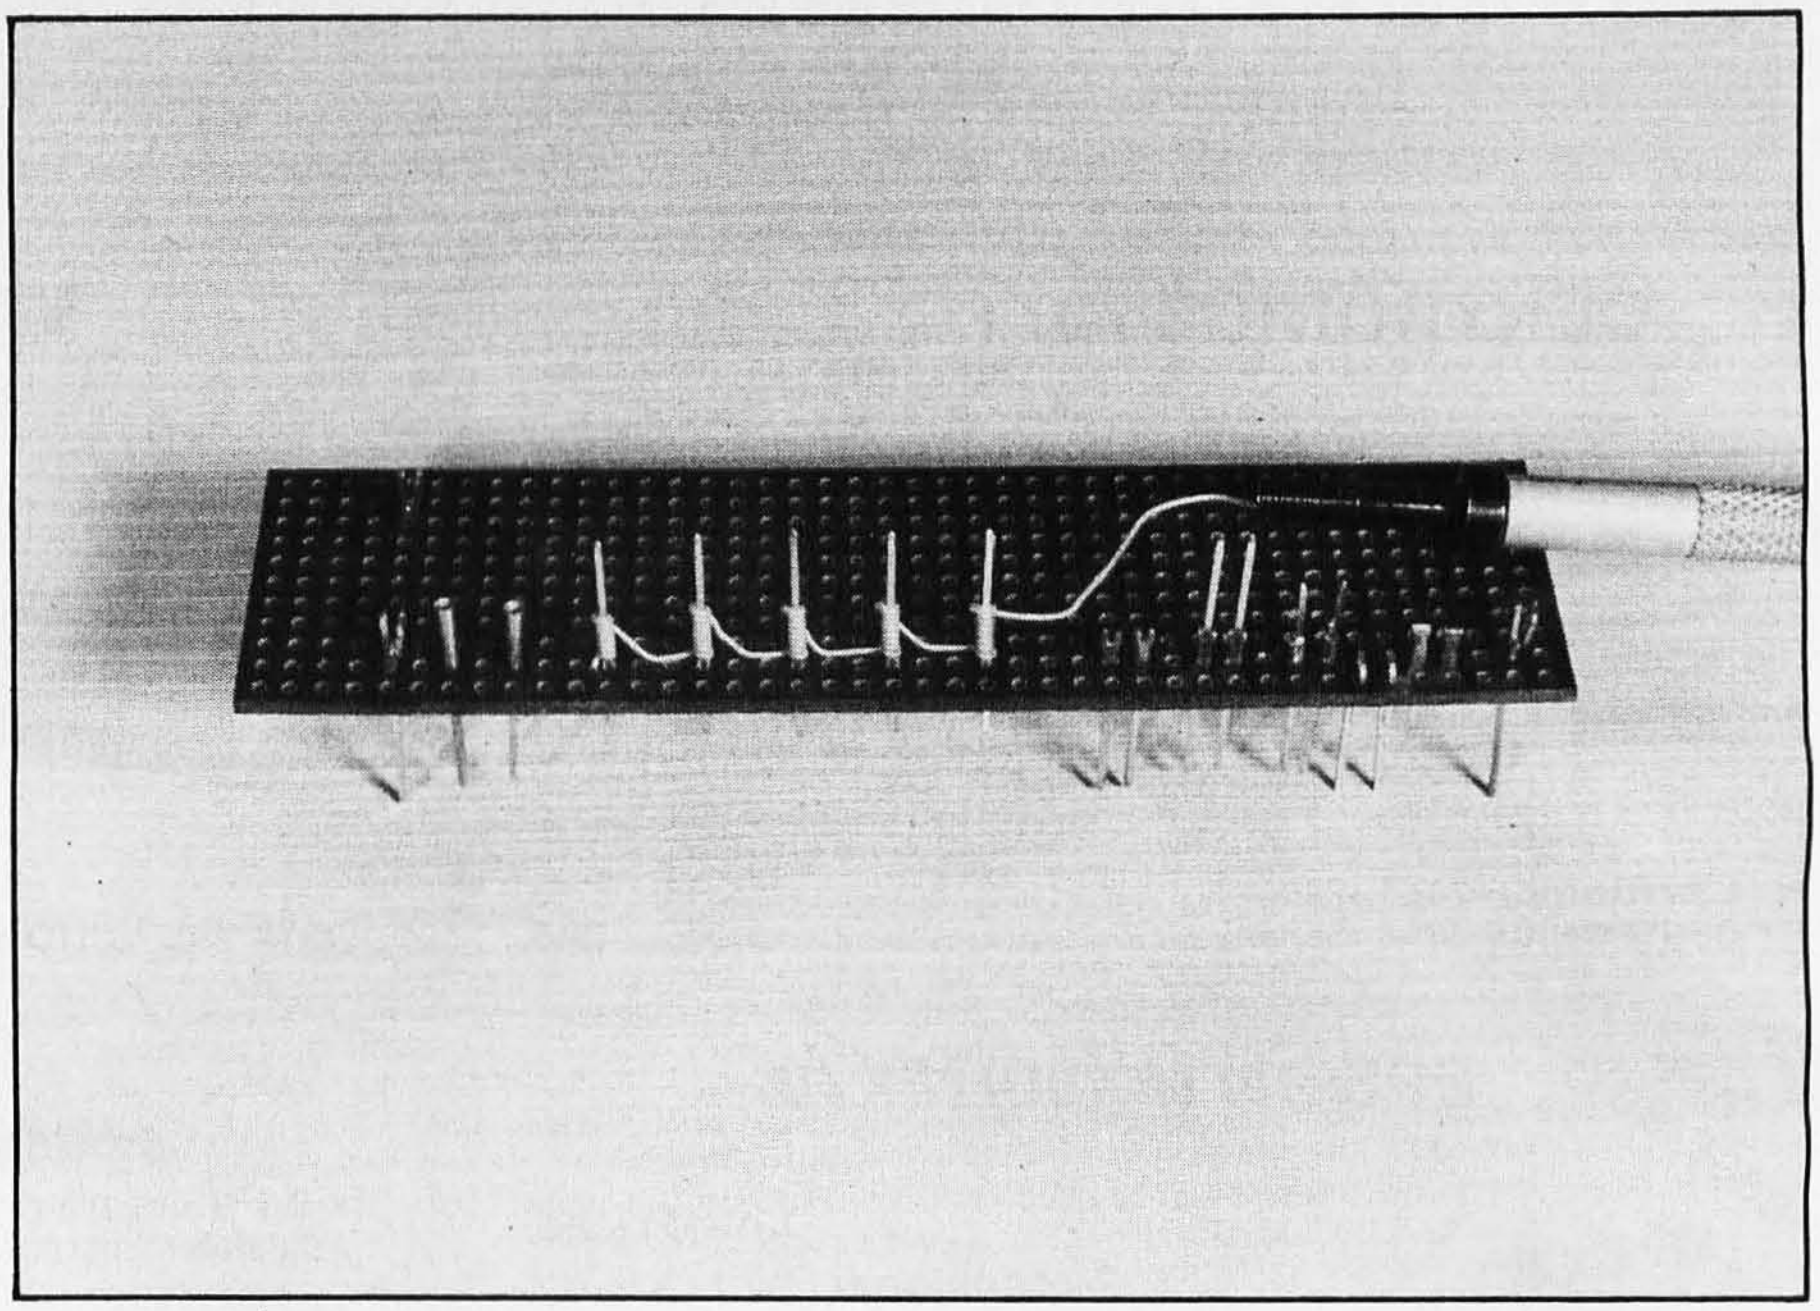

Photo 2: *Rapid assembly of circuit boards demands insulated-wire strapping or chaining techniques, as demonstrated with the P184 Tefzel Slit-N-Wrap tool. The wide variety of board pins shown can handle any wiring situation.*

sizes. At least four pin styles and several pin insertion tools will be needed to assemble a project. Wrap posts are 0.025 inches square (0.64 mm) and are push-fitted into 0.042 inch (1.07 mm) holes. The T-49 Klip Wrap post has a three-way fork (see photo 2) at one end for support of discrete components that may be snapped in place or soldered. You can install this pin with the Vector P156 insertion tool. For soldered installation of discrete components, the T-44 Miniwrap pin has a small slot at one end and is installed with the A13 hand tool. The K-32 J-pin passes through two holes and the short leg is bent to the board. Substitute DIP sockets can be made using these pins.

The Vector T46-5-9 pin is one of several pins that has a crossbar on the shank. The pins are installed with the aid of the P205 insertion tool, and crossbars are aligned to accept female IDC (insulation displacement connector) plugs of ribbon cables. The T46-4-9 pin is similar in design but single-ended, and it passes a card-finger pad or power plane to the other side of the board. Other single-ended board-feed-thru pins include the T46-4 and T51 pins. Typical of a family of pins having no crossbar, the T46-3 double-ended pin is inserted with the P133A insertion tool. Use these pins when the laterally extending crossbar pins create a problem. To assemble sockets for small transistors or integrated circuits, you can use the R31 and R32 socket pins. Use the Vector MB45-20 perforated alignment block to back up the board and assure perpendicular installation of board pins. Photo 2 shows useful pin styles and a sample Tefzel-wire chained connection.

Although the use of Slit-N-Wrap chaining tools reduces time spent forming the wrapped connections, it can be tedious to wire-wrap a circuit that includes hundreds of connections. Much of the time is spent referring to the schematic and plugboard diagrams, locating the pins on the circuit board, forming and routing wires, and correcting wiring errors. A particular circuit board may have markings (eg: socket pin numbers) that can be helpful in wrapping your circuit, but these marks are quickly obscured on a crowded board with hundreds of closely spaced wrap posts. Correcting wiring errors can be time consuming, as the wire in question is often buried under several layers of wires. Make sure that you are properly oriented when you make the connections: it will reduce the

C ~~or~~ AND Pascal
Efficiency ~~or~~ AND Portability
Flexibility ~~or~~ AND Strong Typing

Now you don't have to compromise!

Whitesmiths Ltd. now offers portable language development systems for four families of computers. Approximately one thousand installations use our software.

We support complete versions of both C and Pascal, as compilers and cross-compilers. You get C automatically when you license Pascal, and you get native support with each cross-compiler. Test the software on your VAX before burning PROMs for your 68000 or 8080.

Whitesmiths Ltd. offers a variety of licensing arrangements, the simplest being a binary license for use on a single CPU. The full source code is available with internal documentation. Maintenance, training and sublicensing rights may also be obtained.

Call or write for more information.

Source Operating Systems	**Target Machines**			
	8080/Z80	**LSI-11/PDP-11**	**VAX-11**	**M68000**
8080/Z80 CP/M	C: $630 Pascal: $880	*	*	*
LSI-11/PDP-11: Idris, Unix, RT11, RSX-11/M, RSTS/E, IAS	C: $1130 Pascal: $1380	C: $630 Pascal: $880	*	C: $1130 Pascal: $1380
VAX-11 Unix/V32 VMS	C: $1130 Pascal: $1380	*	C: $630 Pascal: $880	C: $1130 Pascal: $1380
M68000 VERSAdos	*	*	*	C: $630 Pascal: $880

Idris is a trademark of Whitesmiths, Ltd. ■ Unix is a trademark of Bell Laboratories ■ CP/M is a trademark of Digital Research Company ■ VMS, RSX-11/M, RSTS/E, LSI-11, VAX, are trademarks of Digital Equipment Corporation ■ VERSAdos is a trademark of Motorola Corporation

*Special Order

Protect your software investment.

Whitesmiths, Ltd.

P.O. Box 1132 Ansonia Station New York, N.Y. 10023
(212) 799-1200

Circle 434 on inquiry card.

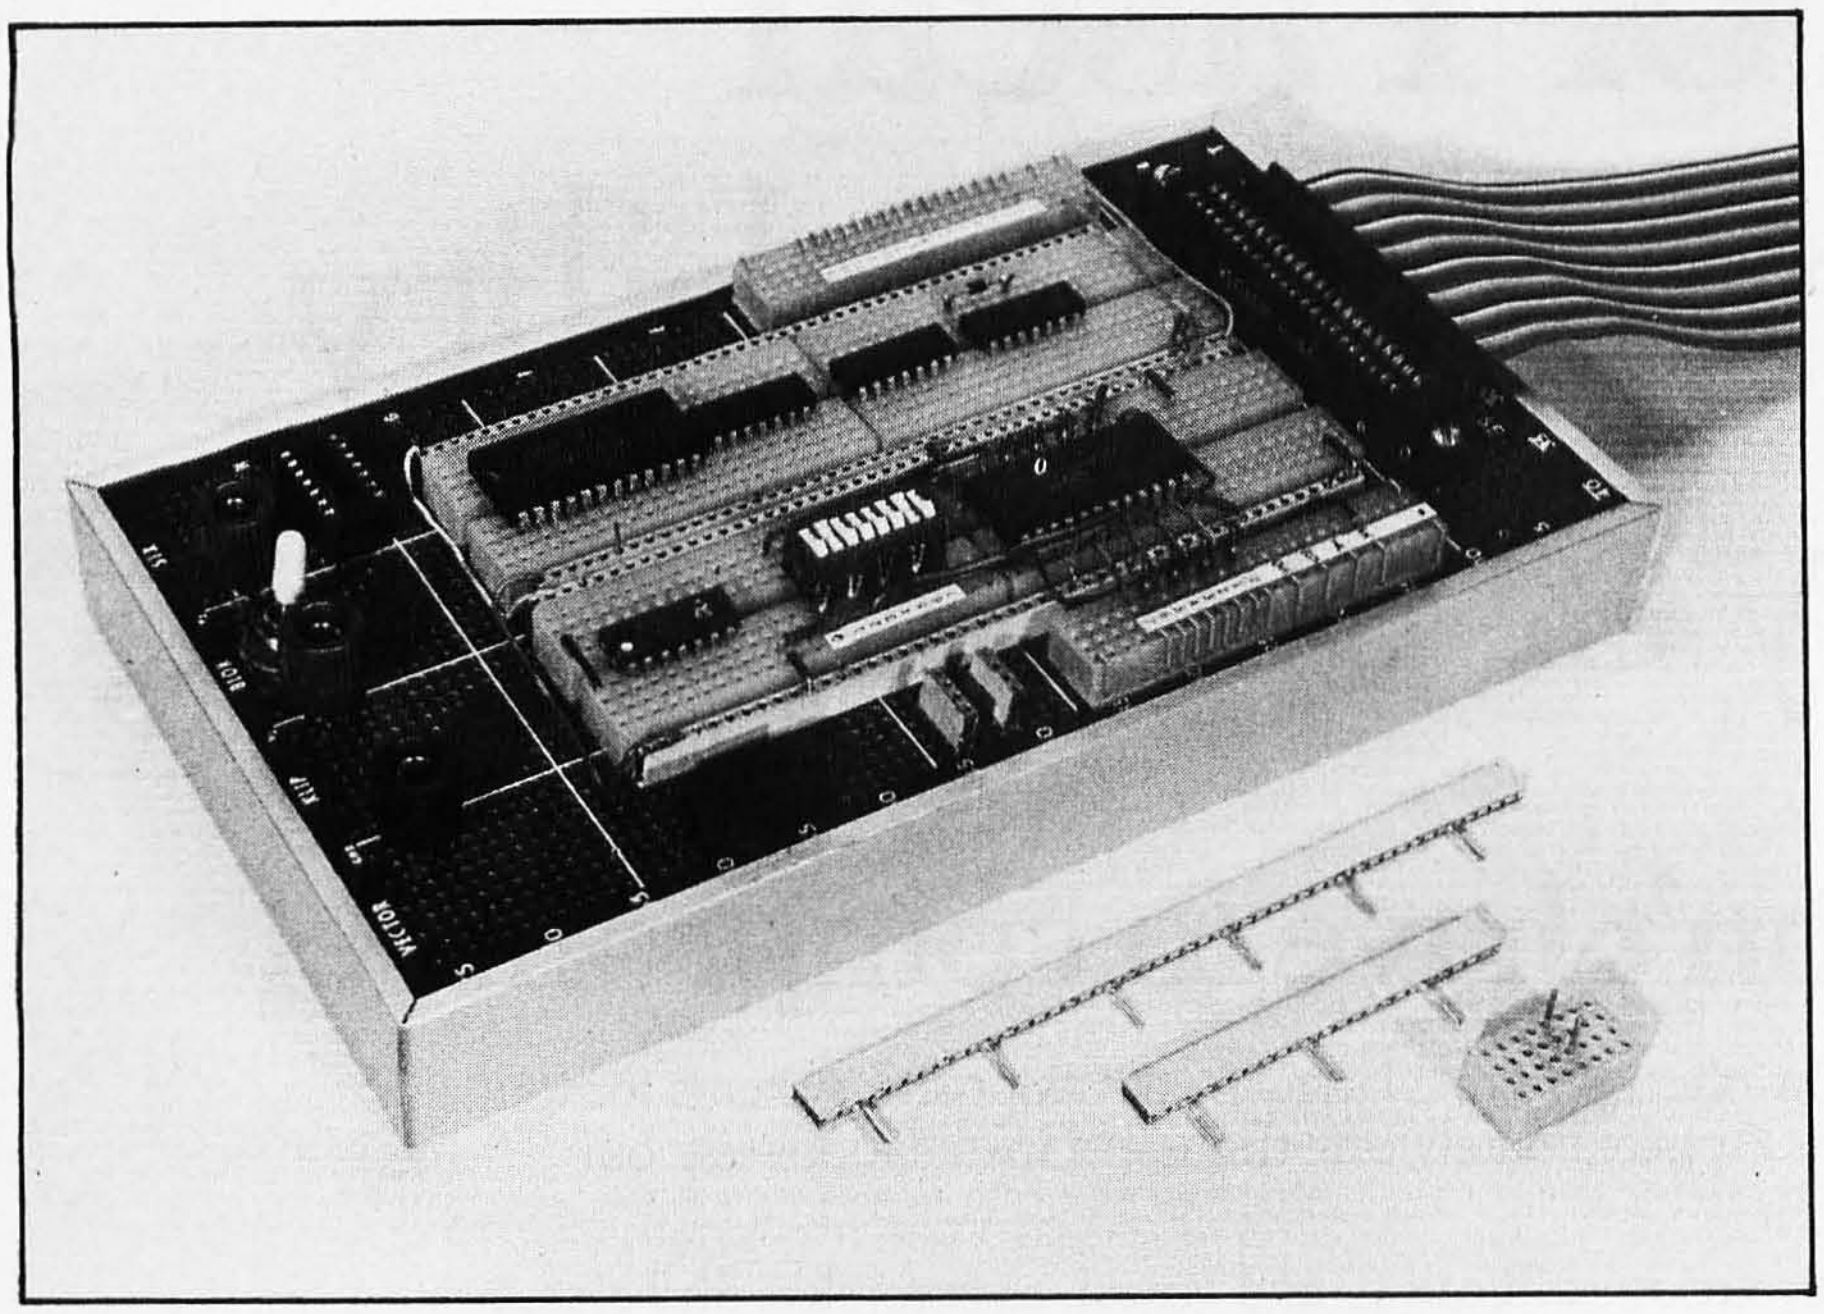

Photo 3: *A DIP (dual in-line package) patchboard or breadboard, such as the Vector 51X patchboard, is indispensable to circuit development. This patchboard is top and bottom wirable and can be easily linked to a computer with an IDC ribbon cable.*

amount of time devoted to the wiring operation.

To install a chained wire-wrap run correctly, push short lengths of insulation over each post as you identify it, then select the best route for the run. You should begin at the end that allows easy removal of the first wire anchor with a chisel knife. Remove the markers as you proceed, taking care to insert the tool on the marked pin. Check the completed wire run for errors before you proceed.

Avoid taut wire runs that can result in wire breakage or bent wrap posts. When removing the tool from a wrap post, use the tip of the wrapping tool or the wire-forming tool to mold the wire to the board. An excellent wire-forming tool can be made from the wooden handle of an artist's paint brush. Sharpen one end in a pencil sharpener and fashion a screwdriver blade at the other end. Use both the wrapping and the wire-forming tools as you form and route wire to the next wrap post. To reduce crosstalk, avoid bundling wire runs, and approach or pass the wire between socket pins perpendicular to the plane of the pin rows. To begin the next wrap, use the forming tool to press the wire to the board: do this slowly, using no down-pressure on the first turn. If you use the P180 wrapping tool, start the wrap slightly above an etched plane. Wire breakage rarely occurs, but it is usually the result of a sudden start on a taut wire.

Pencil Wiring

When you assemble a board that uses solder-tail (low-profile) DIP sockets, use the pencil wiring technique. After you chain-wrap the interconnections, solder the looped turns with a soldering pencil heated to a temperature of 750 degrees F. The heat melts the nylon-polyurethane insulation, which allows the solder to bond the connection. The Vector P178-1 wiring pencil is supplied with #36 gauge solder-thru wire, but spools of #32 gauge solder-thru wire and #30 gauge bare wire can also be used.

Orbit the tip of the wiring pencil around the terminal or socket pin, placing the loops of wire somewhat above the board surface. Due to the additional soldering time required to melt the wire insulation, you should use soldering heatsinks to protect delicate components. If this is not possible, tin a portion of the wire before you form the loops (this premelts the insulation). You can obtain a satisfactory connection by solder-wetting the loops on one side of the terminal or component post: this reduces soldering time.

You can use the Vector P179WS series of plastic wire spacers to route the wire neatly. The wire spacers are push-fitted into the board and have a number of wire-retaining slots topside. Low-impedance ground circuits may be obtained by running a second or third wire parallel to the first run, or you can pencil-wire the ground bus with Vector W30-4 #30 gauge tinned bare wire. Install discrete components on the T42-1 micro-clips or flea clips.

DIP Patchboard

The DIP patchboard or breadboard is a necessity for developing and verifying circuit designs. The breadboard includes strips and banks of tie points that accept DIP devices, jumper wires, and component leads. Photo 3 shows a Vector 51X DIP patchboard that, with the addition of an IDC 40-conductor ribbon cable, is modified to link up with a TRS-80 computer. Model 51X-GP is similar, but the supporting board has a ground plane. To make a large patchboard, you can install four 51X-GP-2 assemblies in the 43X-4 Multi-Conn chassis. A patchboard (including plugboards) can be assembled on any p-pattern board by inserting the large T66-96 Klip-Bloks, the T45-48 Klip-Bus, and similar components in any pattern. These unique systems can be wired from either side of the board. Wrap posts pass directly through the tie points to the other side.

A good ground system on the patchboard is imperative. Push long wrap posts through all device ground points and chain-wrap the pins on the bottom side to form a ground grid. Bypass the supply line with a 100 μF electrolytic capacitor and a 1.0 μF tantalum capacitor, and bypass the supply pins of all monostables and flip-flops with a 0.1 μF disk capacitor to ground. One bypass capacitor for every pair of DIP packages should suffice for other devices. Use short jumper wires and keep the wires separated. You can measure the current drain of the patchboard with a meter, but be sure to short out or

SYBEX BREAKS THE LANGUAGE BARRIER

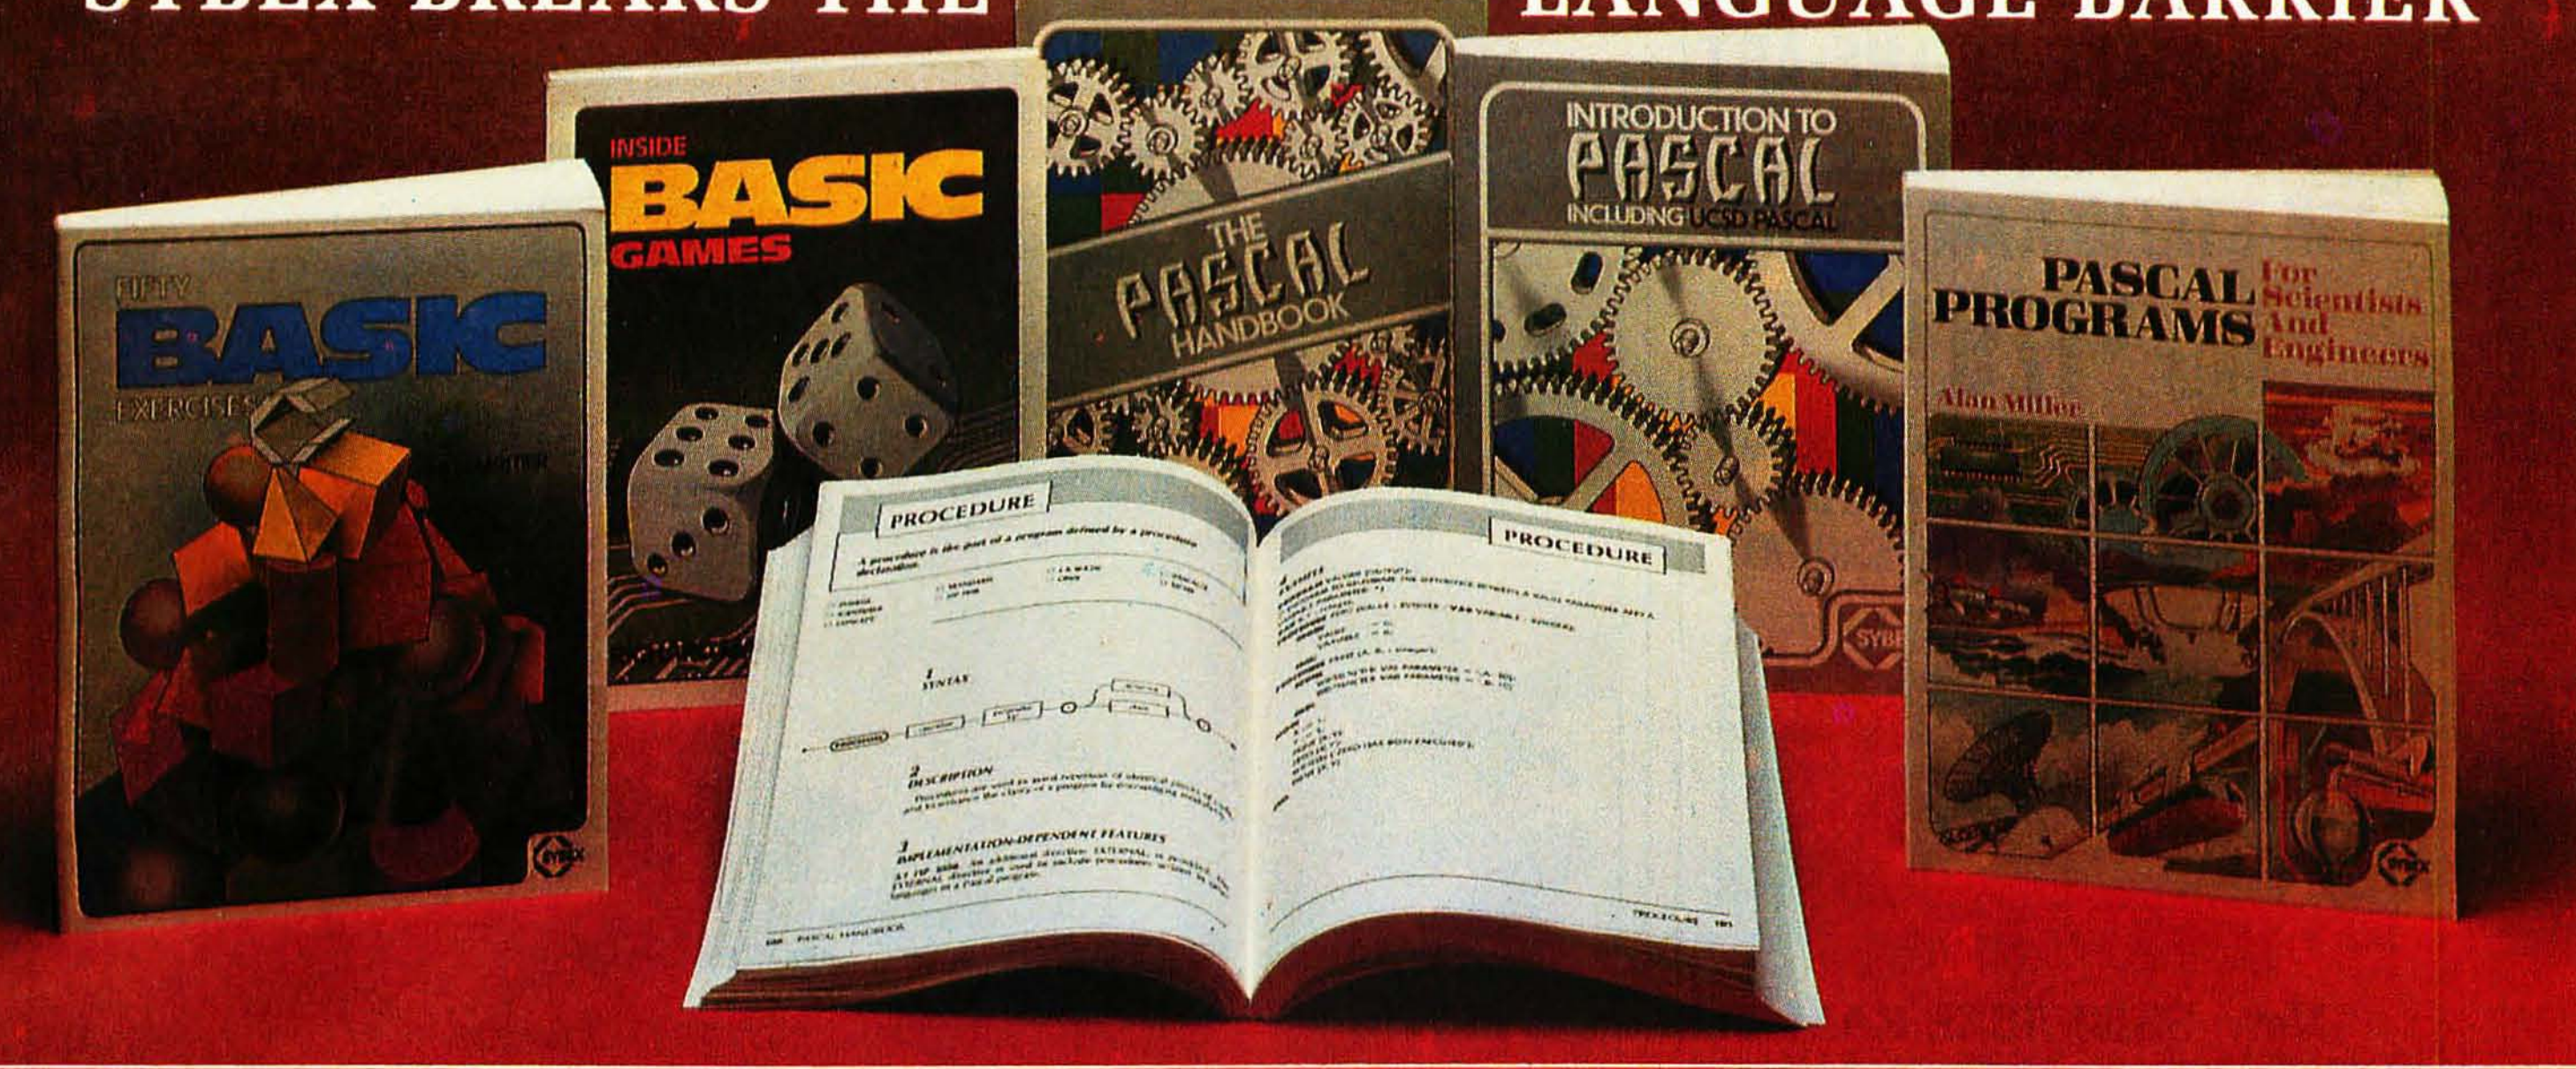

Let the chips fall where they may. These two books on BASIC assure comprehension and competence.

■INSIDE BASIC GAMES

by Richard Mateosian teaches interactive game design and BASIC programming through thorough analysis of eight different kinds of computer games. Programs are presented in Microsoft BASIC with versions for PET/CBM, TRS-80 and APPLE II.
350 pp., 120 illustr., Ref. B245, $13.95

■FIFTY BASIC EXERCISES

by J.P. Lamoitier provides the surest way of learning BASIC—actual practice. Graduated exercises, each containing a detailed explanation, flowchart and sample run, develop skill and competence rapidly. Applications include mathematics, business, operations research, statistics and more.
256 pp., 194 illustr., Ref. B250, $12.95

Get in gear and accelerate your programming productivity with Pascal's power.

■INTRODUCTION TO PASCAL

by Rodnay Zaks is a simple yet comprehensive guide to standard and UCSD Pascals: step-by-step presentation with exercises for beginners, complex concepts and extensive appendices for experienced programmers. An indispensable book for everyone who wants to learn Pascal programming.
320 pp., 100 illustr., Ref. P310, $14.95

■THE PASCAL HANDBOOK

by Jacques Tiberghien is an easy-to-read, easy-to-use dictionary containing all the features for most existing versions of Pascal (Standard, Jensen-Wirth, OMSI, UCSD, HP1000, Pascal/Z). Over 180 entries, arranged alphabetically; each includes definition, description, syntax diagram, details of implementation, variations and examples. The perfect reference tool for any Pascal user.
500 pp., 150 illustr., Ref. P320, $14.95

Scientists and engineers involved in significant work have been delayed by having to reinvent algorithms for a new computer language. No more.
AVAILABLE MAY 1981

■PASCAL PROGRAMS FOR SCIENTISTS AND ENGINEERS

by Alan Miller is a comprehensive collection of frequently used algorithms for scientific and technical applications programmed in PASCAL. This time saving book includes programs for curve fitting, fast Fourier transform, approximations, random number generation, integrals, statistical techniques and more.
250 pp., 80 illustr., Ref. P340 ☐$16.95 paper, ☐$25.00 cloth

MORE SYBEX BOOKS

■YOUR FIRST COMPUTER *by Rodnay Zaks*
280 pp., 150 illustr., 2nd Edition, Ref. C200A, $7.95

■MICROPROCESSORS: FROM CHIPS TO SYSTEMS *by Rodnay Zaks*
420 pp., 250 illustr., 3rd Edition, Ref. C201, $12.95

■MICROPROCESSOR INTERFACING TECHNIQUES *by Rodnay Zaks & Austin Lesea*
464 pp., 400 illustr., 3rd Edition, Ref. C207, $15.95

■PROGRAMMING THE 6502 *by Rodnay Zaks*
392 pp., 160 illustr., 3rd Edition, Ref. C202, $12.95

■6502 APPLICATIONS *by Rodnay Zaks*
288 pp., 207 illustr., Ref. D302, $12.95

■6502 GAMES *by Rodnay Zaks*
304 pp., 140 illustr., Ref. G402, $12.95

■PROGRAMMING THE Z80 *by Rodnay Zaks*
620 pp., 200 illustr., 2nd Edition, Ref. C280, $14.95

■PROGRAMMING THE Z8000
by Richard Mateosian
312 pp., 124 illlustr., Ref. C281, $15.95

■THE CP/M HANDBOOK (With MP/M)
by Rodnay Zaks
336 pp., 100 illustr., Ref. C300, $14.95

SYBEX

MAIL TO:
SYBEX DEPT. B51
2344 SIXTH STREET
BERKELEY, CA 94710
PHONE ORDERS:
INSIDE CA 415/848-8233
TOLL FREE OUTSIDE CA 800-227-2346

or at book and computer stores everywhere

NAME ______ ☐ SEND ME YOUR FREE CATALOG
ADDRESS ______
CITY ______ STATE ______ ZIP ______
ADD ☐ $1.50/book UPS or ☐ 75¢/book 4th class mail or ☐ $8/book overseas airmail
(CA add tax) Total Amt. Enclosed ______ OR CHARGE MY ☐ VISA ☐ MC ☐ AM EX.
CARD NO. ______ EXP. DATE ______
SIGNATURE ______



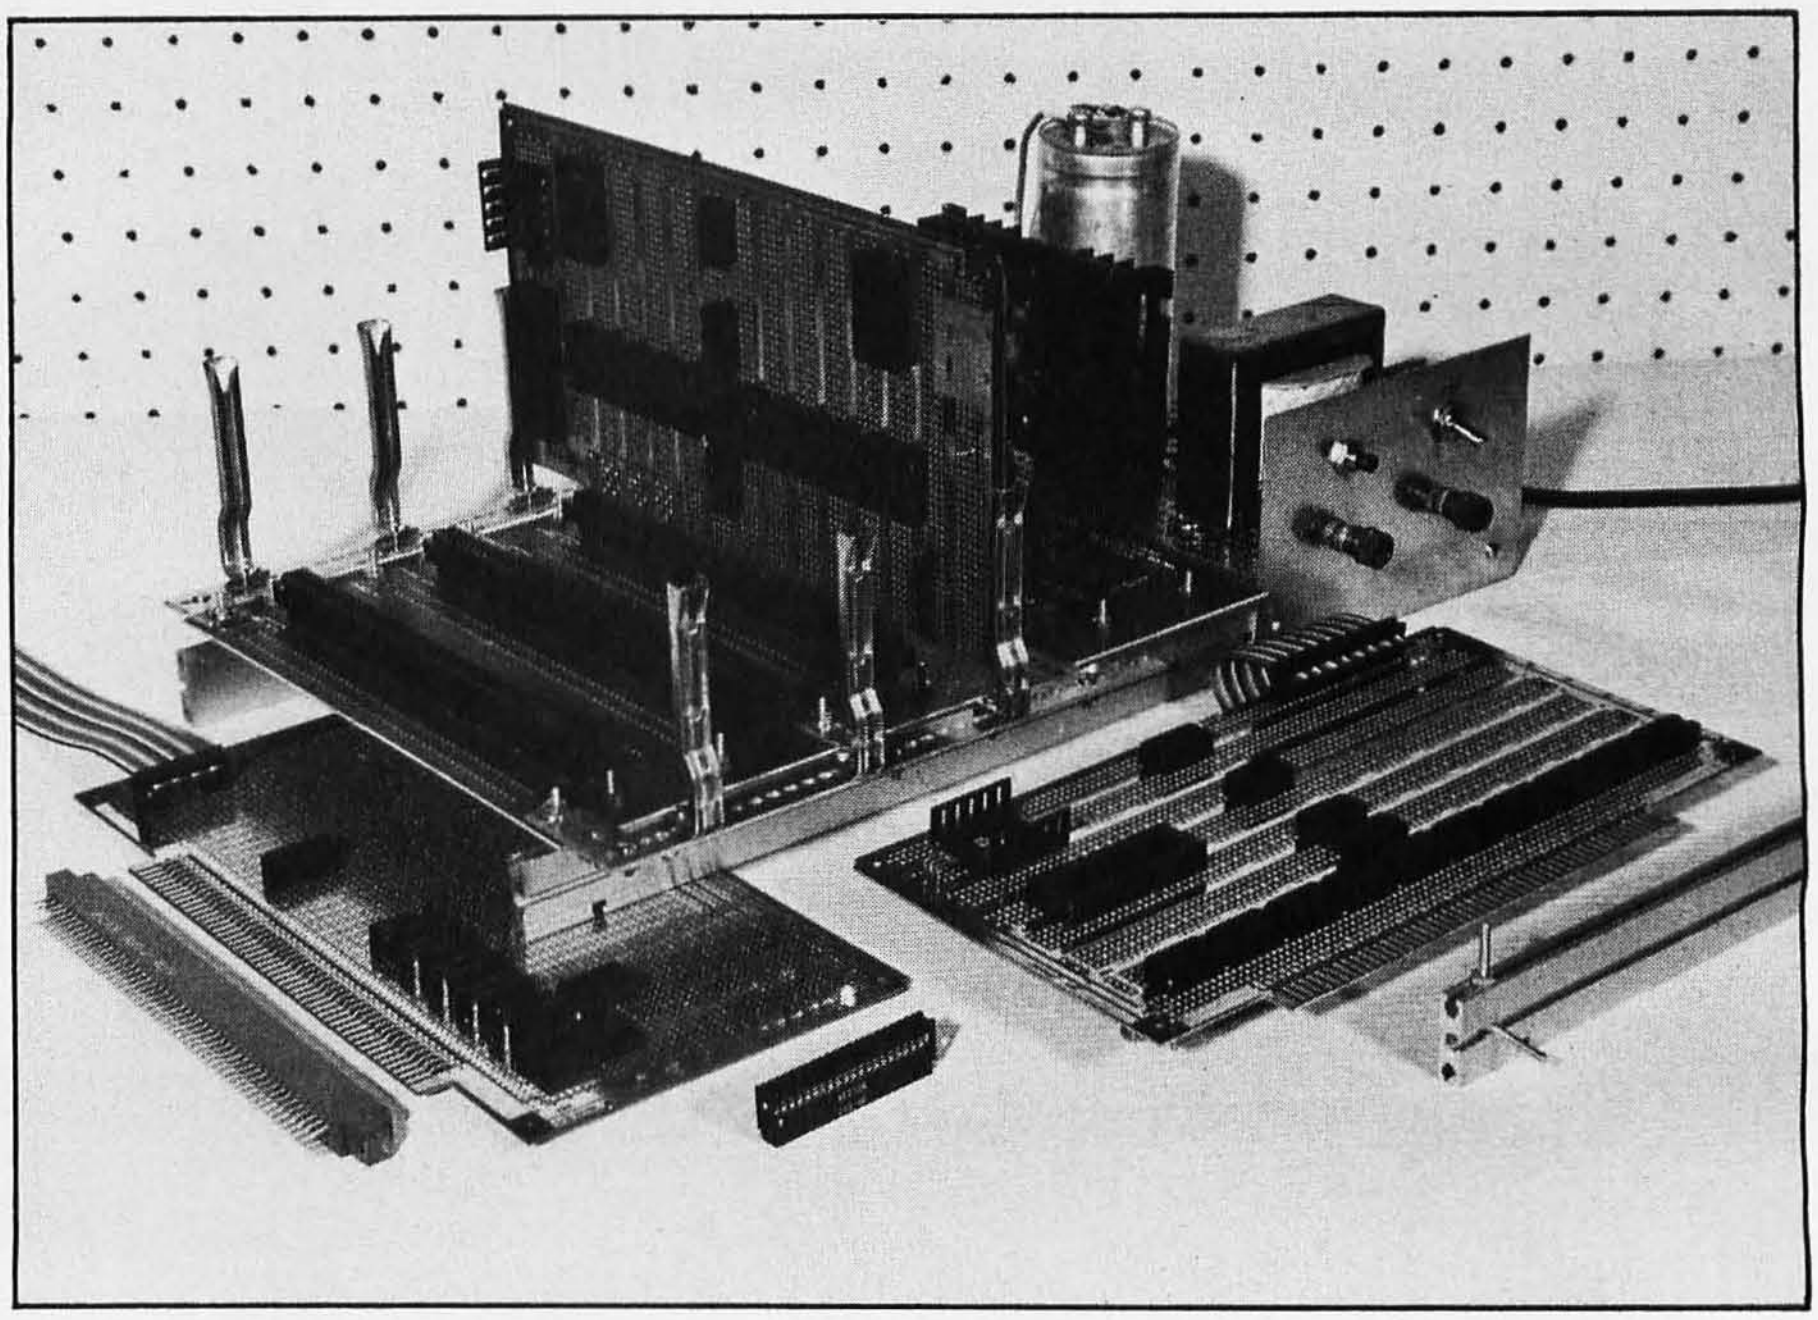

Photo 4: *Low-cost open-frame S-100 bus mainframe uses a Vector 8803 motherboard and T169 T-struts. S-100 prototyping boards include the model 8800V in the mainframe, an 8804 Any-Dip board (right), and the 8802 pad board (left). Shown in the foreground (left to right) are the R681-2 plugboard receptacle, KS2-40 female IDC connector, and T169 T-strut. The power supply (rear) bolts to T-struts supporting the S-100 motherboard.*

remove the meter when you run operating tests.

Plugboard Proto Systems

Plugboard systems for the stand-alone microcomputer or for expansion of an existing system are easily assembled at low cost using Vector card-cage components. You can then add card receptacles to these open-frame systems when needed.

An inexpensive S-100-bus system can be built using the components shown in photo 4, based on the Vector 8803 motherboard. The board accepts eleven Vector RS681-2 card receptacles that are easily soldered to the hot-tinned solder-masked board. A portion of the board includes printed-circuit traces for installation of either active or passive bus terminations.

Install the S-100 motherboard on a pair of Vector T169 T-struts (see photo 4) using the insulating spacers that are supplied, and secure it with SC4-28 hex-head screws (these slide into the strut). The BR27D card guides are mounted on the motherboard, on a length of B63-240 punched mounting plates. There is ample room to the rear for installation of an S-100 mainframe power supply for the stand-alone system. The 8803 motherboard mounts directly on the T-struts of the Vector Pak VP1 and VP2 deluxe table-top microcomputer cabinets. These cabinets include card guides and a mounting plate for the power supply.

For prototyping or the assembly of system components, select from plugboards optimized for wire-wrapping or soldered-wiring techniques. The Vector model 8800V microprocessor board has a number of wide vertical bus bars on both sides that form the ground and supply planes. The connecting zig-zag buses between the bars accept board feed-thru pins. The supplied heatsink mounts on either end of the board which supports two on-card voltage regulators, one of which is prewired to the power plane. Device sockets are mounted vertically, in four rows and twelve columns, with labeled pin numbers. A connector for IDC ribbon cable may be installed at either end of the board. The Vector 8804 Any-Dip board (which is similar to the 8800V model in many respects) accepts

GUARANTEED RELIABLE FOR 2 FULL YEARS.

Unprecedented product reliability deserves an unprecedented warranty. IMS International provides its dealers with both.

Our commitment is real.

We are so confident that our products are the industry standard in reliability, we stand behind them for *two full years* from date-of-sale to the end user. All IMS manufactured products are covered.

The success of our dealers will insure our continued growth. That's why IMS International is committed to providing every IMS dealer with these distinct advantages in today's marketplace:

- 2 year warranty
- Low retail cost
- Best margins in the industry
- Protected territories
- Full factory technical support
- Complete system delivery in 30 days
- Comprehensive advertising and promotional support

For more information about IMS International's "Reliables" and our unique dealer plan, call 714/978-6966 or write us:

IMS INTERNATIONAL
2800 Lockheed Way
Carson City, NV 89701
Telex: 910-395-6051

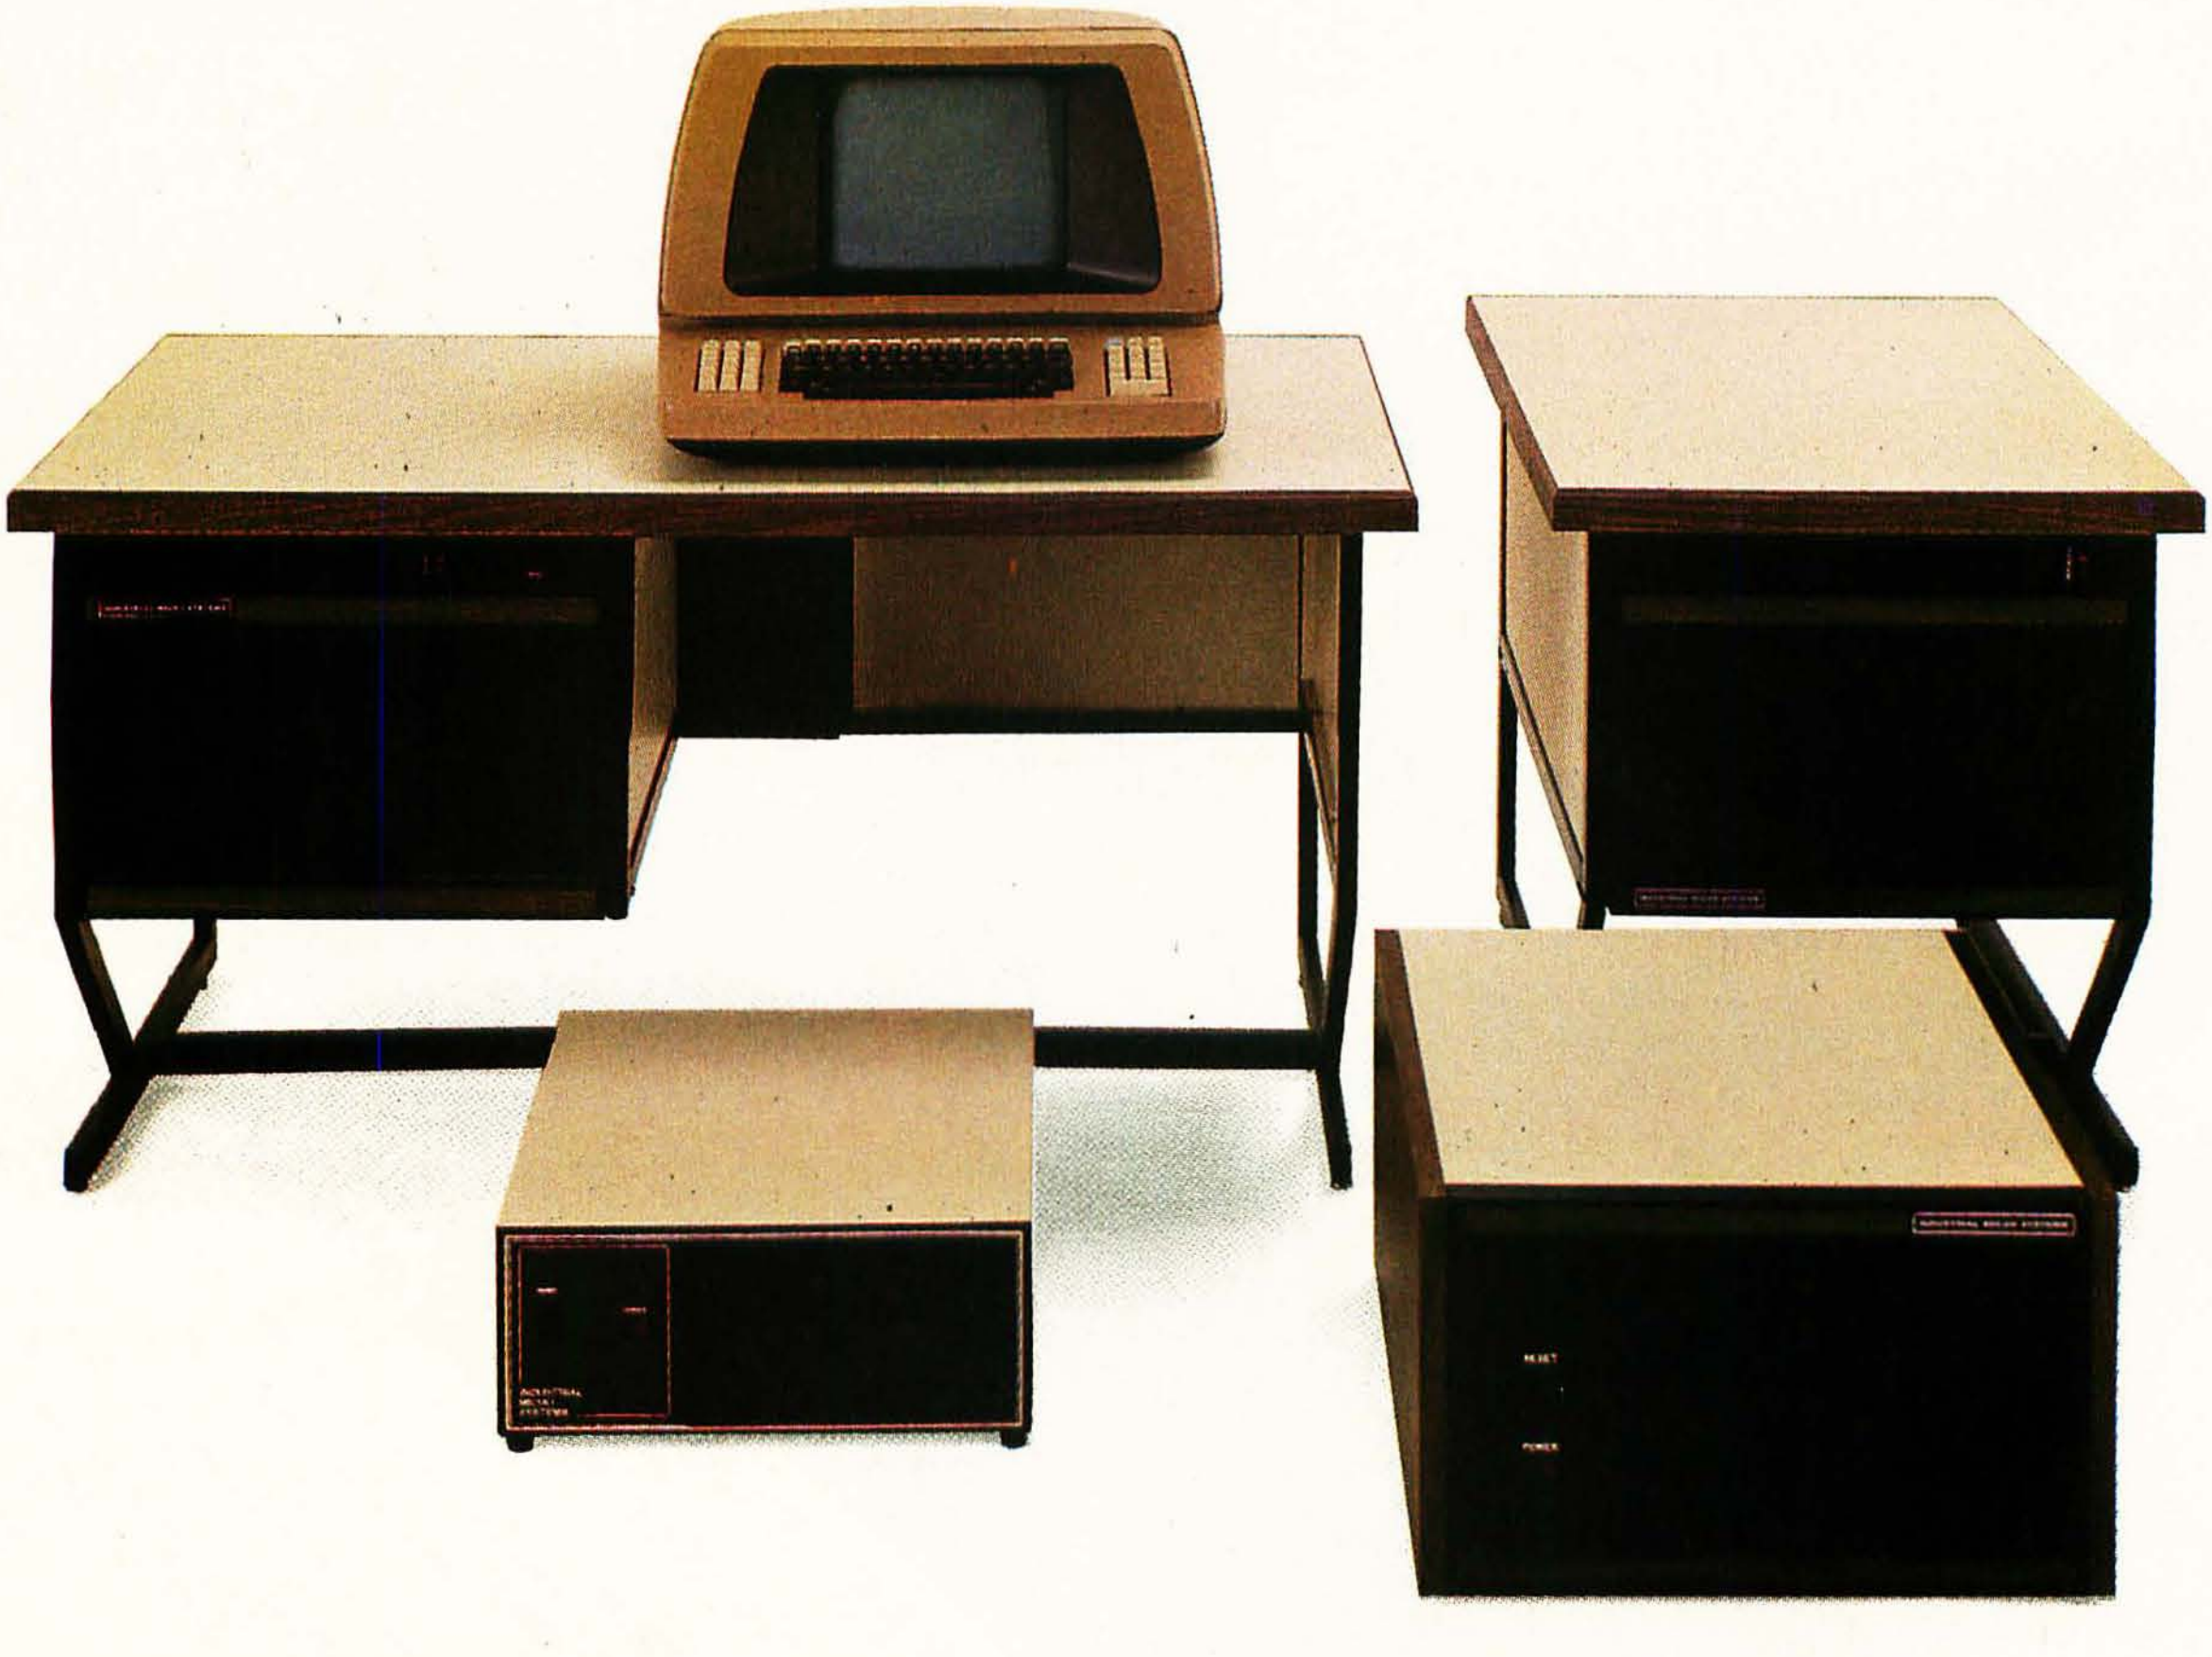

Circle 191 on inquiry card.

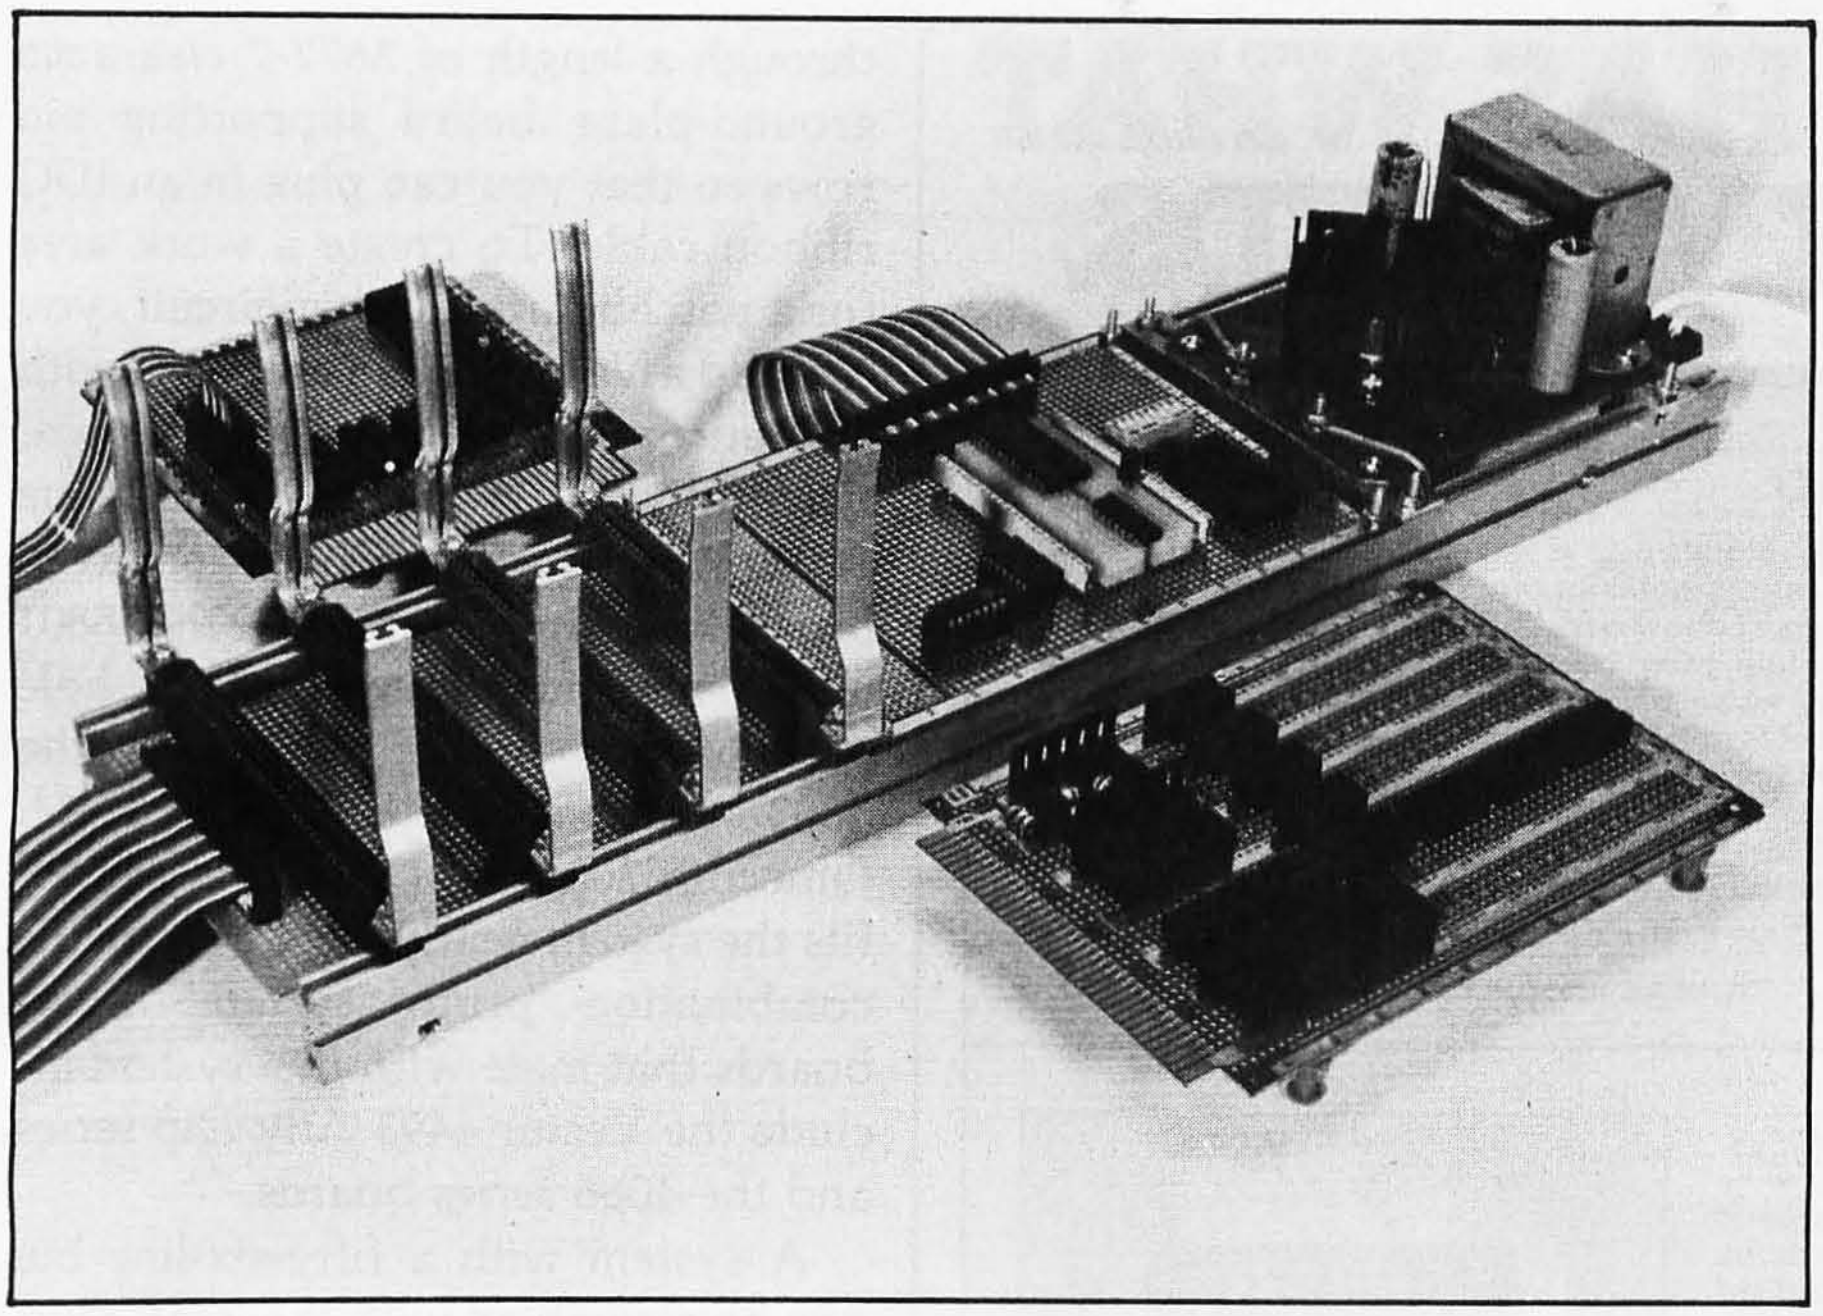

Photo 5: *A system bus with fewer than one hundred lines can also be assembled using standard Vector components. The seventy-two-line combination system pictured here is a typical example. Primary components include the R636-1 receptacles, a 3677-7 clearance ground-plane board on the wire-wrapped backplane, and a Vector 8004 Circboard in the patchboard area. Plugboards include the model 4066-1 ground-plane board (top left) and the 4493 Any-Dip board with opposing power and ground planes. The system is powered by a Jameco model JE200 power supply.*

sockets horizontally, in seven rows and ten columns, and its IDC cable connector resides anywhere along the top edge of the card. With sockets parallel to the card-finger array, this board allows easy wiring of card buffers and memory arrays.

You can choose from four S-100 plugboards that tend to favor point-to-point soldered wiring. The Vector 8801-1 plugboard has no circuit traces apart from card fingers. Sockets and connectors mount in any position, and you can use Vector T107 punched bus strips to assemble low-impedance ground and supply buses. The double-sided 8801 plugboard has one tinned pad per hole that serves as a solderable anchor point for sockets, component wire leads, etc. The double-sided 8802-1 board is similar, but has two holes per pad and vertically mounted sockets. The Vector 8802 board also has two holes per pad, but the holes are plated through to the opposing pad. This unique board favors rapid and reliable anchoring of components, and with minimal risk of pad lifting.

You may find it advantageous to use this prototyping system with a smaller user-defined system bus. Lines from the TRS-80 forty-line bus can be assigned so that you can place ground lines that alternate between signal lines, while retaining the same assignment for normal S-100 bus power-supply lines. Connect the ground on the plugboard, leaving the backplane unaltered. The resulting ground lines shield the signal lines. One prototyping sytem may then serve both the S-100 bus and the foreign bus if you are careful not to plug incompatible cards in simultaneously. The large S-100 boards generally provide more board space per dollar than small cards, but packing a number of smaller system modules on one S-100 card tends to complicate system documentation.

Plugboard systems with a user-defined system bus are easily assembled at low cost and in a manner similar to the assembly of the S-100 system. The system shown in photo 5 uses the R636-1 plugboard receptacle with seventy-two (36/72) contacts and mating BR27-1 card guides. Receptacle wrap posts pass

MICROMAIL HAS WHAT YOUR SYSTEM NEEDS.



DIABLO **630**

The Diablo Model 630 is a reliable, high quality, full-character serial printer for anyone who is seeking superior print quality at a low cost. This is the first Diablo printer to offer complete interchangeability between metal and plastic print wheels. And the sophisticated and discerning user does not sacrifice print quality to obtain this versatility. Every aspect of the Diablo 630 design has been focused on maintaining outstanding print quality. Terminals also have self-test, extensive internal diagnostics and automatic bidirectional printing.

$1,999.00

With Adjustable Forms Tractor add **$200.00**

ANADEX **DP-9500/9501**

The Anadex Models DP-9500 and DP-9501 Alphanumeric Line Printers are designed for all printer applications, including those requiring high density graphics. Standard features include three standard interfaces (RS 232C, Centronics Parallel, and Current Loop), software selectable print sizes including compressed and expanded print, heavy-duty nine-wire printhead (permits true underlining and descending lower case letters), and fast bi-directional printing. The model 9501 offers slightly higher graphics resolution and a slightly slower print speed than the model 9500.

$1,299.00



TEXAS INSTRUMENTS

Fast, reliable, and widely supported, the T.I. 810 has proven itself to be a solid printer for business or industry.

SPECIAL T.I. PRICES

810/2 **$1,549.00**
(includes upper/lower case option)

810/2 VFC/CP **$1,679.00**
(includes u/l case, forms control & compressed print)

Prices good through June 15, 1981

PRINTERS

ANADEX

DP 9000	**$1199**
DP-9001	**$1199**

Just like the 9500/9501, but 5 inches narrower. Uses paper up to 9.5 inches wide.

DIABLO

1640 RO **$2469**
Uses plastic daisywheels, prints up to 45 c.p.s.

1650 RO **$2799**
Uses metal daisywheels, prints up to 40 c.p.s.

NEC
High Quality, 55 c.p.s.

5510 **$2595**
Serial Interface

5530 **$2595**
Parallel Interface

C.R.T.'s

TeleVideo

912C	**$ 699**
920C	**$ 749**
950	**$ 995**

NEW! Features a detachable keyboard & programmable function keys.

SOROC

IQ120	**$ 689**
IQ140	**$1099**
IQ135	**$ 849**

NEW! Microprocessor controlled, programmable function keys.

C. ITOH

CIT 100 **$1625**

DEC

VT-100 **$1650**

TELEPRINTERS

DEC

LA 34 **$ 969**
Dot-matrix, 30 c.p.i. Adjustable character sizes & line spacing.

LA 34 AA **$1099**
Includes programmable forms length control.

TELETYPE

43 **$ 999**
Very reliable 30 c.p.s. teleprinter. Ideal for use with 300-baud acoustic couplers or modems.

DIABLO

1640 KSR **$2699**
Uses plastic daisywheels, prints up to 45 c.p.s.

1650 KSR **$2799**
Uses metal daisywheels, prints up to 40 c.p.s.

NEC and **DIABLO** prices include forms tractor.

To Order: Send check to MICROMAIL, P.O. Box 3297, Santa Ana, CA 92703. Personal or company checks require two weeks to clear. Visa/MasterCard accepted. C.O.D. requires a 15% deposit. **Handling:** Add 3% to orders less than $750, 2% to orders $751 - $2,000, 1% to orders over $2,000. NOTE: Handling charges are waived on orders pre-paid in advance by check. **Shipping:** We ship FREIGHT COLLECT via UPS or Motor Freight. Air and Express delivery is available.

MICROMAIL™

P.O. Box 3297
Santa Ana, CA 92703
Phone: 714/731-4338
TWX: 910 595 1146

through a length of 3677-7 clearance ground-plane board supporting pin rows so that you can plug in an IDC ribbon cable. To create a work area for a patchboard or other circuit, you can add a Vector 8004 Circboard with clearance ground plane, as shown. Alternatively, you can install the 8002 Circboard with interleaved buses for wire wrapping, the 8801 Circboard with buses and three-hole pads for any wiring method, or the 8803 pad-per-hole Circboard. A Jameco JE200 5 V, 1 A power supply fits the system neatly and powers the combination proto system. Plugboards that mate with this system include the Vector 4493 Any-Dip series and the 4066 series boards.

A system with a fifty-six-line bus can be assembled with the R656 plugboard receptacle and the Vector 4610 series plugboards. If you use the R644-3 receptacle with forty-four bus lines, you can choose from numerous plugboards in the Vector 4412, 3662, 3682, and 4494 board series. The 4609 plugboard can be adapted to the external bus system of the Apple II, PET, or Super-KIM machines, either as an open frame set-up or installed in a Vector card cage using the standard mounting hardware.

Give early consideration to the installation of ribbon cable links. IDC cables are readily available, and they come assembled in assorted lengths and a number of lines. You can also use Vector KS2-20 or KS2-40 female IDC plugs to assemble your own cables. The plugs mate with two rows of T49-5-2 wrap posts installed on p-pattern board. Use the P187 universal IDC fixture or its equivalent to press-fit the IDC connector to KW2-20-type twenty-line ribbon cable (use two lengths side by side on the KS2-40 connector). The IDC cable can be used for the links between the computer and proto-system, between plugboards, and to peripherals. You can also use the DIP-plug ribbon cable with male headers that fit standard DIP sockets of most sizes. It is best to use pre-assembled DIP cable. The Vector DIP interconnects are available in lengths of 12 inches (304 mm) and 24 inches (608 mm), and as single- or double-ended cables

Circle 257 on inquiry card.

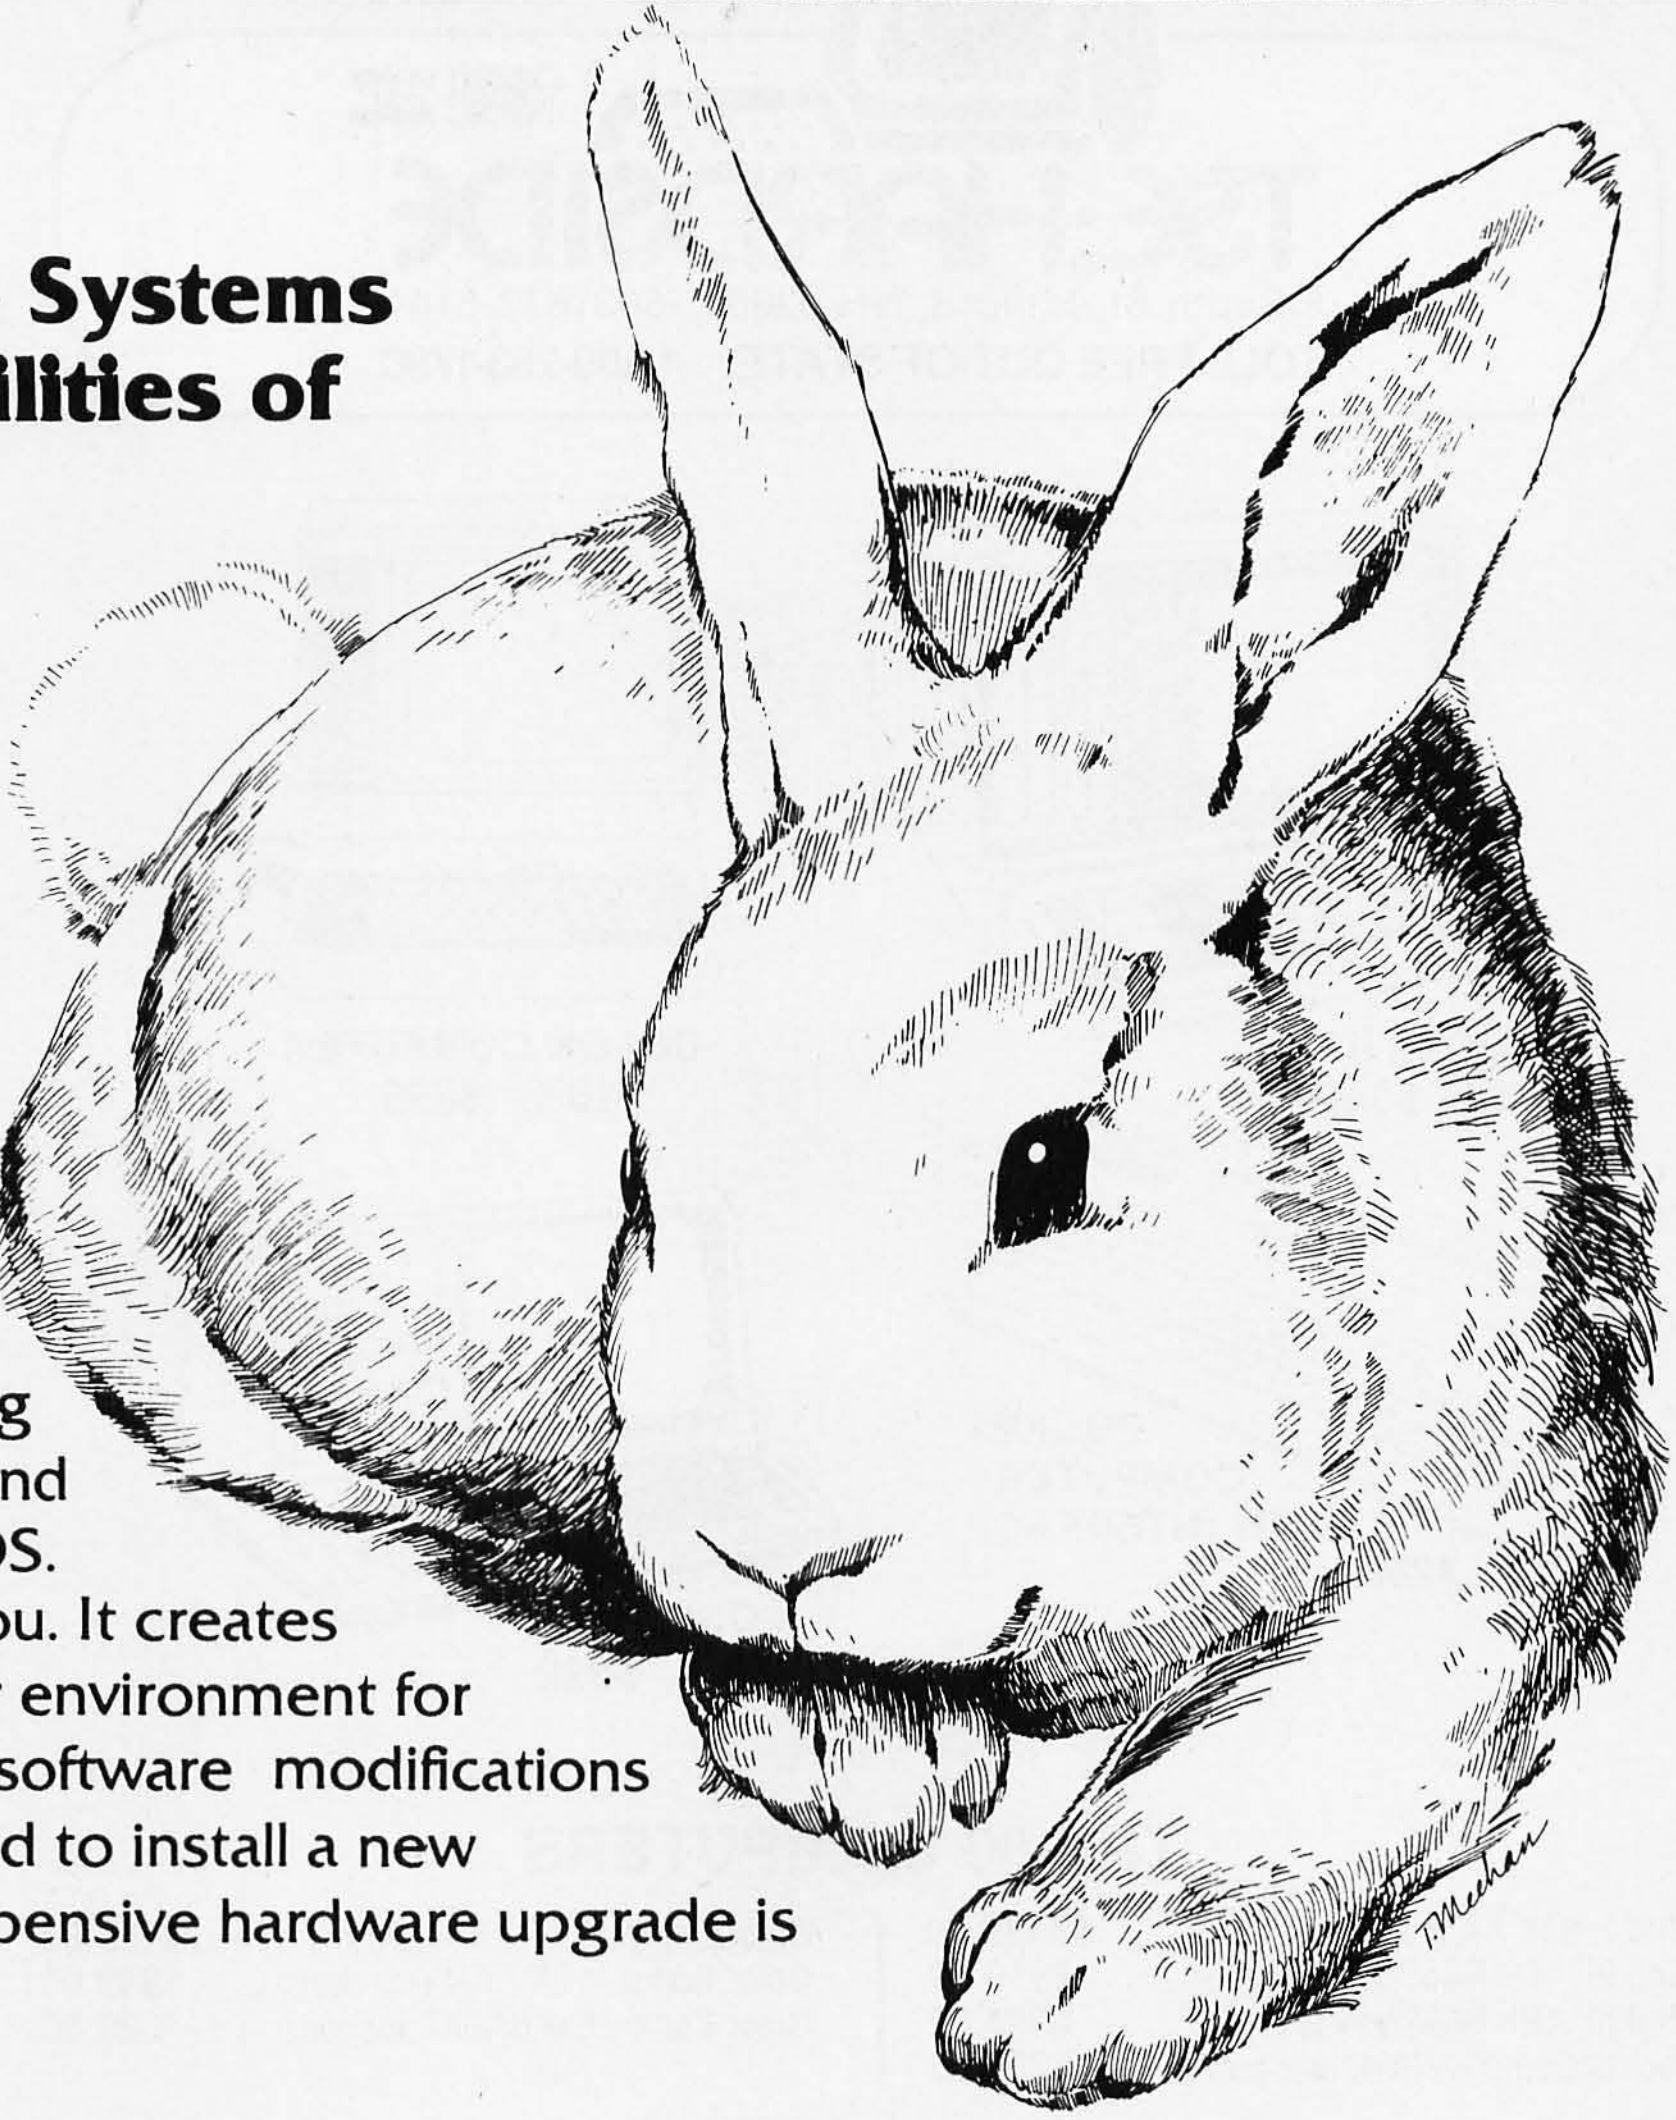

Wild Hare Software Systems Multiply the Capabilities of Data General's

RDOS
INFOS®
ICOS
DOS

Wild Hare gives Data General users a choice when upgrading to a multi-user environment and eliminates the need to use AOS. Wild Hare makes it easy for you. It creates a true multi-lingual, multi-user environment for your current system. No user software modifications are necessary. There is no need to install a new operating system. And, no expensive hardware upgrade is required.

Features

- Each user is totally independent of all other users.
- Each user may run all standard Data General software.
- Each user may independently edit, compile, execute and debug programs written in any language supported by RDOS, INFOS®, ICOS and DOS.
- Standard languages supported include: Fortran IV, Fortran V, COBOL, ALGOL, RPG, DG/L™, BASIC, PASCAL, MAC, etc.
- All NOVA's® and ECLIPSE's® are supported.
- Wild Hare guarantees its software systems on a money back basis.

Wild Hare's Software Gives Data General Users A Choice!

WILD HARE
COMPUTER SYSTEMS INC.

P.O. Box 3581, Boulder, Colorado 80307
(303) 494-0221

NOVA®, ECLIPSE® and INFOS® are registered trademarks of Data General Corporation.

TSE-HARDSIDE
6 South St., Milford, NH 03055 (603) 673-5144
TOLL FREE OUT-OF-STATE 1-800-258-1790

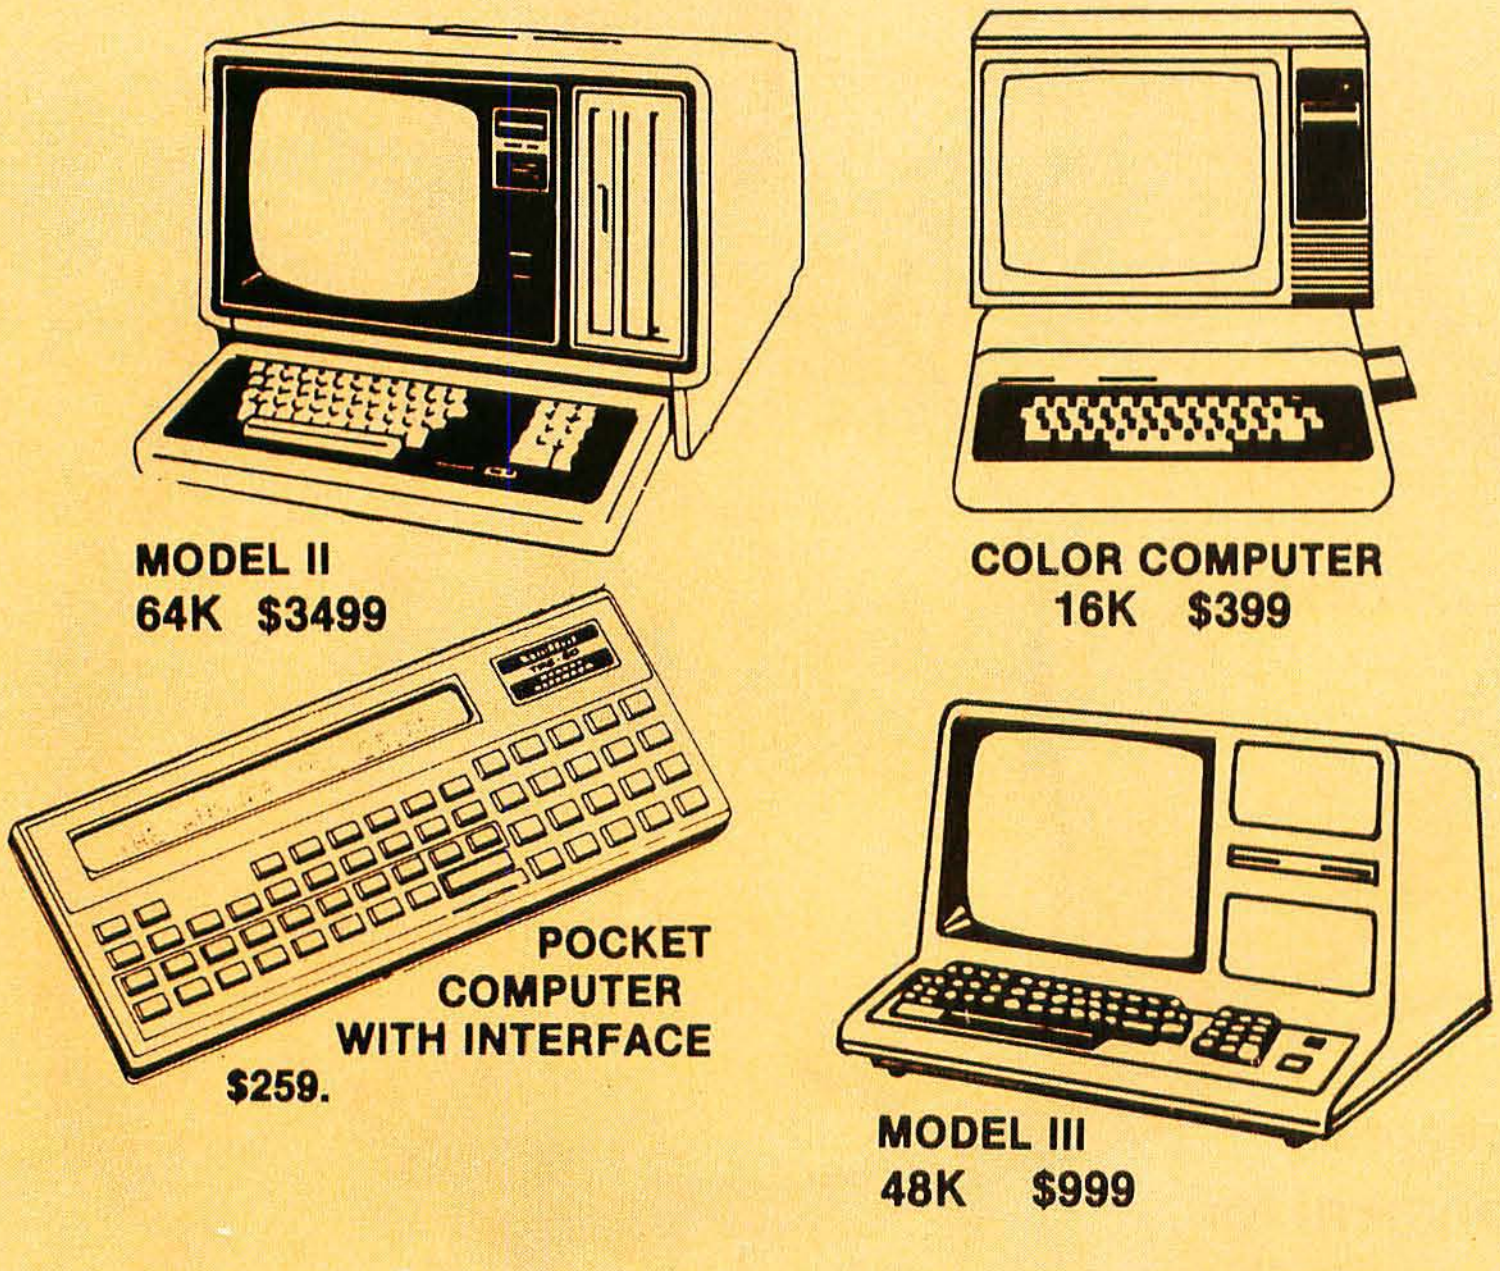

TRS-80 COMPUTERS

Mod I, 64K RAM (#26-4002)	$3499.00
Mod III, 16K RAM (#26-1062)	$919.00
Mod III, 48K RAM (#26-1062+)	$999.00
Pocket Comp w/Inter (#26-3501+)	$259.00
Color Comp, 4K RAM (#26-3001)	$359.00
Color Comp, 16K RAM (#26-3001+)	$399.00
Color Comp, Ext BASIC (#26-3002)	$529.00

MODEL I DISK DRIVES

HARDSIDE 40-track Dr (#7-40)	$319.00
PERCOM TFD-40 Dr (#7-99)	$379.00
PERCOM TFD-100 Dr (#7-100-1)	$399.00
HARDSIDE 80-track Dr (#7-80)	$449.00
PERCOM Dual TFD-100 Dr (#7-100-2)	$799.00
PERCOM Data Sep (#7-03)	$29.95
PERCOM Doubler (#7-07)	$199.95
HARDSIDE Ext Cable (#7-02)	$15.95
HARDSIDE 2-Dr Cable (#7-04)	$29.00
HARDSIDE 4-Dr Cable (#7-05)	$39.00

MODEL I PERIPHERALS

COMM-80 Interf (#4-80)	$159.00
CHATTERBOX Interf (#4-81)	$239.00
DISK-80 Interf, 32K RAM (#4-82)	$339.00
DISK-80 Interf, 32K RAM (#4-83)	$369.00
BUSY BOX Interf (#4-01)	$89.95
LYNX Communications Interf (#19-80)	$229.00
RS Expan Interf 32K RAM (#26-1140-32)	$389.00
16K Memory Kit TRS-keypad (#5-1102-1)	$49.00
16K Memory Kit, TRS-Interf (#5-1102)	$49.00
ORCHESTRA-80 (#15-03)	$79.95
Upper/Lower Mod Kit (#15-02)	$24.95
CPU Speed-up Mod kit (#15-04)	$45.00
Video Reverse Mod kit (#15-05)	$23.95
2-port TRS-BUS Ext (#15-12)	$29.95
3-port TRS-BUS Ext (#15-13)	$39.95
TRS-80 Model I Dust Cover Set (#16-01)	$7.95
TRS-80 Model I Carrying Case (#17-201)	$109.00
TRS-80 Monitor Carrying Case (#17-202)	$84.00
Dual Joysticks for Color Comp (#26-3008)	$24.95
VISTA Model II 8" Disk Dr 1 (#7-4001)	$939.00
VISTA Model II 8" Disk Dr 3 (#7-4002)	$1795.00
CTR-80A Cass Recorder & Cable (#26-1206)	$59.95
TRS-80 Model III Dust Cover (#16-05)	$7.95

TERMS: Prices and specifications are subject to change. HARDSIDE accepts VISA & MASTERCARD. Certified checks and Money Orders; Personal checks accepted (takes 3 weeks to clear). HARDSIDE Pays all shipping charges (within the 48 states) on all PREPAID orders OVER $100.00. On all orders under $100 a $2.50 handling charge must be added. COD orders accepted (orders over $250 require 25% deposit) there is a $5.00 handling charge. UPS Blue Label, and Air Freight available at extra cost. TRS-80 is a trademark of Tandy Corp.

Circle 417 on inquiry card.

that fit 14-, 16-, or 24-pin DIP sockets.

Bus Terminations

With the aid of a short backplane and short connecting cable to the computer, the plugboard system can usually operate without bus line terminations. However, line terminations reduce line impedances, thereby reducing noise and crosstalk. The line termination consists of pull-up resistors that are placed at one end of the backplane and connected from each signal line to a noiseless regulated-voltage source of 2.6 V to 5.0 V.

The active line termination of the 8803 motherboard is made up of 270-ohm resistors connected to the 2.6 V source. On a pull-down to logic level 0 (approximately 0.4 V), the line termination current is (2.6 − 0.4)/270 (approximately 8 mA), which can be easily handled by standard TTL devices. More than likely, the line drivers of your computer consist of 74LS devices which can drive (sink) 8 mA. This leaves no reserve drive for gates sensing the line, and for this reason you should push-fit the termination resistors on T49 Klip Wrap posts instead of soldering so that you can experiment with lower line-termination currents.

You can conserve supply current by using active line terminations. To obtain line-termination currents of approximately 4, 2, and 1 mA, use 560-ohm, 1100-ohm, and 2200-ohm resistors, respectively. For a smaller system, you can pull up the lines to the 5 V source and compute the termination current based on 5 V.

Plugboard Assembly and Test

Check for errors in the schematic diagram of the circuit, especially in the labeling of device-pin numbers. A pair of diagram sheets are supplied with the Vector plugboards so that you can determine the component and wiring placement for both sides of the board before you begin actual construction. Both sheets should be thoroughly labeled, especially with regard to each of the card fingers connected to the system bus. Observe how the data and address lines are

A DataStar™ is born.

Meet Melanie. She was a data-handling novice until she met DataStar.* Now, she's a star. Her revolutionary new system has taken her into a new dimension —and left all her old file cabinets, folders and paper forms behind.

Melanie's learning fast. She lets her DataStar do it all, up on the screen, from creating forms to fast accurate entry and retrieval. And when Melanie uses DataStar with MicroPro's other programs, WordStar™ and SuperSort,™ she's a whiz at a lot more than data. Melanie can enter her data… merge, select and rearrange it… and then produce "personalized" mailings.

Discover what Melanie has. DataStar: the microworld's most comprehensive data entry, updating and retrieval system. Send for a free copy of our DataStar demonstration booklet by calling (415) 457-8990. Or visit your nearby authorized dealer. Remember, when you're the star, we're the star.

MicroPro T.M.
INTERNATIONAL CORPORATION

MicroPro International Corporation
1299 4th Street, San Rafael, CA 94901
(415) 457-8990 TELEX 340388
Sold through authorized dealers and distributors only. OEM inquiries invited.

The Star Maker

---

*Runs on most Z80/8080/8085 microcomputers with CP/M (TM of Digital Research); 48K; and terminal with addressable cursor.

Circle 249 on inquiry card.

CPU's & SUPPORT CHIPS

8080A — 5.95
8085A — 12.95
AMD 2901 — 13.95
8205 — 3.95
8212 — 2.50
8216 — 2.90
8226 — 2.75
8228 — 4.50
8251 — 6.95
8259 — 6.95
8257 (AM9517) — 8.95
Z80A S10 — 17.95
8275 — 16.95
FD1791 — 34.95

RAM's

2114L-3 — 3.95
4116-3 — 3.75
4116-2 — 6.75
21L02-3 — .99
2102-4 — .90
MK4027-3 — 3.50
MK4096-11 — 2.95
TMS4045-25 — 6.50
MS4050NL — 3.95
2101-1 — 2.45
2107B/5280 — 1.75
MM5270 — 3.45
MK4008P — 1.95
IM7001 — 6.95

ROM's

2708 — 6.95
2716 — 7.95
2516 — 9.25
2532 — 29.95
8223 — 3.95
82S23 — 2.95
82S112 — 7.95
825115 — 6.95
82S123 — 4.95
82S126 — 2.95
82S129 — 3.25
82S130 — 3.45
82S131 — 3.95
AM9218C — 6.95

UART's

AY5-1013 — 3.75
TR1602B — 3.95
AY3-8500 — 1.95
PT1482B — 3.25

INTERFACE & DRIVERS

1488 — .90
1489 — 1.10
8130 — 2.50
8131 — 2.50
8830 — 2.50
8833 — 2.50
8834 — 2.00
8837 — 2.00
8838 — 2.00
8T380 — 2.00

SHIFT REGISTERS

MM1402 — 1.75
MM1403 — 1.75
MM1404 — 1.75
MM5013 — 2.50
MM5016 — 2.50
MM5055 — 2.50
MM5056 — 2.50
MM5057 — 2.50
MM5058 — 2.50
MM5060 — 2.50

PRINTED CIRCUIT BOARD
4" x 6" DOUBLE SIDED
EPOXY BOARD 1/16" thick
$.60 ea. . . . . 5/$2.60

EPOXY GLASS VECTOR BOARD
1/16" thick with 1/10" spacing
4½" x 6½" $1.95

DATEL'S DAC-08EQ
8 bit DAC — $7.95

74S00	.30	74S74	.70	74S158	1.25
74S02	.30	74S86	.60	74S161	1.10
74S03	.30	74S89	1.90	74S169	1.75
74S04	.40	74S112	.85	74S174	1.40
74S05	.45	74S133	1.40	74S175	1.40
74S08	.40	74S135	1.50	74S194	1.10
74S10	.30	74S138	1.25	74S257	1.50
74S11	.35	74S139	1.10	74S258	1.40
74S15	.40	74S140	1.00	74S260	1.50
74S20	.40	74S153	1.10	74S280	1.50
74S30	.40	74S151	1.25	74S373	2.25
74S32	.40	74S157	1.25	74S374	2.50

7 WATT LD 65 LASER DIODE IR $8.95

25 watt Infra Red Pulse (SG 2006 equiv.) Laser Diode (Spec sheet included) $24.95

2N3820 P FET . . . . $ .45
2N 5457 N FET . . . . $ .45
2N2646 UJT. . . . . $ .45
ER 900 TRIGGER DIODES. . . . . 4/$1.00
2N 6028 PROG. UJT . . . . $ .65

TTL REED RELAY – **SPST 5V 20ma $1.00**

CLOCK CHIPS
MM5387AA $5.95
MM5314. . . . . $4.75
MM5316. . . . . $4.95

TANTALUM CAPACITORS

.22UF 35 V	5/$1.00	10UF 10V	– $ .40
.47UF 35 V	5/$1.00	22UF 10V	–$ .30
.68UF 35 V	5/$1.00	15UF 16V	3/$1.00
1UF 35V	5/$1.00	30UF 6V	5/$1.00
2.2UF 20V	5 $1.00	33UF 20V	$ .60
3.3UF 20V	4/$1.00	47UF 20V	$ .85
4.7UF 15V	5/$1.00	100UF 15V	$ .70
6.8UF 35V	3/$1.00	150UF 15V	$ .95

SANKEN
AUDIO POWER AMPS
Si 1010 G 10 WATTS . . $ 7.50
Si 1020 G 20 WATTS . . $11.00
Si 1030 G 30 WATTS . $13.50
Si 1050 G 50 WATTS . $25.00

200 PRV 1A LASCR .95

RS232 CONNECTORS
DB 25P male $3.25
DB 25S female . . . $4.25
HOODS $1.50

C/MOS

4001 — 25
4002 — .25
4006 — .85
4007 — .27
4008 — .80
4009 — .45
4010 — .45
4011 — .25
4012 — .25
4013 — .37
4014 — .70
4015 — .65
4016 — .37
4017 — .70
4018 — .60
4019 — .45
4020 — .70
4021 — .90
4022 — 1.00
4023 — .25
4024 — .55
4025 — .25
4027 — .45
4028 — .60
4029 — .95
4030 — .35
4034 — 2.25
4035 — .97
4040 — .90
4042 — .65
4043 — 1.00
4044 — .75
4046 — .90
4049 — .45
4050 — .45
4051 — .80
4052 — 1.10
4053 — 1.10
4066 — .70
4069 — .25
4071 — .35
4072 — .25
4076 — .80
4077 — .35
4081 — .25
4082 — .25
4093 — .75
4099 — 1.75
4501 — .95
4510 — .75
4511 — .75
4514 — 1.95
4515 — 1.95
4516 — 1.00
4518 — 1.20
4520 — .70
4553 — 2.75
74C00 — .27
74C02 — .27
74C04 — .40
74C08 — .30
74C10 — .27
74C14 — 1.20
74C20 — .27
74C32 — .45
74C73 — .75
74C74 — .50
74C76 — .70
74C83 — 1.30
74C85 — 1.40
74C86 — .50
74C90 — .90
74C93 — .95
74C151 — 1.75
74C157 — 1.75
74C160 — 1.20
74C161 — 1.15
74C163 — 1.15
74C165 — 1.25
74C173 — 1.30
74C174 — 1.30
74C175 — 1.20
74C192 — 1.30
74C901 — .50
74C926 — 6.95

SPECIALS

4116-3 RAM'S — 8/$24.00

15% ALL 74LS SERIES

LEADER OSCILLOSCOPES
WE CARRY A FULL LINE OF HIGH QUALITY,
LOW PRICED OSCILLOSCOPES WITH
A TWO YEAR WARRANTY.
COMPARE PRICE & FEATURES.
LBO**517** 50 MHz D.T. CAL. DELAY
$1950.00

OSCILLOSCOPES

LBO-302	10 MHz, D.T., 3" Compact	$ 790.00
LBO-308S	20 MHz, D.T., 3" Portable AC/DC	950.00
LBO-310A	4 MHz, S.T. Recur. Sweep	275.00
LBO-507A	20 MHz, S.T., 5"	610.00
LBO-508A	20 MHz, D.T., 5"	835.00
LBO-511	10 MHz, S.T., 5"	420.00
LBO-513	10 MHz, S.T., 1mV Sens.	495.00
LBO-514	10 MHz, D.T., 1mV Sens.	645.00
LBO-515B	30 MHz, D.T. Cal. Delayed Sweep	1,530.00
LBO-520	30 MHz, D.T. w/Delay Line	1,100.00

SPECIALS GOOD THRU MAY 1981

CRYSTALS $3.45 ea.
2.000 MHz
4.000 MHz
3.000 MHz
3.57 MHz
5.000 MHz
6.000 MHz
6.144 MHz
8.000MHz
10.000 MHz
18.000 MHz
18.432 MHz
20.000 MHz

RIBBON CABLE
FLAT (COLOR CODED)
#30 WIRE
16 cond. - .40/per foot
40 cond. - .75/per foot
50 cond. - .90/per foot

MINIATURE MULTI-TURN TRIM POTS
100, 5K, 10K, 20K, 250K, . . . $.75 each . . . 3/2.00

NO. 30 WIRE WRAP WIRE SINGLE STRAND
100' $1.40

ALCO MINIATURE TOGGLE SWITCHES
MTA 106 SPDT. $1.05
MTA 206 DPDT $1.70
MTA 206 P-DPDT CENTR OFF $1.85
MSD 206 P-DPDT CENTER OFF LEVER SWITCH. $1.85

SCR's

	1.5A	6A	35A	110A
100	.45	.60	1.40	
200	.70	.80	1.90	9.00
400	1.20	1.40	2.60	12.00
600		1.80	3.60	15.00

TRIAC's

PRV	1A	10A	25A
100	.45	.80	1.55
200	.84	1.30	2.10
400	1.30	1.90	3.10
600	2.00	2.75	4.30

FP 100 PHOTO TRANS . . . . $ .50
RED, YELLOW, GREEN OR AMBER LARGE LED's .2" 6/$1.00
RED/GREEN BIPOLAR LED's. . . . . $ .55
MLED92 R LED . . . . $ .75
MRD14B PHOTO DARL. XTOR . . . . $ .75
TIL-118 OPTO-ISOLATOR. . . . . $ .75
IL-5 OPTO-ISOLATOR . . . . $ .80
1 WATT ZENERS: 3.3, 4.7, 5.1, 5.6, 6.8, 8.2, 9.1, 10,
12, 15, 18, or 22V . . . . 6/$1.00

SFC 3301 — 50 PRV 30A
FAST RECOVERY DIODE (35ns) . . $2.25

20KV 250MA DIODE $1.90

SILICON POWER RECTIFIERS

PRV	1A	3A	12A	50A	125A	240A
100	.06	.14	.35	.90	3.70	8.00
200	.07	.20	.40	1.30	4.25	12.00
400	.09	.25	.65	1.50	6.50	15.00
600	.11	.30	.80	2.00	8.50	18.00
800	.15	.35	1.00	2.50	10.50	22.00
1000	.20	.45	1.25	3.00	12.50	26.00

IN 4148 (IN914) . . . . 15/$1.00

.1 or .01 uf 25V ceramic disc. caps.
16/$1.00, 100/$5.00

7 SEGMENT DISPLAYS

FSC 8024-4 digit		DL-707 C.A. .3"	$.75
C.C. 8" display	$5.95	DL 747 C.A. .6"	$1.50
FND 503 C.C. .5" . .	$ .85	HP3400 .8" CA	$1.95
DL-704-.3" C.C. . . .	$ .85	HP3405 .8" CC	$1.95

TRANSISTOR SPECIALS

2N1307 PNP GE TO-5 . . . . $ .40
2N404A PNP GE TO-5 . . . . 3/$1.00
HEP G6014 – PNP GE TO-3 . . . . $ .85
TIP 121 – NPN Si SWITCHING . . . . $ .95
2N6233-NPN SWITCHING POWER. $1.95
MRF-8004 a CB RF TRANSISTOR NPN. . . . . . $ .75
2N3772 NPN Si TO-3. . . . . $1.00
2N4908 PNP Si TO-3 . . . . $1.00
2N5086 PNP Si TO-92 . . . . 4/$1.00
2N3137 NPN Si RF. $ .55
2N3919 NPN Si TO-3 RF $1.50
2N1420 NPN Si TO-5 . . . . 3/$1.00
2N3767 NPN Si TO-66. . . . . $ .70
2N2222 NPN Si TO-18 . . . . 5/$1.00
2N2907 NPN Si TO-18 . . . . 4/$1.00
2N3055 NPN Si TO-3. . . . . $ .60
2N3904 NPN Si TO-92 . . . . 6/$1.00
2N3906 PNP Si TO-92 . . . . 6/$1.00
2N5296 NPN Si TO-220. . . . . $ .55
2N6109 PNP S. TO-220. . . . . $ .55
2N6308 NPN Si TO-3 . . . . $1.95
TIP 31B NPN Si TO-220. . . . . $ .60
TIP 32B PNP Si TO-220 . . . . $ .65
TIP 34 PNP Si . . . . $ .95
TIP PNP Si U84 . . . . $ .60

TTL IC SERIES

7400 — .17
7401 — .17
7402 — .17
7403 — .17
7404 — .24
7405 — .24
7406 — .33
7407 — .35
7408 — .27
7409 — .24
7410 — .17
7411 — .22
7412 — .22
7413 — .42
7414 — .90
7416 — .33
7417 — .37
7420 — .17
7425 — .35
7426 — .33
7427 — .35
7430 — .17
7432 — .27
7437 — .27
7438 — .27
7440 — .17
7441 — .85
7442 — .50
7445 — .70
7446 — .75
7447 — .75
7448 — .75
7450 — .17
7472 — .35
7473 — .35
7474 — .42
7475 — .49
7476 — .45
7480 — .45
7483 — .60
7485 — .75
7486 — .42
7489 — 1.60
7490 — .50
7491 — .55
7492 — .50
7493 — .50
7494 — .60
7495 — .60
7496 — .60
74107 — .35
74121 — .35
74122 — .39
74123 — .42
74125 — .45
74126 — .45
74145 — .75
74148 — 1.50
74150 — 1.10
74151 — .65
74153 — .55
75154 — 1.10
74155 — .75
74157 — .65
74160 — .85
74161 — .80
74162 — 1.20
74163 — .95
74164 — .85
74165 — .85
74166 — 1.05
74167 — 1.35
74170 — 1.60
74173 — 1.30
74174 — .85
74175 — .75
74176 — .75
74177 — .75
74180 — .75
74181 — 1.90
74190 — 1.20
74191 — 1.20
74192 — .79
74193 — .79
74194 — .85
74195 — .65
74196 — .85
74197 — .87
74279 — .95
74325 — 2.25
74365 — .80
74367 — .80
74368 — .65
74390 — 1.50
75325 — 1.50
75491 — 1.05
75492 — 1.05
8T98 — 1.10
9312 — .60
9601 — .75

FULL WAVE BRIDGE

PRV	2A	6A	25A
100			1.40
200	.80	1.30	2.20
400	1.00	1.65	3.30
600	1.30	1.90	4.40

DIP SOCKETS

8 PIN	.17	22 PIN	.30
14 PIN	.20	24 PIN	.35
16 PIN	.22	28 PIN	.40
18 PIN	.25	40 PIN	.60

74LS SERIES

74LS00 — .22
74LS01 — .22
74LS02 — .22
74LS03 — .22
74LS04 — .27
74LS05 — .27
74LS08 — .27
74LS09 — .27
74LS10 — .25
74LS11 — .35
74LS12 — .35
74LS13 — .60
74LS14 — .80
74LS15 — .35
74LS20 — .30
74LS21 — .25
74LS22 — .25
74LS26 — .35
74LS27 — .45
74LS28 — .45
74LS30 — .30
74LS32 — .40
74LS37 — .35
74LS38 — .35
74LS40 — .40
74LS42 — .55
74LS47 — .75
74LS51 — .25
74LS54 — .25
74LS73 — .60
74LS74 — .85
74LS75 — .75
74LS76 — .45
74LS83 — .95
74LS85 — 1.10
74LS86 — .45
74LS90 — .90
74LS92 — .90
74LS93 — .90
74LS96 — .90
74LS107 — .47
74LS109 — .45
74LS112 — .45
74LS113 — .45
74LS114 — .55
74LS123 — .75
74LS125 — .90
74LS126 — .90
74LS132 — .60
74LS136 — .80
74LS138 — .75
74LS139 — .70
74LS151 — 1.19
74LS153 — 1.19
74LS155 — 1.19
74LS156 — 1.19
74LS157 — .85
74LS160 — 1.00
74LS161 — 1.00
74LS162 — 1.00
74LS163 — 1.00
74LS164 — 1.00
74LS168 — 1.25
74LS169 — 1.75
74LS170 — 1.70
74LS173 — .90
74LS174 — 1.00
74LS175 — 1.00
74LS181 — 2.50
74LS190 — 1.25
74LS191 — 1.15
74LS192 — .90
74LS193 — .90
74LS194 — 1.10
74LS195 — .90
74LS196 — 1.00
74LS197 — .90
74LS240 — 1.60
74LS241 — 1.60
74LS242 — 1.60
74LS243 — 1.60
74LS244 — 1.60
74LS245 — 2.25
74LS251 — 1.29
74LS253 — 1.00
74LS257 — .90
74LS258 — .90
74LS259 — 1.50
74LS266 — .70
74LS273 — 1.25
74LS279 — .70
74LS283 — .80
74LS290 — .80
74LS293 — .80
74LS365 — .80
74LS367 — .80
74LS368 — .80
74LS373 — 1.50
74LS375 — .95
74LS377 — 1.50
74LS386 — .50
74LS393 — 1.50
74LS670 — 2.50

LINEAR CIRCUITS

LM201 — .75
LM301/748 — .30
741CV — .30
741C — .35
747 — .50
1458 — .50
4136 — .95
3900 — .55
LM307 — .30
LM308 — .75
LM324 — .95
LM339 — 1.10
LF355 — 1.25
LF356 — 1.35
LM311 — .75
LM318 — 1.20
LM348 — .90
LM358 — .70
LM361 — 1.75
LM377 — 1.60
LM382 — .80
LM386 — .80
LM387 — 1.25
LM553 — 2.25
LM555 — .45
LM553 — .85
565 — .95
566 — 1.25
567 — 1.10
702 — .95
703 — .85
709 — .25
710 — .45
711CH — .40
LM1808 — 1.75
LM1810 — 2.20
LM1889 — 1.95
CA758 — 1.75
CA3018 - 1.95
CA3046 — .85
CA3078 — 1.50
CA3080 — .95
CA3086 — .95
CA3094 — 2.25
8038CC — 3.90
N5596A — 1.50

REGULATORS

LM317T $2.50
LM337 . . . . $2.50
323K-5V 3A $5.75
79HGKC-5V at 5A $6.95
723 . . . . $ .50
320T 5, 12, or 15V $1.10
LM305G . . . . $ .75
340K-12, 15 or 24V . $1.50
340T-5, 6, 8, 12, 15
18 or 24V $1.10
320M5 . . . . $ .75
LAS1412 + 12V 3A $3.95

POSTAGE RATES ADD 10% FOR ORDERS UNDER $20.00
ADD 5% FOR ORDERS BETWEEN $20.00 AND $50.00
ADD 3% FOR ORDERS ABOVE $50.00

TERMS: FOB CAMBRIDGE, MASS. SEND CHECK OR MONEY ORDER. MINIMUM TELEPHONE, C.O.D. PURCHASE ORDER OR CHARGE $20.00 MINIMUM MAIL ORDER $5.00.

SEND $.25 FOR OUR CATALOG FEATURING TRANSISTORS & RECTIFIERS. **145 HAMPSHIRE ST., CAMBRIDGE, MASS. 02139**

SOLID STATE SALES
P.O. BOX 74B
SOMERVILLE, MASS. 02143

TEL. (617) 547-7053

WE SHIP OVER 95% OF OUR ORDERS WITHIN 24 HOURS OF RECEIPT

TOLL FREE 1-800-343-5230

grouped together in certain areas—it can help you determine the optimum placement of the associated integrated circuits. Use the plugboard itself for the preliminary layout of sockets and other components. Determine the locations of board feed-thru pins and all discrete components: don't wait until after you have begun to wire the board. It's a good idea to include extra ground feed-thru pins and to leave one socket position open near the card fingers for future additions. Draw the socket outlines on both layout sheets, show the positions of feed-thru pins and discrete components, and label them accordingly. Check any prewired card finger or voltage regulator position and make any changes by cutting traces.

Install all board pins, but omit the sockets so that you can use the board backup block. Insert T46-2-9 double-ended wrap posts in all card fingers, driving them in from the copper side of the pad hole. Though pins make excellent electrical contact with the pads, the connection can become erratic if you loosen or rock the pins excessively. Check for continuity with the ohmmeter, and solder if necessary. Many of the wire-wrap-style plugboards are designed to accept the disk bypass capacitor by direct soldering to the etched planes. Install and solder the capacitors before you install the sockets.

Secure the sockets to the board using 5-minute epoxy cement. Press an index card against the tips of the wrap posts associated with the card fingers on the wiring side of the board. Mark and label the impressions with bus assignments, for reference when wiring. Label an unmarked socket position using MS10A pin-marking strips. Begin by chain-wrapping the ground circuits to further reduce ground-return impedance. Wire the supply lines next and, as the last step, install any wiring which may be altered. Record your progress on the schematic diagram as you install and verify each wire run.

Before you install any integrated circuits, use the ohmmeter to verify all wiring topside from card fingers and from socket to socket. Check for

Circle 103 on inquiry card. →

Corvus Lowers the Price of Admission to the Winchester Club.

Here's the price breakthrough you've been waiting for on Winchester disk systems. It's our new 5¼-inch 5-million byte Winchester that adds cost effective mass storage to over 15 of the most popular microcomputers. Now everyone can enjoy the improved reliability, increased storage capacity, and faster speed of sealed-environment Winchester technology.

You can start with 5 million bytes, then expand the system with up to three add-on drives of 5, 10, or 20 million bytes. Our 5 million byte system has all of the advanced features of the larger capacity Corvus systems, including our low cost MIRROR back-up and multi-user CONSTELLATION network that allows up to 64 computers to share the Corvus data base and peripherals such as printers.

Want the full story? Contact your local computer store.

PRICE: $3750
WHEN: NOW!
WHERE: YOUR LOCAL COMPUTER DEALER

★★ CORVUS SYSTEMS

5 MILLION BYTE MICRO WINCHESTER DISK SYSTEM

For Apple TRS-80 LSI-11 Zenith
SuperBrain Pet S-100 Bus
Alpha Micro

★★ CORVUS SYSTEMS
2029 O'Toole Avenue
San Jose, California 95131
408/946-7700 TWX: 910-338-0226
See us at NCC — Booth 3014

bus- and supply-line short circuits. Insert a milliameter in the power supply line and energize the board. Check voltage-regulator outputs and voltage distribution. With the power off, insert integrated circuits one by one and observe the expected increases in supply current. If all is well, connect the ribbon cable to the proto system and check the voltages at the other end of the cable. Take care that the proto system's power supplies do not feed directly back to your computer!

At this point, the wise experimenter will perform static tests on at least a portion of the board logic (eg: port and memory decoders). Use jumper wires to program the input logic and verify the output. A patchboard with the entire system bus laid out and labeled on Klip Block linked to the system by ribbon cable is a handy aid for conducting static tests. These tests detect wiring and design errors, as well as defective integrated circuits.

Always turn off all power when inserting or removing connectors and plugboards. Connect the untested ribbon cable and proto system to your computer, but do not install the plugboards. If your computer fails to function, look for line shorts. Another possible culprit is the ribbon cable capacitance (or the cable may be picking up noise). Always use very short cables and be prepared to experiment with several lengths. As the final and most crucial test, insert the plugboard in the proto system for dynamic on-line tests. The most frequently encountered problems are the result of wiring errors or omissions, erratic or defective integrated circuits, and contaminated and erratic connectors.

An erratic integrated circuit device is difficult to pinpoint, but it can be forced to reveal itself. Allow the system to warm up thoroughly, and attempt to reproduce the observed erratic behavior. Then, spray each suspected device with integrated-circuit cooler. In many cases, this will temporarily restore the system to normal operation and isolate the troublesome component. Another approach is to substitute suspect integrated circuits with those that you know are reliable.

Once you resolve the frustrating circuit problem, you will gain a far greater understanding of the microprocessor, logic circuits, and test techniques. So start experimenting with computer hardware circuits made simply by wire wrapping and a plugboard system. It will lead to greater enjoyment of your hobby.■



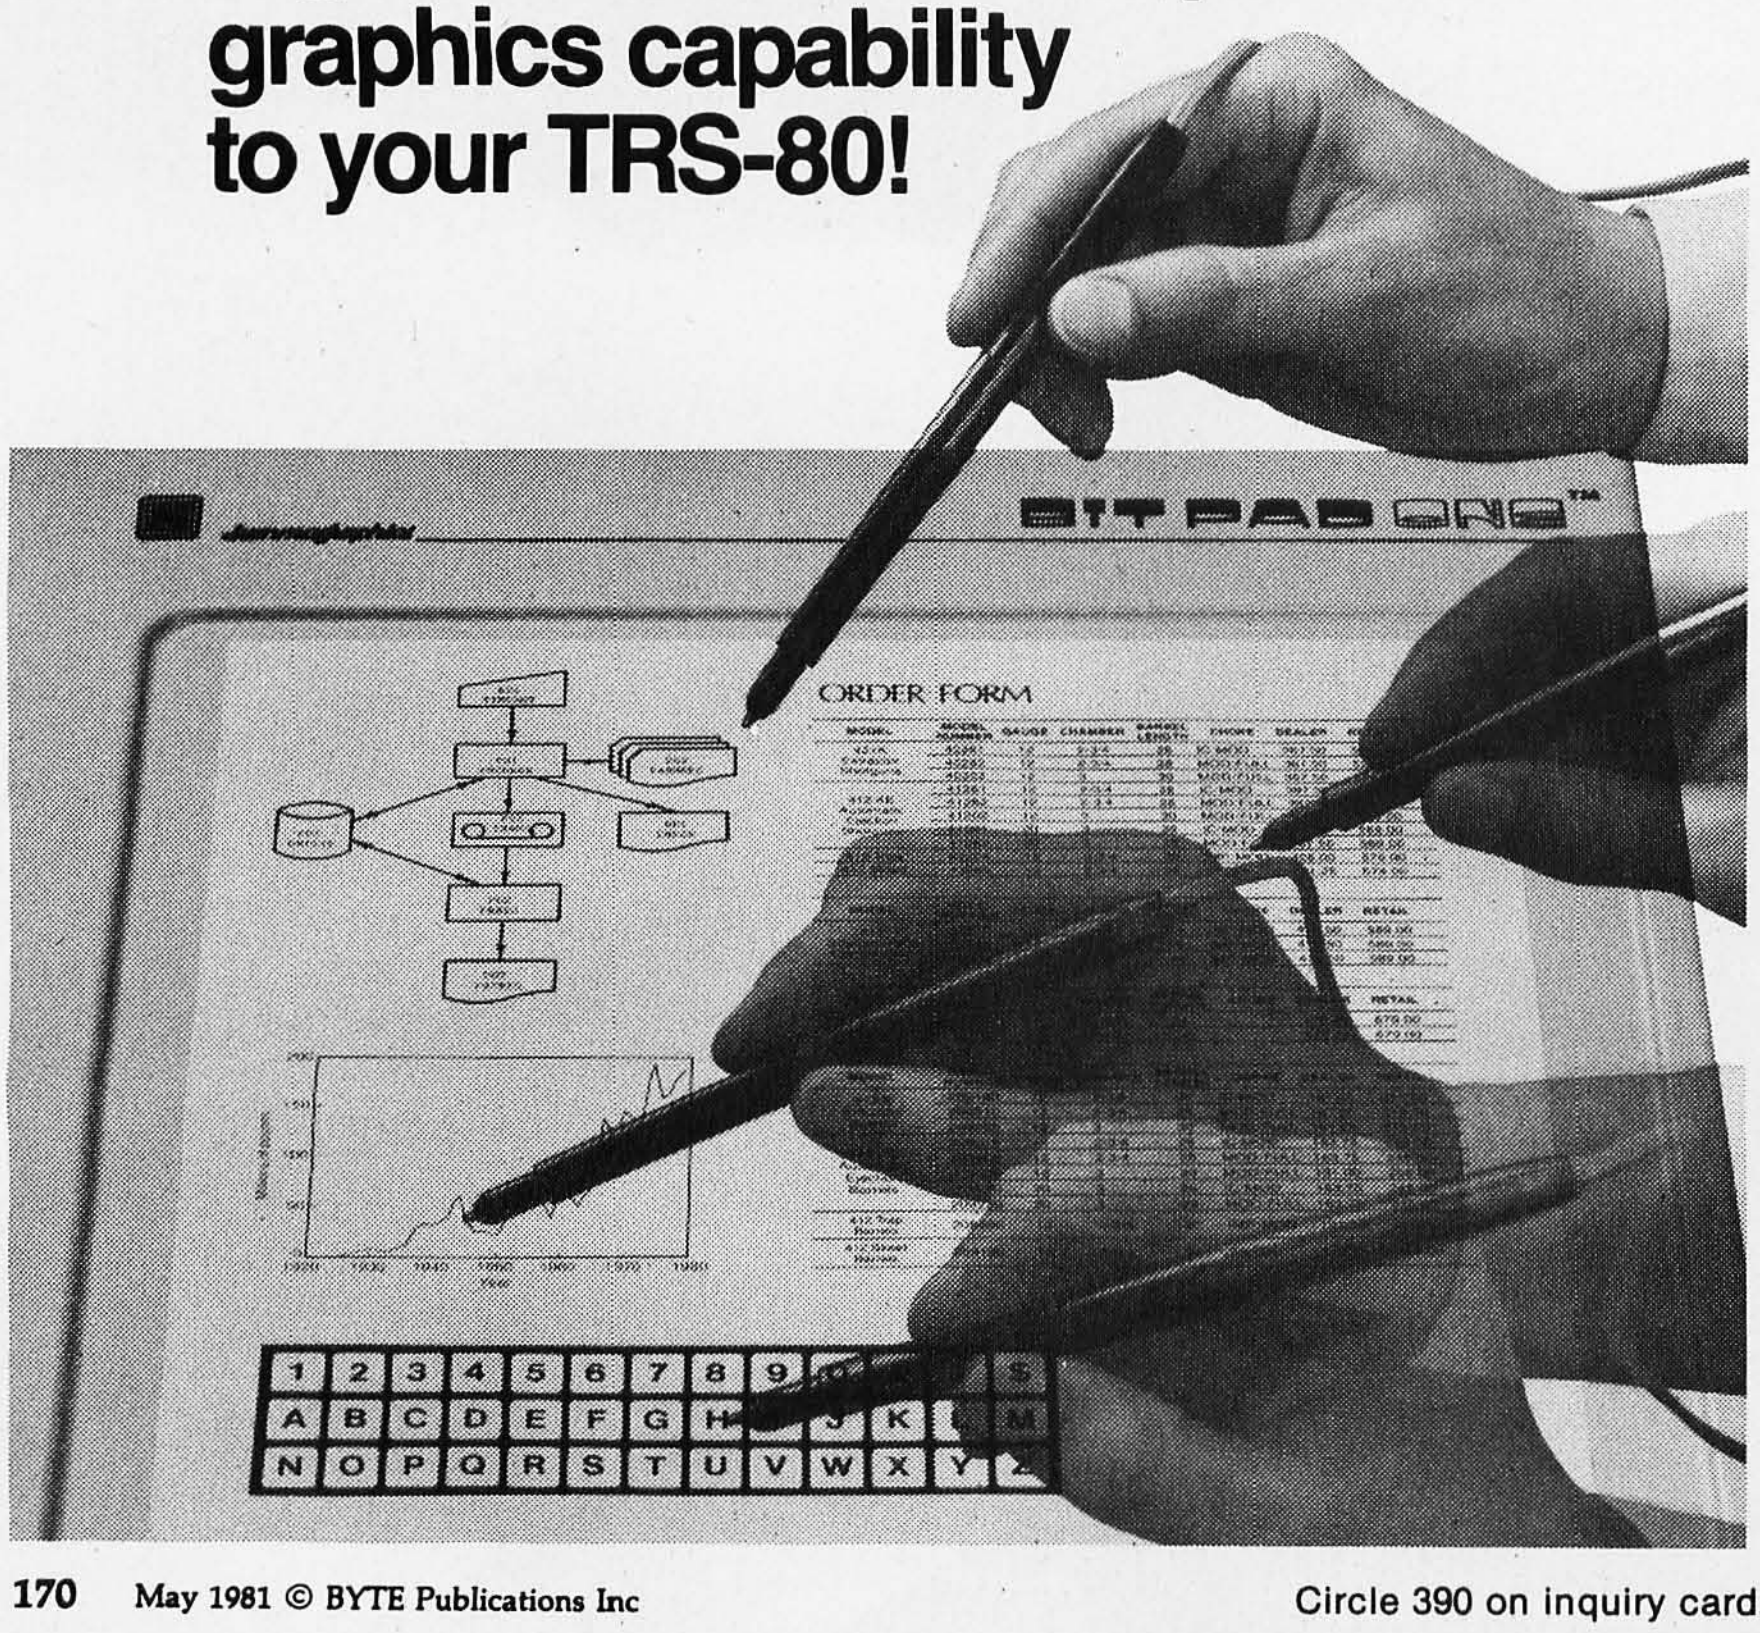

Notice of Omission

Due to a processing error the Lanier Business Products ad which appeared on page 27 of the April Byte had no Reader Service Number.

For more information regarding their "no problem trial offer" circle 475 on the inquiry card in this issue.

Speeding Up TRS-80 Graphics

Ronald Bobo
3246 Gravois
St Louis MO 63118

John Knoderer
The Software Center
51 Florissant Oaks Shopping Ctr
Florissant MO 63031

Many TRS-80 owners have probably, at one time or another, experimented with using DATA statements to store graphics information. This method can be highly efficient, but there's a catch. It is possible to store graphics as data in *several* different ways. Which is best?

In this article, we will examine some of the methods of storing a screen image as DATA statements, and, later, of recreating it on the video screen. Listings 1 thru 13 show the evolution of successively complex techniques.

In most cases, we will start with a picture onscreen (as provided by a run of listing 1). Many of the simpler sketching programs for the TRS-80 don't provide any way to store the images to disk, and the screen-reading programs used as examples in this article can be appended to a sketching program that will allow you to save your work. Let's look at the first method of saving screen images.

POINT Graphics

Every cell (graphics point) on the TRS-80 graphics screen can be turned on by a SET statement or turned off by a RESET statement. This method is used in listing 1 to draw a picture on the TRS-80 video screen. Another TRS-80 Level II command, POINT, returns a 1 or 0 based on the value of the cell given by the x (column number) and y (row number) parameters of the POINT statement.

The easiest way to store the video screen would be to examine and write an (x, y) number pair for each cell that is shown. Unfortunately, this is both time consuming and wasteful of disk storage. Due to the nature of most drawings, they are more easily approached as a series of horizontal lines; this is done in listing 1 where a horizontal line of cells is SET to screen inside a do-loop that varies the x (column) coordinate of the SET statement. We can store each line of cells as a triad of numbers: y (row) number, beginning x (column) number, and ending x (column) number. Then we can later read the triad and recreate the line by executing a SET statement within a do-loop.

By PEEKing the appropriate memory locations, we can represent the contents of the screen as exactly 1024 numbers.

Listing 2 illustrates this process by creating the disk file of triads (lines 11000 thru 11050), closing it (line 11060), then opening it again and recreating the picture from a cleared screen (it does this by reading the disk data file in lines 12000 thru 12020, as discussed above). The data in this data file will be used by listing 3.

Data Files and POKE Graphics

To use these data files in other programs, the disk file of numbers must now be converted to DATA statements. However, you won't have to type them on the keyboard. Listing 3 will read the disk file from listing 2, convert the numbers to DATA statements complete with line numbers, and put them back onto disk in ASCII format, ready to be merged with a BASIC program.

Now that the numbers have been reconfigured as DATA statements, they can be merged with a short program that will use the DATA statements to set the graphics. This method is a bit faster than reading the data from a disk file. Listing 4 includes the DATA statements (lines 1905 thru 1960) generated by listing 3 (which contain the data generated by listing 2). Lines 100 to 130 read the data and set the graphics. Lines 200 to 210 generate hardcopy of the information on the screen for conversion to DATAPOKE statements. Line 300 creates a file and stores the data on disk.

Listing 4 creates (in line 300) a new

Text continued on page 176

Interested readers can call The Software Center at (314) 838-7785.

REQUEST™

U.S.A. BEATS I.B.M. TO MARKET WITH TRUE RELATIONAL DATA BASE!

On Feb. 1, 1981, I.B.M. announced a relational data base for 370/3033 users... U.S.A. introduced REQUEST™ 3 months earlier for the APPLE & PET!

DATA BASES ARE A DIME A DOZEN!

Flip through any computer magazine and one company after another will promise you that their product is the ultimate in data base programs.

WE DON'T TAKE THEIR WORD FOR IT!

A recent ad for data base management even provided it's own comparison checklist to prove that their data base surpassed all other data bases on the market today.

"COMPARE...DON'T TAKE OUR WORD FOR IT," THEY SAID.

WE DID COMPARE

UNTIL TODAY THERE WERE MORE THAN ~~20~~ 21 DATA BASE MANAGERS FOR THE APPLE II.
NOW THERE'S ONLY ONE!

~~DB MASTER~~ REQUEST

THE APPLE DATA BASE MANAGER YOU'VE BEEN WAITING FOR!

If you want an easy-to-use, flexible, and versatile data base manager, you have a choice of one. DB MASTER from Stoneware Microcomputer Products - soon to become the standard by which all others will be judged.

But don't just take our word for it. Compare the many advanced features of DB MASTER with the data base manager you're now using. Or for that matter, compare it with any data base manager on the market. No one will even come close.

FEATURES	DB MASTER	REQUEST ~~OTHER~~ DBMS
FILING SYSTEM:		
Maximum search time to find any record by its primary key	UNDER 3 SECS	under 1 sec.
True ISAM file system with multi-field primary keys	YES	Yes
Multiple secondary keys for rapid access (5-7 seconds) to records by any field	YES	Yes (approx 1 sec)
Primary & Secondary keys maintained automatically—no need to rebuild keys after adding records	YES	Yes
Maximum record size (bytes)	1020	4064
Maximum number of fields/record ..	100	999
Handles files with more than one diskette of data	YES	Yes
Custom disk operating system (DOS) for faster data retrieval and program chaining	YES	No
User-designed screen formats	YES	No
Up to 9 screen "pages" per record...	YES	Yes(16)
Ten field types, including dollar/cents, phone & social security number, date, etc.	YES	Yes(15)
Automatic data compaction for increased disk storage capacity.	YES	Yes
Wild card, partial string, range and Boolean search capabilities...	YES	Yes
Dynamic prompting (tm) - lists all available functions on screen—no need for quick reference card.	YES	Yes
Password file protection	YES	Yes
Four function calculator mode	YES	Yes
Daily update lists for printout of all records added/edited on any day or range of dates	YES	Yes

REPORT GENERATOR:		
Send reports to screen or printer	YES	Yes
Sort on up to 6 fields at a time	YES	Yes(16)
Column subtotals and totals	YES	Yes
Subtotal and page breaks	YES	Yes
Up to 24 computed fields per report .	YES	Yes(99)
Up to 9 lines of column titles	YES	Yes(16)
Up to 9 lines for each record	YES	Yes(16)
Maximum number of fields per report	100	999
Code fields - store short codes, print long descriptions	YES	Yes
Comment lines and footnotes	YES	Yes
Comment fields for printing labels or headers within each record ...	YES	Yes
Summary only reports	YES	Yes

While a custom DOS is nice for speed, it does place the user in a bind, since it makes the data incompatible with APPLE'S DOS & other software. REQUEST™ is fully compatible!

REQUEST™ utilizes a sophisticated screen generation algorithm to produce screens pleasing to the eye and easy to use, AUTOMATICALLY.

REQUEST'S™ additional search functions include:
- context search
- arithmetic expression evaluation search
- multi-field relational search

AND REQUEST ™ GIVES YOU ALL THESE EXTRAS

- Multiple formats for mailing labels
- REQUEST™ can be used with a modem
- On the APPLE™ REQUEST™ is compatible with 80 column boards
- High level query language or screens used to form query
- Query library stores executive queries for Run-On-Demand
- REQUEST™ will interface with Source™, VisiCalc™, and word processing packages
- Disks are readable and copyable by normal DOS

ONLY
$225

DEALER INQUIRIES INVITED

REQUEST & THINKER are trade marks of United Software of America

THINKER™

THE INTELLIGENT ACCOUNTING SYSTEM

THINKER™ & REQUEST™ CAN BE USED SEPARATELY OR TOGETHER AND DATA MAY BE INTERCHANGED.

THINKER'S™ ADDITIONAL FEATURES INCLUDE —

- Compatible with REQUEST™
- Customized access to THINKER™ data via REQUEST™
- Relational analysis of THINKER™ data via REQUEST™
- Utilizes a 9 digit ZIP Code compatible with Canada & Europe
- Password protection for system security
- Daily audit trails for system integrity
- Dynamic system configurator will expand data to additional drives when needed, AUTOMATICALLY!
- Employs industrial psychological approach to achieve superior human engineering.

Introductory Price

$495

SUPER KRAM IS REQUIRED FOR EITHER REQUEST OR THINKER AND IS AVAILABLE FOR $175

Look for the RED-WHITE-BLUE United Software Display at your local computer dealer, or send check or moneyorder, plus $3.00 shipping to:

USA *UNITED SOFTWARE OF AMERICA*
750 THIRD AVE.
NEW YORK NY 10017
(212) 682-0347 *Telex 640055*

SOFTWARE THAT THINKS FOR ITSELF

Before The **THINKER™**, microcomputer business systems have fallen short in two distinct areas: *FLEXIBILITY* and *INTEGRATION.* Every business is different and requires software to be pre-set to fit its own particular needs. A nip here, a tuck there, and files are extended to where the business was expected to be. . . But, a single file too short can cause the system to fail, or a single file too long wastes costly disk space. The **THINKER™** takes the guess work out of your business data processing by thinking for you.

EASY TO USE–FULLY INTEGRATED ACCOUNTING SYSTEM

The **THINKER™** consists of **6** comprehensive *interactive* modules, with all transactions applied immediately and the results are instantaneously accessible. They are;

- ACCOUNTS RECEIVABLE • ACCOUNTS PAYABLE
- SALES ORDER ENTRY • PURCHASE ORDER ENTRY
- INVENTORY CONTROL • MAILING LIST
  (General Ledger available in June)

FLEXIBILITY– SOFTWARE THAT GROWS WITH YOUR BUSINESS

The **THINKER™** utilizes the **DYNAFILE™** *Keyed File Allocation Scheme* which dynamically manages file length and records to meet the businessman's needs and will automatically extend itself to work on hard disks without any program modification. No disk space is wasted because the system automatically recaptures space when records are deleted. **DYNAFILE™** utilizes a sophisticated indexing scheme, allowing direct access to any record. Machine language programming insures **DYNAFILE™** speed, reliability, and integrity.

The THINKER™ is currently available for 6502 based microcomputers. 80 column PET/CBM Computers
80 column Apple Computers

Listing 1: *TRS-80 graphics program using the traditional SET and RESET graphics.*

```
10 CLS:CLEAR 200
20 FOR X=50 TO 95:Y=12:SET(X,Y):NEXT:FOR Y=13 TO 32:SET(50,Y):SET(95,Y):NEXT
30 FOR X=28 TO 50:Y=22:SET(X,Y):NEXT:Y=22:FOR X=37 TO 43:SET(X,Y):Y=Y-1:NEXT
40 FOR X=44 TO 49:SET(X,Y):Y=14:NEXT:FOR Y=22 TO 29:X=28:SET(X,Y):NEXT:FOR Y=29
TO 30:X=27:SET(X,Y):NEXT:FOR Y=27 TO 28:X=29:SET(X,Y):NEXT:FOR Y=26 TO 27:X=30:S
ET(X,Y):NEXT
50 FOR Y=25 TO 26:X=31:SET(X,Y):NEXT:SET(31,25):FOR X=32 TO 38:Y=24:SET(X,Y):NEX
T:SET(40,23):SET(41,24):SET(46,24):Y=25:FOR X=42 TO 47:SET(X,Y):Y=Y+1:NEXT:FOR Y
=23 TO 30:X=48:SET(X,Y):NEXT
60 Y=25:FOR X=38 TO 44:SET(X,Y):SET(X+1,Y):Y=Y+1:NEXT:FOR X=45 TO76:Y=32:SET(X,Y
):NEXT:Y=31:FOR X=76 TO 83:SET(X,Y):SET(X+1,Y):Y=Y-1:NEXT
70 FOR X=83 TO 90:Y=24:SET(X,Y):NEXT:Y=25:FOR X=90 TO 94:SET(X,Y):SET(X+1,Y):Y=Y
+1:NEXT:FOR X=96 TO 97:Y=31:SET(X,Y):NEXT
80 FOR X=33 TO 36:Y=27:SET(X,Y):NEXT:FOR X=85 TO 88:SET(X,Y):NEXT:FOR Y=30 TO 32
:X=30:SET(X,Y):NEXT:Y=30:FOR X=30 TO 32:SET(X,Y):SET(X+1,Y):Y=Y-1:NEXT
90 Y=28:FOR X=36 TO 38:SET(X,Y):SET(X+1,Y):Y=Y+1:NEXT:Y=32:FOR X=30 TO 33:SET(X,
Y):SET(X+1,Y):Y=Y+1:NEXT:FOR X=33 TO 36:Y=35:SET(X,Y):NEXT
100 Y=34:FOR X=36 TO 38:SET(X,Y):SET(X+1,Y):Y=Y-1:NEXT:FOR Y=30 TO 32:X=39:SET(X
,Y):NEXT:X=34:Y=30:SET(X,Y):SET(X+1,Y):SET(33,31):SET(36,31):X=34:Y=32:SET(X,Y):
SET(X+1,Y)
110 FOR Y=30 TO 32:X=82:SET(X,Y):SET(X+9,Y):NEXT:Y=30:FOR X=82 TO 85:SET(X,Y):SE
T(X+1,Y):Y=Y-1:NEXT:Y=32:FOR X=82 TO 84:SET(X,Y):SET(X+1,Y):Y=Y+1:NEXT:FOR X=85
TO 88:Y=35:SET(X,Y):NEXT
120 Y=34:FOR X=88 TO 90:SET(X,Y):SET(X+1,Y):Y=Y-1:NEXT:Y=28:FOR X=88 TO 90:SET(X
,Y):SET(X+1,Y):Y=Y+1:NEXT:FOR X=86 TO 87:Y=30:SET(X,Y):Y=32:SET(X,Y):NEXT:SET(85
,31):SET(88,31)
130 X=55:Y=15:SET(X,Y):SET(X,Y+1):SET(X+1,Y+2):SET(X+1,Y+3):SET(X+2,Y+4):SET(X+2
,Y+5):SET(X+3,Y+6):SET(X+4,Y+5):SET(X+4,Y+4):SET(X+5,Y+3):SET(X+5,Y+2):SET(X+6,Y
+1):SET(X+6,Y)
140 FOR Y=15 TO 21:X=65:SET(X,Y):NEXT:FOR X=69 TO 73:Y=15:SET(X,Y):NEXT:FOR Y=16
 TO 21:X=71:SET(X,Y):NEXT:FOR X=77 TO 81:Y=15:SET(X,Y):Y=21:SET(X,Y):NEXT:SET(78
,18):FOR Y=15 TO 21:X=77:SET(X,Y):NEXT
150 FOR Y=15 TO 21:X=85:SET(X,Y):NEXT:Y=18:FOR X=86 TO 89:SET(X,Y):Y=Y-1:NEXT:Y=
18:FOR X=86 TO 89:SET(X,Y):Y=Y+1:NEXT
160 FOR Y=24 TO 29:X=55:SET(X,Y):SET(X+4,Y):SET(X+9,Y):NEXT:Y=25:FOR X=60 TO 62:
SET(X,Y):SET(X+1,Y):Y=Y+1:NEXT:
170 FOR Y=25 TO 28:X=68:SET(X,Y):NEXT:FOR X=69 TO 71:Y=24:SET(X,Y):Y=29:SET(X,Y)
:NEXT:SET(72,25):SET(72,28):SET(74,29)
180 FOR X=1 TO 1500:NEXT:PRINT@64,STRING$(60," "):PRINT@128,STRING$(60," "):FOR
X=5 TO 125:Y=0:SET(X,Y):SET(X,Y+1):Y=47:SET(X,Y):SET(X,Y-1):NEXT:FOR Y=0 TO 47:X
=5:SET(X,Y):SET(X+1,Y):SET(X+2,Y):NEXT
185 FOR Y=0 TO 47:X=125:SET(X,Y):SET(X-1,Y):SET(X-2,Y):NEXT:FOR X=1 TO 1000:NEXT
```

Listing 2: *Program to read data directly from the screen memory and store it to the disk as numbers representing a series of horizontal lines of graphic dots.*

```
11000 OPEN"O",1,"GRAPHIC/DAT":FORY=0TO47:X=-1
11010 X=X+1:IFX>127THEN11060
11020 IFPOINT(X,Y)=0THEN11010
11030 X1=X
11040 X=X+1:IFX>127ORPOINT(X,Y)=0THENPRINT#1,Y",."X1",."X:GOTO11010
11050 GOTO11040
11060 NEXTY:CLOSE
12000 OPEN"I",1,"GRAPHIC/DAT":CLS
12010 C=C+1:IFEOF(1)=0THENINPUT#1,Y,X1,X2:FORX=X1TOX2:SET(X,Y):NEXT:GOTO12010
12020 GOTO12020
20000 REM--ORIGINAL GRAPHICS ROUTINE FROM A SKETCH BY
       KARL WILLIAMSON, OVERLAND, MO.  SET AND RESET
       GRAPHICS BY RON BOBO.
20005 REM--ALL OTHER PROGRAMMING IN THIS SERIES BY
      JOHN KNODERER, COMP-U-TRS, 51 FLORISSANT OAKS
      SHOPPING CENTER, FLORISSANT, MO, 63031
20010 REM--LINES 11000 TO 11060 CONVERT SCREEN TO VALUES
      Y, X1 AND X2 AND SEND TO DISK.  FOR USE IN LINE "FOR
      X=X1 TO X2:SET(X,Y):NEXT"
20020 REM--LINES 12000-12020 TEST THE NUMBERS CREATED BY 11000
65000 'TWO
```

Listing 3: *This routine reads the data file generated by the program in listing 2 (and subsequent listings) and creates an ASCII file containing BASIC DATA statements.*

```
13000 CLEAR9999:OPEN"I",1,"GRAPHIC/DAT":LN=1900:OPEN"O",2,"GRAPHIC/ASC
13010 LN=LN+5:X$=STR$(LN)+" DATA"
13020 IFEOF(1)THENPRINT#2,LEFT$(X$,LEN(X$)-1):PRINTX$CHR$(8):CLOSE:END
13030 INPUT#1,Y:X$=X$+MID$(STR$(Y),2)+",":IFLEN(X$)>237THENPRINT#2,LEFT$(X$,LEN(
X$)-1):PRINTX$CHR$(8):GOTO13010
13040 GOTO13020
13900 REMARK--THIS CONVERTS NUMBERS ON DISK TO BECOME REGULAR BASIC DATA STATEME
NTS WITH A LIMIT OF 240 CHARACTERS PER LINE
65000 'CONVERT
```

The business information you need at the turn of a key.



Datadex is a new interactive business management system designed for the Apple personal computer. It's from IUS, the people who brought you EasyWriter™ and who are bringing you new products for office automation, education, and development systems.

Datadex is short for **data index.** It lets you put all your business data into your Apple the way you like to see it and manipulate it any way you want. **It adapts to your way of doing business.**

Want to generate a sales report? Just press four keys and fill in the blanks. That puts your sales data into the computer. Now, your report: Datadex **designs it for you,** based on what you've entered. Nothing to it. That's **power!**

You can do the same with phone lists, mailing lists, dealer names or inventories.

They all enter Datadex and form your own personal **data base.**

Want to find a company but don't know how to spell its name? Try something that sounds close, and our **Soundex** routine will find it. It is very forgiving on typos and extra spaces.

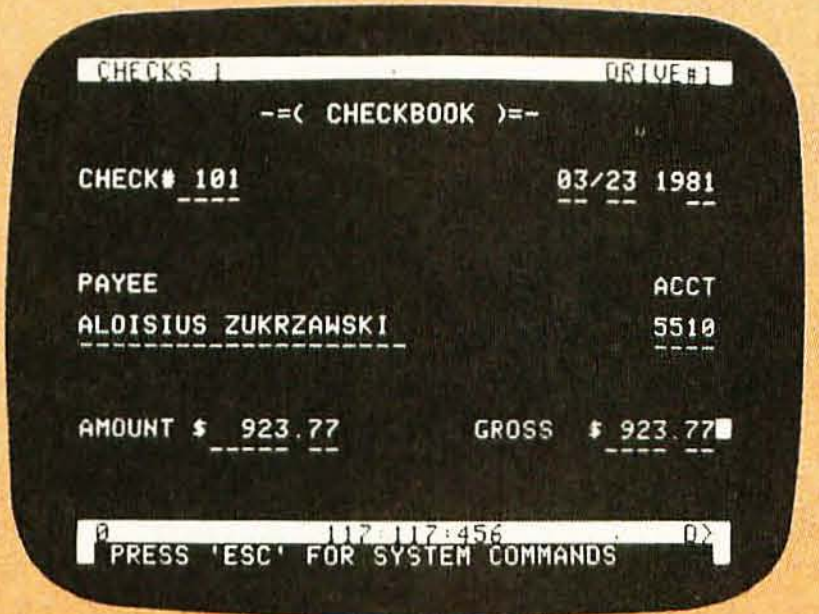

```
 CHECKS 1                                   DRIVE#1
                 -=( CHECKBOOK )=-

 CHECK# 101                            03/23 1981
        ----                           -- --   --

 PAYEE                                       ACCT
 ALOISIUS ZUKRZAWSKI                         5510
 -----------------------                     ----

 AMOUNT $  923.77          GROSS    $ 923.77█
          ------ --                   ---- --

 0                117 117:456                  D>
  PRESS 'ESC' FOR SYSTEM COMMANDS
```

Soundex helped us find Mr. Zukrzawski when we were balancing our checkbook. We weren't sure how to spell Al's name, so searched for Al Z and found him. Instantly. The check register and several other applications are free with Datadex.

Want a specific piece of information, like sales for January 14–21? Inquire Datadex and the answer comes up on the screen right now. And right.

Want a report of all sales in ZIP code areas starting with 9? Sure. Just ask it to print a report.

But seeing is the only way to believe. Get a demonstration of Datadex at your local Apple dealer. See the personal computing power it can bring to your office and home. If you've looked at a VisiCalc-type program, see Datadex before you buy.

By the way, about IUS. We're the Apple of software. We got there by giving you great products and super support. We provide customer service over the phone. Professionally written documentation. And products that are never outdated, only updated. Information Unlimited Software, Incorporated,
281 Arlington Ave., Berkeley,
CA 94707. (415) 525-9452.

Does your other software have auto system configuration and auto report generation? Datadex does. You don't have to be a computer expert to get results!

PUT DATADEX™ IN YOUR APPLE.

Datadex is a trademark of Sonoma Softworks.
EasyWriter is a trademark of Cap'n Software.
Apple is a trademark of Apple Computer Inc.
VisiCalc is a trademark of Personal Software, Inc.

Notice of Omission

Due to a processing error the Lanier Business Products ad which appeared on page 27 of the April Byte had no Reader Service Number.

For more information regarding their "no problem trial offer" circle 475 on the inquiry card in this issue.

Listing 4: *Recreation of a graphics picture. This listing shows how the DATA statements generated by listing 3 may be appended to a program that uses them to recreate the original graphics display.*

```
100 ONERRORGOTO120:CLS
110 READY,X1,X2:FORX=X1TOX2:SET(X,Y):NEXT:GOTO110
120 RESUME130
130 ONERRORGOTO0:GOTO 150
150 REMARK--THIS SECTION OF PROGRAM FROM LINE 100 TO LINE 130 IS PROGRAM LISTING
NUMBER ZERO THAT WILL RECREATE THE GRAPHIC PICTURE OF LISTING 1.
190 'GOTO300
200 FORI=15360TO16383:LPRINTPEEK(I);:NEXT:RETURN
210 REM--LINE 200 WILL GENERATE HARD COPY OF DATA FOR THE NEXT PROGRAM
300 OPEN"O",2,"DATAPOKE":FORI=15360TO16383:PRINT#2,PEEK(I):NEXT:CLOSE:STOP:REMAR
K THIS LINE WILL OUTPUT TO DISK
1905 DATA0,5,126,1,5,126,2,5,8,2,123,126,3,5,8,3,123,126,4,5,8,4,123,126,5,5,8,5
,123,126,6,5,8,6,123,126,7,5,8,7,123,126,8,5,8,8,123,126,9,5,8,9,123,126,10,5,8,
10,123,126,11,5,8,11,123,126,12,5,8,12,50,96,12,123,126,13,5,8,13,50,51,13,95
1910 DATA96,13,123,126,14,5,8,14,45,51,14,95,96,14,123,126,15,5,8,15,44,45,15,50
,51,15,55,56,15,61,62,15,65,66,15,69,74,15,77,82,15,85,86,15,89,90,15,95,96,15,1
23,126,16,5,8,16,43,44,16,50,51,16,55,56,16,61,62,16,65,66,16,71,72,16,77,78
1915 DATA16,85,86,16,88,89,16,95,96,16,123,126,17,5,8,17,42,43,17,50,51,17,56,57
,17,60,61,17,65,66,17,71,72,17,77,78,17,85,86,17,87,88,17,95,96,17,123,126,18,5,
8,18,41,42,18,50,51,18,56,57,18,60,61,18,65,66,18,71,72,18,77,79,18,85,87,18
1920 DATA95,96,18,123,126,19,5,8,19,40,41,19,50,51,19,57,58,19,59,60,19,65,66,19
,71,72,19,77,78,19,85,86,19,87,88,19,95,96,19,123,126,20,5,8,20,39,40,20,50,51,2
0,57,58,20,59,60,20,65,66,20,71,72,20,77,78,20,85,86,20,88,89,20,95,96,20,123
1925 DATA126,21,5,8,21,38,39,21,50,51,21,58,59,21,65,66,21,71,72,21,77,82,21,85,
86,21,89,90,21,95,96,21,123,126,22,5,8,22,28,51,22,95,96,22,123,126,23,5,8,23,28
,29,23,40,41,23,48,49,23,50,51,23,95,96,23,123,126,24,5,8,24,28,29,24,32,39,24
1930 DATA41,42,24,46,47,24,48,49,24,50,51,24,55,56,24,59,60,24,64,65,24,69,72,24
,83,91,24,95,96,24,123,126,25,5,8,25,28,29,25,31,32,25,38,40,25,42,43,25,48,49,2
5,50,51,25,55,56,25,59,62,25,64,65,25,68,69,25,72,73,25,82,84,25,90,92,25,95
1935 DATA96,25,123,126,26,5,8,26,28,29,26,30,32,26,39,41,26,43,44,26,48,49,26,50
,51,26,55,56,26,59,60,26,61,63,26,64,65,26,68,69,26,81,83,26,91,93,26,95,96,26,1
23,126,27,5,8,27,28,31,27,33,37,27,40,42,27,44,45,27,48,49,27,50,51,27,55,56
1940 DATA27,59,60,27,62,65,27,68,69,27,80,82,27,85,89,27,92,94,27,95,96,27,123,1
26,28,5,8,28,28,30,28,32,34,28,36,38,28,41,43,28,45,46,28,48,49,28,50,51,28,55,5
6,28,59,60,28,64,65,28,68,69,28,72,73,28,79,81,28,84,86,28,88,90,28,93,96,28
1945 DATA123,126,29,5,8,29,27,29,29,31,33,29,37,39,29,42,44,29,46,47,29,48,49,29
,50,51,29,55,56,29,59,60,29,64,65,29,69,72,29,74,75,29,78,80,29,83,85,29,89,91,2
9,94,96,29,123,126,30,5,8,30,27,28,30,30,32,30,34,36,30,38,40,30,43,45,30,47
1950 DATA49,30,50,51,30,77,79,30,82,84,30,86,88,30,90,92,30,95,96,30,123,126,31,
5,8,31,30,31,31,33,34,31,36,37,31,39,40,31,44,46,31,50,51,31,76,78,31,82,83,31,8
5,86,31,88,89,31,91,92,31,95,98,31,123,126,32,5,8,32,30,32,32,34,36,32,38,40
1955 DATA32,45,77,32,82,84,32,86,88,32,90,92,32,95,96,32,123,126,33,5,8,33,31,33
,33,37,39,33,83,85,33,89,91,33,123,126,34,5,8,34,32,34,34,36,38,34,84,86,34,88,9
0,34,123,126,35,5,8,35,33,37,35,85,89,35,123,126,36,5,8,36,123,126,37,5,8,37
1960 DATA123,126,38,5,8,38,123,126,39,5,8,39,123,126,40,5,8,40,123,126,41,5,8,41
,123,126,42,5,8,42,123,126,43,5,8,43,123,126,44,5,8,44,123,126,45,5,8,45,123,126
,46,5,126,47,5,126
65000 'FOUR
```

Text continued from page 171:

data file, DATAPOKE, that represents the screen contents in another way. Actually, the contents of the screen are stored in the TRS-80 memory as 1024 contiguous bytes of memory, each byte representing six graphics cells (two cells wide by three cells high). By PEEKing the appropriate memory locations (decimal 15360 to 16383), we can represent the contents of the screen as exactly 1024 numbers, which are written to the DATAPOKE file, as shown in listing 4.

Now, using the DATAPOKE file just generated and the conversion program in listing 3, we come up with a new set of DATA statements. These are merged with another short routine to produce listing 5, which reads data and POKEs the values into video memory.

To get all of these graphics characters on the screen we are now using 1024 different numbers, with an average of 3 to 4 bytes used per number for storage (including commas). In return for the large amount of memory that is being used, we are only gaining a slight speed advantage over the original program. Let's look for something that will reduce memory usage.

Replacing Blanks with Tabs

Tab characters are stored in TRS-80 Level II BASIC as the value 192 plus the number of spaces to tab to the right. With this knowledge, we can combine a string of spaces into one character of memory by replacing the spaces with a tab character.

Listing 6 uses this information to take a different set of numbers off the screen. The program will generate a new set of numbers that may then be converted to DATA statements using the converison program. To list these same values to a printer, merely remove the END statement from line 660.

Note that in listing 6, the computer was not told to store any of the figures for regular printable charac-

WE'RE HAVING A CREATIVITY EXPLOSION!

IS THE SKY THE LIMIT?

The opportunities are stellar — filled with all the professional challenge you might envision. Move up to ATARI, on the SAN FRANCISCO PENINSULA, where your design & development talents will fit right in with our momentum. Consider these newly created opportunities in our Coin-Op Division and our Consumer Division which includes Video Computer Systems (VCS) and Personal Computers (PCS), where we are the pacesetters in the industry:

MICROPROCESSOR PROGRAMMERS

Discover the excitement in the programming of coin-operated video games. In this incredible growth area, we need programmers with a BSCS or equivalent experience. Assembly language experience necessary; microprocessor experience and interest in games is desirable. (Refer to Job MP)

MICROPROCESSOR PROGRAMMER

You'll find unlimited avenues for your creativity with your involvement in our VCS cartridges, toys & games products. Assembly programming on mini or microprocessors, real-time control programming, hardware background and BSEE/CS or Math plus 1-3 years experience would make you an ideal candidate. (Refer to Job MP)

SR. SOFTWARE DEVELOPER

Step into our PCS Division and design & develop software in the areas of personal interest, entertainment, professional development — and more! Your in-depth experience of 5-10 years coupled with software design & development in real-time, interactive, graphics systems are key professional tools; Microprocessor background preferred. Writing and artistic talents plus systems analysis and specifications development background would be ideal. Degree or equiv. required. (Refer to Job SSD)

SR. COMMUNICATIONS SOFTWARE DEVELOPER

Help develop telecommunications systems of the future where thousands of ATARI Personal Computer users tie into international networks.

Your 4 or more years of experience in communications hardware and software on central-on terminal-systems will open our door for you. Software design & development skills are essential. Set your path for terrific career growth. (Refer to Job SCSD)

SR. MICROPROCESSOR PROGRAMMERS

Enjoy the satisfaction in developing programming for microprocessor controlled test equipment design in our Programmable Interactive Test System for the Personal Computer line. You will have the opportunity to work with minimal supervision on long-range projects. BSEE/CS (or equivalent) preferred, with 3-5 years experience in microprocessor programming, including Assembly language experience on 6502 (preferred) or 6800. (Refer to Job SMP)

SR. MICROPROCESSOR PROGRAMMER

If your expertise is on Data General equipment, with programming in DGL and ALGOL, you will enjoy working on development of progamming for our Data General controlled test equipment design. Minimum supervision on long-range projects. Bachelors degree or equivalent (BSEE/CS preferred); along with 3-5 years experience on Data General equipment preferred. (Refer to Job SMP)

SOFTWARE PRODUCT MANAGEMENT ENGINEERS

You will draw on all your talent and experience in developing business plans for system software and languages — including product specification, merchandising plans, manuals, and sales literature. You will also have responsibility for schedule review and reporting. Ideally, you have a college degree (or equivalent) plus 6-10 years experience in one or more of the following: software product definition, project management in software development/contract management of educational products, business products, professional development, or systems software. You must have ability to communicate with a variety of departments involved in software development. (Refer to Job SPME)

ATARI provides you the ultimate State-of-the-Art environment complemented by exceptional salaries & benefits which include Company-paid Employee Life/Health/Disability/Dental Insurance, plus a Sabbatical Leave Policy which offers 7 weeks paid leave of absence after 7 years continuous service with ATARI. Please send your resume, including salary history, or contact our Employment Department, Mail Station OS, ATARI, INC., 1265 Borregas Ave., Sunnyvale, CA 94086. (408) 745-2030. We are an equal opportunity employer.

ATARI

A Warner Communications Company

Engineers

EVERYONE'S IDEAS COUNT

WHEN GTE IN PHOENIX DESIGNS FOR THE FUTURE!

Few technical challenges equal those encountered in designing the telecommunications systems of tomorrow. At GTE, your work will take you into advanced systems engineering and behind the scenes of existing high technology systems. It is an exciting time for those who can think beyond known technology!

If you have new ideas and want to see them translated into working systems, possess a degree in Computer Science, Electrical Engineering or Computer Engineering, consider the following positions:

OPERATING SYSTEM SOFTWARE

DEVELOPMENT SUPPORT SOFTWARE

TEST UTILITY SOFTWARE

ON-LINE RECOVERY AND DIAGNOSTIC SOFTWARE

CALL PROCESSING AND ADMINISTRATIVE SOFTWARE

DATA BASE DEVELOPMENT

SYSTEM TEST AND CONTROL

The compensation is equal to the challenge you will encounter and the location is one of the most attractive communities in the Sunbelt. Potential for professional advancement is as great as you want to make it. Explore the future with **GTE**, send your resume or letter of interest to:
GTE Automatic Electric Laboratories, Manager of Manpower,
Dept. BO581, 11226 N. 23rd Avenue, Phoenix, AZ 85029.

GTE Automatic Electric Laboratories

GTE | Research and Development

An Equal Opportunity Employer M/F/H

Listing 5: *This program takes the DATA statements generated by listing 4 and POKEs the information directly into the screen memory.*

```
500 DEFINTI-N:CLS
520 FORI=15360TO16383:READA:POKEI,A:NEXT
530 GOTO 530
550 REM--LINES 500 TO 520 READ DATA STATEMENTS AND POKE THE
VALUES INTO SCREEN MEMORY
1905 DATA32,32,170,191,159,143,143,143,143,143,143,143,143,143,143,143,143,143,1
43,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,1
43,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143
1910 DATA143,143,143,175,191,149,32,32,170,191,149,32,32,32,32,32,32,32,32,32
,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,3
2,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,170,191,149,32,32
1915 DATA170,191,149,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32
,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,3
2,32,32,32,32,32,32,32,32,32,170,191,149,32,32,170,191,149,32,32,32,32,32,32
1920 DATA32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32
,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,1
70,191,149,32,32,170,191,149,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32
1925 DATA32,160,176,176,191,131,131,131,131,131,131,131,131,131,131,131,131,131,
131,131,131,131,131,131,131,131,171,149,32,32,32,32,32,32,32,32,32,32,32,170,
191,149,32,32,170,191,149,32,32,32,32,32,32,32,32,32,32,32,32,32,32,184
1930 DATA135,32,32,191,32,138,181,32,186,133,170,149,130,171,151,129,170,151,131
,129,170,181,158,129,32,170,149,32,32,32,32,32,32,32,32,32,32,32,170,191,149,
32,32,170,191,149,32,32,32,32,32,32,32,32,32,32,32,32,32,160,158,129,32,32
1935 DATA32,191,32,32,171,188,151,32,170,149,32,170,149,32,170,151,32,32,170,159
,180,32,32,170,149,32,32,32,32,32,32,32,32,32,32,32,170,191,149,32,32,170,191
,149,32,32,32,32,32,32,32,32,32,188,140,140,140,140,143,188,140,140,140,188,191
1940 DATA32,32,32,131,32,32,130,129,32,130,129,32,130,131,131,129,130,129,130,12
9,32,170,149,32,32,32,32,32,32,32,32,32,32,32,170,191,149,32,32,170,191,149,3
2,32,32,32,32,32,32,32,32,191,184,151,131,131,175,182,173,144,131,191,191,32
1945 DATA170,149,170,189,180,191,32,190,131,141,32,32,32,160,190,135,131,131,175
,180,170,149,32,32,32,32,32,32,32,32,32,32,32,170,191,149,32,32,170,191,149,3
2,32,32,32,32,32,32,32,160,191,167,190,135,175,180,139,189,155,180,191,191,32
1950 DATA170,149,170,149,131,191,32,175,176,156,176,32,184,159,161,190,135,175,1
80,139,191,149,32,32,32,32,32,32,32,32,32,32,32,170,191,149,32,32,170,191,149
,32,32,32,32,32,32,32,32,130,129,191,153,183,157,187,149,130,175,182,179,191
1955 DATA176,176,176,176,176,176,176,176,176,176,176,176,190,135,32,191,153,183,
157,187,149,170,157,132,32,32,32,32,32,32,32,32,32,32,32,170,191,149,32,32,170,1
91,149,32,32,32,32,32,32,32,32,32,32,130,175,180,190,135,32,32,32,32,32,32,32
1960 DATA32,32,32,32,32,32,32,32,32,32,32,32,32,32,130,175,180,190,135,32,32,32,
32,32,32,32,32,32,32,32,32,32,32,32,170,191,149,32,32,170,191,149,32,32,32,32,32
,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32
1965 DATA32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32
,32,170,191,149,32,32,170,191,149,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,3
2,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32
1970 DATA32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,170,191,149,32,32,170,191,
149,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,3
2,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32,32
1975 DATA32,32,32,32,32,170,191,149,32,32,170,191,189,188,188,188,188,188,188,18
8,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,18
8,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188
1980 DATA188,188,188,188,188,188,188,188,188,188,190,191,149
65000 'FIVE
```

Listing 6: *A routine that compresses a string of spaces into a TAB character that represents the number of spaces in the string.*

```
600 OPEN"O",2,"PRINTCHR":L=1:A=PEEK(15360):POKE16383,32:IFA<129THENA=32
610 FORI=15361TO16383:B=PEEK(I):IFB<129THENB=32
620 IFB=AANDA=32THENL=L+1:GOTO660
630 IFB=32THENL=1:C=A:GOSUB690:A=B:GOTO660
640 IFA=32THENC=192+L:GOSUB690:GOTO655
650 C=A:GOSUB690
655 A=B
660 NEXTI:END
690 PRINT#2,C:RETURN
695 REMARK  LINES 600-690 OUTPUT TO DISK, LINES 900-960 OUTPUT TO LINEPRINTER
900 POKE16383,32:L=1:A=PEEK(15360):IFA<129THENA=32
910 FORI=15361TO16383:B=PEEK(I):IFB<129THENB=32
920 IFB=AANDA=32THENL=L+1:GOTO960
930 IFB=32THENL=1:LPRINTA;:A=B:GOTO960
940 IFA=32THENLPRINT192+L;:GOTO955
950 LPRINTA;
955 A=B
960 NEXTI:END
65000 'SIX
```

Listing 7: *Program to display data stored in the compressed format.*

```
800 DEFINTI-N:ONERRORGOTO830:CLS
820 READJ:PRINTCHR$(J);:GOTO820
830 RESUME840
840 POKE 16383,149
850 GOTO 850
```

Listing 7 continued on page 180

ters (such as blanks, letters, or numbers) because these can be more efficiently printed using PRINT statements. If you have both graphics and alphanumeric characters on the screen, the programs shown here will treat alphanumerics as a series of blanks for DATA purposes.

The next routine, listing 7, displays the data from the DATA statements created using listing 3 and the data file from listing 6, PRINTCHR. This routine requires graphics characters on every line. If you go more than sixty-three successive blank spaces, you will get a function error, so we are assuming that graphics will be present on every line.

In the sample data in listing 7, the last item in the DATA statements would give us a function error, so we did not use it in this particular example. Instead, a 149 was POKEd into the space (16383).

One problem that must be solved concerns the method of ending the loop that contains the DATA statements. For example, the three BASIC statements in line 820 of listing 7 are an endless loop that reads an item from the DATA statement and prints it. If we plan to use the same routine for different sets of DATA statements, we need to get the program out of the loop after it has read the last item of data; if we do not, the program will end immediately with an out-of-data error.

There are several ways this problem can be approached. Although tedious, we could count the number of items in the data statements and put the READ statement in a do-loop. We could also append a certain flag value (one that would not otherwise be in a valid list of data) to the end of the data statements and put the READ statement in a loop that stops when it reads the flag value. Instead, we decided to use the ON ERROR GOTO option that is available *in* Level II BASIC.

In listing 7, the ON ERROR GOTO 830 (in line 800) is executed when the READ tries to read past the last data value. (Without this statement, the program would end.) The RESUME 840 statement at line 830 causes the program to continue, even after what would otherwise be a fatal error. The loop to itself at line 850 allows us to fill the entire video screen with the picture being displayed, without ending the program and scrolling the

Listing 7 continued:

```
1905 DATA194,170,191,159,143,143,143,143,143,143,143,143,143,143,143,143,143,143
,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143
,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143,143
1910 DATA143,143,143,175,191,149,194,170,191,149,248,170,191,149,194,170,191,149
,248,170,191,149,194,170,191,149,248,170,191,149,194,170,191,149,209,160,176,176
,191,131,131,131,131,131,131,131,131,131,131,131,131,131,131,131,131,131,131
1915 DATA131,131,131,171,149,204,170,191,149,194,170,191,149,208,184,135,194,191
,193,138,181,193,186,133,170,149,130,171,151,129,170,151,131,129,170,181,158,129
,193,170,149,204,170,191,149,194,170,191,149,206,160,158,129,195,191,194,171
1920 DATA188,151,193,170,149,193,170,149,193,170,151,194,170,159,180,194,170,149
,204,170,191,149,194,170,191,149,201,188,140,140,140,140,143,188,140,140,140,188
,191,195,131,194,130,129,193,130,129,193,130,131,131,129,130,129,130,129,193
1925 DATA170,149,204,170,191,149,194,170,191,149,201,191,184,151,131,131,175,182
,173,144,131,191,191,193,170,149,170,189,180,191,193,190,131,141,195,160,190,135
,131,131,175,180,170,149,204,170,191,149,194,170,191,149,200,160,191,167,190
1930 DATA135,175,180,139,189,155,180,191,191,193,170,149,170,149,131,191,193,175
,176,156,176,193,184,159,161,190,135,175,180,139,191,149,204,170,191,149,194,170
,191,149,200,130,129,191,153,183,157,187,149,130,175,182,179,191,176,176,176
1935 DATA176,176,176,176,176,176,176,176,176,190,135,193,191,153,183,157,187,149
,170,157,132,203,170,191,149,194,170,191,149,202,130,175,180,190,135,213,130,175
,180,190,135,207,170,191,149,194,170,191,149,248,170,191,149,194,170,191,149
1940 DATA248,170,191,149,194,170,191,149,248,170,191,149,194,170,191,189,188,188
,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188
,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,188
1945 DATA188,188,188,188,188,188,188,188,188,188,188,188,188,188,188,190,191
65000 'SEVEN
```

Listing 8: *Routine to convert the graphics data to strings of characters.*

```
1100 POKE16383,32:OPEN"O",2,"PRINTSTR":L=1:A=PEEK(15360):IFA<129THENA=32
1110 FORI=15361TO16383:B=PEEK(I):IFB<129THENB=32
1120 IFB=ATHENL=L+1:GOTO1160
1130 PRINT#2,L","A:L=1:A=B
1160 NEXTI:END
1170 REMARK--PRINT OUT TO DISK
65000 'EIGHT
```

top two lines off the top of the screen.

Graphics Using STRING$

From an examination of the DATA statements in listing 7 it is apparent that we still have a lot of repetition. This is especially true when we print a straight line or a solid area of graphics. In order to save even further on DATA items and to speed program execution, the DATA may be rearranged to allow the printing of strings of identical characters (in much the same way that we printed a line of "set" graphics points in listing 2).

The STRING$(X,Y) command in Level II BASIC allows us to print X identical characters, each of which has an ASCII value of Y. When reading the video screen with PEEK statements, we will be looking for identical adjacent values. The data we print to a disk file (and later translate to DATA statements) will be a pair of numbers, the first number being the repetition factor and the second being the ASCII value of the character to be repeated. This method has been used to create the data file PRINTSTR in listing 8, and it displays graphics faster than previous methods.

Please note that in each of these programs that use PRINT for output purposes, the very last character on the screen (position 16,383) will not print, so if any SET, RESET, or POKE had been done into this area in the original program, it would be left blank. Your program could remedy this by POKEing 16383 with the proper value.

Listing 9 restores the graphics image to the video screen by reading the data items in the DATA statements (again created by the PRINTSTR file and listing 3). This program reads pairs of data items and prints them using STRING$ in line 1420 to expand the pair of numbers to a string of proper length.

Listing 9 demonstrates that it is possible to extend the number of lines on which graphics are not required. However, they must still be present on at least every fourth line, because the length of each string must be less than or equal to 255, a limitation of Level II BASIC.

Combining Methods

Listing 10 (to create the data file FASTER) and listing 11 (to print the image from the DATA statements) refine the above method by storing a single data item instead of a data pair, when the character being repeated is a space (decimal value 32). Since the

Text continued on page 184

Teach your little Apple big-time electronic mail.

To the average manager, electronic mail means bells, whistles and fans. It means expensive special phone lines. It means a fussy, exotic mainframe that only data processing zealots understand, and only committees of senior corporate vice presidents authorize for acquisition. To top it off, the system is useless for communications outside your own company.

But now there's Micro-Courier.™ A system that gives you all the electronic mail you'll ever need without draining the corporate treasury, or entangling you in corporate red tape.

All it takes is a trip to your local Apple™ computer dealer, who can install low-cost Micro-Courier software on any Apple II desktop computer.

The rest of the equipment you already have. Your own phone line. Micro-Courier communicates over standard telephone lines, and it's designed to let you take advantage of late-night transmission rates. While you're home in bed, your Micro-Courier system will send 1,000 words of text in one minute for less than a quarter. A comparable TWX® message costs $4.32.

But text is only the beginning. Because Micro-Courier will electronically mail much more. Charts, graphs, VisiCalc™ reports and complete programs. Built-in error checking (the kind found on big computers) ensures accurate transmission.

What's more, the system is menu-driven, so it asks for your commands in plain English. It maintains phone lists and sorts messages by individual user. Its documentation is clear and nontechnical. And the scope of your network is virtually limitless, because Micro-Courier will exchange information with time-sharing systems and larger computers.

Call our toll-free number today.

MICROCOM

We make little computers talk big.

Even little budgets can now buy big-time electronic mail. Call 800-547-5995, ext. 188, toll-free, for the Micro-Courier-Apple dealer nearest you. *Dealer inquiries invited.*

Microcom, Inc., 6 Faneuil Hall Marketplace, Boston, MA 02109. (617) 367-6362

Apple and Apple II are trademarks of Apple Computer, Inc. VisiCalc is a trademark of Personal Software, Inc. TWX is a trademark of Western Union, Inc.

Circle 241 on inquiry card.

Listing 9: *Routine to display graphics data converted to strings of characters.*

```
1390 CLEAR 3000
1400 DEFINTI-N:ONERRORGOTO1430:CLS
1420 READI,J:PRINTSTRING$(I,J);:GOTO1420
1430 RESUME1440
1440 POKE 16383,149
1450 GOTO 1450
1905 DATA2,32,1,170,1,191,1,159,56,143,1,175,1,191,1,149,2,32,1,170,1,191,1,149,
56,32,1,170,1,191,1,149,2,32,1,170,1,191,1,149,56,32,1,170,1,191,1,149,2,32,1,17
0,1,191,1,149,56,32,1,170,1,191,1,149,2,32,1,170,1,191,1,149,17,32,1,160,2,176
1910 DATA1,191,21,131,1,171,1,149,12,32,1,170,1,191,1,149,2,32,1,170,1,191,1,149
,16,32,1,184,1,135,2,32,1,191,1,32,1,138,1,181,1,32,1,186,1,133,1,170,1,149,1,13
0,1,171,1,151,1,129,1,170,1,151,1,131,1,129,1,170,1,181,1,158,1,129,1,32,1,170
1915 DATA1,149,12,32,1,170,1,191,1,149,2,32,1,170,1,191,1,149,14,32,1,160,1,158,
1,129,3,32,1,191,2,32,1,171,1,188,1,151,1,32,1,170,1,149,1,32,1,170,1,149,1,32,1
,170,1,151,2,32,1,170,1,159,1,180,2,32,1,170,1,149,12,32,1,170,1,191,1,149,2
1920 DATA32,1,170,1,191,1,149,9,32,1,188,4,140,1,143,1,188,3,140,1,188,1,191,3,3
2,1,131,2,32,1,130,1,129,1,32,1,130,1,129,1,32,1,130,2,131,1,129,1,130,1,129,1,1
30,1,129,1,32,1,170,1,149,12,32,1,170,1,191,1,149,2,32,1,170,1,191,1,149,9,32
1925 DATA1,191,1,184,1,151,2,131,1,175,1,182,1,173,1,144,1,131,2,191,1,32,1,170,
1,149,1,170,1,189,1,180,1,191,1,32,1,190,1,131,1,141,3,32,1,160,1,190,1,135,2,13
1,1,175,1,180,1,170,1,149,12,32,1,170,1,191,1,149,2,32,1,170,1,191,1,149,8,32
1930 DATA1,160,1,191,1,167,1,190,1,135,1,175,1,180,1,139,1,189,1,155,1,180,2,191
,1,32,1,170,1,149,1,170,1,149,1,131,1,191,1,32,1,175,1,176,1,156,1,176,1,32,1,18
4,1,159,1,161,1,190,1,135,1,175,1,180,1,139,1,191,1,149,12,32,1,170,1,191,1,149
1935 DATA2,32,1,170,1,191,1,149,8,32,1,130,1,129,1,191,1,153,1,183,1,157,1,187,1
,149,1,130,1,175,1,182,1,179,1,191,12,176,1,190,1,135,1,32,1,191,1,153,1,183,1,1
57,1,187,1,149,1,170,1,157,1,132,11,32,1,170,1,191,1,149,2,32,1,170,1,191,1,149
1940 DATA10,32,1,130,1,175,1,180,1,190,1,135,21,32,1,130,1,175,1,180,1,190,1,135
,15,32,1,170,1,191,1,149,2,32,1,170,1,191,1,149,56,32,1,170,1,191,1,149,2,32,1,1
70,1,191,1,149,56,32,1,170,1,191,1,149,2,32,1,170,1,191,1,149,56,32,1,170,1,191
1945 DATA1,149,2,32,1,170,1,191,1,189,56,188,1,190,1,191
65000 'NINE
```

Listing 10: *Routine to generate a more compact graphics data file.*

```
1500 POKE16383,32:L=1:A=PEEK(15360):IFA<129THENA=32
1505 OPEN"O",2,"FASTER"
1510 FORI=15361TO16383:B=PEEK(I):IFB<129THENB=32
1520 IFB=ATHENL=L+1:GOTO1560
1530 IFA=32THENLPRINT192+L;ELSELPRINTL;A;
1535 IFA=32THENPRINT#2,192+LELSEPRINT#2,L","A
1540 L=1:A=B
1560 NEXTI:END
1570 REMARK--PROGRAM LISTING NUMBER TEN TO PRINT OUT LISTING FOR NEXT PROGRAM AN
D SEND IT TO DISK
1580 REMARK--IF HARD COPY IS NOT DESIRED, ELIMINATE LINE 1530
65000 'TEN
```

Listing 11: *Routine to display data as created by listing 10.*

```
1690 CLEAR 3000
1700 DEFINTI-N:ONERRORGOTO1730:CLS
1720 READI:IFI<192THENREADJ:PRINTSTRING$(I,J);ELSEPRINTCHR$(I);
1725 GOTO1720
1730 RESUME1740
1740 POKE 16383,149
1745 GOTO 1745
1750 REMARK--PROGRAM NUMBER ELEVEN LINES 1600-1740
1905 DATA194,1,170,1,191,1,159,56,143,1,175,1,191,1,149,194,1,170,1,191,1,149,24
8,1,170,1,191,1,149,194,1,170,1,191,1,149,248,1,170,1,191,1,149,194,1,170,1,191,
1,149,248,1,170,1,191,1,149,194,1,170,1,191,1,149,209,1,160,2,176,1,191,21,131
1910 DATA1,171,1,149,204,1,170,1,191,1,149,194,1,170,1,191,1,149,208,1,184,1,135
,194,1,191,193,1,138,1,181,193,1,186,1,133,1,170,1,149,1,130,1,171,1,151,1,129,1
,170,1,151,1,131,1,129,1,170,1,181,1,158,1,129,193,1,170,1,149,204,1,170,1,191
1915 DATA1,149,194,1,170,1,191,1,149,206,1,160,1,158,1,129,195,1,191,194,1,171,1
,188,1,151,193,1,170,1,149,193,1,170,1,149,193,1,170,1,151,194,1,170,1,159,1,180
,194,1,170,1,149,204,1,170,1,191,1,149,194,1,170,1,191,1,149,201,1,188,4,140
1920 DATA1,143,1,188,3,140,1,188,1,191,195,1,131,194,1,130,1,129,193,1,130,1,129
,193,1,130,2,131,1,129,1,130,1,129,1,130,1,129,193,1,170,1,149,204,1,170,1,191,1
,149,194,1,170,1,191,1,149,201,1,191,1,184,1,151,2,131,1,175,1,182,1,173,1,144
1925 DATA1,131,2,191,193,1,170,1,149,1,170,1,189,1,180,1,191,193,1,190,1,131,1,1
41,195,1,160,1,190,1,135,2,131,1,175,1,180,1,170,1,149,204,1,170,1,191,1,149,194
,1,170,1,191,1,149,200,1,160,1,191,1,167,1,190,1,135,1,175,1,180,1,139,1,189
1930 DATA1,155,1,180,2,191,193,1,170,1,149,1,170,1,149,1,131,1,191,193,1,175,1,1
76,1,156,1,176,193,1,184,1,159,1,161,1,190,1,135,1,175,1,180,1,139,1,191,1,149,2
04,1,170,1,191,1,149,194,1,170,1,191,1,149,200,1,130,1,129,1,191,1,153,1,183
1935 DATA1,157,1,187,1,149,1,130,1,175,1,182,1,179,1,191,12,176,1,190,1,135,193,
1,191,1,153,1,183,1,157,1,187,1,149,1,170,1,157,1,132,203,1,170,1,191,1,149,194,
1,170,1,191,1,149,202,1,130,1,175,1,180,1,190,1,135,213,1,130,1,175,1,180,1,190
1940 DATA1,135,207,1,170,1,191,1,149,194,1,170,1,191,1,149,248,1,170,1,191,1,149
,194,1,170,1,191,1,149,248,1,170,1,191,1,149,194,1,170,1,191,1,149,248,1,170,1,1
91,1,149,194,1,170,1,191,1,189,56,188,1,190,1,191
65000 'ELEVEN
```

Nestar Is Growing a Local Network for You.

Centralized data processing is under pressure. Managers compete for computer time and complain about the lengthy justification process for new applications. Individual users at their terminals are frustrated by unacceptable response times. When the system goes down, everybody's DP-dependent work grinds to a halt.

High Productivity

Nestar's Cluster/One, Model A is a local network of Apple® computers that lets people get on with productive work instead of waiting in line. Since every user station is a computer in itself, response time is fast, and downtime problems are restricted to single individuals. The net result: productivity grows as your network grows.

More for Less

Nestar's Cluster/One is a true local network, not merely a limited function shared disk system. This means your company enjoys the benefits of shared data, station-to-station communication (including electronic mail), *and* the reduced costs of shared peripherals. Since Cluster/One is microcomputer-based, its cost-per-station is dramatically lower than other systems with similar capabilities, including mini-based systems. And the more people on the network, the greater your savings!



We're Growing Our List of Applications

Cluster/One is working right now — in banking, manufacturing, the travel industry, schools, and many other institutions and businesses. Software for the application you have in mind may also exist right now — literally thousands of programs have been written for Apple.

Plant One Now!

We're ready to ship immediately. So if you're working on the problems of DP overload, consider the Cluster/One from Nestar. It's a solution that grows on you. For more information, contact us at: Nestar Systems, Inc., 2585 East Bayshore Road, Palo Alto, CA 94303, 415/493-2223

NESTAR

® Apple is a registered trademark of Apple Computers, Inc.

Listing 12: *Routine that converts screen data to the most compact, fastest form discussed in this article.*

```
1800 POKE16383,149:L=1:A=PEEK(15360):IFA<129THENA=32
1805 OPEN"O",2,"FASTEST"
1810 FORI=15361TO16383:B=PEEK(I):IFB<129THENB=32
1820 IFB=ATHENL=L+1:GOTO1860
1830 IF A=32 THEN PRINT#2,192+L:ELSE IF L=1 PRINT#2,AELSEPRINT#2,L","A
1840 L=1:A=B
1860 NEXTI:END
65000 'TWELVE
```

Listing 13: *Routine to display the compressed data generated by listing 12.*

```
1905 DATA194,170,191,159,56,143,175,191,149,194,170,191,149,248,170,191,149,194,
170,191,149,248,170,191,149,194,170,191,149,248,170,191,149,194,170,191,149,209,
160,2,176,191,21,131,171,149,204,170,191,149,194,170,191,149,208,184,135,194
1910 DATA191,193,138,181,193,186,133,170,149,130,171,151,129,170,151,131,129,170
,181,158,129,193,170,149,204,170,191,149,194,170,191,149,206,160,158,129,195,191
,194,171,188,151,193,170,149,193,170,149,193,170,151,194,170,159,180,194,170
1915 DATA149,204,170,191,149,194,170,191,149,201,188,4,140,143,188,3,140,188,191
,195,131,194,130,129,193,130,129,193,130,2,131,129,130,129,130,129,193,170,149,2
04,170,191,149,194,170,191,149,201,191,184,151,2,131,175,182,173,144,131,2,191
1920 DATA193,170,149,170,189,180,191,193,190,131,141,195,160,190,135,2,131,175,1
80,170,149,204,170,191,149,194,170,191,149,200,160,191,167,190,135,175,180,139,1
89,155,180,2,191,193,170,149,170,149,131,191,193,175,176,156,176,193,184,159
1925 DATA161,190,135,175,180,139,191,149,204,170,191,149,194,170,191,149,200,130
,129,191,153,183,157,187,149,130,175,182,179,191,12,176,190,135,193,191,153,183,
157,187,149,170,157,132,203,170,191,149,194,170,191,149,202,130,175,180,190,135
1930 DATA213,130,175,180,190,135,207,170,191,149,194,170,191,149,248,170,191,149
,194,170,191,149,248,170,191,149,194,170,191,149,248,170,191,149,194,170,191,189
,56,188,190,191
2000 DEFINTI-N:ONERRORGOTO2030:CLS
2020 READI:IFI<129THENREADJ:PRINTSTRING$(I,J);ELSEPRINTCHR$(I);
2025 GOTO2020
2030 RESUME2040
2040 POKE 16383,149
2045 GOTO 2045
2050 REMARK--PROGRAM NUMBER THIRTEEN TO EXECUTE PRINTOUT LINES 1900-2040
65000 'THIRTEEN
```

Text continued from page 180:

tab characters have a decimal value of 193 or greater, listing 11 can distinguish between tab values (to be printed using CHR$) and number pairs (to be printed using STRING$). This gives us a slight improvement in speed over the previous method.

A variation of this program comes to mind, since the number 1 is really not needed when using the STRING$ function. If the length of the string is 1, we can PRINT CHR$(176), instead of using STRING$(1,176) as we would when using a number pair (see line 1910 of listing 11). That being the case, it is possible to rewrite the routine and, by adding one statement, tell the computer to go ahead and print out only 1 character.

Features of several of these programs may be combined. The space saver, which prints a series of spaces as the value 192 plus the number of spaces (as done in listings 6 and 7), may be combined with printing of a string of graphic characters using STRING$ (see listings 8 and 9). By combining these with the length-1 technique discussed above, we have a slightly more complicated program. It does, however, run a bit faster than its predecessor and uses much less memory in the DATA statements.

The final (and fastest) version of this program is given in listings 12 and 13. Using the three techniques just discussed, listing 12 writes data values out to the data file FASTEST. When this data is converted to DATA statements (by running listing 3), the program in listing 13 (which includes the data statements) uses them to recreate the original picture on the video screen.

Conclusions

These programs serve to illustrate alternative methods of using graphics on the TRS-80 Model I with Level II BASIC. These are not the only techniques that can be used, but are merely our suggestions for ideas you can try in some of your programs.

In some cases you will be sacrificing memory space for printout speed. The decision as to which of these methods is best for your particular program rests solely with you. The easiest way to find out is to put the various routines into programs and experiment with them.■

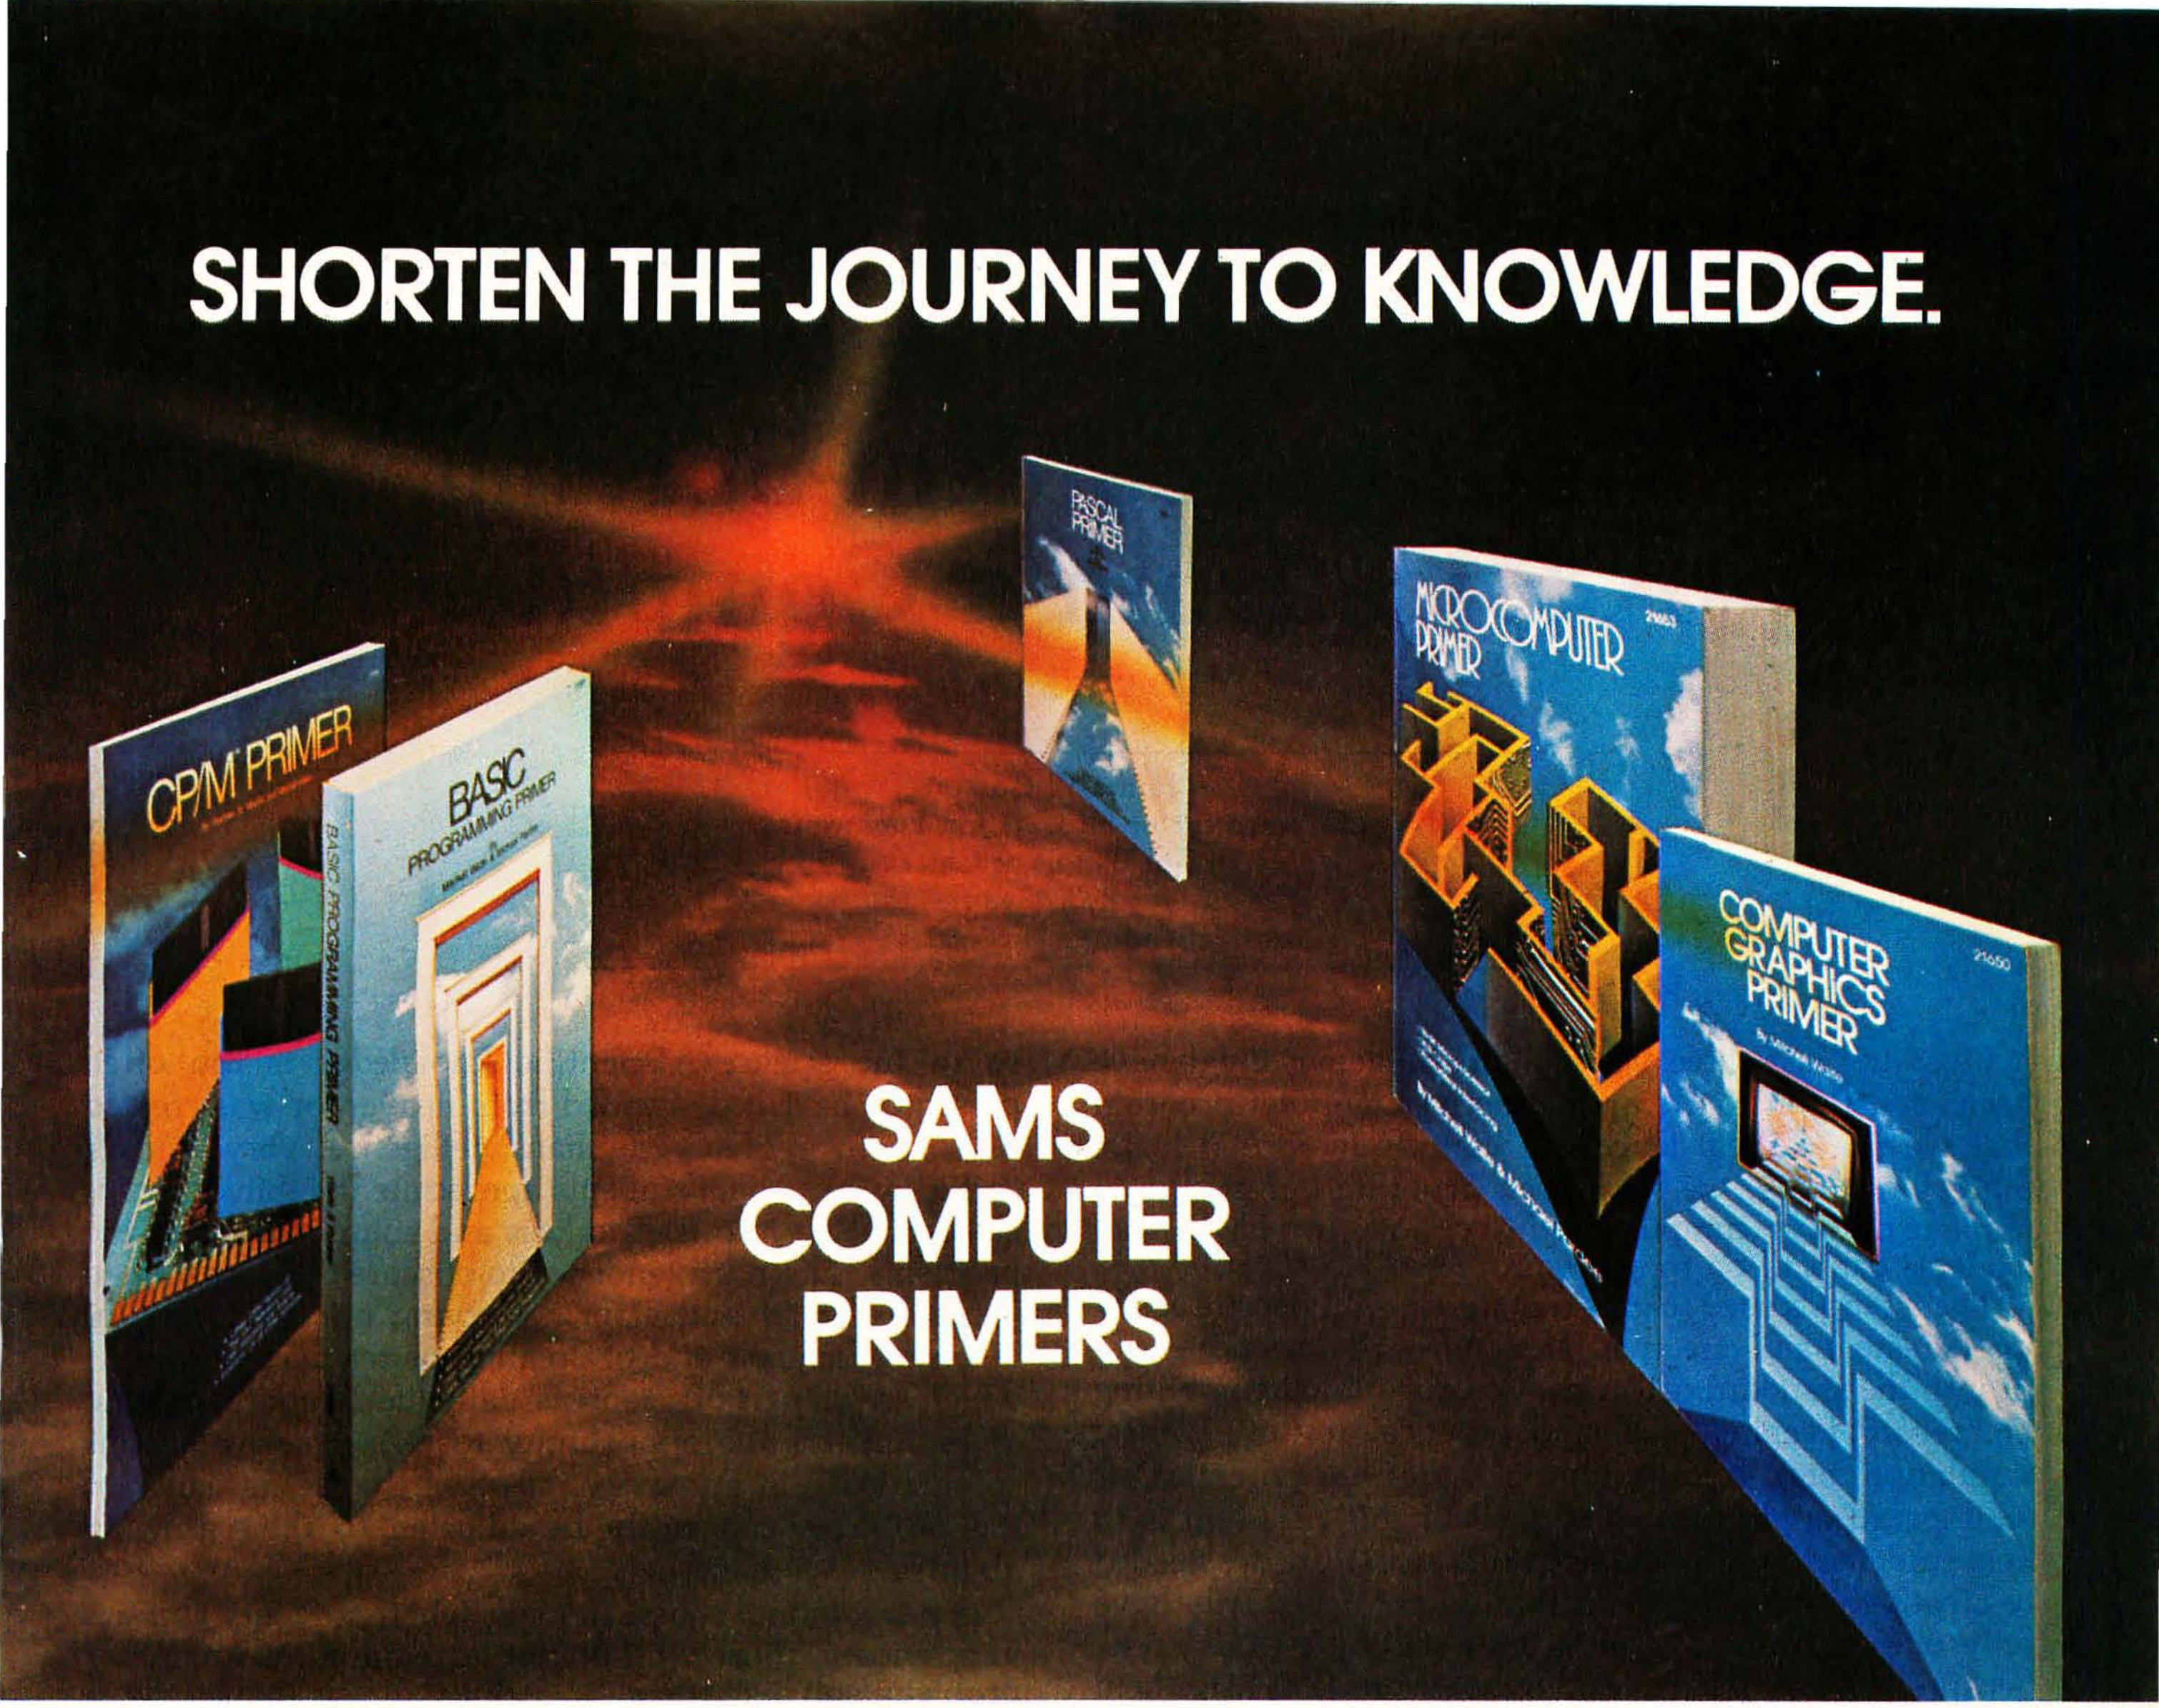
SHORTEN THE JOURNEY TO KNOWLEDGE.
CP/M PRIMER
BASIC PROGRAMMING PRIMER
PASCAL PRIMER
MICROCOMPUTER PRIMER
COMPUTER GRAPHICS PRIMER
SAMS COMPUTER PRIMERS

Getting Problem-Solving Advice from a Computer

James W Garson
Department of Information Engineering
University of Illinois at Chicago Circle
Box 4348
Chicago Il 60680

Over the last three years, Paul Mellema and I have been at work on EMIL, an interactive computer program that we use to help teach our courses in formal logic. Since June 1979, we have been devoting our efforts to implementing a computerized "copilot" for EMIL that students can call on to solve problems.

The methods used to give our students advice are easily implemented and effective. The approach does not easily fit into the standard categories of educational computing (ie: record keeping, drill and practice, testing, games, simulation, etc). It is an approach that has potential for widespread application. The goal of this program is to help students develop and use skills and strategies needed to creatively solve problems that do not necessarily have only one solution. The program is Socratic in its style, because it asks students leading questions that help them analyze and resolve their difficulties.

In the study of formal logic, students are required to construct formal proofs. A proof is a series of statements leading to a conclusion. Each step of the proof is assumed to be true or derived from previous steps according to the rules of logic. The proof is intended to demonstrate that the conclusion follows logically from the assumptions.

Learning this type of thinking is valuable to students not only because it can lead to a mastery of logic, but because it also gives students experience in the kind of creative problem solving characteristic of mathematics, theoretical science, and many other disciplines and real-life pursuits.

Giving students practice in the creative solution of formal problems is important in education and particularly so in the sciences. Scientific knowledge is too often presented as if it descended from heaven or was created by some form of superhuman intelligence. Very little effort is given to help students appreciate the thinking processes that go into the analysis and solution of scientific problems. There is a tendency to obscure the very human process of trial and error, of trying out strategies, of assessing failures, and of creating better lines of attack, which are all part of scientists' daily life. A course in logic gives students the opportunity to refine their problem-solving skills in an environment where the difficulty of the problems can easily be adjusted to their growing abilities.

In a traditional course in logic, where students' abilities vary widely, those who do not have an initial knack for problem solving are at a serious disadvantage. Even when strategies for proof building are carefully discussed in class, some students invariably complain that they cannot solve a new problem on their own in spite of understanding the lectures. Part of this difficulty is that some students cannot convert verbal explanations of techniques into strategies for dealing with new situations. Their problem is somewhat similar to that of a student driver who has mastered a lecture on how to operate a car, but cannot convert this knowledge into the appropriate series of actions for handling a real car on a real road. Driver training classes overcome this problem by using the guidance of a copilot who helps correct errors while the students practice the task.

Similar sorts of tutoring are very effective for helping students who cannot apply the verbal knowledge about logic to the construction of proofs. If students are asked to "think out loud" while attempting a proof, a gentle nudge here and there often leads to success. If they do not understand the rules or simply have not bothered to learn them, guiding them through a few proofs tends to straighten things out quickly, and it improves confidence and motivation. Just as in teaching most skills, effective methods involve letting students perform given tasks under guidance. Lecturing on the proper procedures and telling students to "go home and do likewise" is relatively ineffective.

About the Author

James Garson is a member of the Department of Information Engineering, University of Illinois at Chicago Circle. This article is a revised version of a paper he delivered to the National Educational Computer Conference, June 1980, in Norfolk VA. The work described was carried out under the National Science Foundation Grant Number SER79-00527. This article does not represent the views of that foundation. Another article by Mr Garson, "The Case Against Multiple Choice," can be found in The Computing Teacher, *February-March 1980, page 29.*

CRYSTALWARE

12215 MURPHY AVENUE,
SAN MARTIN, CALIFORNIA 95046

THE FINEST IN FANTASY GAME SOFTWARE

APPLE	ATARI	PET	TRS-80
48K — w/disk	48K — w/disk	32K — w/disk	48 — w/disk

SPACE GAMES — Climb aboard the Starship Herman

GALACTIC QUEST Warp through the 64 solar systems in Hires graphics with Crystalsonics sound. Fire lasers and rifter pods as you battle the Vegans in real time simulation. In Galatic Quest we have attempted to combine the best elements of a Star Trek type game with one similar to Space Trader. What is Skishi and where is the Pleasure Planet? In some systems, lurking behind swarms of asteroids, are Space Pirates who will gut your ship and leave you a derelict in space. To win Galactic Quest you must be shrewd a business man as well as a top notch warrior. $29.95

LASAR WARS — Attacking aliens in 3D. Thousands of approach simulations and 10 levels of difficulty. Three kinds of invader craft scored by size and attack mode. An exciting Invaders type game with perspective and sound. For fantasy enthusiasts from 8 to 80. $29.95

SANDS OF MARS — You embark on the Maiden Voyage of the Starship Herman. This game takes up almost 200K and uses 2 disks. It includes more than 300 Hires screens animated scenarios, a 3 dimensional maze, and a Martian labyrinth drawn entirely with hexagons. The takeoff and landing sequences are paddle or joystick controlled for the Apple and Atari and the game has 5 full scenarios. Once you land on Mars, you wander through fields of Sasquati and Degwat. Beware of the Vishu and the Lizardmen of Meshim. Seek the wise Mudra and unlock secrets hidden for centuries. Glyphs written on the Martian Sand hold the key to the mystery for which we offer $100 to the first to solve it. To answer a question we have been asked many times — yes, Sands of Mars attempts to fully utilize the sound and graphics capabilities of the Apple and Atari to their max! $39.95

ADVENTURES — Cross the threshold to new worlds.



HOUSE OF USHER —Walk the dreaded corridors of the deadly House of Usher. Complete with 40 rooms and hundreds of aggressive monsters and unique treasures. This is not your typical text adventure game but goes far beyond that, with animated monsters and a visual display of each room. We believe this to be the first indoor-outdoor game ever written for a microcomputer game which includes graphics. You may choose to wander through Usher's scenic garden paths or brave the perils of the graveyard and descend into the crypt. Beneath the house there are labyrinths, shrinking rooms, and torture chambers with no doors or windows. Your character may pick up, drop, or use objects, fire arrows, or run frantically for the door when pursued by some loathsome creature. As the old grandfather clock ticks away, you will have until dawn to solve the Usher Mystery and win a real live $100 prize! $24.95

IMPERIAL WALKER (ATARI 16K) — For you Atari people out there, here's a fantastic game pack of 4 games with revolutionary new graphics routine and Crystalsonics. As Luke Skywalker you have taken control of an All Terrain Armored Transport and with your lasers are fending off the Imperial attack forces. Written especially for Atari by Mike Potter. The game pack also includes Laser Nim, Auto Race, and Gunfight. Will run on Atari 400 or 800 with disc and Joysticks. $29.95

ADVENTURELAND 2041 (Coming June 1) — Step with us through the Crystal door into the world of tomorrow's fantasy. In the great Outback of Australia in the year of 2041, will be built the greatest Adventureland of all time. Through your computer, you can experience six separate worlds of fantasy. These programs will take up more than 500,000 bytes of memory and fill 6 disks. Many of the options may be played by up to six players and in many cases against the computer itself. $59.95

WAR GAMES

WORLD WAR III — This is a three scenario war game in Hires graphics with sound. *It is not* merely the conversion of a board game to computer, nor are your pieces represented by lifeless text charcters. It may be played by two persons and takes about 8 hours to complete. The rules are simple enough that you won't have to spend several days reading your manual before you can play. It contains 2 world maps and a fairly detailed map of the Iran-Iraq battle field. All scoring, animation, and positions are handled by the computer — no separate tablets to fool with. Moves are input by both players in series of 3 and when the space bar is pressed the battle becomes animated. A must see to believe $29.95

WATERLOO (Coming July 1) — A war game with graphics very similar to World War III. We have attempted to make this as detailed as possible, down to what each individual is wearing, his line of sight, and the number of bullets he has fired. It will occupy two disks and may be saved over a period of weeks. We will be publishing more information on this in BYTE MAGAZINE in July. $49.95

And for you PET Users let us introduce you to . . . **VIGIL** A brand new language for the PET computer: Video Interactive Game Interpretive Language. Make your own shape tables in 80 x 50 graphics. Write your own exciting games with sound, using this versatile tool by Roy C. Wainwright. With this package are 9 full length graphic games. Space War, Maze, and many more. VIGIL is now in the PET world and because of its possible application even by the beginner, it's a fun language. Available only on disk/32K PET $99.95

Order line open 24 hrs / day (408) 683-0696

VISA We accept VISA & Mastercharge master charge

For good software, fast... We've got your number (203) 853-6880.

To get your software tomorrow, call Westico today.

Westico understands your microcomputer software needs. We know you want a good selection of software without the hassle of hunting all over for it... We know you want it fast... And we also know you want a product backed by service. With Westico you get all three.

We have an extensive list of quality software products for the serious microcomputer buyer — accounting, professional time accounting, text processing, planning and analysis, telecommunications, data management, development tools. And the list is growing.

Dial-up the 24-Hour Computer Hotline (203) 853-0816 (300 baud)

It's an on-line catalog, updated each day! See displays of all products and the latest version numbers and prices. Build a trial order without any obligation. Complete the order only if you wish. We also offer 24-hour delivery service. Call, write, Telex or dial-up today. C.O.D., Master Card and VISA accepted.

New from Westico

MILESTONE™: Tough Planning Jobs Made Easy

MILESTONE is a powerful new tool for managers and planners, which organizes complex projects and identifies job schedules essential to on-time completion.

MILESTONE finds the critical path through hundreds of interrelated tasks and determines where slack time can be eliminated.

Equally significant, MILESTONE computes manpower requirements and costs, . allocating them to proper schedule periods, and up to nine manpower skill/cost levels can be allocated to each task.

With MILESTONE, projects can be measured in hours, days, weeks, months, quarters or fiscal quarters; with provision to specify working hours, holidays, vacations and other non-productive time periods.

You can reschedule or complete tasks, revise prerequisites, play "What If" games. MILESTONE immediately displays the results on your screen or printer — either as a table or graph! It's easy to use and requires **no** programming!

System with full documentation, $295. Documentation alone, $25.

Versions for CP/M, APPLE PASCAL and CDOS.

Of course there are good reasons why tutoring is not widely used in introductory logic courses. These classes are usually quite large, so tutoring simply takes too much of the teacher's time. Besides that, grading formal proofs constructed by students is tedious, so teachers tend to give students relatively few exercises that require them to create such proofs. Even students who do well in logic generally do not get enough practice to develop very much skill. Often the teacher relies on exercises that require a single answer — exercises that ask students to give justifications for the steps of a completed proof. This does familiarize students with the rules, but it gives them no practice in the art of building up a proof.

Enter the Computer

Computers make it possible to simulate the tutoring situation. Students can enter their proofs at the terminal, and the computer can determine whether each line follows from previous lines and describe the difficulty if one does not. If students get lost, the computer can give advice on how to proceed.

In 1976 we wrote a program called EMIL that lets students enter their proofs at the terminal and monitors their progress. The program has been used in a variety of courses at Notre Dame and has recently been adopted at Rutgers University. EMIL has several advantages over other proof-checking programs. First, there are a large number of logic textbooks, each with its own version of the rules of logic. Our program is the only one that lets a teacher supply the program with the set of rules used in his or her class, instead of forcing the use of the text with the set of rules written into the program. Second, the EMIL program is extremely gentle with students' input and generally repairs typing mistakes rather than complaining about them. This is important because many students are unfamiliar both with the terminal keyboard and the notation of logic. Third, the program lets students enter statements at the bottom (ie: end) of the proof so they can work the proof backwards if they desire to do so.

We allow and, in fact, encourage this because effective proof-building requires an analysis not only of the statements already derived, but of the statement to be proved as well. Often the proof can be considerably simplified by using the goal statement as a guide for determining the steps previous to it. Our program allows students to employ such strategies right at the terminal, instead of submitting a finished product to the computer for checking. The fourth advantage of our program is the main topic of this article: since September of 1979 EMIL has been giving students good advice on how to solve problems they find difficult. In this way, it is providing a good portion of what can be offered by a human logic tutor.

Programming Strategies

There are several distinct approaches to designing a computer program that can offer advice on formal proof construction. The first is simply to store a completed version of each proof and a list of comments that are intended to help students who ask for aid in deriving a given line. If the comments prove unhelpful, students can ask to see the next line of the stored proof or, indeed, any number of lines up to and including the entire proof.

This hint approach requires that a completed proof

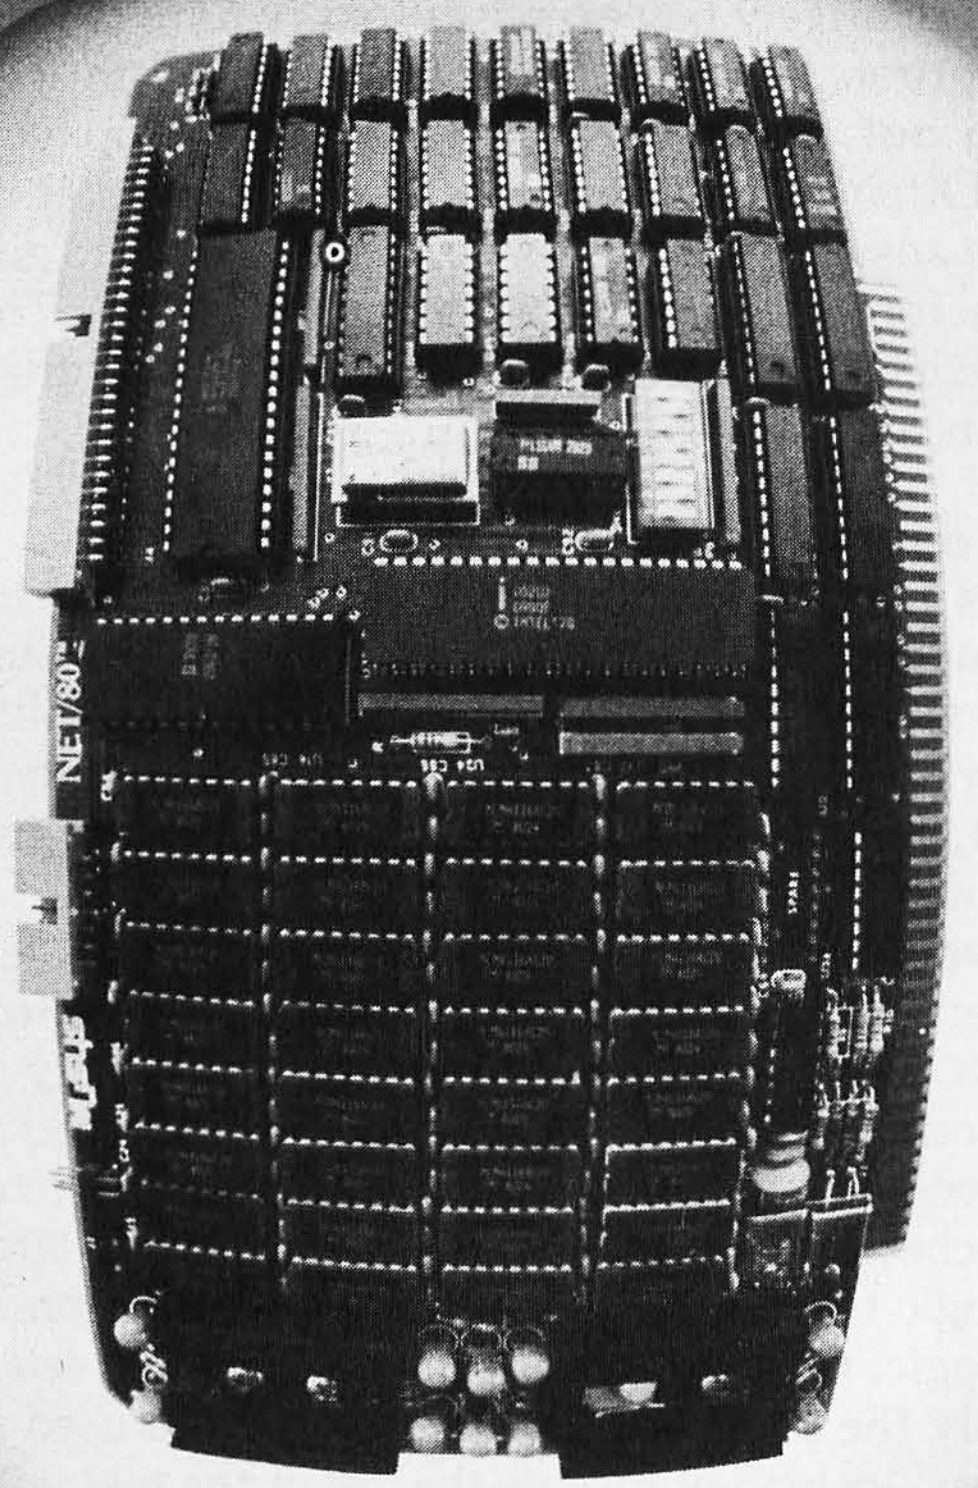

must be stored in the computer with appropriate comments for every problem students will work on. It also presupposes that there is only one reasonable sequence of steps that leads to the conclusion. If students approach a problem in an unusual way, there may not be enough similarity between their proofs and the stored proof for the computer to be of any help. Finally, it presupposes a top-to-bottom pattern of proof construction. But very often, from a given step in a proof, it is not at all apparent how to get to the conclusion. Such strategies must be explained with reference to what happens later in the proof. This sort of hint routine fails to help students appreciate global strategies that require knowledge not just of where the proof has been, but of where it is going. These are generally the most useful strategies.

Another technique is to write a program that allows the computer to generate a solution to students' problems and to recognize certain standard situations during the course of that solution. This strategy eliminates the need for storing a proof with commentary for each problem, since the computer generates its own solutions. But this strategy runs the risk of generating strange proofs that students are unlikely to recapitulate. Also, each formulation of the rules of logic would require its own custom-tailored program for generating proofs. Furthermore, the program to generate comments must be very carefully written to avoid misleading advice. Most importantly, this approach still does not help students to see global strategies; like the stored proof approach, it uses a top-to-bottom pattern of proof construction. So, this approach also confines itself to giving advice only about the next line of the proof.

Another difficulty with both of these approaches to the design for an advice giver is that the program does not attempt to construct advice on the basis of whatever progress the student may have already made on the proof. This tends to discourage invention of novel, yet promising, partial solutions. It can devalue students' creative abilities and lower their self-confidence. It dampens students' engagement in the problem-solving process while reinforcing stereotyped solutions.

Our Approach

The third approach to the design of an advice giver, the one we have adopted, overcomes these problems by paying more attention to the techniques actually used by human logic tutors. One of the main things a human tutor should do is to provide students with effective problem-solving tools for analyzing situations and for breaking problems into simpler subproblems. The same tools can then be applied to these simpler problems. An effective tutor does not give a solution or even pieces of it. Instead, the tutor provides an apprenticeship in the art of asking relevant questions, whose answers lead students to see how problems can be broken down into more manageable parts. Questions like "Can you apply this rule to statements you have already derived?" and "What rule could be used to derive a statement of this type?", when presented in a coherent sequence, are very effective for helping students develop strategies to be used effectively in a wide variety of proof-building problems.

The central function of our advice-giving program is simply to ask students leading questions and then branch

Say Ahh...

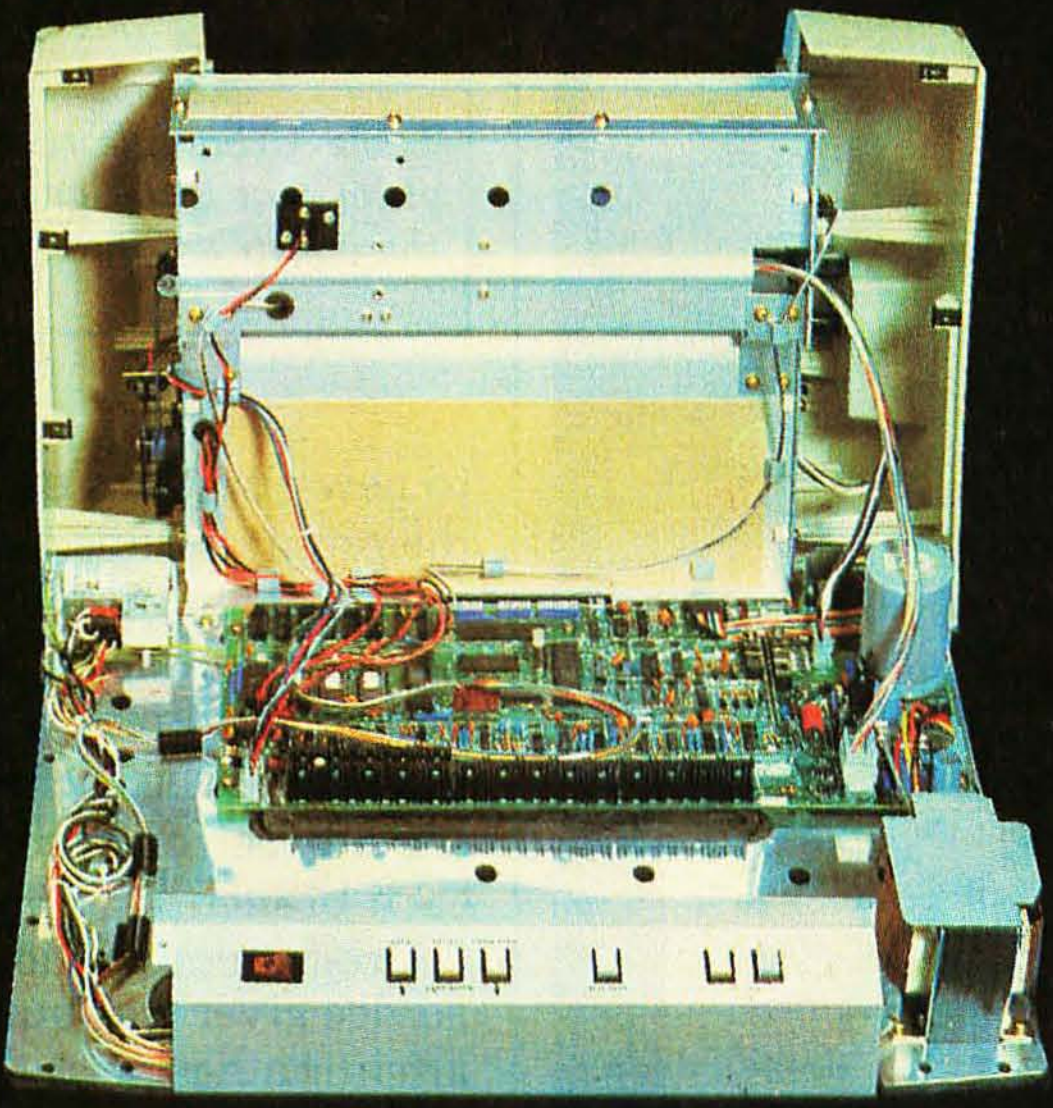

Our New grafixPLUS™ 80-column printer opens wide for easy servicing.

Introducing the newest members of our grafixPLUS™ family—the DP-9000 Series 80/132 column printers—built on the same tradition of quality printout, solid design and low cost of ownership established by our 132/220 column DP-9500 Series.

A Case for Serviceability

Not that is comes up often, but want to get inside? Simple. Just remove a few screws and the clamshell case swings open exposing all major components. This easy access plus built-in self-test and minimum component count yields an MTTR of one-half hour. The 9-wire print head replacement's even simpler . . . two screws and it's out. Without opening the case. And without a service call.

Performance Plus

The DP-9000 Series prints the full ASCII 96 character set, including descenders and underlining, bi-directionally, at up to 200 CPS. Number of columns can go up to 80 or 132, depending on character density—switch or data source selectable from 10 to 16.7 characters per inch. And all characters can be printed double width. The print head produces razor-sharp characters and high-density graphics with dot resolutions of 72X75 dots/inch under direct data source control.

Interface Flexibility

The three ASCII compatible interfaces (parallel, RS-232-C and current loop) are standard, so connecting your computer is usually a matter of plug-it-in and print. Also standard are: a sophisticated communications interface for printer control and full point-to-point communications, DEC PROTOCOL, and a 700 character FIFO buffer. An additional 2K buffer is optional.

When you're ready for a printer (or several thousand), look into the grafixPLUS DP-9000 Series from Anadex—you'll find an open and shut case for quality. Contact us today for details, discounts and demonstrations.

Anadex®
...the plus in printers

...close please.

SALES OFFICES: San Jose, CA (408) 247-3933
Fullerton, CA (714) 871-0501 • Wakefield, MA (617) 245-9160 • Austin, TX (512) 327-5250

ANADEX, INC. • 9825 DeSoto Avenue • Chatsworth, California 91311, U.S.A. • Telephone: (213) 998-8010 • TWX 910-494-2761
ANADEX, LTD. • Dorna House, Guildford Road • West End, Woking, Surrey GU24 9PW, England • Tel: Chobham (09905) 6333 • Telex: 858762 ANADEX G

```
1. 'CAN YOU APPLY MP TO ANY PROVEN LINES' 'Y' 2 'N' 3
   '*ANSWER YES OR NO'
2. 'APPLY MP TO THESE LINES' '*'
3. 'WHAT IS THE MAIN CONNECTIVE OF YOUR GOAL FOR-
MULA?' '&' 4 'V' 5 '->' 6 '*PLEASE ANSWER &, V OR ->'
```

Table 1: *Sample records from the question file of our program that is designed to give advice to students concerning the construction of formal proofs in logic courses.*

to new questions on the basis of the answers. Eventually, the program runs out of questions to ask, and specific advice is given on the basis of the information provided in the previous answers. (The questions can be thought of as being structured in a tree, with the path taken along the branches being determined by the students' answers and the advice for each situation being located at the tip of each branch.)

Programming the question-asking routines for our own advice giver was quite simple. Thus the main focus of our attention has been the creation of a file of questions with real pedagogical merit. Since the questions are not written into the structure of our program, modifying the question tree in response to what we learn about effective advice is a painless process that does not require any programming expertise.

Our question file has a very simple format. (See table 1.) Each record contains the text of a question followed by a list of acceptable answers. Each answer is followed by a number indicating which record to jump to in case the student responds with that answer. The last item in each record begins with a "*" (which indicates that there are no more acceptable answers) and contains text that is printed in case the student does not respond with one of the acceptable answers. Most of the questions we ask are answered with *yes* or *no*, but we found the use of other sorts of answers more convenient for certain questions. The text of the advice to be given is simply stored in the question file followed by "*". This indicates that this pseudoquestion has no acceptable answers, and the program should stop after printing the advice.

Expansion

We have built a number of improvements into this simple program. The first has to do with the fact that the sequence of the questions should vary depending on how much students have learned and how difficult their problems are. Our solution to this problem is to assign each problem a level number and to use this number to route the program to separate question trees for each level we have defined.

The second enhancement is motivated by the fact that we want to mention items in our questions that change during the execution of the program (for example, the last line number finished in the proof or the name of the rule to be used). Obviously the text of the questions in the file cannot mention specific line numbers or rule names. Our solution is to introduce variables that are replaced with the corresponding specific information just before the question is printed. We have adopted a convention that words beginning with "&" are variables, so a line of advice on our question file might read:

First compare quality. Then compare cost.

Morrow Designs' 10 megabyte hard disk system: $3,695.

MORE MEMORY. LESS MONEY.

Compare Morrow Designs' DISCUS™ M26™ hard disk systems to any system available for S-100 or Cromemco machines. First, compare features. Then, compare cost per megabyte. The M26 works out to under $200 a megabyte. And the M10 is about half the cost of competing systems.

COMPLETE SUBSYSTEMS.

Both the M10 (8"), and the M26 (14"), are delivered complete with disk controller, cables, fan, power supply, cabinet and CP/M® operating system. It's your choice: 10 Mb 8" at $3,695 or 26 Mb 14" at $4,995. That's single unit. Quantity prices are available.

BUILD TO FOUR DRIVES.

104 Megabytes with the M26. 40+ megabytes with the M10. Formatted. Additional drives: M26: $4,495. M10: $3,195. Quantity discounts available.

S-100, CROMEMCO AND NORTH STAR*

The M26 and M10 are sealed-media hard disk drives. Both S-100 controllers incorporate intelligence to supervise all data transfers through four I/O ports (command, 2 status and data). Transfers between drives and controllers are transparent to the CPU. The controller can also generate interrupts at the completion of each command ... materially increasing system throughput. Sectors are individually write-protectable for multi-use environments. North Star or Cromemco? Call Micro Mike's, Amarillo, TX, (806) 372-3633 for the software package that allows the M26 and M10 to run on North Star DOS. MICAH of Sausalito, CA, (415) 332-4443, offers a CP/M expanded to full Cromemco CDOS compatibility.

Morrow Designs' 26 megabyte hard disk system: $4,995.

AND NOW, MULT-I/O.™

Mult-I/O is an I/O controller that allows multi-terminal and multi-purpose use of S-100 and Cromemco computers. Three serial and two parallel output ports. Real time clock. Fully programmable interrupt controller. Designed with daisy-wheel printers in mind. Price: $299 (kit), $349 assembled and tested.

MAKE HARD COMPARISONS.

You'll find that Morrow Designs' hard disk systems offer the best price/performance ratios available for S-100, Cromemco and North Star computers. See the M26 and M10 hard disk subsystems at your computer dealer. Or, write Morrow Designs. Need information fast? Call us at (415) 524-2101.

Look to Morrow for answers.

MORROW DESIGNS

5221 Central Avenue
Richmond, CA 94804

*CP/M is a trademark of Digital Research Corp.
*Cromemco is a trademark of Cromemco, Inc.
*North Star is a trademark of North Star Computers, Inc.

"YOU SHOULD APPLY &RULE TO LINE &GNUM"

This directs the program to fill in the specific information about the rule name and line number, for example:

"YOU SHOULD APPLY MP TO LINE 5"

Although our advice-giving program was running with these two enhancements in September, we were still working on a central portion of the program the following January. We still had to program the most important improvement: the development of subroutines that can answer all the questions posed to students by the program and that can comment on any errors in students' responses. Though students are usually accurate in their responses, they occasionally make mistakes that can result in their receiving bad advice. But this is not the only reason for giving the computer the ability to monitor the correctness of students' responses.

Once students run the advice giver a number of times, they become bored with answering a number of seemingly pointless questions. The questions become pointless not because they are not needed in analyzing proof-construction problems in general, but because a particular portion of the analysis is not needed for the problem being dealt with. When the computer is capable of answering the questions itself, we can decide which questions at particular levels of difficulty should be printed at the terminal, and those the computer should answer for itself by examining the proof being worked on.

Experienced students may resent being asked any questions at all and may prefer the advice giver to merely print specific pieces of advice. However, we believe that for most students who need the advice giver in the first place, posing relevant questions is much more valuable to learning problem-solving skills than is obtaining advice.

Does It Work?

We now have a version of EMIL that answers all the questions it poses. We also have a method for indicating which questions are to be asked under the particular circumstances. There is a need to do more research on how obtrusive the advice giver ought to be in relation to students' progress and cognitive style. However, one of the advantages of our program is that we can easily control the circumstances under which questions are asked. In fact, our program allows the students to suppress the asking of questions if this bothers them.

There is a final reason for programming the computer so that it can answer all the questions: when this is done the program can traverse the question tree on its own and come up with relevant advice. Once advice is available, the program can follow it to construct proofs on its own. Judging from extensive tests of the program, our advice tree turns out to be highly, though not totally, effective for solving logic problems. It is capable of solving over 95% of the problems that we give to our students. This provides us with an important tool for improving our program. By running a large number of problems through our advice giver, we can determine the circumstances under which it is unable to do a proof. Then we use that information to create a more sophisticated version of our question file.

This approach to giving computerized advice has a


Catch the Greatest Show on Earth...
Quiet Designs
flexible disk
Quiet Designs

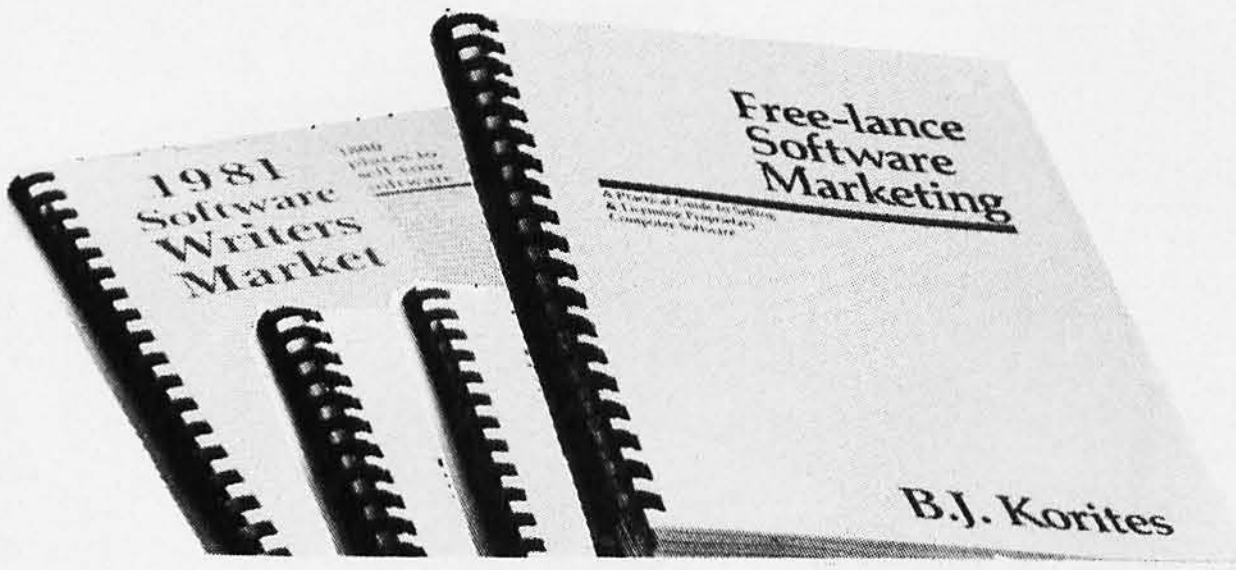

wide range of applications. It can be used, for example, to help college students with their physics homework, to determine the identity of unknowns in qualitative chemistry, to help medical students learn diagnosis, and even to help people determine what is wrong with their cars or whether they should itemize their deductions. All it takes is a simple program to run the questions and a question file that is carefully constructed to reflect the best strategies that people actually use to solve the kind of problems at issue. Depending on the context of its use, some or all of the enhancements to the basic program we have developed could be used.

It is worth pointing out exactly how our advice-giving program differs from the traditional way in which the multiple-choice format is used in CAI (computer-aided instruction). These differences are not particularly striking from the programmer's point of view. In both cases, programs are designed to ask questions and to select new questions on the basis of the answers. The advice-giving program requires a more elaborate branching structure and may differ in being unable to evaluate responses. But the important differences are the ones that are obvious to the educator: these have to do with the educational goals of the program.

The standard objective for using multiple-choice techniques is to help students learn certain facts. In the case of the advice-giving program, the answers are not part of what is being taught. It is the sequence of questions representing an effective problem-solving strategy that we would like students to master. By repeatedly exposing students to questions that have been proven effective in problem analysis, they learn to develop efficient strategies that can be used over a wide range of problems. The whole process of adopting principles of problem analysis is a valuable exercise of problem-solving skills that can be applied to any domain where creative thinking is required.

We should stress that despite our emphasis on strategy learning as an objective to advice-giving programs, the programs are also effective in giving factual information. From our advice giver, our students learn about the rules of logic, their names, their operation, and their functions in proofs. Also important is that our program helps expose students to this information at the exact times when it is most useful: this is the context when they are most likely to be receptive to learning these facts.

Although the advice-giving program may not look very different from standard multiple-choice "courseware" to the programmer, it has radically different educational goals — the most important of which is the development of problem-solving abilities. Given the simplicity of the programming effort as compared to games and simulations, the advice-giving program is particularly attractive for educators interested in developing students' creativity.■

Education Forum is an occasional feature in BYTE intended to foster debate about the uses of personal computers in the schools and colleges. We encourage reader participation. Contributors should supply their full names and addresses for publication, along with their telephone numbers, which will not be published.

CUSTOM PRODUCTS

DESIGN • LAYOUT
MANUFACTURING



R ^{2}I/O
ROM/RAM & I/O

S-100 PRODUCTS



ECT-100-F
RACKMOUNT CARD CAGES

ECT™



RM-10
CARD CAGE & POWER SUPPLY



8080 CPU
CENTRAL PROCESSING UNITS



16K RAM
FULLY STATIC MEMORY

BUILDING BLOCKS FOR MICROCOMPUTER SYSTEMS, DEDICATED CONTROLLERS AND TEST EQUIPMENT

CARD CAGES, POWER SUPPLIES
MAINFRAMES, CPU'S, MEMORY
I/O, OEM VARIATIONS

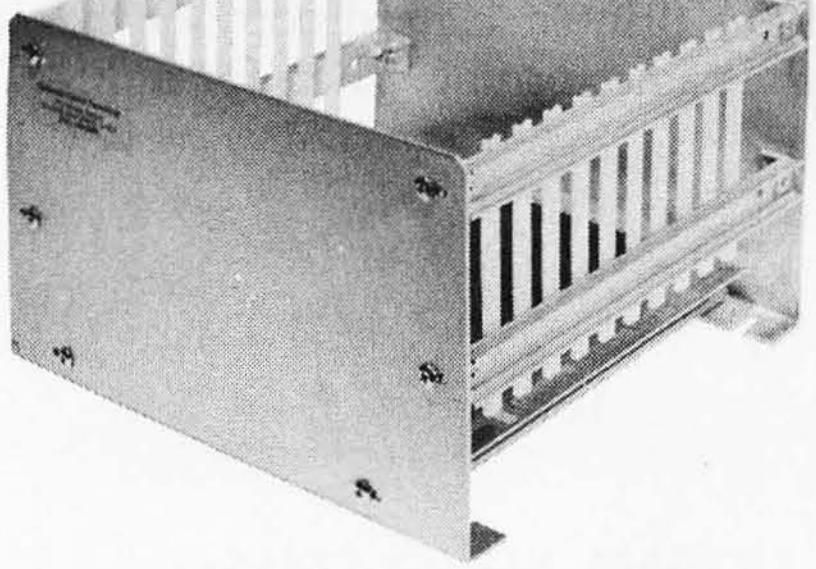

CCMB-10-F MIN
6,10 OR 20 SLOT CARD CAGES



TT-10
TABLE TOP MAINFRAMES

ELECTRONIC CONTROL TECHNOLOGY, INC.

763 Ramsey Ave., Hillside, NJ 07205 (201) 686-8080



PS-30 A
POWER SUPPLIES

SPECIALIZING IN
QUALITY
MICRO COMPUTER
HARDWARE

MULTIBUS® PRODUCTS

MULTIBUS IS A TRADEMARK OF INTEL CORP.

Circle 145 on inquiry card.

A Chessboard Journey on the TI-59 Programmable Calculator

Michael Gilpin
Michigan Technological University
Houghton MI 49931

KTTOUR-59 (see listing 1) is a program for the Texas Instruments TI-59 that finds *Knight tours* on an 8 by 8 board. (A Knight tour is a journey on a chessboard where the Knight lands on each square exactly once.)

To begin, partition the calculator memory locations into 320 program lines and 90 addressable memory locations by pressing 9, *Op, 17. Then enter the program and press B. This initializes values in registers 00 thru 89 as shown in figure 1. The actual chessboard is represented by registers 11 thru 18, 21 thru 28, . . . 81 thru 88. After setting up this initial configuration, the program returns with the display value 0. Enter the initial square number and press C. The program will then move the Knight at the approximate rate of one move every 33 seconds according to the Rule of Warnsdorf. That is, it will always move the Knight to a square having, at that point in the tour, a minimal number of entrances.

Execution stops with the display value 0 as soon as no additional moves can be found. Pressing D causes the program to flash each move in the format "square.move" (eg: "13.07" means the seventh move was made on square number 13). This allows the user to write down the complete tour on graph paper. If used in conjunction with the Texas Instruments PC-100A printer, a hard copy of the tour is produced using the same format. Then for a dif-

Text continued on page 202

Listing 1: *KTTOUR-59, written for the Texas Instruments TI-59.*

```
Loc.            Keys                                          Comments

000  9    STO  50                                             Start with 9 exits.
003       8    STO  09                                        Prepare to test 8 jumps.
006            RCL  *IND 09   SUM  10                         Put KT on test square.
010            SUB  0    91   INV  *x=t 0    61               Test for legal move.
017            8    STO  00                                   Prepare to count exits.
020                 1    STO  89                              One exit has been found.
023                 RCL  *IND 00   SUM  10                    Put KT on potential exit.
027                 SUB  0    91   INV  *x=t 0    37          Test for legal exit.
034                 1    SUM  89                              Increase exit count.
037                 *DSZ 0    0    23                         Next potential exit.
```

Listing 1 continued on page 200

ENTER, THE INNOVATOR.

Now You Can Access The World's Most Respected Business & Financial Database On Your Personal Computer

Whether you own an **Apple, Atari, Commodore, Radio Shack,** or other computer hardware system, you can now get on-line with Dow Jones Information Services.

This database is filled with reliable business and investment information fed directly from **The Wall Street Journal, Barron's,** and the world-wide Dow Jones News Service. Having access to this business/investment database is like having a private stock ticker, financial consultant, and comprehensive business library right at your fingertips.

With Dow Jones Information Services you can retrieve in-depth articles from **The Wall Street Journal** and **Barron's**; get stock quotations—just 15 minutes delayed—for over 6,000 companies; receive 50 key financial indicators on selected companies. . .even update and evaluate your personal portfolio! And, you can do all of this at your convenience, in the privacy of your home or office.

To make sound business and investment decisions, you need instant access to and retrieval of vital business information. With Dow Jones Information Services, you get this information—as recent as 90 seconds, as far back as 90 days—when you need it, 21 hours a day. Plus when you get on-line with Dow Jones, there's no minimum access charge or subscription fee.

If you're serious about investments and would like to have the information-gathering resources of Dow Jones at your fingertips, visit your computer store for a demonstration or call us today.

For More Information
Call Toll Free (800) 257-5114
(In New Jersey, call (609) 452-1511)

DOW JONES INFORMATION SERVICES

Providing Information Through Innovation

P.O. Box 300
Princeton, NJ 08540

Circle 135 on inquiry card.

Listing 1 continued:

```
041          2      1      +/-    SUM    10                                  Return KT to test square.
046          RCL    50     x≷t    RCL    89     *x≥t   0      60             Test for new minimum.
054          STO    50     RCL    10     STO    20                           New minimum and position.
060          *CP
061          *DSZ   9      0      06                                         Next test square.
065   2      1      +/-    SUM    10                                         Return KT to last square.
070   RCL    10     -      RCL    20     =      *x=t   2      10            Stop if no move possible.
079   RCL    *IND   10     STO    *IND   20     RCL    20
      STO    10     1      SUM    *IND   10                                  Move knight.
090 RST                                                                      Look for further moves.
091 RCL  10     x≷t    1      0      *x≥t   1      07
         8      9      x≷t    *x≥t   1      07                               Test for correct range.
105 RCL  *IND   10     *CP    INV    SUB                                     Return 0 for legal move.
109 *LBL B                                                                   Prepare board for tour.
         *CMS   8      0      STO    00     8      +/-
         STO    *IND   00     *Op    30     STO    *IND
         00     SUM    00     *DSZ   0      1      18                        Fill border squares.
130      2      STO    01     STO    07     4      STO    03
         STO    05     x^2    STO    04     7      STO    02
         STO    06     2      1      +/-    STO    08                        Load jump increments.
153 CLR  R/S
155 *LBL C                                                                   Make first move.
         STO    10     STO    20     1      STO    *IND   10     RST         Begin search.
165 *LBL D      *Fix   2                                                     Display Routine.
169      8      STO    00                                                    Prepare row index.
172      8      STO    09                                                    Prepare column index.
175             RCL    00     ×      1      0      +      RCL    09
                =      STO    89     +      RCL    *IND   89     ÷
                1      0      0      =      Pause  Pause  Pause  *Prt        Display "square.move".
198      *DSZ   9      1      75     *Adv                                    Next column.
203      *DSZ   0      1      72                                             Next row.
207 CLR  INV    *Fix   R/S
```

The tool you need to chop your software backlog can be yours now

TRAM™

TRAM Drastically Cuts Development Time and Can Increase Your Productivity by 2000%

TRAM is an advanced TRansaction Access Method developed in PL/I to run on a variety of CPU's and operating systems. With its screen manager, you are completely freed from the burdens of screen communication such as location, length, rendition and even text itself. In addition, TRAM takes care of full data validation, default value generation and housekeeping of past values.

Look at what TRAM can do for you:

TRAM will assist you in design:

TRAM forms, kept with your specifications, describe in detail the layout, along with the information and processing required to get and validate data. This documentation is of tremendous help when modification is required.

As an option, TRAM provides a multiple-level up-and-down generalized menu and chaining system allowing you to create tree-structured applications along with parameter passing.

TRAM will boost your productivity:

TRAM takes care of line-column positions and all video attributes. TRAM has a unique "no show" feature which extends the versatility and scope of your software. TRAM has a powerful exception processing handler. TRAM controls protected areas and echoing. TRAM formats and redisplays accepted data. TRAM retains past values for each item. TRAM builds default values based on past events. TRAM checks input for consistency, magnitude, match in a predefined list and even provides an interface for a search against your own external files, or, as an option, against a built-in fast direct access code file.

All those benefits lead to a deep reduction in the actual number of lines you have to code.

TRAM will give you environment freedom:

All TRAM features can be used on any display video terminal with cursor addressing. TRAM will also work on a variety of CPU's and operating systems from micros to minis and even mainframes. Any displayable text is program independent and can be in any foreign language. Even more, the date format can be any arrangement of day, month and year, with or without month spelling. And the decimal point is what you want it to be. The menu option gives you drive independence: programs, parameters and data files are freely scattered on different disk drive, with run-time choice.

CHECK IT BEFORE YOU BUY

Ask for the demo kit and you will see how a 2000 line program is reduced to 100. Send the coupon below, along with $50 and here is what you get:

- The screen generator and editor. You will immediately start creating and editing your own screens.
- The screen examiner. You will display and examine your new screens and see TRAM features at work.
- The utility programs you need to adapt TRAM to your environment.
- The demo program with source listing and documentation.
- The full TRAM screen manager manual set.
- A sample of TRAM screen forms.

The demo kit is for Z80, 8080 CP/M based systems with a minimum of 48K and comes on an 8" single side single density soft sectored diskette. TRAM's screen manager price is $295 and can be yours for $245 if bought less than 30 days after the demo.

Purchase price includes a 6 month maintenance and update period.

So act now to see how TRAM will solve your problem.

Concentrate on your application, TRAM concentrates on the technical burden.

TRAM is available now for Z80, 8080 CP/M and MP/M systems with 48K minimum and requires the PL/I-80 compiler (or the PL/I-80 run-time library if your application is not in PL/I).

Coming soon are versions for 8086/8088, Prime Computers, Data General, Digital Equipment (LSI 11, PDP 11 and VAX), IBM and others. Coming soon also are the multi-key multi-user file management system, the report writer, the file inquirer and the transaction processor.

REDDOX™

REDDOX CORPORATION
215 CHAPEL CREST TERRACE, PITTSBURGH, PA 15238
PHONE (412) 963-6532 TELEX 866 555

(CP/M, MP/M and PL/I-80 are registered trademarks of Digital Research)

It isn't just for small business anymore!

PLEASE SEND ME:

Qty.		Price ea.
☐	TRAM's screen manager (disk & doc)	$295
	+ code file option	75
	+ menu option (with doc)	100
☐	TRAM's menu system alone	150
☐	TRAM demo kit	50
☐	TRAM's screen manager - documentation only	30
☐	TRAM's menu system - documentation only	20
☐	PL/I compiler & run-time library (disk & doc)	500
☐	PL/I run-time library (disk & doc)	100
	PA residents add 6% tax	
	shipping and handling	3
	TOTAL	

I understand that if I decide to buy TRAM's screen manager in less than 30 days after the demo, $50 credit will be applied towards the total amount. I understand also that a signed software license agreement is required and that purchase price includes a 6 month maintenance and update period.

Send check or money order to Reddox Corporation, Dept. B1 - 215 Chapel Crest Terrace, Pittsburgh, PA 15238

NAME ____________________

ADDRESS ____________________

CITY __________ STATE ______ ZIP ______

Circle 352 on inquiry card.

DISCOUNT
Ad#13 SOFTWARE
✓ out our new items.
CP/M users: specify disk systems and formats. Most formats available.

DISK WITH MANUAL / MANUAL ONLY

CP/M®
ARTIFICIAL INTELLIGENCE
✓ Medical . . . . . . $449/$40
✓ Dental . . . . . . $449/$40
COMPLETE BUS. SYSTEM
Creator . . . . . . $269/$25
Reporter . . . . . . $169/$20
Both . . . . . . $399/$45
COMPUTER CONTROL
✓ Fabs . . . . . . $159/$20
UltraSort II . . . . . . $159/$25
COMPUTER PATHWAYS
Pearl (level 1) . . . . . . $ 99/$25
Pearl (level 2) . . . . . . $299/$40
Pearl (level 3) . . . . . . $549/$65
DIGITAL RESEARCH
CP/M 2.2
NorthStar . . . . . . $149/$25
TRS-80 Model II (P&T) . $159/$35
Micropolis . . . . . . $169/$25
Cromemco . . . . . . $189/$25
PL/I-80 . . . . . . $459/$35
✓ BT-80 . . . . . . $179/$25
Mac . . . . . . $ 85/$15
Sid . . . . . . $ 65/$15
Z-Sid . . . . . . $ 95/$15
Tex . . . . . . $ 70/$15
DeSpool . . . . . . $ 50/$10
DYNAMIC MICRO-PROCESSOR ASSOC.
✓ Ascom . . . . . . $109/$15
CBS . . . . . . $369/$45
✓ DMA-DOS . . . . . . $179/$35
GRAHAM-DORIAN
✓ General Ledger . . . . . . $729/$40
✓ Acct Receivable . . . . . . $729/$40
✓ Acct Payable . . . . . . $729/$40
✓ Job Costing . . . . . . $729/$40
Payroll . . . . . . $493/$40
Inventory . . . . . . $493/$40
Cash Register . . . . . . $493/$40
Apartment Mgt . . . . . . $493/$40
KEY BITS
String/80 . . . . . . $ 84/$20
✓ String/80 (source) . . . . . . $279/$na
WordSearch . . . . . . $179/$25
MICRO-AP
S-Basic . . . . . . $269/$25
Selector III . . . . . . $269/$25
Selector IV . . . . . . $469/$35
MICRO DATA BASE SYSTEMS
HDBS . . . . . . $269/$35
MDBS . . . . . . $795/$40
✓ DRS or QRS or RTL . . . . $269/$35
✓ MDBS PKG . . . . . . $1295/$60
MICROPRO
WordStar . . . . . . $324/$60
✓ Customization Notes . . . . $ 89/$na
Mail-Merge . . . . . . $114/$25
WordStar/Mail-Merge . . $434/$85
✓ DataStar . . . . . . $249/$60
WordMaster . . . . . . $119/$40
SuperSort I . . . . . . $199/$40
MICROSOFT
Basic-80 . . . . . . $294/$30
✓ Basic Compiler . . . . . . $329/$30
✓ Fortran-80 . . . . . . $349/$30
Cobol-80 . . . . . . $574/$30
Macro-80 . . . . . . $144/$20
Edit-80 . . . . . . $ 84/$20
MuSimp/MuMath . . . . . . $224/$25
MuLisp-80 . . . . . . $174/$20
ORGANIC SOFTWARE
TextWriter III . . . . . . $111/$20
DateBook . . . . . . $269/$25
OSBORNE
General Ledger . . . . . . $ 59/$20
Acct Rec/Acct Pay . . . . $ 59/$20
Payroll w/Cost . . . . . . $ 59/$20
✓ All 3 . . . . . . $129/$57
All 3 + CBASIC-2 . . . . . . $199/$71

PEACHTREE®
General Ledger . . . . . . $399/$40
Acct Receivable . . . . . . $399/$40
Acct Payable . . . . . . $399/$40
Payroll . . . . . . $399/$40
Inventory . . . . . . $399/$40
Property Mgt . . . . . . $799/$40
CPA Client Write-up . . . . $799/$40
Mailing Address . . . . . . $349/$40
SOFTWARE WORKS
Adapt . . . . . . $ 69/$na
Ratfor . . . . . . $ 86/$na
SOHO GROUP
MatchMaker . . . . . . $ 97/$20
WorkSheet . . . . . . $177/$20
STRUCTURED SYSTEMS
GL or AR or AP or Pay . . . $599/$40
Inventory Control . . . . . . $449/$40
✓ Analyst . . . . . . $199/$25
✓ QSort . . . . . . $ 89/$20
SUPERSOFT
✓ Forth (8080 or Z80) . . . . $149/$25
✓ Diagnostic II . . . . . . $ 84/$20
Other . . . . . . less 10%
TCS
GL or AR or AP or Pay . . . $ 79/$25
All 4 . . . . . . $269/$99
WHITESMITHS
"C" Compiler . . . . . . $600/$30
Pascal (incl "C") . . . . . . $850/$45
"DATA BASE"
FMS-80 . . . . . . $649/$45
dBASE II . . . . . . $629/$50
Condor . . . . . . $599/$30
T.I.M. . . . . . . $329/$35
"PASCAL"
✓ Pascal/MT+ . . . . . . $429/$30
✓ Pascal/Z . . . . . . $349/$30
Pascal/UCSD . . . . . . $299/$30
Pascal/M . . . . . . $149/$20
"WORD PROCESSING"
✓ SpellGuard . . . . . . $249/$25
Spell Binder . . . . . . $349/$45
✓ Magic Wand . . . . . . $289/$45
✓ VTS/80 . . . . . . $489/$65
"OTHER GOODIES"
Tiny "C" . . . . . . $ 89/$50
Tiny "C" Compiler . . . . . . $229/$50
CBASIC-2 . . . . . . $ 89/$15
Nevada Cobol . . . . . . $129/$25
MicroStat . . . . . . $224/$15
Vedit . . . . . . $ 99/$15
✓ Prof Time Bill (Asyst) . . . . $549/$40
✓ ESQ-1 . . . . . . $1349/$50
✓ MiniModel . . . . . . $449/$50
✓ StatPak . . . . . . $449/$40
✓ Micro B + ... $229/$40
✓ BSTAM . . . . . . $129/$10

APPLE II®
MICROSOFT
Softcard $292
✓ Fortran $179
Cobol $574
PERSONAL SOFTWARE
Visicalc $122
CCA Data Mgr . . . . . . $ 84
Desktop/Plan . . . . . . $ 84
Zork . . . . . . $ 34
PEACHTREE®
General Ledger . . . . . . $224/$40
Acct Receivable . . . . . . $224/$40
Acct Payable . . . . . . $224/$40
Payroll . . . . . . $224/$40
Inventory . . . . . . $224/$40
"OTHER GOODIES"
Super-Text II $127
Data Factory $129
✓ DB Master $159
Ledger Plus $549
✓ Charles Mann . . . . . . less 15%
✓ STC . . . . . . less 15%

ORDERS ONLY—CALL TOLL FREE VISA • MASTERCHARGE
1-800-854-2003 ext. 823 • Calif. 1-800-522-1500 ext. 823
Overseas—add $10 plus additional postage • Add $2.50 postage and handling per each item • California residents add 6% sales tax • Allow 2 weeks on checks, C.O.D. ok • Prices subject to change without notice. All items subject to availability • ®—Mfgs. Trademark.
THE DISCOUNT SOFTWARE GROUP
6520 Selma Avenue, #309 • Los Angeles, CA 90028 • (213) 666-7677

00 0	01 2	02 7	03 4	04 16	05 4	06 7	07 2	08 -21	09 -8
10 -8	11 0	12 0	13 0	14 0	15 0	16 0	17 0	18 0	19 -8
20 -8	21 0	22 0	23 0	24 0	25 0	26 0	27 0	28 0	29 -8
30 -8	31 0	32 0	33 0	34 0	35 0	36 0	37 0	38 0	39 -8
40 -8	41 0	42 0	43 0	44 0	45 0	46 0	47 0	48 0	49 -8
50 -8	51 0	52 0	53 0	54 0	55 0	56 0	57 0	58 0	59 -8
60 -8	61 0	62 0	63 0	64 0	65 0	66 0	67 0	68 0	69 -8
70 -8	71 0	72 0	73 0	74 0	75 0	76 0	77 0	78 0	79 -8
80 -8	81 0	82 0	83 0	84 0	85 0	86 0	87 0	88 0	89 0

Figure 1: *Register initialization assignments. The values are assigned as shown for an 8 by 8 playing area. Usable squares are identified by a zero value; the board size can be reduced by manually assigning nonzero values to eliminate squares.*

11 1	12 20	13 9	14 14	15 3
21 10	22 15	23 2	24 19	25 24
31 21	32 8	33 23	34 4	35 13
41 16	42 11	43 6	44 25	45 18
51 7	52 22	53 17	54 12	55 5

Figure 2: *Example of a reduced-size board. The Knight tour shown here is the result of KTTOUR-59's version of the Rule of Warnsdorf applied to a starting position of 11.*

Text continued from page 198:

ferent tour, press B, enter a new starting position, and proceed as before.

The program execution can be modified to find tours on subsets of the 8 by 8 board. Press B as before. Then enter a nonzero value (say 1) into any square you wish to eliminate before entering the initial square and pressing C. This works since the Knight is not allowed to move to squares containing a nonzero value. For example, press B and then store the value 1 into registers 16, 17, 26, 27, 36, 37, 46, 47, 56, 57, 61 thru 67, and 71 thru 77. Enter the initial position of 11 and press C. The result will be the 5 by 5 tour shown in figure 2.■

Acknowledgments

M Kraitchik, le Probleme du Cavalier, Gauthiers-Villars et C^IE^, Paris, 1927.

Thanks are also due Professor William Woodruff, Grand Rapids, Michigan.

Circle 132 on inquiry card.

HOW'S YOUR MEMORY?

Our MEMORIES Have Made US Famous!

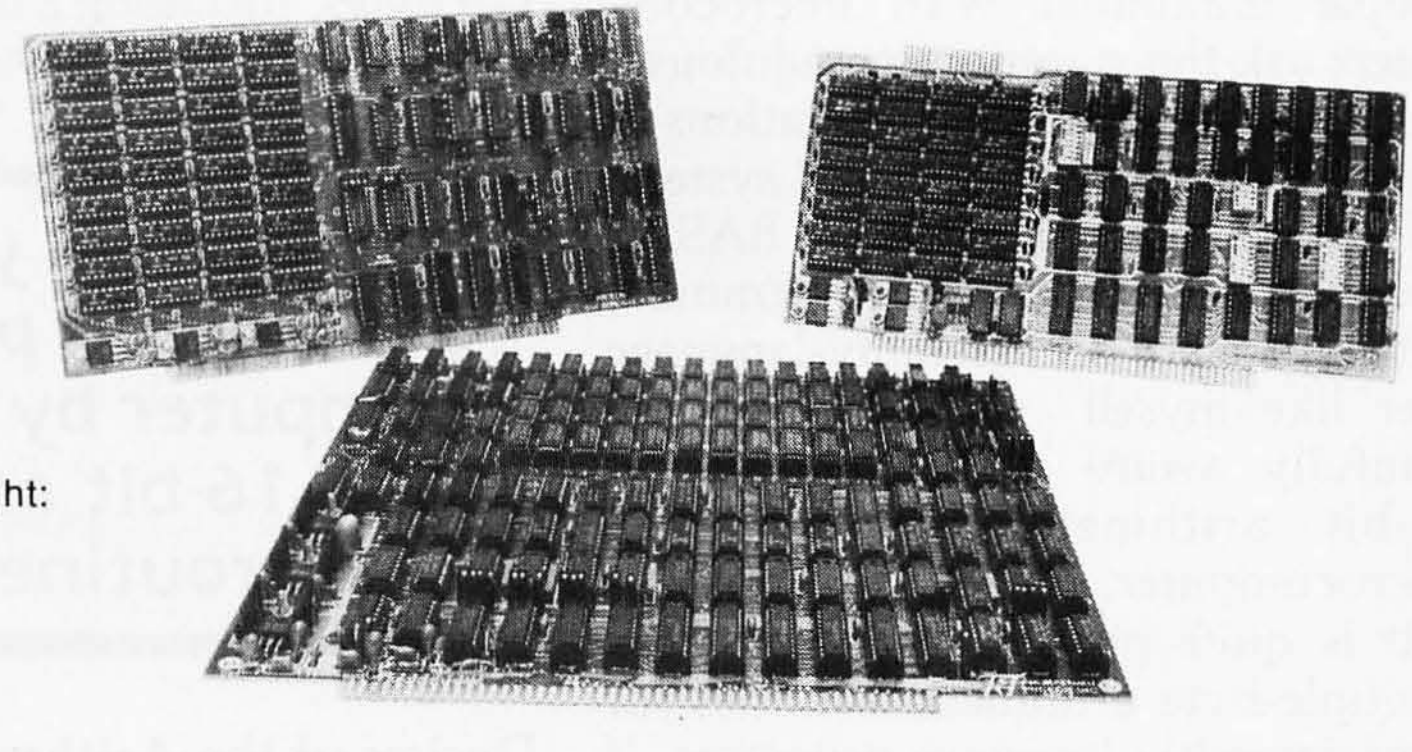

Shown Left to Right:
SUPERAM 4
SUPERMEM-ECC
SUPERAM 2

WHY?

Reliability!

That's the secret of our success. We are dedicated to producing the most reliable memories possible for the S-100 bus and the new IEEE S-100 bus.

Flexibility!

No matter what CPU you use, we have the memory for you.

SUPERAM™ 2—We've delivered over 5,000 of these 64K dynamic RAM boards to OEMs worldwide. This board sets the standard for reliable operation.

SUPERAM™ 4—Now available for Z80A and 8085A users, with bank select and optional parity bit.

SUPERAM™ 5—Our forthcoming IEEE-696 (S-100) compatible RAM will provide 64 Kbytes of dynamic RAM as either 32Kx16 or 64Kx8.

With ECC, too!

Announcing the SUPERMEM™ ECC! This is the ultimate in memory data protection: built-in automatic error correction. The SUPERMEM transparently corrects single bit errors and detects double bit errors.

We'll Design One for You!

If you have a special situation that calls for a custom design involving memory, processors, controllers, or even complete systems, give PIICEON a call. We might have the answer to your product need.

And That's Not All!

We also supply the following Microcomputer Boards:

- C-86 — 16-bit 8086 processor board with multi-processor arbitration logic, on-board PROM and RS-232 port.
- V-100 — 80x24 high-speed video output board.
- D-100 — Coming soon, the answer to 5¼ and 8-inch Winchester control.

WRITE FOR OUR NEW BROCHURE

PIICEON™

OEM Computer Products
2350 Bering Drive
San Jose, CA 95131
(408) 946-8030

Circle 328 on inquiry card.

An Integer Math Package for the 8080

Bruce D Carbrey
109 Bucknell Trl
Hopatcong NJ 07843

"How can you have a computer that doesn't know how to multiply?" People unfamiliar with microcomputers ask this question incredulously whenever I describe the limitations of arithmetic on my 8080-based system. Of course, if you work in BASIC, you may take arithmetic for granted; but if you are an assembly-language user like myself, you are probably painfully aware of the absence of 16-bit arithmetic on the 8080 microcomputer.

It is quite possible that you need multiple-byte arithmetic routines for your assembly-language programs. If program space is a problem (most floating-point routines use several K bytes of memory), or if 16-bit signed integer arithmetic is sufficient for your needs, then the arithmetic routines given in this article may be of interest. These routines run one order of magnitude faster than full floating-point routines; also, they occupy only 215 bytes, all of which may be in read-only memory if desired.

Two additional routines provide conversion between ASCII (American Standard Code for Information Interchange) decimal character strings and the signed binary notation used by the arithmetic routines. These routines require an additional 175 bytes, including 2 bytes that must be in programmable memory.

Improve your 8080-based personal computer by adding these 16-bit arithmetic routines.

Design of the Arithmetic Routines

The arithmetic routines (given in listing 1) use the HL register pair as a 16-bit wide "accumulator." Subroutines performing *dyadic* operations (ie: those with two operands) expect to find one operand in the HL register pair and the other in the DE register pair. The result is returned in the HL pair. The arithmetic subroutines also set the sign and zero flags to reflect the value of the result returned in the HL register pair. (For example, if the result of an operation is decimal −11034, then the minus flag will be set and the zero flag will be cleared.) The information in the carry flag is invalid and should be ignored. The B, C, D, and E registers are restored by all routines except EDIVMOD (the division routine), which returns the quotient in the HL register pair and the remainder in the DE register pair, with the B and C registers restored.

Internally, values are represented in two's complement form, with the most significant bit acting as a sign bit. (See text box on page 225.) This representation is a simple extension of the 8-bit representation used for normal accumulator operations.

Unfortunately, this also leads to one small anomaly. The smallest representable number is −32,768, but the largest is only +32,767. (See the text box on page 226.) Thus, if you negate the value −32,768, an overflow will result. As a consequence of this fact, you may add or subtract two values that give a result of exactly −32,768, but if you try to multiply or divide two numbers that will yield an answer of exactly −32,768, an overflow will result because the multiply and divide routines work on absolute values internally.

All operations, including the string-to-numeric conversions, will

Text continued on page 226

NO MEMORY PARITY? Good luck!

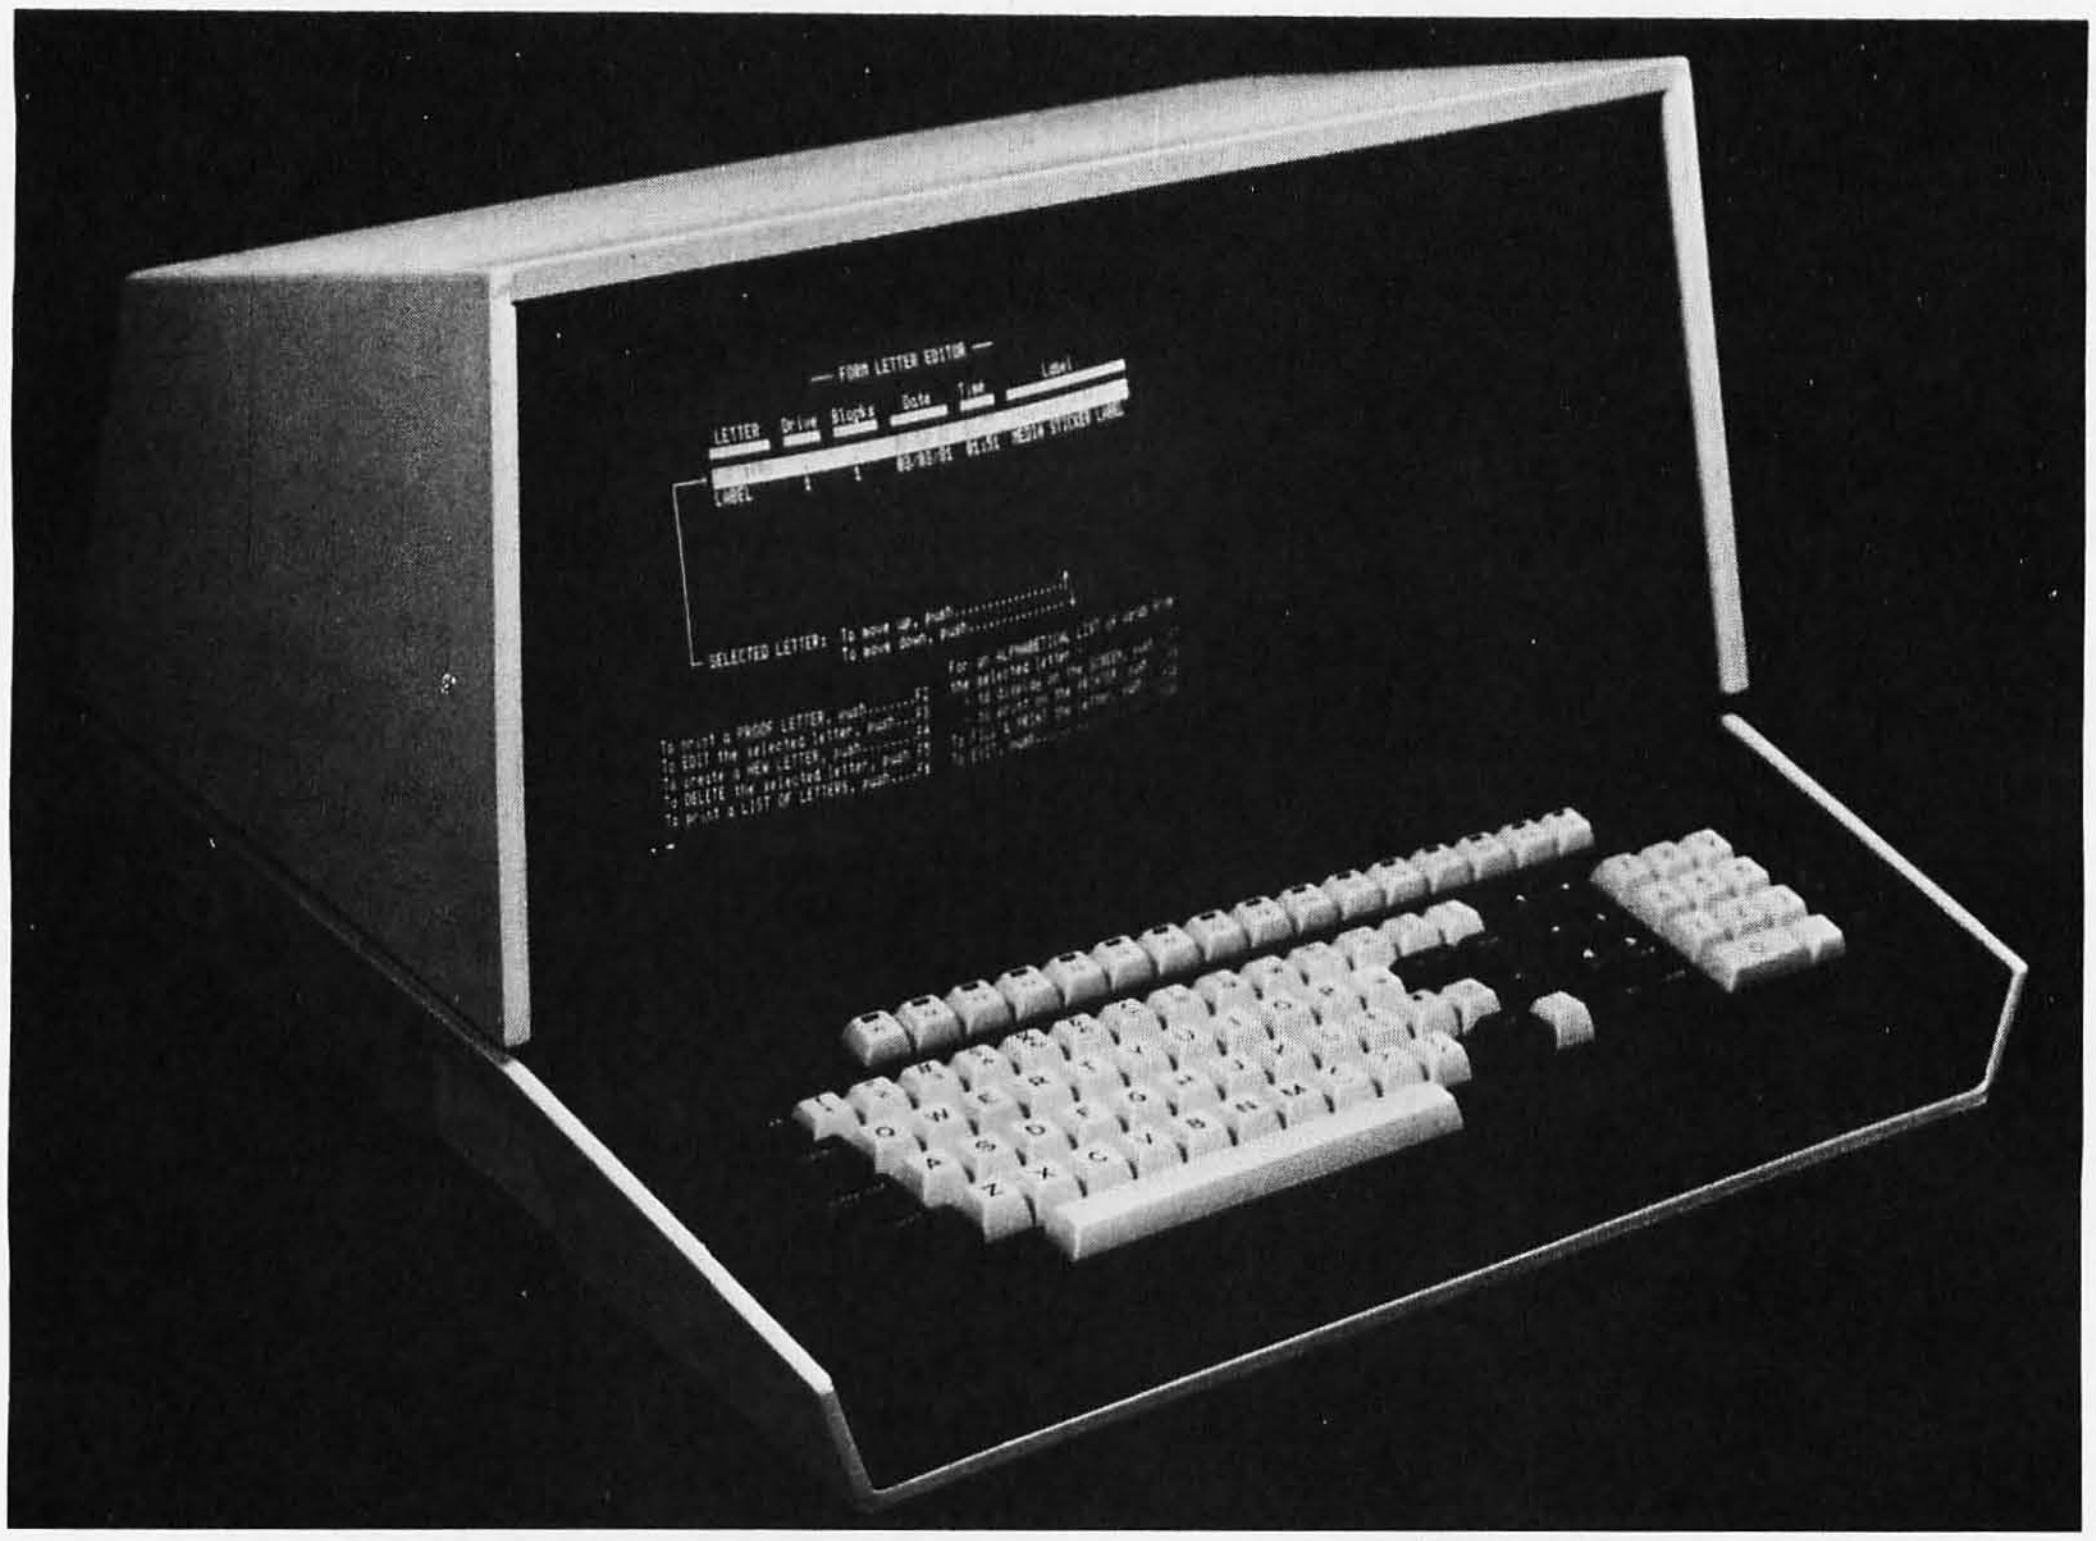

BILLINGS BC-12 FD COMPUTER SYSTEM

The difference between a "hobby" computer and a "professional" system can mean the difference between success and failure when accuracy and dependability are at stake.

For example, professional computers go to the extra expense of adding memory parity. This feature uses an extra 64K Bits of RAM to monitor the condition of the computer's memory banks. When a memory chip malfunctions, the memory parity watchdog immediately identifies the malfunction without losing data integrity.

In "hobby" computers without the memory parity feature, a memory error goes undetected often causing the program to "walk" all over the customers data files. To a hobbiest such problems are an interesting challenge to test his skill. To the businessman, they are expensive and intolerable.

All **Billings Computer Systems** have been designed for professional applications. Every machine has full memory parity capabilities. These features cost a little more, but we believe that a few dollars invested in good equipment will result in substantial savings for years to come for the serious computer user. If you would like to know more about **Billings** quality products please contact us today.

COMPUTER SYSTEMS DESIGNED FOR THE PROFESSIONAL

Billings

Computer Division
18600 E. 37th
Independence, MO 64057
(816) 373-0000

Include payment for the purchase of a Billings Computer System with this ad and receive the Billings Word Processing Pack and the Billings Operating System Pack at no extra cost (a $1,000 value).

Name ______________________________
Company ____________________________
Title ______________ Phone ( ) ____________
Address ____________________________
City __________ State __________ Zip __________

☐ **BC12-FD Computer System $6600**
Includes 64K RAM Parity, 630K Disk capability, 2 serial and 1 parallel port, Full 96 Character Graphics Display Screen.

☐ **BC12 DF2M COMPUTER SYSTEM $9900**
Includes all the BC-12 FD features except disk capacity is increased to 2 megabytes in a separate cabinet.

☐ **P-55 WORD PROCESSING PRINTER $3100**
55 Characters per second. Interchangeable Thimbles

☐ **CHECK ENCLOSED. Amount $**
(Billings pays shipping costs on all prepaid orders.)

☐ **SHIP COD**

☐ **Send information on becoming a Billings Dealer.**

☐ **Send information on the Billings Library of Professional Applications Software.**

FORTRAN IV

for CP/M

"I needed a FORTRAN with COMPLEX as well as REAL and DOUBLE precision arithmetic, that would produce relocatable code and link in assembly language subroutines. It also had to be a FORTRAN that was easy to use as well as being a complete implementation. SuperSoft/SSS FORTRAN is the only microcomputer FORTRAN that met my requirements."

Supersoft makes full WATFIV FORTRAN IV available to microcomputers. Supersoft/SSS FORTRAN meets and exceeds the ANSI 1966 standard. The compiler supports many advanced features including: variable character strings and recursive subroutines with static variables. Fully compatible RATFOR is also available.

FEATURES

Code generation:	ROMable ".COM" files or intermediate code files (saves disk space). External routines may be called. Relocatable format.
Data types:	Byte, integer, real, double precision, complex, logical, character and varying length strings.
Operations:	All standard operations plus string comparisons, assignments, and .XOR.
Constants:	Hexadecimal, decimal, and character literals with features to imbed control characters.
Statements:	ANSI 1966 standard with multiple statement lines.
Controls:	Map, List, and Symbol table output options.
I/O:	Read, Write, Append, Rewind, Close, Delete, Rename, Search, Sequential and Random I/O on disk files. Supports all CP/M devices.

System Requirements & Prices

SSS FORTRAN requires a 32k CP/M system. Z80 only.

SSS FORTRAN with RATFOR:	$325
SSS FORTRAN alone:	$250
Manual only:	$ 25
RATFOR alone:	$100
Macro Assembler:	$ 80

CP/M Formats: 8" soft sectored, 5" Northstar, 5" Micropolis Mod II, Vector MZ, Superbrain DD/QD Apple II +

All Orders and General Information:
SUPERSOFT ASSOCIATES
P.O. BOX 1628
CHAMPAIGN, IL 61820
(217) 359-2112
Technical Hot Line: (217) 359-2691
(answered only when technician is available)

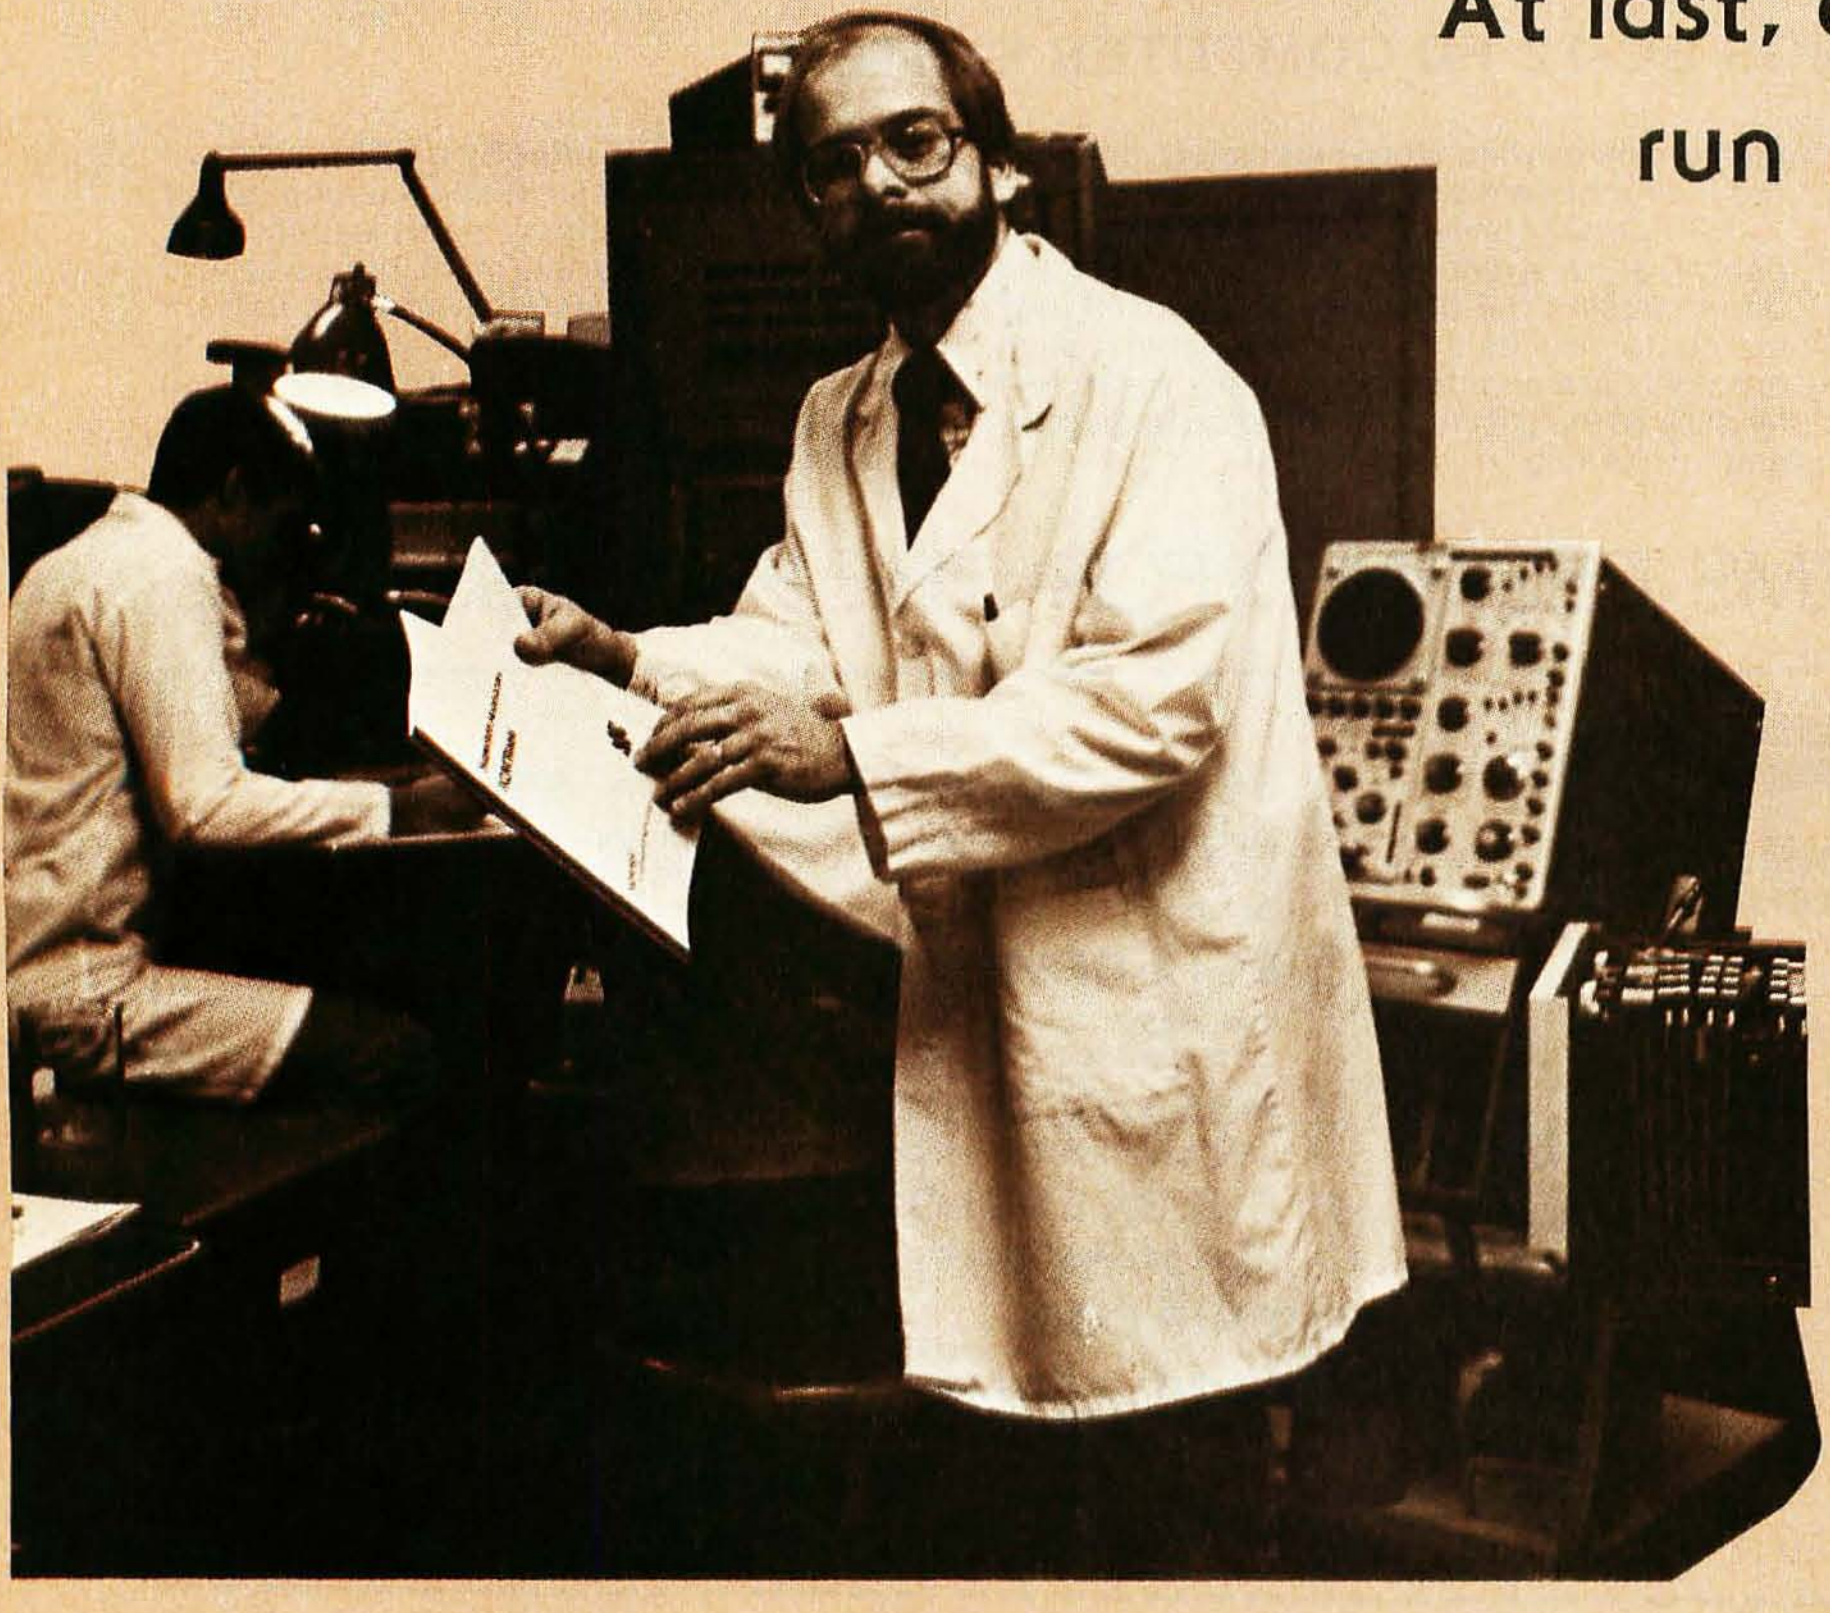

"At last, a FORTRAN that will run my large mainframe programs."

SuperSoft

First in Software Technology

*CP/M REGISTERED TRADEMARK DIGITAL RESEARCH
SSS FORTRAN is the copyright of Small Systems Services, Urbana, Illinois

Listing 1: *16-bit arithmetic subroutines in 8080 assembly language. The eight routines, which are fully documented in the listing, operate on 16-bit numbers in two's complement form.*

```
                          ORG       4000H

              ********************************************************************************
              *                                                                              *
              *          ***** EXTENDED ARITHMETIC SUBROUTINES FOR 8080 COMPUTERS *****      *
              *                                                                              *
              *          WRITTEN BY BRUCE D. CARBREY        REVISION 0       SEPT., 1977     *
              *                                                                              *
              *          THESE ROUTINES EXTEND THE ARITHMETIC CAPABILITIES OF                *
              *          THE 8080 MICROCOMPUTER TO INCLUDE INTEGER ARITHMETIC                *
              *          ON SIGNED, 16-BIT QUANTITIES, USING BINARY, TWOS-COMPLEMENT         *
              *          ARITHMETIC.   THE RANGE OF PERMISSABLE VALUES WITHOUT               *
              *          OVERFLOW IS                                                         *
              *                       -32767 TO +32767                                       *
              *                                        DECIMAL.  TO USE A MATH ROUTINE,      *
              *          SIMPLY LOAD THE REGISTER(S) INDICATED WITH THE OPERAND(S),          *
              *          AND CALL THE APPROPRIATE ROUTINE.  THE ANSWER WILL BE               *
              *          RETURNED IN THE REGISTER(S) INDICATED.  THE SIGN (S) AND            *
              *          ZERO (Z) FLAGS WILL BE SET TO REFLECT THE VALUE OF THE              *
              *          RESULT IN THE SAME WAY AS FOR AN ORDINARY 8-BIT ADD.                *
              *          LOGIC IS PROVIDED FOR DETECTING OVERFLOW FOR ALL OPERATIONS,        *
              *          WHICH RESULTS IN A CALL TO A ROUTINE NAMED OVERFLOW                 *
              *          ( WHICH IS NOT SUPPLIED SINCE YOU MUST DECIDE WHAT YOU              *
              *          WANT TO DO IN CASE OF OVERFLOW--- PROBABLY PRINT A MESSAGE          *
              *          AND JUMP TO YOUR MONITOR).                                          *
              *                                                                              *
              *          IN ADDITION TO THE MATH OPERATORS, TWO UTILITY SUBROUTINES          *
              *          ARE PROVIDED FOR STRING-NUMERIC AND NUMERIC-STRING CONVERSION.      *
              *                                                                              *
              *          ENTRY     SUBROUTINE FUNCTION                                       *
              *          -----     ---------- --------                                       *
              *                                                                              *
              *          EADD      (HL) = (HL) + (DE)                                        *
              *          ESUB      (HL) = (HL) - (DE)                                        *
              *          EMULT     (HL) = (HL) * (DE)                                        *
              *          EDIVMOD   (HL) = (HL) / (DE), AND (DE) = (HL) MOD (DE)              *
              *          ESIGN     SET (S), (Z) FLAG TO REFLECT (HL), LEAVING (HL)           *
              *                    UNCHANGED.                                                *
              *          ECMP      SET (S), (Z) FLAGS TO REFLECT (HL) - (DE), LEAVING        *
              *                    (HL) AND (DE) UNCHANGED.                                  *
              *                                                                              *
              *          DECBIN    CONVERT ASCII CHARACTER STRING REPRESENTING A SIGNED      *
              *                    DECIMAL INTEGER TO A SIGNED BINARY NUMBER.                *
              *          BINDEC    CONVERT A SIGNED BINARY NUMBER TO AN ASCII STRING         *
              *                    REPRESENTING THE SIGNED DECIMAL VALUE OF THE NUMBER.      *
              *                                                                              *
              *                                                                              *
              ********************************************************************************

                *        MATH PACKAGE EXECUTION TIMES IN MICRO-SECONDS:
                *
                *        ROUTINE  TYPICAL  WORST CASE
                *
                *        EADD       30         54
                *        ESUB       50         74
                *        EMULT     370        517
                *        EDIVMOD   680       2500
                *
                *
                *        ***** YOU MUST PROVIDE PATCHES TO THESE TWO ROUTINES... *****
                *
                OVERFLOW  EQU       0          WHERE TO GO AFTER OVERFLOW
                CONVERR   EQU       0          WHERE TO GO ON STRING-NUMERIC ERROR
                *

              ********************************************************************************
              *                                                                              *
              * SUBROUTINE EADD - ADD (HL) TO (DE), RESULT TO (HL)                           *
              *                                                                              *
              ********************************************************************************

                *         (HL) = (HL) + (DE)
                *        ON RETURN, SIGN, ZERO FLAGS WILL REFLECT RESULT. CY CLEARED.
                *        A REGISTER CLOBBERED. B, C, D, E REGS RESTORED.
                *
4000    7C      EADD      MOV       A,H        TEST IF SIGNS ARE SAME OR DIFFER...
4001    AA                XRA       D
4002    E680              ANI       80H
4004    19                DAD       D          ADD, WITHOUT AFFECTING ZERO FLAG...
4005    C20E40            JNZ       ESIGN      SKIP OVERFLOW TEST IF SIGNS DIFFER
4008    1F                RAR                  TEST FOR OVERFLOW BY...
```

Listing 1 continued on page 212

AVAILABLE FALL 1981

DIGITAL HARMONY

by John Whitney

A new synthesis of sight and sound

Digital Harmony lays the foundation for the whole new field of audio-visual art made possible by microcomputers. John Whitney, a pioneer of the special effects technology used in STAR WARS and 2001: A SPACE ODYSSEY, explains the special union of computer graphics and music. His computer-generated visual art graphically depicts the laws of harmonic motion common to all music.

Digital Harmony includes a complete description of Whitney's computer, peripherals, and film techniques. Colorful illustrations are included, as well as the program listings that generated them. The descriptions are sufficient for anyone to begin to explore this new territory as a composer and computer experimenter - transforming the small computer into an ideal instrument for creating compositions in aural and visual art.

John Whitney is on the Faculty in the Department of Art at the University of California, Los Angeles.

ISBN 0-07-070015-X
240 pages
hardcover
over 50 color photographs

$21.95

INVERSIONS: A Catalogue of Calligraphic Cartwheels

by Scott Kim
Foreword by Douglas Hofstader
Backword by Jef Raskin

Surprising symmetries in design and letterforms

Illusion . . . calligraphy . . . visual magic - Scott Kim's new book, Inversions, delights the eye and enchants the mind. Filled with intriguing designs, words that read the same right-side up and upside down, words within words, and unexpected symmetries, these compositions create a fresh way to look at the alphabet. The text includes the visual principles of symmetry, lettering, and problem solving that are basic to these images. The author also draws parallels to related exercises in perception in such diverse areas as art, music, word play, and mathematics. Scott Kim's original inversion designs first appeared in *Omni* magazine, inspiring an overwhelming reader response. An irresistable challenge, invertible writing appeals to everyone who loves beauty in mathematics and design.

Scott Kim is a doctoral student in Computer Science at Stanford University and is a concert pianist and composer.

ISBN 0-07-034546-5
128 pages
softcover
over 50 illustrations
available summer 1981

$8.95

BRAINS, BEHAVIOR, AND ROBOTICS

by James S. Albus

Robotics design and applications

This computer-oriented guide explores how the brain functions primarily as a computer device for generating and controlling behavior. The author assesses behavior as a product of three hierarchies of computing modules:

- memory modules
- behavior-generating modules
- sensory-processing modules

A section on artificial intelligence ties this hierarchical model to vital computer science techniques such as planning, problem-solving, machine vision, natural language understanding and knowledge representation. A closing section on robotics discusses the design considerations in constructing a robot control system fashioned after this model of the brain, and explores the current and potential use of robots in our environment.

Dr. James S. Albus is Project Manager with the National Bureau of Standards.

ISBN 0-07-000975-9
400 pages
hardcover
180 illustrations

$15.95

THE BRAINS OF MEN AND MACHINES

by Ernest W. Kent

Human models for computer design

When the "Brains of Men and Machines" series of articles first appeared in BYTE magazine, the response was immediate and enthusiastic. Now Ernest W. Kent has expanded his ideas about the brain into a full-length book. As researchers begin to unravel the mysteries of the brain's chemical, electrical, and synaptic circuitry, their findings are becoming immediately applicable to advances in robotic behavior and computer design. The Brains of Men and Machines "dissects" the brain to provide new insights into computer design and artificial intelligence.

It is one of the rare books that transcends disciplinary boundaries. In it the ever-increasing relationship between man and machine is freshly examined - a relationship, Professor Kent concludes, that is today being reexamined in the light of man's own neurological self-image.

Dr. Ernest W. Kent is a Professor of Physiological Psychology and Psychopharmacology at the University of Illinois at the Chicago Circle Campus.

ISBN 0-07-034123-0
304 pages
hardcover
illustrated

$15.95

The BYTE BOOK Collection........

Circle 53 on inquiry card.

BASIC SCIENTIFIC SUBROUTINES, VOLUMES 1 AND 2



by Fred Ruckdeschel

Valuable programs for professional and hobbyist

Designed for the engineer, scientist, experimenter, and student, this series presents a complete scientific subroutine package in BASIC.

- Volume 1 covers plotting, complex variables, vector and matrix operation, random number generation, and series approximations.
- Volume 2 continues with least-squares approximation, special polynomial functions, approximating techniques, optimization, roots of functions, interpolation, differentiation, integration, and digital filtering.

These volumes feature routines written in both standard Microsoft and North Star BASIC, extensive appendices, and subroutine cross-referenes.

Dr. Fred Ruckdeschel is a Principal Scientist with Dynacomp, Inc.

VOLUME 1	VOLUME 2
ISBN 0-07-054201-5	ISBN 0-07-054202-3
336 pages	384 pages hardcover
hardcover	illustrated
illustrated	available Fall 1981
$19.95	**$23.95**

THE BYTE BOOK OF PASCAL



Blaise W. Liffick, Editor

A powerful, structured language

Based on articles, language forums, and letters from BYTE magazine, this work is a valuable software resource. Pascal continues to be popular as a structured programming language. Written for both potential and established users, this book introduces the Pascal language and examines its merits and possible implementations. Featured are two versions of a Pascal compiler, one written in BASIC and the other in 8080 assembly language; a p-code interpreter written in both Pascal and 8080 assembly language; a chess-playing program; and an APL interpreter.

ISBN 0-07-037823-1
334 pages
hardcover

$25.00

THREADED INTERPRETIVE LANGUAGES

by Ronald Loeliger

How to implement FORTH on your Z80

Threaded languages (such as FORTH) are compact, giving the speed of assembly language with the programming ease of BASIC. They combine features found in no other programming languages. This book develops an interactive, extensible language with specific routines for the Zilog Z80 microprocessor. With the core interpreter, assembler, and data type defining words covered in the text, it is possible to design and implement programs for almost any application and equivalent routines for different processors.

Ron Loeliger is a Senior Analyst with Intermetrics, Inc.

ISBN 0-07-038360-X
272 pages
hardcover
illustrated

$18.95

BEGINNER'S GUIDE FOR THE UCSD PASCAL SYSTEM

by Kenneth L. Bowles

The most popular Pascal version explained by its creator

Written by the originator of UCSD Pascal System, this informative book is an orientation guide to the UCSD Pascal System. For the novice, this book steps through the System, bringing the user to a sophisticated level of expertise. Once familiar with the System, the reader will find the guide an invaluable reference tool for creating advanced applications. The package offers programs which may be run without alteration on:

- DEC PDP-11 or General Automation minicomputers
- Western Digital Microengines
- 8080, 8085, Z80, 6502, 6800, 9900 or AM-100 based microcomputers (including the popular Apple II and Radio Shack TRS-80 microcomputers)

Dr. Kenneth L. Bowles is Director of the Institute for Information Systems, University of California, San Diego.

ISBN 0-07-006745-7
204 pages
softcover

$11.95

YOU JUST BOUGHT A PERSONAL *WHAT?*

by Thomas Dwyer and Margot Critchfield

A Structured Approach to Creative Programming

Intended for both the novice programmer and the experienced computer enthusiast, this book presents practical ideas for personal computer use at home or at wor

Its approach is especially suitable for educational purposes. Written by the leading contributors of computer education material, this book is an entertaining and resourceful tool. There are over 60 ready-to-use programs written in Microsoft and Level II BASIC for the TRS-80 in the are of educational games, financial record keeping, business transactions, disk-based files, and word processing.

Dr. Thomas Dwyer is a Professor of Computer Science at the University of Pittsburgh.

Margot Critchfield is a doctoral student in Foundations in Education at the University of Pittsburgh.

ISBN 0-07-018492-5
343 pages
softcover
78 illustrations

$11.95

BEYOND GAMES SYSTEM SOFTWAR FOR YOU 650 PERSONAL COMPUTER



by Kenneth Skie

Creating programs for the Apple, Atari, Challenger and PET computers

At last, a complete programming guidebook for owners of personal computers utilizing the 6502 microprocessor. A self-contained course in structures programmin and top-down design, this book presents a powerful set of tools for building an extended monitor, disassembler, hexadecimal dump routine, and text editor program Programs are thoroughly explained, with clear instructions for modifications.

Kenneth Skier is a Systems Programmer for Wang Laboratories, Inc., and a Lecturer at MIT.

ISBN 0-07-057860-5
440 pages
softcover
illustrated

$14.95

stimulating, provocative, problem-solving

Circle 54 on inquiry card.

CIARCIA'S CIRCUIT CELLAR

by Steve Ciarcia

Practical uses for home computers

Imaginative and practical, Ciarcia's Circuit Cellar details a variety of microcomputer projects. A collection of the best articles from the popular series in BYTE magazine, this volume includes

- D/A conversion
- Programming EPROMS
- AC remote-controlled appliances
- digitized speech
- touch input video display

Complete instructions are given on how to construct each project. With amusing anecdotes and an easy-going style, Ciarcia presents his material in such a manner that even a neophyte need not be afraid of it.

ISBN 0-07-010960-5
125 pages
softcover
color photographs and diagrams

$8.00

CIARCIA'S CIRCUIT CELLAR, VOLUME II

by Steve Ciarcia

More practical uses for home computers

Composed of popular articles from BYTE magazine, this volume tells how microcomputers can be uniquely interfaced to our environment. Projects include

- building a computer controlled home-security system
- computerizing appliances
- transmitting digital information over a beam of light
- building the Intel 8086 microprocessor system design kit
- input-output expansion for the TRS-80

ISBN 0-07-010963-X
224 pages
softcover
photographs and diagrams

$12.95

MICRO-COMPUTER STRUCTURES

by Henry D'Angelo

Digital Electronics, Logic Design, and Computer Architecture

Today, there is an increasing demand for computer users who are not only well-versed in software, but who can also maintain, modify, and design their own hardware systems.

This text introduces computer users with little or no background in digital hardware to the basic computer structures used in microcomputer design and microcomputer interfacing. Helpful examples and end-of-chapter exercises further illustrate the various concepts presented, and a detailed bibliography provides additional reading opportunities. As a resource and textbook, it will assist

- programmers and systems analysts
- engineers and scientists
- managers
- students

Detailed Instructor's Manual also available.

Dr. Henry D'Angelo is the Associate Dean of the College of Engineering and Professor of Manufacturing Engineering at Boston University.

ISBN 0-07-015294-2
288 pages
hardcover
314 illustrations
available spring 1981

$18.95

Instructor's Manual
ISBN 0-07-015298-5
softcover

$8.95

BYTE Books' reputation is based on providing technically accurate, useful, and timely information. Established on the same principle as *BYTE* magazine, BYTE Book's evolved in response to the rapidly expanding audience of home and business computer users. Computer professionals and enthusiastic newcomers need to keep pace with this unabated growth. This selection of BYTE books can expand your library of knowledge and expertise.

TO ORDER, CALL TOLL FREE 800-258-5420, OR FILL OUT YOUR CHOICES IN THIS COUPON and return it with check, money order, or charge card number to:

BYTE BOOKS
70 Main Street
Peterborough,
New Hampshire 03458

BUILD YOUR OWN Z80 COMPUTER

by Steve Ciarcia



Every step spelled out for do-it-yourself buffs

For the engineer, computer technician, student, and anyone interested in building a computer rather than buying one, this practical guide shows how to build a working computer based on the Zilog Z80 microprocessor. Each computer subsystem is fully explained and supported by proven design and testing information. The description focuses on a basic single-board microcomputer containing

- easy expansion to include a video terminal
- a 1 K-byte operating system
- serial and parallel ports
- hexadecimal display
- audio cassette mass storage

Readers can modify the system to meet personal needs.

Steve Ciarcia is a Computer Consultant, Electrical Engineer, and author of "Ask Byte" and "Ciarcia's Circuit Cellar" columns in BYTE magazine.

ISBN 0-07-010962-1
330 pages
softcover
available summer 1981

$15.95

BYTE BOOKS
70 Main Street
Peterborough, New Hampshire 03458

Name ____________________

Address ____________________

City __________ State __________ Zip __________

- Check enclosed in the amount of __________
- Bill Visa. Card Number __________
- Bill Master Charge. Card Number __________
- Expiration Date __________

Include 75c per book to cover postage and handling.

TITLE	PRICE	QUANTITY	AMOUNT
		SHIPPING	
		TOTAL	

order now . . . !

Circle 55 on inquiry card.

Listing 1 continued from page 206:

```
4009    AC                XRA       H          ...EXCLUSIVE OR OF CY AND SIGN OF RESULT
400A    17                RAL
400B    DC0000            CC        OVERFLOW   CHECK FOR ARITH OVERFLOW
                *                              FALL THRU TO .....

                ***************************************************************************
                *                                                                         *
                * SUBROUTINE ESIGN - SET (S), (Z) FLAGS TO REFLECT (HL)                   *
                *                                                                         *
                ***************************************************************************

                *
                *         A REGISTER CLOBBERED, ALL OTHERS RESTORED.
                *
400E    AF      ESIGN     XRA       A          CLEAR FLAGS
400F    84                ADD       H          SET FLAGS TO REFLECT HI BYTE
4010    C0                RNZ                  RETURN IF HI-ORDER BYTE IS NON-0
4011    85                ADD       L          ELSE, SEE IF L IS 0 TOO...
4012    C8                RZ                   AND IF SO, RETURN
4013    AF                XRA       A          ELSE, FORCE FLAGS TO SHOW +
4014    3C                INR       A
4015    C9                RET

                ***************************************************************************
                *                                                                         *
                * SUBROUTINE ESUB - SUBTRACT (DE) FROM (HL), RESULT TO (HL)               *
                *                                                                         *
                ***************************************************************************

                *         (HL) = (HL) - (DE)
                *         ON RETURN, ZERO, SIGN FLAG REFLECT RESULT. CY CLEARED.
                *         A REGISTER CLOBBERED. B, C, D, E RESTORED.
                *
4016    D5      ESUB      PUSH      D
4017    EB                XCHG
4018    CD3040            CALL      COMP2      FORM 2S COMPLEMENT OF SUBTRAHEND...
401B    CD0040            CALL      EADD       ...AND PROCEED AS IN ADDITION
401E    D1                POP       D
401F    C9                RET

                ***************************************************************************
                *                                                                         *
                * ECHS - CHANGE SIGN OF REGISTER (HL)                                     *
                *                                                                         *
                ***************************************************************************

                *         (HL) = -(HL)
                *         ON RETURN, ZERO, SIGN FLAG REFLECT RESULT.  CY CLEARED.
                *         A REGISTER CLOBBERED.  B, C, D, E RESTORED.
                *
4020    7C      ECHS      MOV       A,H
4021    D680              SUI       80H        CHECK FOR THAT ONE NASTY CASE...
4023    C22A40            JNZ       ECHSGO     ...OF (HL) = EXACTLY -32768...
4026    85                ADD       L          ...WHICH CANT BE COMPLEMENTED RIGHT
4027    CC0000            CZ        OVERFLOW   ...AND WHEN DETECTED, ABORT
402A    CD3040  ECHSGO    CALL      COMP2      ELSE, FORM 2S COMPLEMENT IN (HL)
402D    C30E40            JMP       ESIGN      SET FLAGS AND RETURN
                *
                *         SUBROUTINE COMP2 - FORM 2S COMPLEMENT OF (HL)
                *
4030    7C      COMP2     MOV       A,H
4031    2F                CMA
4032    67                MOV       H,A
4033    7D                MOV       A,L
4034    2F                CMA
4035    6F                MOV       L,A
4036    23                INX       H
4037    C9                RET

                ***************************************************************************
                *                                                                         *
                * SUBROUTINE EMULT - MULTIPLY (HL) BY (DE), RESULT TO (HL)                *
                *                                                                         *
                ***************************************************************************

                *         (HL) = (HL) * (DE)
                *         ON RETURN, ZERO, SIGN FLAG REFLECT RESULT.  CY CLEARED.
```

Listing 1 continued on page 214

THE ORIGINAL MAGAZINE FOR OWNERS OF THE TRS-80™* MICROCOMPUTER

* TRS-80™ IS A TRADEMARK OF TANDY CORP.

SOFTWARE FOR TRS-80™ OWNERS

H & E COMPUTRONICS INC.

MONTHLY NEWSMAGAZINE FOR TRS-80™ OWNERS

MONTHLY NEWSMAGAZINE

Practical Support For Model I, II & III

- PRACTICAL APPLICATIONS
- BUSINESS
- GAMBLING • GAMES
- EDUCATION
- PERSONAL FINANCE
- BEGINNER'S CORNER
- NEW PRODUCTS
- SOFTWARE EXCHANGE
- MARKET PLACE
- QUESTIONS AND ANSWERS
- PROGRAM PRINTOUTS

. . . . AND MORE

NOW IN OUR 4th YEAR

PROGRAMS AND ARTICLES PUBLISHED IN RECENT ISSUES INCLUDE THE FOLLOWING:

- FINCALC - A COMPLETE FINANCIAL APPLICATIONS PACKAGE
- INFORMATION SYSTEM REVIEW
- STATISTICAL COMBINATIONS
- PASCAL'S TRIANGLE
- ASSEMBLY LANGUAGE FOR BEGINNERS
- DISK FILES
- MOD-III REVIEW
- KEYBOARD THUNDER AND LIGHTING EXPLAINED
- DOS COMMANDS IN LEVEL II
- PROBABILITY CURVE GENERATOR
- CALCULATOR SIMULATIONS
- THE MEGABYTE GAP
- STOCKS AND BONDS
- BUDGET ANALYSIS (FOR BUSINESS AND HOME)
- NEWDOS/80 REVIEW
- DUTCHING - THE HORSE SYSTEM THAT CAN'T LOSE
- A SIMULATED GOLF GAME
- CONTINUOUS FORM SOURCES
- TAX/SAVER REVIEW

. . . . . AND MORE

FREE* WITH YOUR SUBSCRIPTION OR RENEWAL

FINCALC A Complete Financial Analysis Package Used To Calculate Markup, Margin, Annuities, Compound Interest, Nominal And Effective Rates, Sinking Funds, Mortgage Calculations, Future Value, Savings and Insurance, Percentage Difference Between Two Numbers, Amortization Schedule and More . . . . . .

SEND FOR OUR NEW 64 PAGE SOFTWARE CATALOG (INCLUDING LISTINGS OF HUNDREDS OF TRS-80™ PROGRAMS AVAILABLE ON CASSETTE AND DISKETTE). $2.00 OR **FREE** WITH EACH SUBSCRIPTIONS OR SAMPLE ISSUE

*** All programs are supplied on cassette (add $3 for Diskette Version - add $5 for modified Mod-II Version).**

H & E COMPUTRONICS INC.
MATHEMATICAL APPLICATIONS SERVICE™
50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

ONE YEAR SUBSCRIPTION $24 . . . .
TWO YEAR SUBSCRIPTION $48 . . . .
SAMPLE OF LATEST ISSUE $ 4 . . . .
START MY SUBSCRIPTION WITH ISSUE. . . . .
(#1 - July 1978 • #12 - June 1979 • #24 - July 1980 • #30 - January 1981)
NEW SUBSCRIPTION. . . . . RENEWAL. . . . .

NEW TOLL-FREE ORDER LINE
(OUTSIDE OF N.Y. STATE)
(800) 431-2818

master charge

24 HOUR ORDER LINE
(914) 425-1535

VISA

CREDIT CARD NUMBER ________________ EXP. DATE ________________
SIGNATURE ________________ NAME ________________
ADDRESS ________________ CITY ________________ STATE ________ ZIP ________

***** ADD $12/YEAR (CANADA, MEXICO) - ADD $24/YEAR AIR MAIL - OUTSIDE OF U.S.A., CANADA & MEXICO *****

Circle 171 on inquiry card.

Listing 1 continued:

```
                *        A REGISTER CLOBBERED.  B, C, D, E RESTORED.
                *
4038     C5     EMULT     PUSH      B
4039     D5               PUSH      D
403A     CD6F40           CALL      RSLTSIGN  FIND RESULT SIGN, ABS VAL OF OPERANDS
403D     AF               XRA       A
403E     84               ADD       H
403F     CA4840           JZ        HLSMALL   BRANCH IF (HL) LESS THAN 8 BITS
4042     AF               XRA       A
4043     82               ADD       D         ELSE, OTHER OP MUST BE .LT. 8 BITS...
4044     C40000           CNZ       OVERFLOW  ...OR OVERFLOW WOULD RESULT
4047     EB               XCHG                (HL) NOW HAS AN OP WITH .LT. 8 BITS
4048     7D     HLSMALL   MOV       A,L       MOVE 8-BIT OR LESS MULTIPLIER TO A
4049     210000           LXI       H,0       INITIALIZE PARTIAL PRODUCT
404C     37     XMLOOP    STC                 CLEAR CARRY...
404D     3F               CMC
404E     1F               RAR                 ROTATE MULTIPLIER RITE OFF END
404F     D25640           JNC       SHIFTOP   IF BIT SHIFTED-OUT WAS 0, SKIP
4052     19               DAD       D         ELSE, ADD MULTIPLICAND TO PARTIAL PROD.
4053     DC0000           CC        OVERFLOW  ...WHILE CHECKING FOR OVERFLOW
4056     EB     SHIFTOP   XCHG
4057     29               DAD       H         SHIFT MULTIPLICAND LEFT 1 BIT...
4058     DC0000           CC        OVERFLOW  ...WHILE CHECKING FOR OVERFLOW
405B     EB               XCHG
405C     B7               ORA       A
405D     C24C40           JNZ       XMLOOP    BRANCH TO TOP OF LOOP IF MULT IS NON-0
4060     D1               POP       D         WHEN MULTIPLY DONE, RECALL (DE)
4061     7C     SIGNRCL   MOV       A,H
4062     07               RLC                 MAKE FINAL OVERFLOW CHECK...
4063     DC0000           CC        OVERFLOW  FOR VALUES BETWEEN32768 AND 65535 INCLUS.
4066     78               MOV       A,B       THEN RECALL SIGN BYTE
4067     17               RAL
4068     DC3040           CC        COMP2     CHANGE SIGN OF RESULT IF IT IS TO BE -
406B     C1               POP       B
406C     C30E40           JMP       ESIGN     SET FLAGS AND RETURN
                *
                *        SUBROUTINE RSLTSIGN - COMPUTE SIGN OF RESULT FOR * AND /
                *
                *        ON RETURN: (HL) = ABSOLUTE VALUE OF (DE), (DE) = ABS. VAL (HL),
                *        (B) = SIGN OF RESULT IN MOST SIGNIFICANT BIT.
                *
406F     44     RSLTSIGN  MOV       B,H       FETCH SIGN BYTE OF 1ST OPERAND
4070     7C               MOV       A,H       ...TO B AND ALSO TO A...
4071     17               RAL
4072     DC3040           CC        COMP2     ABSOLUTE VALUE OF (HL)
4075     EB               XCHG                2ND OPERAND...
4076     7C               MOV       A,H       SIGN BYTE TO A...
4077     A8               XRA       B         RESULTANT SIGN...
4078     47               MOV       B,A       ...TO MSB OF REG B FOR LATER RECALL
4079     7C               MOV       A,H       SIGN BYTE OF 2ND OP TO A
407A     17               RAL
407B     DA3040           JC        COMP2     ABSOLUTE VALUE, THEN RETURN.
407E     C9               RET

              ********************************************************************************
              *                                                                              *
              * SUB. EDIVMOD - DIVIDE (HL) BY (DE), QUO. TO (HL), REM. TO (DE)               *
              *                                                                              *
              ********************************************************************************

                *        ON CALL: (HL) = DIVIDEND, (DE) = DIVISOR.
                *        ON RETURN: (HL) = QUOTIENT, (DE) = REMAINDER.
                *        FLAGS REFLECT VALUE OF QUOTIENT.  CY CLEARED.
                *        A REGISTER CLOBBERED.  B, C RESTORED.
                *        REMAINDER IS ALWAYS POSITIVE, REGARDLESS OF SIGN OF OPERANDS.
                *
407F     C5     EDIVMOD   PUSH      B
4080     AF               XRA       A         IF DIVISOR = 0...
4081     B3               ORA       E
4082     B2               ORA       D
4083     CC0000           CZ        OVERFLOW  ...THEN ABORT
4086     CD6F40           CALL      RSLTSIGN  COMPUTE RESULT SIGN; SWAP DE, HL
4089     7C               MOV       A,H       INSURE THAT NEITHER OPERAND...
408A     B2               ORA       D         ...WAS THAT NASTY SPECIAL CASE...
408B     07               RLC                 ...OF EXACTLY -32768...
408C     DC0000           CC        OVERFLOW  ...AND IF IT WAS, ABORT
408F     C5               PUSH      B         SAVE RESULT SIGN BYTE
4090     4B               MOV       C,E       MOVE DIVIDEND ( = REM) TO BC
4091     42               MOV       B,D
4092     110000           LXI       D,0       INITIALIZE QUOTIENT = 0...
4095     D5               PUSH      D         ...ON TOP OF STACK (TOS)
4096     EB               XCHG                NOW BC = REM, DE=DIV, TOS=QUO
```

Listing 1 continued on page 216

H & E COMPUTRONICS INC.

• EVERYTHING FOR YOUR TRS-80* • ATARI* • APPLE* • PET* •

*TRS-80 is a trademark of the Radio Shack Division of Tandy Corp. - *ATARI is a trademark of Atari Inc. - *Apple is a trademark of Apple Corp. - *Pet is a trademark of Commodore

NEW

★ All orders processed within 24-Hours
★ 30-Day money back guarantee on all Software

BUSINESS PAC 100

100 Ready-To-Run Business Programs

(ON CASSETTE OR DISKETTE).....Includes 110 Page Users Manual.....5 Cassettes (Or Diskettes)
Inventory Control.....Payroll.....Bookkeeping System.....Stock Calculations.....
Checkbook Maintenance.....Accounts Receivable.....Accounts Payable.....

BUSINESS 100 PROGRAM LIST

1 RULE78	Interest Apportionment by Rule of the 78's
2 ANNU1	Annuity computation program
3 DATE	Time between dates
4 DAYYEAR	Day of year a particular date falls on
5 LEASEINT	Interest rate on lease
6 BREAKEVN	Breakeven analysis
7 DEPRSL	Straightline depreciation
8 DEPRSY	Sum of the digits depreciation
9 DEPRDB	Declining balance depreciation
10 DEPRDDB	Double declining balance depreciation
11 TAXDEP	Cash flow vs. depreciation tables
12 CHECK2	Prints NEBS checks along with daily register
13 CHECKBK1	Checkbook maintenance program
14 MORTGAGE/A	Mortgage amortization table
15 MULTMON	Computes time needed for money to double, triple, etc.
16 SALVAGE	Determines salvage value of an investment
17 RRVARIN	Rate of return on investment with variable inflows
18 RRCONST	Rate of return on investment with constant inflows
19 EFFECT	Effective interest rate of a loan
20 FVAL	Future value of an investment (compound interest)
21 PVAL	Present value of a future amount
22 LOANPAY	Amount of payment on a loan
23 REGWITH	Equal withdrawals from investment to leave 0 over
24 SIMPDISK	Simple discount analysis
25 DATEVAL	Equivalent & nonequivalent dated values for oblig.
26 ANNUDEF	Present value of deferred annuities
27 MARKUP	% Markup analysis for items
28 SINKFUND	Sinking fund amortization program
29 BONDVAL	Value of a bond
30 DEPLETE	Depletion analysis
31 BLACKSH	Black Scholes options analysis
32 STOCVAL1	Expected return on stock via discounts dividends
33 WARVAL	Value of a warrant
34 BONDVAL2	Value of a bond
35 EPSEST	Estimate of future earnings per share for company
36 BETAALPH	Computes alpha and beta variables for stock
37 SHARPE1	Portfolio selection model-i.e. what stocks to hold
38 OPTWRITE	Option writing computations
39 RTVAL	Value of a right
40 EXPVAL	Expected value analysis
41 BAYES	Bayesian decisions
42 VALPRINF	Value of perfect information
43 VALADINF	Value of additional information
44 UTILITY	Derives utility function
45 SIMPLEX	Linear programming solution by simplex method
46 TRANS	Transportation method for linear programming
47 EOQ	Economic order quantity inventory model
48 QUEUE1	Single server queueing (waiting line) model
49 CVP	Cost-volume-profit analysis
50 CONDPROF	Conditional profit tables
51 OPTLOSS	Opportunity loss tables
52 FQUOQ	Fixed quantity economic order quantity model
NAME	**DESCRIPTION**
53 FQEOWSH	As above but with shortages permitted
54 FQEOQPB	As above but with quantity price breaks
55 QUEUECB	Cost-benefit waiting line analysis
56 NCFANAL	Net cash-flow analysis for simple investment
57 PROFIND	Profitability index of a project
58 CAP1	Cap. Asset Pr. Model analysis of project
59 WACC	Weighted average cost of capital
60 COMPBAL	True rate on loan with compensating bal. required
61 DISCBAL	True rate on discounted loan
62 MERGANAL	Merger analysis computations
63 FINRAT	Financial ratios for a firm
64 NPV	Net present value of project
65 PRINDLAS	Laspeyres price index
66 PRINDPA	Paasche price index
67 SEASIND	Constructs seasonal quantity indices for company
68 TIMETR	Time series analysis linear trend
69 TIMEMOV	Time series analysis moving average trend
70 FUPRINF	Future price estimation with inflation
71 MAILPAC	Mailing list system
72 LETWRT	Letter writing system-links with MAILPAC
73 SORT3	Sorts list of names
74 LABEL1	Shipping label maker
75 LABEL2	Name label maker
76 BUSBUD	DOME business bookkeeping system
77 TIMECLCK	Computes weeks total hours from timeclock info.
78 ACCTPAY	In memory accounts payable system-storage permitted
79 INVOICE	Generate invoice on screen and print on printer
80 INVENT2	In memory inventory control system
81 TELDIR	Computerized telephone directory
82 TIMUSAN	Time use analysis
83 ASSIGN	Use of assignment algorithm for optimal job assign.
84 ACCTREC	In memory accounts receivable system-storage ok
85 TERMSPAY	Compares 3 methods of repayment of loans
86 PAYNET	Computes gross pay required for given net
87 SELLPR	Computes selling price for given after tax amount
88 ARBCOMP	Arbitrage computations
89 DEPRSF	Sinking fund depreciation
90 UPSZONE	Finds UPS zones from zip code
91 ENVELOPE	Types envelope including return address
92 AUTOEXP	Automobile expense analysis
93 INSFILE	Insurance policy file
94 PAYROLL2	In memory payroll system
95 DILANAL	Dilution analysis
96 LOANAFFD	Loan amount a borrower can afford
97 RENTPRCH	Purchase price for rental property
98 SALELEAS	Sale-leaseback analysis
99 RRCONVBD	Investor's rate of return on convertable bond
100 PORTVAL9	Stock market portfolio storage-valuation program

☐ **CASSETTE VERSION**	**$99.95**
☐ **DISKETTE VERSION**	**$99.95**
☐ **TRS-80* MODEL II VERSION**	**$149.95**

ADD $3.00 FOR SHIPPING IN UPS AREAS
ADD $4.00 FOR C.O.D. OR NON-UPS AREAS
ADD $5.00 OUTSIDE U.S.A, CANADA & MEXICO

NEW TOLL-FREE ORDER LINE
(OUTSIDE OF N.Y. STATE)
(800) 431-2818

H & E COMPUTRONICS INC.
MATHEMATICAL APPLICATIONS SERVICE™

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

VISA
master charge

24 HOUR ORDER LINE
(914) 425-1535

Circle 172 on inquiry card.

Listing 1 continued:

```
4097     210100                LXI       H,1       INITIALIZE HOLD = 1
                *
409A     29     DBLDIV    DAD       H         LEFT SHIFT HOLD
409B     EB               XCHG                NOW BC=REM, DE=HOLD, HL=DIV, TOS=QUO
409C     29               DAD       H         LEFT SHIFT DIV
409D     CDC940           CALL      CMPBH     COMPARE DIV TO REM
40A0     EB               XCHG                NOW BC=REM, DE=DIV, HL=HOLD, TOS=QUO
40A1     D29A40           JNC       DBLDIV    BRANCH BACK IF DIV < REM
40A4     EB               XCHG                DUMMY XCHG TO MAKE LOOP WORK 1ST PASS...
40A5     EB     HALVEDIV  XCHG                NOW BC=REM, DE=DIV, HL=HOLD, TOS=QUO
40A6     CDCE40           CALL      DIVBY2    HOLD = HOLD/2 (RITE SHIFT)
40A9     CAC240           JZ        DIVDONE   IF HOLD = 0, WERE DONE
40AC     EB               XCHG                NOW BC=REM, DE=HOLD, HL=DIV, TOS=QUO
40AD     CDCE40           CALL      DIVBY2    RITE SHIFT DIV
40B0     CDC940           CALL      CMPBH     COMPARE DIV TO REM...
40B3     FAA540           JM        HALVEDIV  IF DIV > REM, BRANCH BACK
40B6     79               MOV       A,C       REM = REM - DIV...
40B7     95               SUB       L
40B8     4F               MOV       C,A
40B9     78               MOV       A,B
40BA     9C               SBB       H
40BB     47               MOV       B,A
40BC     E3               XTHL                NOW BC=REM, DE = HOLD, HL=QUO, TOS=DIV
40BD     19               DAD       D         QUO = QUO + HOLD
40BE     E3               XTHL                NOW BC=REM, DE=HOLD, HL=DIV, TOS=QUO
40BF     C3A540           JMP       HALVEDIV  ENDDO.

40C2     E1     DIVDONE   POP       H         GET QUOTIENT TO HL
40C3     59               MOV       E,C       MOVE FINAL REM TO DE
40C4     50               MOV       D,B
40C5     C1               POP       B         RECALL SIGN BYTE FOR RESULT
40C6     C36140           JMP       SIGNRCL   COMPUTE FINAL SIGN OF RESULT AND RETURN
                *
                *        INTERNAL SUBROUTINE CMPBH - COMPARE BC TO HL...
                *
40C9     79     CMPBH     MOV       A,C
40CA     95               SUB       L
40CB     78               MOV       A,B
40CC     9C               SBB       H         SIGN, ZERO NOW REFLECT (BC) - (HL)...
40CD     C9               RET
                *
                *        INTERNAL SUBROUTINE DIVBY2 - DIVIDE (HL) BY 2 (RITE SHIFT)
                *        KILLS PSW.  REMAINDER RETURNED IN CY.
                *
40CE     AF     DIVBY2    XRA       A         CLEAR CY
40CF     7C               MOV       A,H
40D0     1F               RAR
40D1     67               MOV       H,A
40D2     7D               MOV       A,L
40D3     1F               RAR
40D4     6F               MOV       L,A
40D5     B4               ORA       H         SET ZERO FLAG IF BOTH H AND L = 0
40D6     C9               RET


              ********************************************************************************
              *                                                                              *
              * SUBROUTINE DECBIN - CONVERT ASCII DECIMAL TO BINARY NUMBER                   *
              *                                                                              *
              ********************************************************************************

                *        THIS ROUTINE CONVERTS A STRING OF ASCII CHARACTERS REPRESENTING
                *        A NUMBER TO A SIGNED 16-BIT NUMBER IN TWOS COMPLEMENT FORM.
                *        LEGAL RANGE OF CONVERTIBLE VALUES IS -32767 TO +32767.
                *        LEGAL FORM FOR STRING IS...
                *
                *        <BLANKS><SIGN><BLANKS><DIGITS><NON-DIGIT>
                *
                *        WHERE  <BLANKS> IS 0 OR MORE BLANKS,
                *               <SIGN> IS +, -, OR OMITTED,
                *               <DIGITS> IS A STRING OF 1 OR MORE NUMERIC DIGITS,
                *                        REPRESENTING AN INTEGER NOT EXCEEDING 32767.
                *               <NON-DIGIT> IS ANY NON-DIGIT CHARACTER (E.G., A BLANK).
                *
                *        USAGE:
                *
                *        ON CALL:
                *        (DE) = ADDRESS OF START-OF-ASCII STRING TO BE CONVERTED.
                *        ON RETURN TO CALLING PROGRAM...
                *        (HL) = RETURNED SIGNED NUMERIC VALUE
                *        (DE) = ADDRESS OF TERMINAL CHARACTER OF STRING (<NON-DIGIT>)
                *        SIGN AND ZERO FLAGS WILL BE SET TO REFLECT VALUE IN (HL).
```

Listing 1 continued on page 220

H & E COMPUTRONICS INC.

••EVERYTHING FOR YOUR TRS-80™ ••
MODEL III

TRS-80 is a trademark of Tandy Corp.

★ *All orders processed within 24-Hours*
★ *30-Day money back guarantee on all TRSDOS Software*
★ *Add $2.00 for shipping in UPS Areas*
★ *Add $4.00 for C.O.D. or NON-UPS Areas*
★ *Add $5.00 outside U.S.A., Canada & Mexico*
★ *We will match any bonafide advertised price in any of the Major Computer Magazines*

GENERAL LEDGER, ACCOUNTS RECEIVABLE, ACCOUNTS PAYABLE, PAYROLL, INVENTORY CONTROL AND INVOICING (Small Business Group).....an extensive business system for the serious user.....can be used one module at a time or as a coordinated system..... **$199.95** per module.....**$1199.95** for the complete system.*

MASTER PAC 100.....100 essential programs.....BUSINESS.....PERSONAL FINANCE..... STATISTICS.....MATH.....GAMBLING.....GAMES.....includes 125 page manual and 5 diskettes **$59.95**

BUSINESS PAC 100.....100 essential business programs.....INVENTORY CONTROL.....PAYROLL.....BOOKKEEPING SYSTEM.....STOCK CALCULATIONS.....CHECKBOOK MAINTENANCE.....ACCOUNTS RECEIVABLE.....ACCOUNTS PAYABLE.....includes 125 page manual and five diskettes **$99.95**

INFORMATION SYSTEM (The Bottom Shelf).....An in-memory information system for small mailing lists, inventories (i.e. books, articles, records, program reference files).....Can be used for anything that you would use rolodex or index card files.....Up to ten user define fields..... Programmable printouts for rolodex cards, mailing labels, etc......Will identify all records that contain a group of characters you've entered even if that group is in the middle of a line.....Sorts data base by any field **$49.50***

DATA MANAGER II (The Bottom Shelf).....RANDOM ACCESS Disk based DATA MANAGEMENT SYSTEM (Similiar to INFORMATION SYSTEM above........but RANDOM ACCESS STORAGE expands the amount of storage space available).....Used to replace index cards for medium sized mail lists, inventories, personnel records, sales prospects, etc......Uses up to four disk drives on line.....Up to twenty user defined fields, programmable printouts for rolodex cards, etc.....will identify all records that contain a group of characters you've entered even if that group is in the middle of a line.....maintain up to 5 changeable presorted "key" files...... variable length random records (the smaller the record you define, the more records yu can store) **$99.95***

BUSINESS MAIL SYSTEM (The Bottom Shelf).....Handles large mailing lists (up to 150,000 names).....supports 3 or 4 line addresses.....files automatically in zip code order, alphabetical within zip code.....formats for 1 to 4 across mailing labels.....supports quick disk location of single or multiple names.....meets all industry and postal standards.....numeric code fields included for printing selected records **$125.00***

ANALYSIS PAD (The Bottom Shelf).....A Columnar Calculator for financial analysis, line item budgeting, cost analysis, sales analysis and almost any financial function (and many statistical functions).....create matrixes of 29 × 39.....make all entries at one time either by row or column..... add, delete, move or switch columns and rows.....edit any data from full screen display.....add, subtract, multiply and divide one column by another and put results in designated column (up to six calculations can be made and placed in designated column).....define columns as constants.....save calculations and formulas on disk.....results can be printed in a variety of report formats **$99.95***

CHECKBOOK II (The Bottom Shelf).....A complete in memory checkbook balancing and reconcilliation program.....five column keyboard input with 5 characters for check number, 16 for payee, 4 for code.....numerical sort routine **$49.50***

CHECK REGISTER ACCOUNTING SYSTEM (The Bottom Shelf).....A complete random access checkbook system.....set and define up to 60 accounts with as many income accounts as you choose.....complete checkbook balancing and reconcilliation.....single entry input where transaction can be dispersed over several accounts.....enables user to make a 64-character note on each transaction.....print out your own check after data entry.....prints monthly summaries of each account with month and year-to-date totals.....create a suspense file to remind you of coming expenses.....Reports generated included Check Register (for any month), notes to Check Register, Income/Expense Distribution Report, Statement of Selected Accounts, Bank Reconcile Statement, Suspense File and Full Account Distribution Statement **$74.95***

LIBRARY 100 (The Bottom Shelf).....100 Programs on a broad range of topics.....Finance..... Education.....Graphics.....Home.....Games.....CASSETTE VERSION **$49.50**
DISK VERSION **$74.95**

ADVENTURE (by Scott Adams).....A series of games (for ages 10-99).....wander through enchanted worlds seeking treasures..... 1. Adventureland.....2. Pirate's Adventure.....3. Mission Impossible Adventure.....4. Voodoo Castle.....5. The Count.....6. Strange Odyssey.....7. Mystery Fun House.....8. Pyramid of Doom.....9. Ghost Town.....(#1 and #2 recommended for the movie adventure).....Each adventure **$14.95** (jon cassette)......Diskette versions sold in groups of three at **$39.95** per three programs (#1 - #3, #4 - #6, #7 - #9).

HORSE SELECTOR II (Dr. Hal Davis).....New simplified version of the original Horse Selector (for flats).....The first Horse Selection System to actually calculate the estimated offs for each horse.....easy to follow rules.....uses 4 factors (speed rating, track variant, distance of the present race, distance of the last race).....calculated estimated odds.....FREE DUTCHING TABLES allows betting on 2 or more horses with a guaranteed profit **$50.00**

MON-3 and MON-4 (Howe Software).....Powerful utility programs enabling you to interact directly with your **TRS-80** in MACHINE LANGUAGE.....The monitor comes with complete 40-page instruction manual making it useful for both the beginner and advanced programmer.... simple commands make it easy to use.....functions include DISPLAY, DISASSEMBLE, MOVE and COMPARE, SEARCH, MODIFY, RELOCATE, PRINT, READ and WRITE, UNLOAD, SAVE and READ, INPUT and OUTPUT, SEND and RECEIVE.....MON-3 **$39.95** (for cassette)..... MON-4 **$49.95** (for disk).

(14) **SMART TERMINAL** (Howe Software).....enables your TRS-80 to be used as a remote terminal to a time sharing computer system **$69.95**

(15) **FAST SORT** (Howe Software).....a series of machine-language subroutines to sort data from BASIC programs.....data may be alphabetic (string) or numeric.....easily interfaced with your BASIC programs (no machine language knowledge is necessary) **$9.95**

(16) **MAILING LIST** (Howe Software).....maintains mailing lists of over 1000 names.....commands allow adding, changing, deleting, and finding names. Sorting is done in machine language subroutine.....labels printed in 1, 2 or 3 columns **$69.95**

(17) **HOME BUDGET** (Howe Software).....combines the maintenance of your checkbook with analysis of your income, expenses and monthly bills. Handles data including bills, income, deposits, checks and debits to your checking account, and cash expenses. Computes checkbook balance, list of unpaid bills, monthly and year-to-date summaries of income and expenses showing income tax deductions.....All output printed on video display or line printer.....comes with complete instructions manual **$49.95***

(18) **SMALL BUSINESS ACCOUNTING** (Howe Software).....Based on the DOME BOOKKEEPING SYSTEM.....keeps track of all income, expenditures and payroll for a small business of up to 16 employees.....income and expenditures can be entered on a daily, weekly or monthly basis..... computes monthly and year to date totals.....manual contains complete instrucitons for customization Cassette version **$29.95**.....Diskette version **$49.95**

(19) **REMODEL-PROLOAD** (Racet Computes).....Renumber program lines.....move statements from one part of a program to another **$34.95**

(20) **GSF** (Racet Computes).....Lightning fast in-memory machine language sort utility that can be made part of your BASIC progams without any machine language knowledge.....includes several other utilities to speed up your BASIC programs.....no machine knowledge necessary to use GSF in your BASIC programs **$30.00**

(21) **DOSORT** (Racet Computes).....includes **GSF** (above).....extends the in memory sort to sorts on multiple disk drives **$45.00***

(22) **COPSYS** (Racet Computes).....allows the user to make copies of machines language cassettes without any knowledge of machine language **$20.00**

(23) **COMRPOC** (Racet Computes).....an auto load program for disk users.....allows the user to insert a diskette into their **MOD-III** and have the computer take over all loading.....load a machine language program, BASIC, RUN a certain program all without pressing a single button .....allows your computer to perform 10, 20, 30 or more functions without pressing a single button **$30.00***

(24) **INFINE BASIC** (Racet Computes).....adds a variety of machine language subroutines to your BASIC programs (without any machine language knowledge).....fast sorts.....matrix operations .....compress and uncompress data.....and more **$60.00**

(25) **INFINITE BUSINESS** (Racet Computes).....an add on package to **INFINITE BASIC**.....adds a variety of routines important to the businessman (increase accuracy of calculations and more) **$30.00**

(26) **DMS** (Racet Computes).....lightning fast machine language sort.....sorts up to 4 disk drives of information **$90.00***

(27) **BLINK** (Racet Computes).....allows you to RUN new programs without losing the variables stored in your previous program.....line many programs together without losing important variables **$30.00***

(28) **KFS-80** (Racet Computes).....now you can use ISAM (Index Sequential Access Files) on your **MOD-III**.....using ISAM in your BASIC programs allows instant access of your items in your data files.....use with mail programs.....inventory programs.....etc. **$100.00***

(29) **MAIL LIST** (Racet Computes).....all routines are in machine language allowing for quick access **$75.00**

* **FOR DISK ONLY**

Circle 173 on inquiry card.

H & E COMPUTRONICS INC.
MATHEMATICAL APPLICATIONS SERVICE™

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

NEW TOLL-FREE
ORDER LINE
(OUTSIDE OF N.Y. STATE)
(800) 431-2818

24 HOUR ORDER LINE
(914) 425-1535

master charge
VISA

EAST COAST

ΩMEGA Sales Co.
12 Meeting St.
Cumberland, RI 02864
1-800-556-7586
1-401-722-1027

ΩMEGA
SALES
CO.

SPECIAL OF THE MONTH!!



INTERTEC SUPERBRAIN
64K RAM **$2849**

OR TOGETHER FOR ONLY
$5195



NEC 5510 SPINWRITER **$2395**



16K
ATARI 800
$759

OKIDATA MICROLINE-83	$949
OKIDATA MICROLINE-80	$469
APPLE II PLUS 48K	$1150
APPLE DISK w/ 3.3 DOS Controller	$545
APPLE DISK w/o Controller	$435
BASE II PRINTER	$649
HAZELTINE 1420	$799
NORTHSTAR HORIZON II 32K QD	$2975
ATARI 400 8K	$399
ATARI 400 16K	$499

DIABLO 630
$1995
Tractor option $200

- ***NO SURCHARGE FOR CREDIT CARDS***
- ***WE ACCEPT C.O.D.'S***
- ***ALL EQUIPMENT FACTORY FRESH W/MANUFACTURER'S WARRANTY***
- ***STOCK SHIPMENTS USUALLY SAME DAY OR NEXT DAY***
- ***NO HIDDEN CHARGES - WE LIVE BY OUR PUBLISHED PRICES***

ΩMEGA SALES COMPANY

ΩMEGA
SALES
CO.

WEST COAST

ΩMEGA Sales Co.
3353 Old Conejo Rd. #102
Newbury Park, CA 91320

1-800-235-3581

1-805-499-3678

RADIO SHACK 16K Level II Model 3	$875
RADIO SHACK 64K Model 2	$3449
ANADEX DP-9500	$1249
TELEVIDEO 912C	$669
TELEVIDEO 920C	$729
TELEVIDEO 950	$1049
ATARI 825 PRINTER	$729
ATARI 850 INTERFACE	$169
ATARI 810 DISK	$449

(Call for price list of ATARI Software)



C-ITOH STARWRITER 25 **$1595**



EPSON MX-80 PRINTER
INTERFACES: IEEE $55, TRS•80 $35,
APPLE INTERFACE + CABLE $90,
RS•232 $70 **Call for price**

NEC MONITOR
$219

CALL TOLL FREE

EAST COAST / WEST COAST

1-800-556-7586 **1-800-235-3581**

ΩMEGA SALES COMPANY

Listing 1 continued:

```
                           *         CY CLEARED. A REGISTER CLOBBERED. B, C RESTORED.
                           *
                           *         NOTES ON METHOD... B REG USED TO HOLD 3 FLAGS...
                           *         BIT 7="-" FLAG = MINUS SIGN ENCOUNTERED
                           *         BIT 6= "SE" FLAG = SIGN ENCOUNTERED
                           *         BIT 0 = "DE" = DIGIT ENCOUNTERED.
                           *
40D7    C5        DECBIN     PUSH    B
40D8    0600                 MVI     B,0         INITIALIZE FLAGS -,DE,SE
40DA    210000               LXI     H,0         INITIALIZE RESULT
40DD    1A        AKLOOP     LDAX    D           FETCH NEXT ASCII CHARACTER
40DE    D630                 SUI     48          CONVERT CHAR TO BCD DIGIT IF POSSIBLE
40E0    4F                   MOV     C,A         SAVE (CHARACTER-48) IN C
40E1    FAFF40               JM      NOTDIGIT    IS IT A DIGIT 0 THRU 9...
40E4    FE0A                 CPI     10
40E6    F2FF                 JP      NOTDIGIT
40E9    D5                   PUSH    D           ...IF SO, SAVE BUFFER POINTER
40EA    110A00               LXI     D,10        ...MULTIPLY PARTIAL RESULT BY 10...
40ED    CD3840               CALL    EMULT       ...(ALSO CHECKING FOR OVERFLOW)...
40F0    1600                 MVI     D,0         ...AND ADD IN VALUE OF DIGIT...
40F2    59                   MOV     E,C
40F3    CD0040               CALL    EADD        (HL) = (HL)*10 + DIGIT
40F6    D1                   POP     D           RECALL BUFFER POINTER
40F7    13                   INX     D           BUMP BUFFER POINTER
40F8    3E01                 MVI     A,1         ...SET "DIGIT ENCOUNTERED (DE) FLAG...
40FA    B0                   ORA     B
40FB    47                   MOV     B,A
40FC    C3DD40               JMP     AKLOOP      ...AND WERE READY FOR NEXT CHARACTER
                           *
                           *         COME HERE FOR ANY CHARACTER EXCEPT 0,1,...9
                           *
40FF    79        NOTDIGIT   MOV     A,C         RECALL (CHAR-48)
4100    FEF0                 CPI     -16         IS IT A BLANK. SET ZERO FLAG IF SO.
4102    78                   MOV     A,B         RECALL FLAGS
4103    0F                   RRC                 TEST "DIGIT ENCOUNTERED" FLAG IN CY
4104    DA6140               JC      SIGNRCL     IF DIGITS ENCOUNTERED PRIOR, WERE DONE
4107    C20E41               JNZ     TRYSIGN     ...ELSE, IF NOT BLANK TRY + OR -
410A    13                   INX     D           ...ELSE IGNORE LEADING BLANK,
410B    C3DD40               JMP     AKLOOP      AND PROCEED WITH NEXT CHARACTER
410E    78        TRYSIGN    MOV     A,B         TEST "SE" FLAG IN CY
410F    07                   RLC
4110    07                   RLC
4111    DC0000               CC      CONVERR
4114    79                   MOV     A,C         ELSE RECALL (CHAR-48)
4115    FEFD                 CPI     -3          IS IT "-"...
4117    C2                   JNZ     TRYPLUS     ...IF NOT TRY FOR "+" SIGN...
411A    3EC0                 MVI     A,0C0H      ...IF IT IS "-", SET SE AND - FLAG
411C    B0                   ORA     B
411D    47                   MOV     B,A
411E    13                   INX     D           BUMP BUFFER POINTER
411F    C3DD40               JMP     AKLOOP      AND PROCEED WITH NEXT CHARACTER
4122    FEFB      TRYPLUS    CPI     -5          IS IT "+" CHARACTER...
4124    C40000               CNZ     CONVERR     IF NOT ITS AN ERROR
4127    3E40                 MVI     A,40H       IF IT IS "+", SET "SE" FLAG
4129    B0                   ORA     B
412A    47                   MOV     B,A
412B    13                   INX     D           BUMP BUFFER POINTER
412C    C3DD40               JMP     AKLOOP      AND PROCEED WITH NEXT CHARACTER
                           *


                          ****************************************************************************
                          *                                                                          *
                          *  SUBROUTINE BINDEC - CONVERT BINARY NUMBER TO DECIMAL ASCII STRING       *
                          *                                                                          *
                          ****************************************************************************

                           *         THIS ROUTINE GENERATES A STRING OF ASCII CHARACTERS
                           *         REPRESENTING A SIGNED DECIMAL INTEGER.  THE STRING IS
                           *         GENERATED LEFT-JUSTIFIED, WITH LEADING ZEROS SUPPRESSED.
                           *         THE STRING WILL OCCUPY FROM 1 TO 6 CHARACTERS DEPENDING ON
                           *         THE SIGN AND MAGNITUDE OF THE NUMBER DESIRED.
                           *         ON CALL: (HL) = SIGNED BINARY NUMBER TO BE CONVERTED.
                           *         (DE) = ADDRESS OF FIRST CHARACTER OF BUFFER WHERE STRING IS
                           *         TO BE GENERATED.
                           *         ON RETURN: (DE) = ADDRESS OF NEXT BYTE AFTER THE STRING
                           *         WHICH WAS GENERATED.  (A) = NUMBER OF CHARACTERS GENERATED.
                           *         B, C, H, L RESTORED.
                           *
412F    C5        BINDEC     PUSH    B
4130    E5                   PUSH    H           SAVE HL
4131    010000               LXI     B,0         B=MINUS FLAG, C= DIGIT COUNTER
```

Listing 1 continued on page 222



Reliable/low cost single board design w/Z80 CPU.

Supports 1 to 4 single density floppy disks.

External S100 Bus available for extended adaptability (12 slots).

Four serial RS232 ports (parallel option available).

Random Access Memory: 64K RAM standard.

Data Communications: Integrated modem or any RS232 compatible external modem.

SIERRA

The Versatile Computer Company

Sierra National Corporation
5037 Ruffner Street
San Diego, CA 92111
Tel: 714-277-4810
TWX: 910-335-1532

Data Storage Power with 0.5 to 96 Megabytes available. The S100 Bus and SMD disk controller access a variety of hard disk systems:

BASF	8, 24, 40 Megabytes (fixed Winchester system)
AMPEX	32, 64, 96 Megabytes (fixed Winchester + removable cartridge)
CDC	32, 64, 96 Megabytes (fixed Winchester + removable cartridge)

Multiprocessing: Multiple computer boards can be mounted within the System 4000 chassis and each can support a separate user station with its own display terminal and printer. The terminal network is controlled by a master CPU and each slave has the computational speed and memory size necessary to execute sophisticated programs without burdening the other user stations.

SIERRA'S PROFESSIONAL APPLICATION SOFTWARE
General Ledger
Accounts Receivable w/invoicing
Inventory
Accounts Payable
Payroll

PLUS

Many specific market adaptations:
Wordprocessing
Medical/Dental
Property Management
Insurance
Contractor
Accountants
Manufacturing, etc.

Spanish versions available.

OPERATING SYSTEMS
CP/M
MP/M
CP/NET

LANGUAGES
Fortran
Basic
Cobol
Pascal

ALSO

Sierra provides dealers or end user:

- TIME-SHARING
- TRAINING
- SOFTWARE DEVELOPMENT

as part of our complete customer support service.

Attractive dealer package offered. Please inquire.

Circle 367 on inquiry card.

Listing 1 continued:

```
402    4134    E5                   PUSH    H
403    4135    29                   DAD     H          PUSH SIGN INTO CY
404    4136    E1                   POP     H          RECALL UN-SHIFTED NO.
405    4137    D24241               JNC     DIV10K     FALL THRU FOR - NUMBER
406    413A    3E2D                 MVI     A,45       ASCII MINUS SIGN
407    413C    12                   STAX    D          INTO BUFFER
408    413D    04                   INR     B          SET MINUS FLAG
409    413E    13                   INX     D          AND BUFFER POINTER
410    413F    CD3040               CALL    COMP2      ABSOLUTE VALUE OF NUMBER
411    4142    EB      DIV10K       XCHG               N TO DE, BUFF ADDR TO HL
412    4143    228441               SHLD    BUFADR     SAVE BUFFER ADDRESS
413    4146    EB                   XCHG
414    4147    111027               LXI     D,10000
415    414A    CD6E41               CALL    CNVT1DIG   FIND FIRST DECIMAL DIGIT
416    414D    11E803               LXI     D,1000
417    4150    CD6E41               CALL    CNVT1DIG   SECOND DEC DIGIT...
418    4153    116400               LXI     D,100
419    4156    CD6E41               CALL    CNVT1DIG   THIRD...
420    4159    110A00               LXI     D,10
421    415C    CD6E41               CALL    CNVT1DIG   4TH
422    415F    7D                   MOV     A,L        LAST DIGIT IS FINAL REMAINDER
423    4160    C630                 ADI     48         CONVERT TO ASCII CHAR
424    4162    0C                   INR     C
425    4163    2A8441               LHLD    BUFADR     RECALL BUFFER POINTER
426    4166    EB                   XCHG
427    4167    12                   STAX    D          INSTALL LAST CHARACTER INTO BUFFER
428    4168    79                   MOV     A,C        RETURN CHARACTER COUNT IN A REG
429    4169    80                   ADD     B          ...AND ADD 1 FOR MINUS SIGN IF MINUS
430    416A    13                   INX     D          POINT TO NEXT DIGIT IN BUFFER
431    416B    E1                   POP     H          FINAL RESTORE FOR HL
432    416C    C1                   POP     B          RECALL B
433    416D    C9                   RET
434    416E    CD7F40  CNVT1DIG     CALL    EDIVMOD    DIVIDE REMAINDER BY 10**N
435    4171    EB                   XCHG               NEW REM TO HL
436    4172    7B                   MOV     A,E        DIGIT TO A
437    4173    B1                   ORA     C          IF NO NON-ZERO DIGITS SO FAR...
438    4174    C8                   RZ                 ...AND THIS = 0, THEN SUPPRESS LEADING 0
439    4175    7B                   MOV     A,E        ELSE, RECALL DIGIT
440    4176    C630                 ADI     48         CONVERT DIGIT TO CHAR
441    4178    0C                   INR     C          UPDATE CHAR COUNTER
442    4179    EB                   XCHG
443    417A    2A8441               LHLD    BUFADR     BUFFER ADDRESS LOAD
444    417D    77                   MOV     M,A        STORE CHAR IN BUFFER
445    417E    23                   INX     H          NEXT CHAR
446    417F    228441               SHLD    BUFADR     SAVE BUFFER POINTER
447    4182    EB                   XCHG
448    4183    C9                   RET

                       *****************************************************************
                       *                                                               *
                       * FOLLOWING MUST BE IN READ/WRITE MEMORY...                     *
                       *                                                               *
                       *****************************************************************

450    4184            BUFADR       DS      2          TEMPORARY STORAGE FOR POINTER
451    4186                         END


                                        --- SYMBOLIC CROSS-REFERENCE MAP ---

-SYMBOL-    -VALUE- -R          -DEFINED-  -REFERENCED-

AKLOOP       40DD   *A             336       353     364     376     383
BINDEC       412F   *A             399        29
BUFADR       4184   *A             450       412     425     443     446
CHIN         0000                    7        13
CHOUT        0000                    8        27      36
CMPBH        40C9   *A             285       255     264
CNVT1DIG     416E   *A             434       415     417     419     421
COMP2        4030   *A             161       141     156     205     217     224     410
CONVERR      0000                  102       368     378
DBLDIV       409A   *A             252       257
DECBIN       40D7   *A             333        20      23
DIVBY2       40CE   *A             294       260     263
DIVDONE      40C2   *A             277       261
DIV10K       4142   *A             411       405
EADD         4000   *A             110       142     347
ECHS         4020   *A             151     *UNUSED
ECHSGO       402A   *A             156       153
EDIVMOD      407F   *A             234       434
EMULT        403B   *A             175        25     344
ESIGN        400E   *A             125       114     157     207
```

Listing 1 continued on page 224

MEMOREX

SUPERB QUALITY AT UNBEATABLE PRICES. THAT'S MEMOREX DISCS FROM PACIFIC EXCHANGES

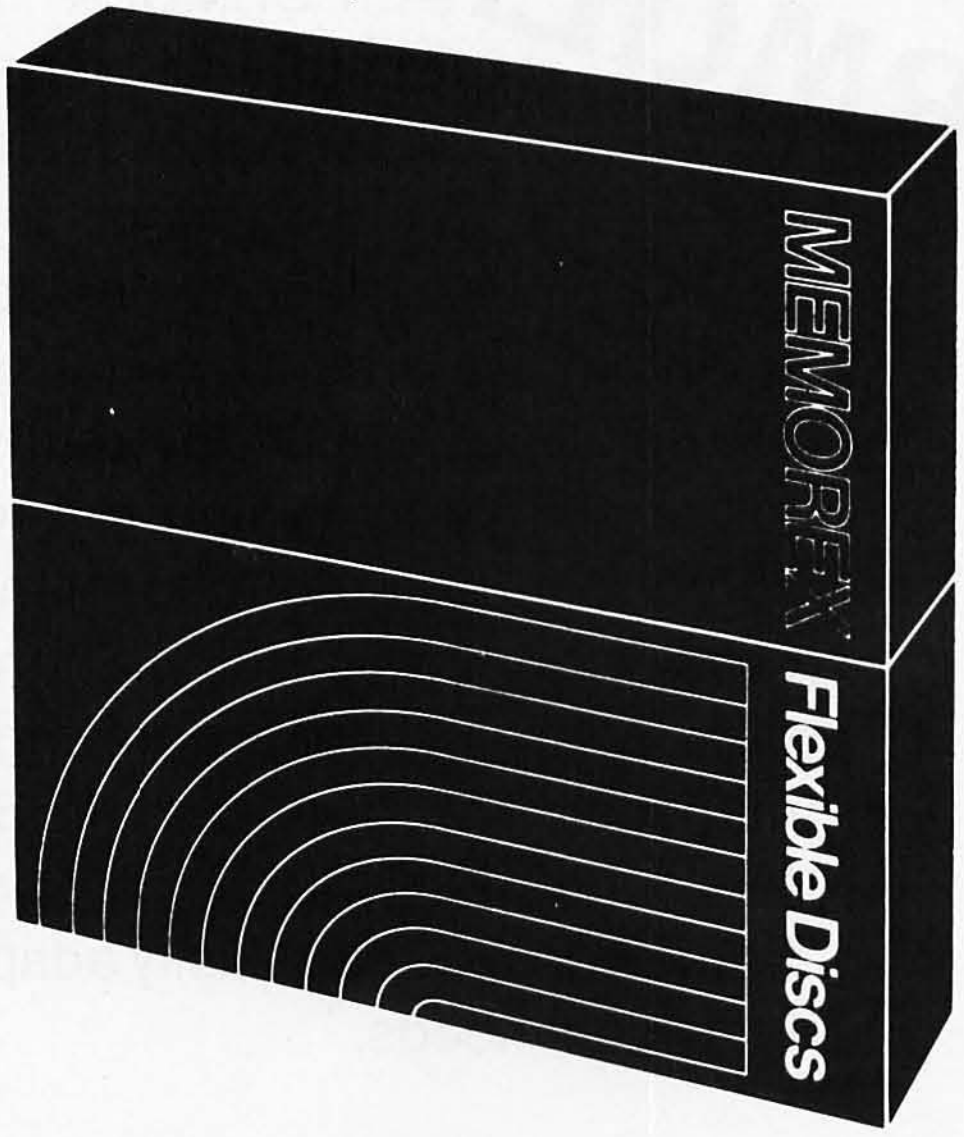

**For Data Reliability—
Memorex
Flexible
Discs**

CALL FREE FOR PRICES & INFORMATION

(800)235-4137

In California, (805)543-1037



PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401

DEALER INQUIRIES INVITED VISA master charge C.O.D.'s ACCEPTED

Circle 310 on inquiry card.

Listing 1 continued:

```
ESUB         4016  *A             139    *UNUSED
HALVEDIV     40A5  *A             259       265    275
HLSMALL      4048  *A             185       180
INBUF        303B  *A              40        12     19
MONITOR      0000                   9        35
NOTDIGIT     40FF  *A             357       339    341
OUTBUF       304F  *A              41        28     32
OVERFLOW     0000                 101       118    155    183    192    195    202    238    243
RSLTSIGN     406F  *A             214       177    239
SHIFTOP      4056  *A             193       190
SIGNRCL      4061  *A             200       281    361
TEST         3000  *A              12    *UNUSED
TEST1        3003  *A              13        18
TEST2        3010  *A              19        16
TEST3        302F  *A              33        38
TRYPLUS      4122  *A             377       371
TRYSIGN      410E  *A             365       362
XMLOOP       404C  *A             187       198

-COMMON BLOCK-     -L      -

ABSOL               01DF
```

TECHNOLOGY:
AMERICA'S COMPETITIVE EDGE.

Westinghouse addresses the vital role of technology in industry.

Technology is the key to the world marketplace.

If we want to maintain America's competitive edge, we must make better use of present technologies, and encourage new ones.

Most of the firms and countries which have achieved conspicuous success in this world have done so because they possessed some special advantage. They had an edge over their competitors. In recent decades, America's competitive edge has been its technology. Our ability to originate and apply innovative scientific and engineering ideas earned us a commanding lead in the world marketplace.

Things have changed

Unfortunately, that lead has dwindled. America's share of the world's manufactured goods market has eroded over the past 20 years, lost to foreign manufacturers. Not only have they captured part of what had been our share of the world market, but they are now successfully penetrating our own domestic markets.

What happened?

A look at a few statistics helps reveal some of the reasons for our reversals. Take patents. The number of domestic patent applications by Americans has been flat for several years. In contrast, the number of those filed here by foreign countries has been rising every year. In 1978, almost 37 percent of the patents granted went to foreign applicants. Or take the percentage of our Gross National Product going into industrial R&D. Over the past two decades, it has dropped precipitously.

What is needed

Fortunately, today Westinghouse and other corporations already have technologies which can help America maintain its technological leadership. And these same corporations are hard at work on technologies which can expand America's leadership. The problem lies in implementing those technologies. Because, while the development of new technologies costs a large amount of money, turning them into commercial realities requires far more.

A national commitment

Something else is needed: a united effort by industry, labor and government. Obviously, management should make a greater R&D effort to refine today's technologies, and develop new ones for tomorrow. Employes must realize that their cooperation is vital if America is to remain the most productive nation in the world. And our elected officials need to reestablish a sound economic foundation, because that is basic to all social progress. In particular, tax laws and monetary policy must be structured to allow industry to accumulate capital needed to apply available technologies, and invest in the development of still more advanced ones.

The Westinghouse role

At Westinghouse, we believe technology is vital to our nation, our customers, and our own progress. We're supporting that belief by ambitious R&D programs, by building and modernizing existing facilities, and by introducing innovative methods to improve both our own quality and productivity and that of our customers. Today's proven Westinghouse technologies are focused on key areas such as productivity, services, energy, and America's national security. These existing technologies, together with the ones we are developing for the future, represent our efforts to help maintain this nation's competitive edge. On the following pages are some examples.

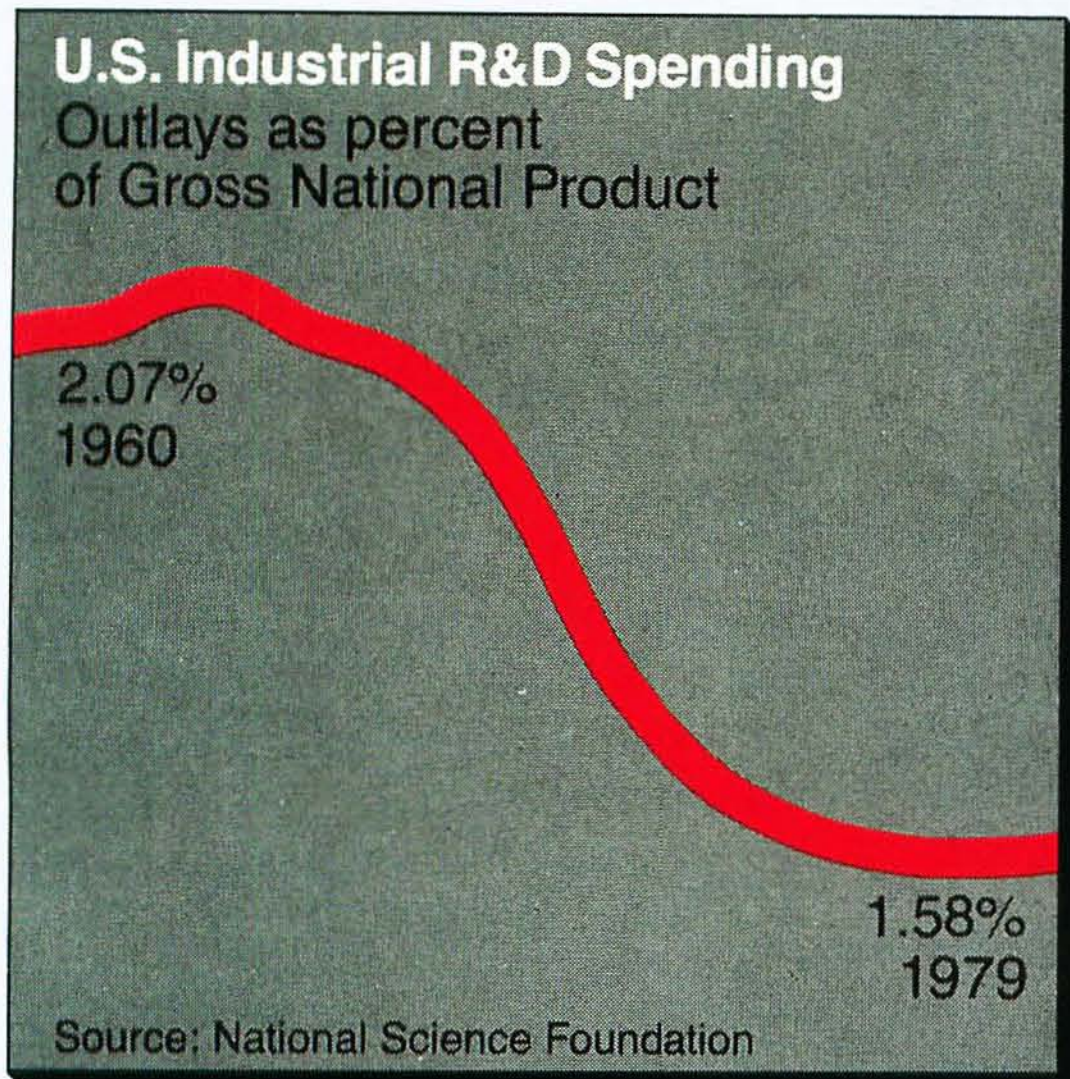
U.S. Industrial R&D Spending
Outlays as percent of Gross National Product

Source: National Science Foundation

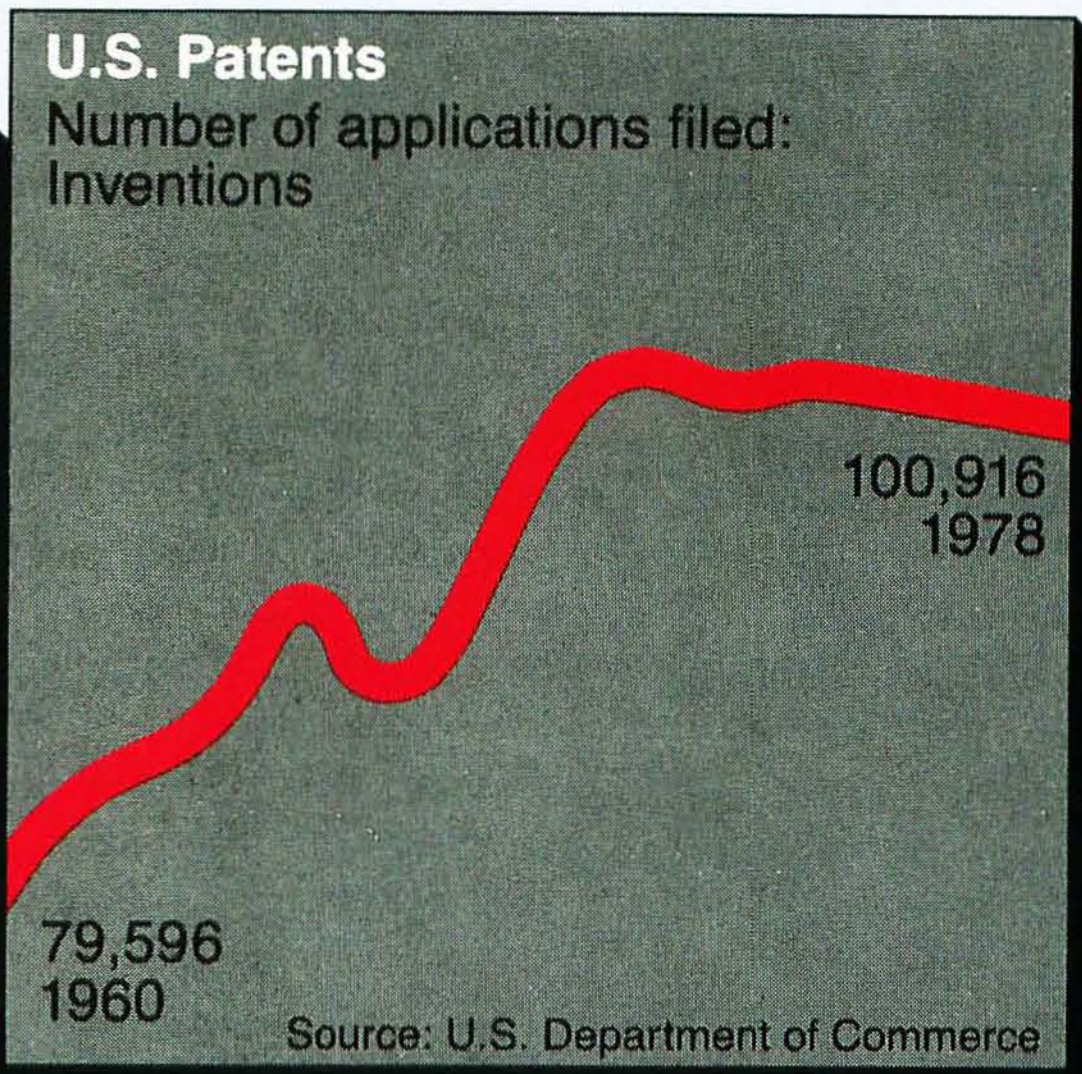
U.S. Patents
Number of applications filed: Inventions

Source: U.S. Department of Commerce


U.S. Exports
Percent share manufactured goods from 15 major countries excluding exports to U.S.

Source: U.S. Department of Commerce

In the next five years, Westinghouse plans to invest:

$1 Billion on R&D and $2 Billion applying current technologies in:

- Modernization of existing plants and equipment
- Construction of new plants
- Productivity and quality improvement projects

WESTINGHOUSE TECHNOLOGY APPLIED TO ENERGY

Someday, Westinghouse technology will provide economical electricity from the sun, and clean gas from coal.

The fact that silicon photovoltaic cells can turn sunlight into electric current has been known for some time. The problem is the high cost involved. Westinghouse has invented a new dendritic web process that significantly reduces the cost of producing such cells. As a result, the U.S. Department of Energy's economic cost target now appears achievable. Westinghouse is working with the two largest electrical utilities in California to provide demonstration photovoltaic modules this year.

Advanced energy technologies

Westinghouse is involved in the advanced energy technologies that may play a role in this nation's energy future. For example, on the horizon are promising technologies like iron-nickel, and iron-air high power batteries. Also showing promise are fuel cells that chemically produce electricity. But until solar and other energy technologies become a reality, this nation will depend upon coal and nuclear power for its electricity. Westinghouse is focusing much of its effort on these two areas.

Clean gas from coal

Westinghouse has pioneered in coal gasification technology. Over the last decade we have developed a process to turn coal into a clean gas for power generation, and for industrial or synthetic natural gas applications. The process has the advantage that it can use virtually any type of coal, soft coal or hard coal. The environmental impact is minimal, regardless of the coal's moisture, sulphur, or ash content. With continued technical progress, Westinghouse coal gasification systems can be in commercial operation by the mid-1980's.

Nuclear technology

Nuclear power remains an economical and safe way of producing electricity. Westinghouse leads in the application of nuclear technology to generate electricity. And we are developing an advanced nuclear plant able to make more fuel than it uses.

A segment of silicon ribbon from the Westinghouse dendritic web process

WESTINGHOUSE TECHNOLOGY APPLIED TO SECURITY

Today, Westinghouse Airborne Radar is one of our first lines of defense around the world.

It's called AWACS, an airborne warning and control system which provides long-range surveillance in an area at least 20 times greater than any surface-based system. It's already in use by our Air Force, and has been adopted by NATO. Just one AWACS radar mounted on a military version of the Boeing 707 flying at 30,000 feet can provide early warning of enemy attacks in an airspace of more than three million cubic miles. The information it helps give to military commanders multiplies the effectiveness of our air defense systems.

New safety for pilots

Another Westinghouse system protects aircraft crews from fast-closing missiles and enemy aircraft. It's called our Tail Warning Radar and it provides the pilot with accurate warnings to take evasive maneuvers. It also automatically triggers appropriate countermeasures. It's able to do all this in a split second, and with a phenomenally low false alarm rate.

Radar, of course, has many applications in commercial aviation, and its importance grows as the skies become more crowded. Thirty-six Westinghouse Air Traffic Control surveillance radars are now serving the FAA, the Switzerland Federal Air Office, and the Canadian Department of National Defense. The FAA uses the radars in some of the nation's most heavily traveled areas. So, nearly all domestic commercial flights come under the surveillance of a Westinghouse radar at some point during their flight.

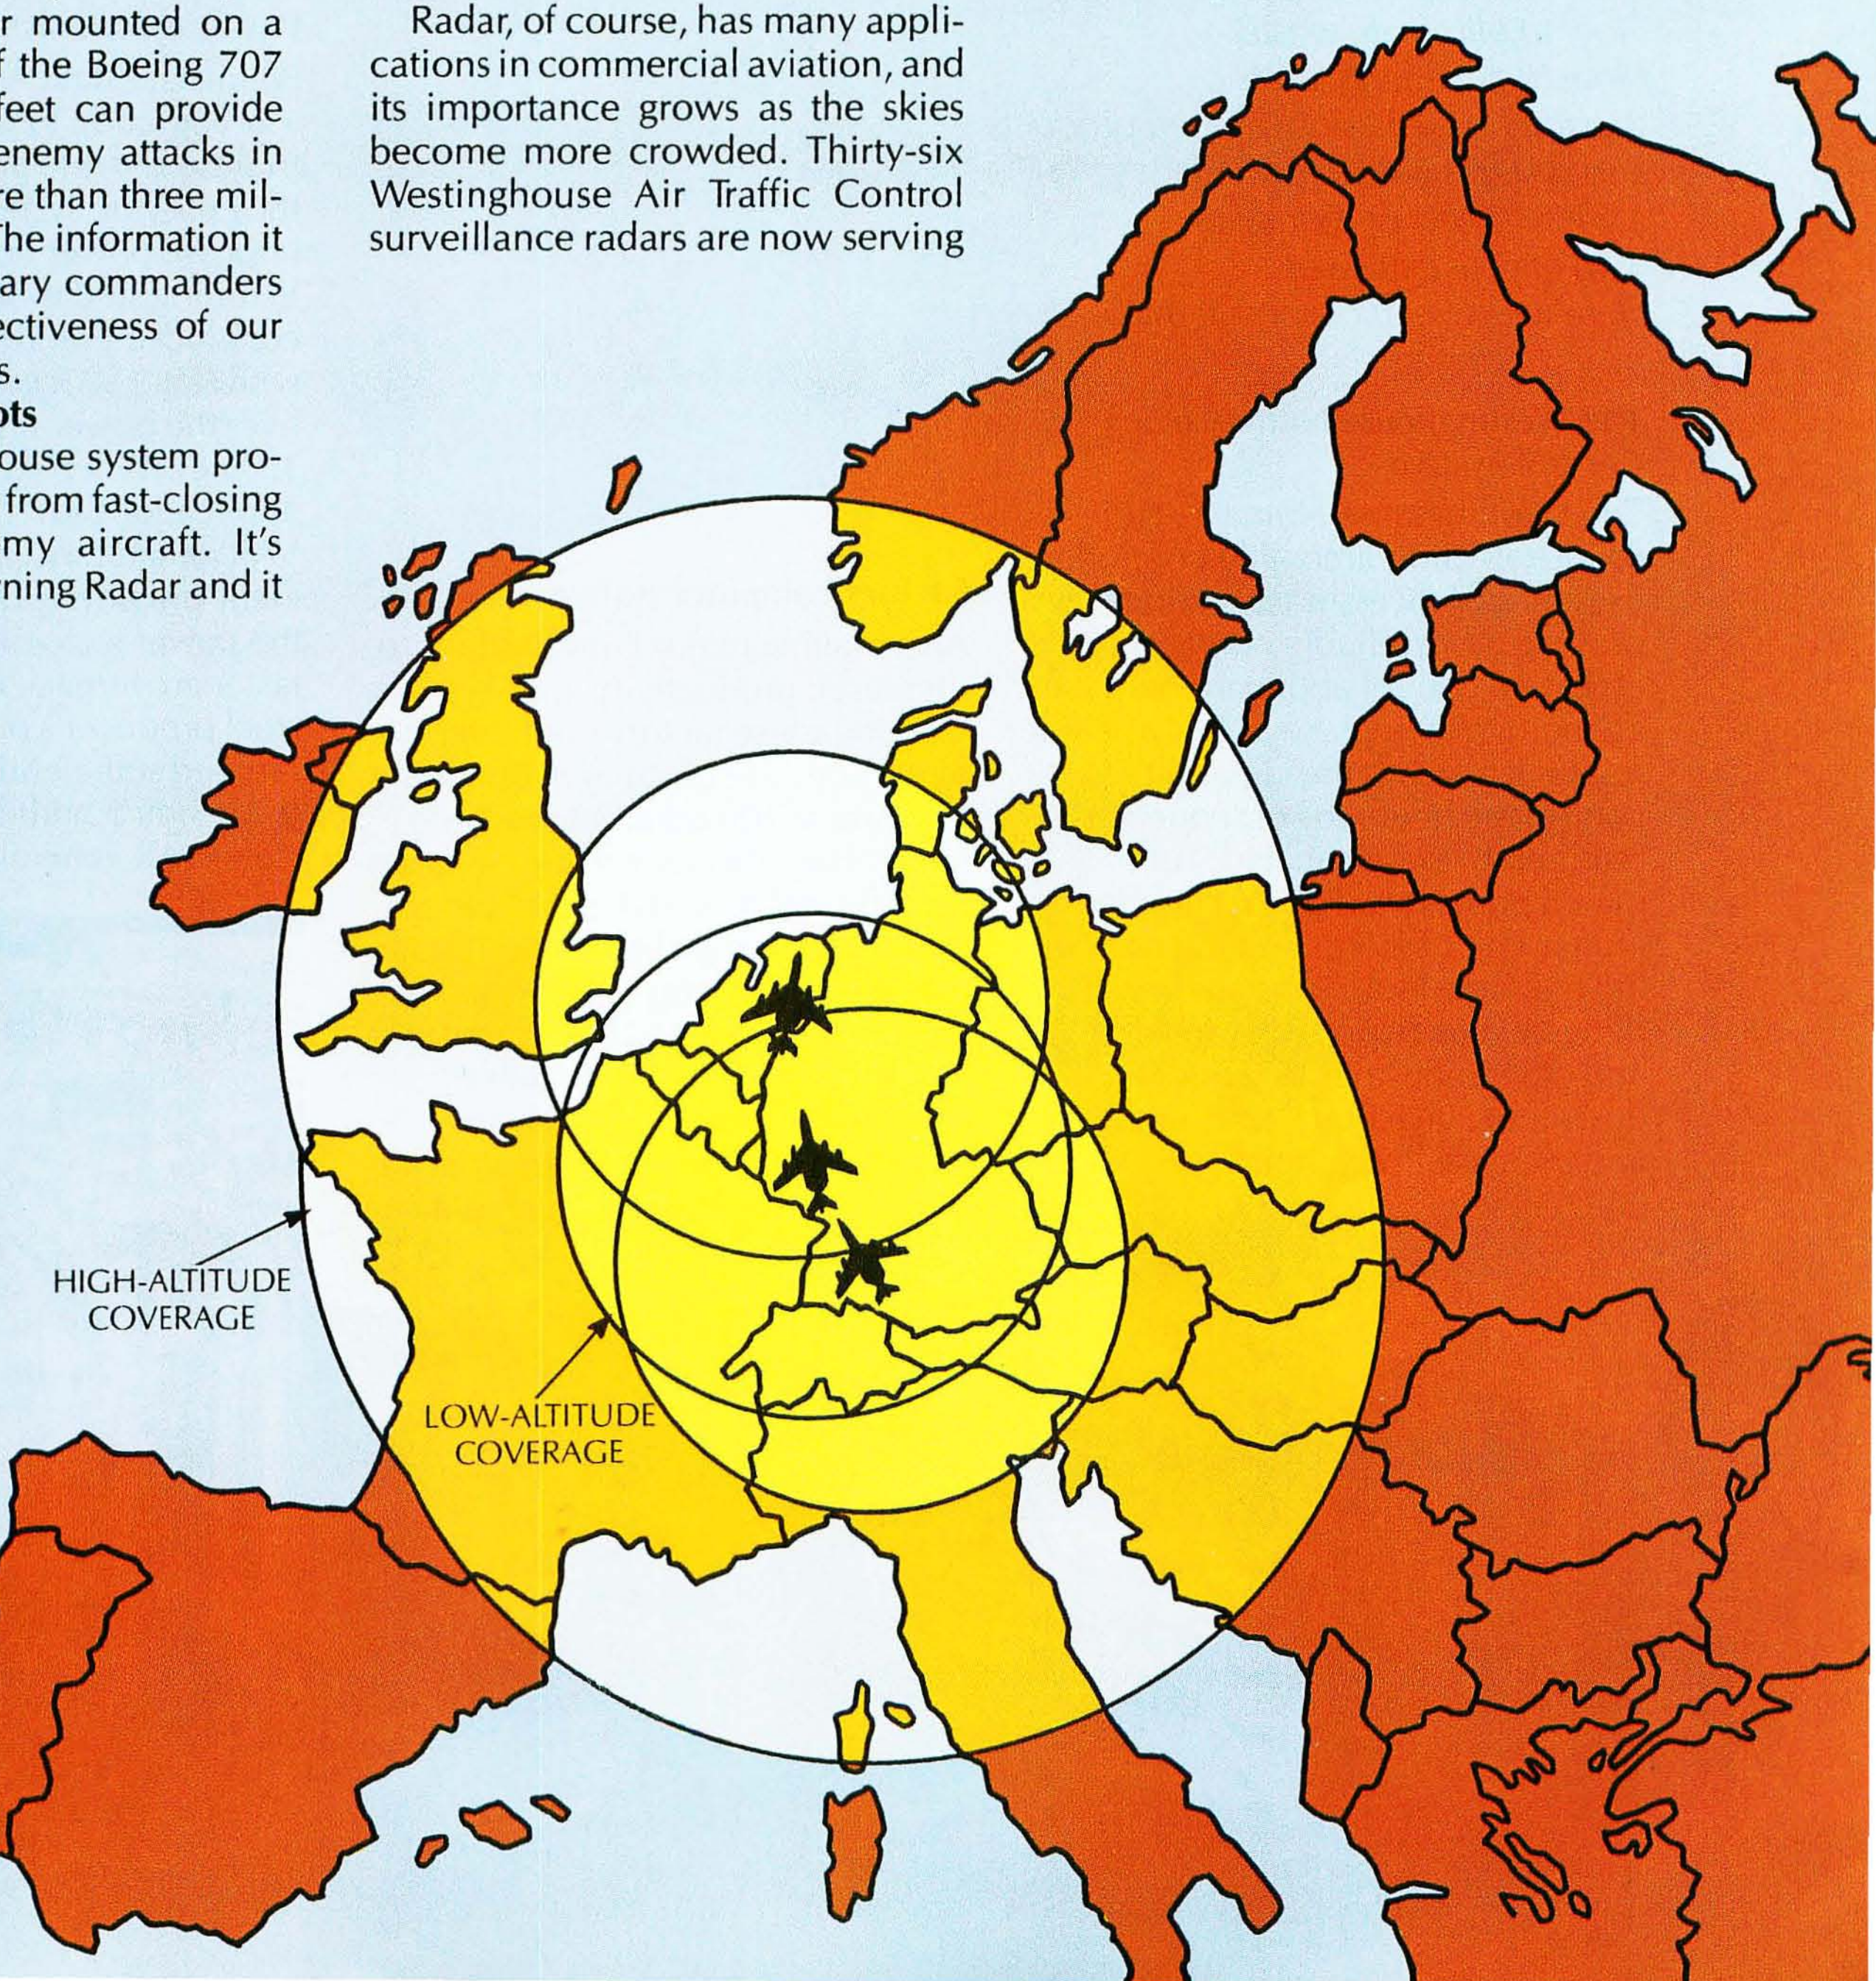

WESTINGHOUSE
TECHNOLOGY APPLIED TO
PRODUCTIVITY

How Westinghouse product can increase industrial

How to increase output per hour…
How to eliminate waste…
How to cut energy costs…
Westinghouse has developed products
and systems able to provide
a wide variety of industries
with effective answers.
Here are several of special interest.

The Westinghouse Numa-Logic® Control System

The Westinghouse Numa-Logic solid-state programmable controller uses microprocessor technology to provide more reliable operation for electrical control applications. It can economically replace as few as eight relays. It also has the capability to control the hundreds of sequences required by sophisticated, automated processes. The Westinghouse Numa-Logic system is being used in the machine tool, materials handling, textile, paper, steel-making and other industries to reduce downtime, give quick start-ups, and increase operational efficiency.

Factory computer systems

Also making major contributions to increased productivity are Westinghouse factory computer systems. They are capable of operating as many as 100 different machine tools simultaneously. They can also provide real time status and performance monitoring at four levels: maintenance, shop supervisor, middle and upper management. In application after application, downtime has been sharply reduced, and actual machine time has been increased up to 55 percent.

Power electronics

Solid-state static VAR generators are a key solution for utility and industrial system line problems because they provide system stability and improve power flow capability. Planning studies at a major utility concluded that 10 transmission lines with static VAR generators could deliver the power ordinarily requiring 16 lines. When it comes to industrial applications such as steel-making, VAR generators can improve the efficiency of power usage by improving the power factor and providing faster arc furnace melt times. One steel producer's productivity increased sufficiently to pay back the nearly $2 million cost of the static VAR generator in 15 months.

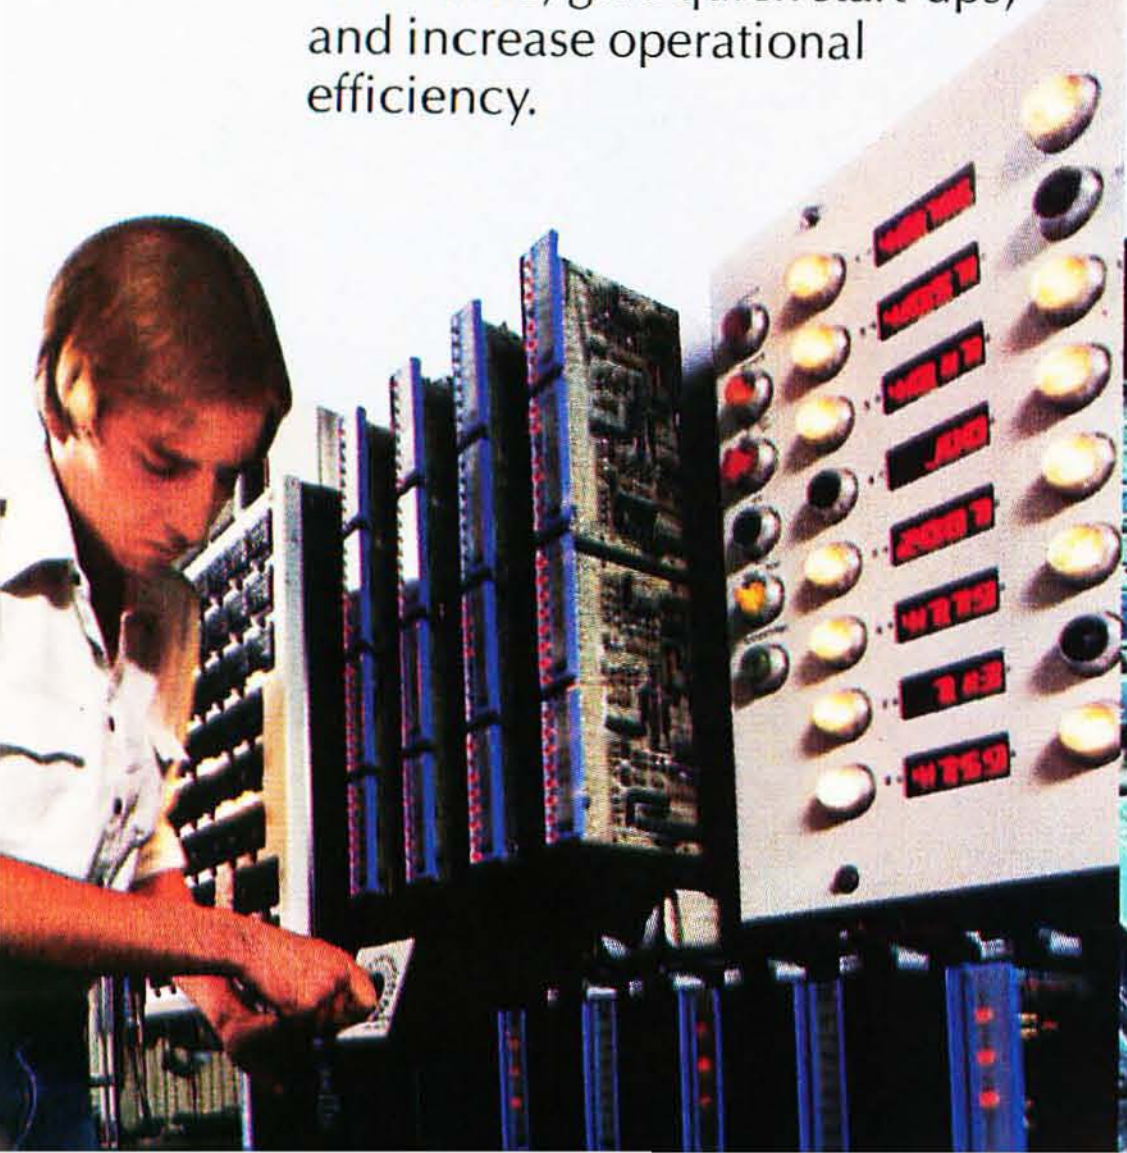

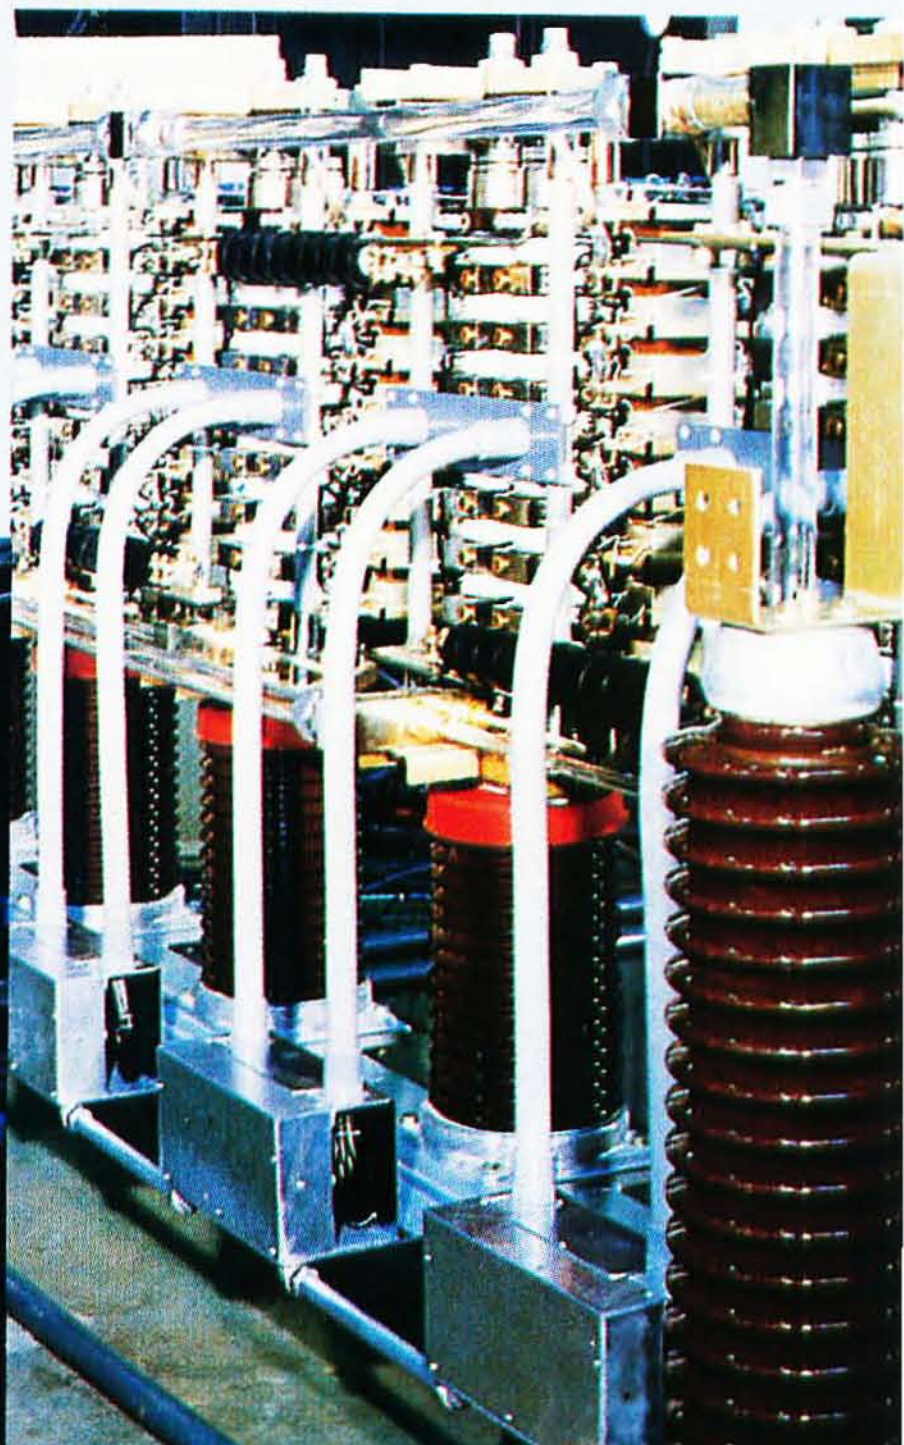

and service technologies productivity today.

Applied Plasma Systems

Because of the skyrocketing costs of fossil fuels used to supply process heat or chemical reactions, many firms are searching for alternatives. The Westinghouse Applied Plasma Systems can efficiently fire high temperature industrial processes, and serve as a central heating device for a myriad of applications such as chemical processes, metals treating, and combustion replacement. This technology is already providing an efficient answer for blast furnaces and direct reduction iron-making processes. It uses a high temperature gas stream to transmit heat. Studies on the upgrading of existing blast furnace facilities demonstrate up to an 80 percent increase in the capacity of the facilities through the application of Applied Plasma Systems.

How to minimize downtime... As machines grow more complex, keeping them running takes specialists. To help you maximize productivity, Westinghouse can provide the same technological expertise in services as it does in products.

A remarkable worldwide service network

Because Westinghouse engineers, tests, and builds complex products and systems, we have the special skills, trained personnel, and necessary tools to maintain such equipment best; or to repair it in the least amount of time. Available to help you with either maintenance or repair are hundreds of trained Westinghouse field service engineers and specialist mechanics who use the most sophisticated on-site testing and repair equipment. And backing them up is a vast network of repair facilities.

Whether Westinghouse built it or not, we can service and repair almost anything from escalators and elevators, to steam turbines and nuclear power plants. Westinghouse can do an operation analysis and recommend an upgrading program, we can train your operators and service personnel, or we can do continuous monitoring of various operations. Whatever is needed.

Experience has taught us that a regularly planned and scheduled maintenance program greatly increases uptime and saves money. Westinghouse is equipped to provide programmed maintenance on a plant-wide basis. During scheduled shutdowns, a crew of Westinghouse field engineers and technicians can move in to do a complete analysis and top-to-bottom overhaul of your entire facilities.

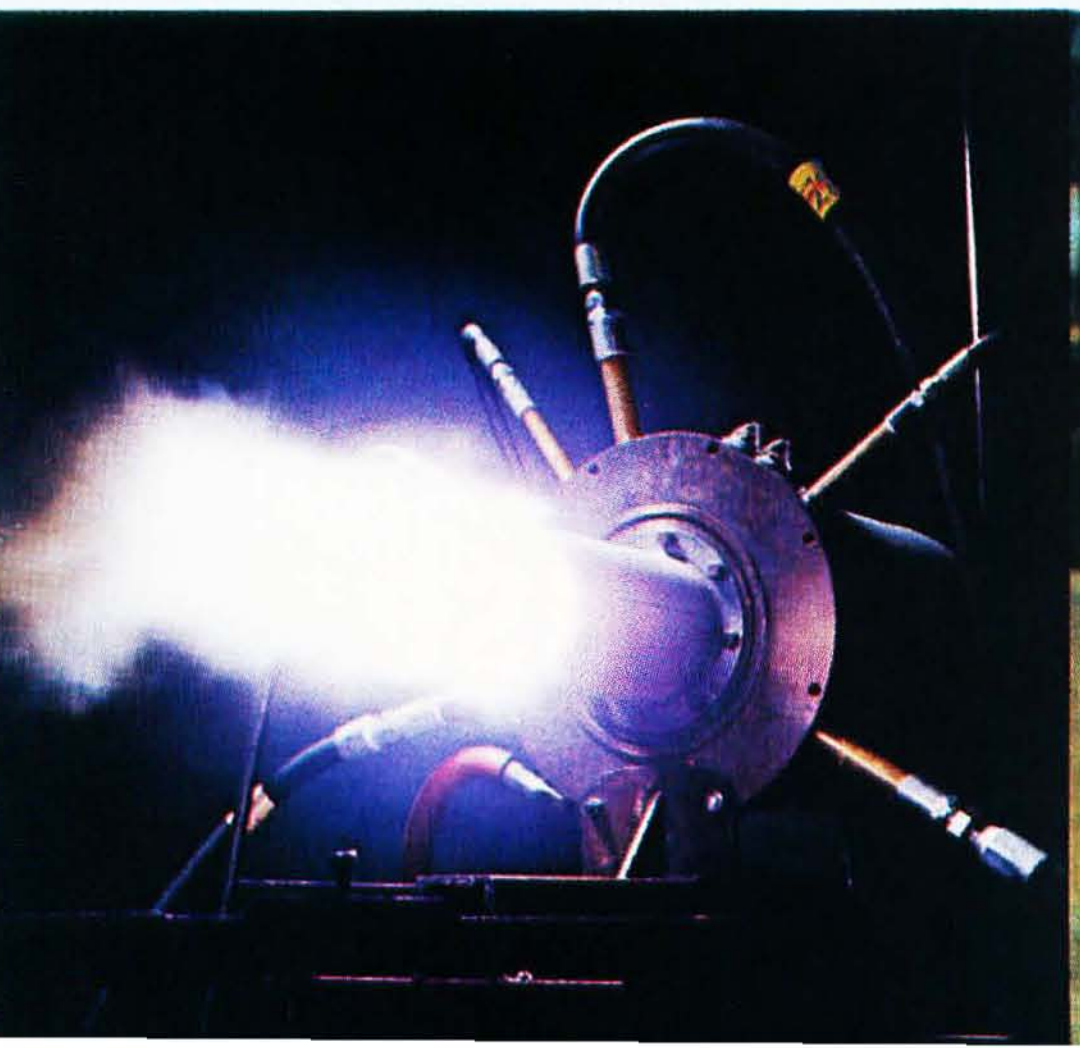

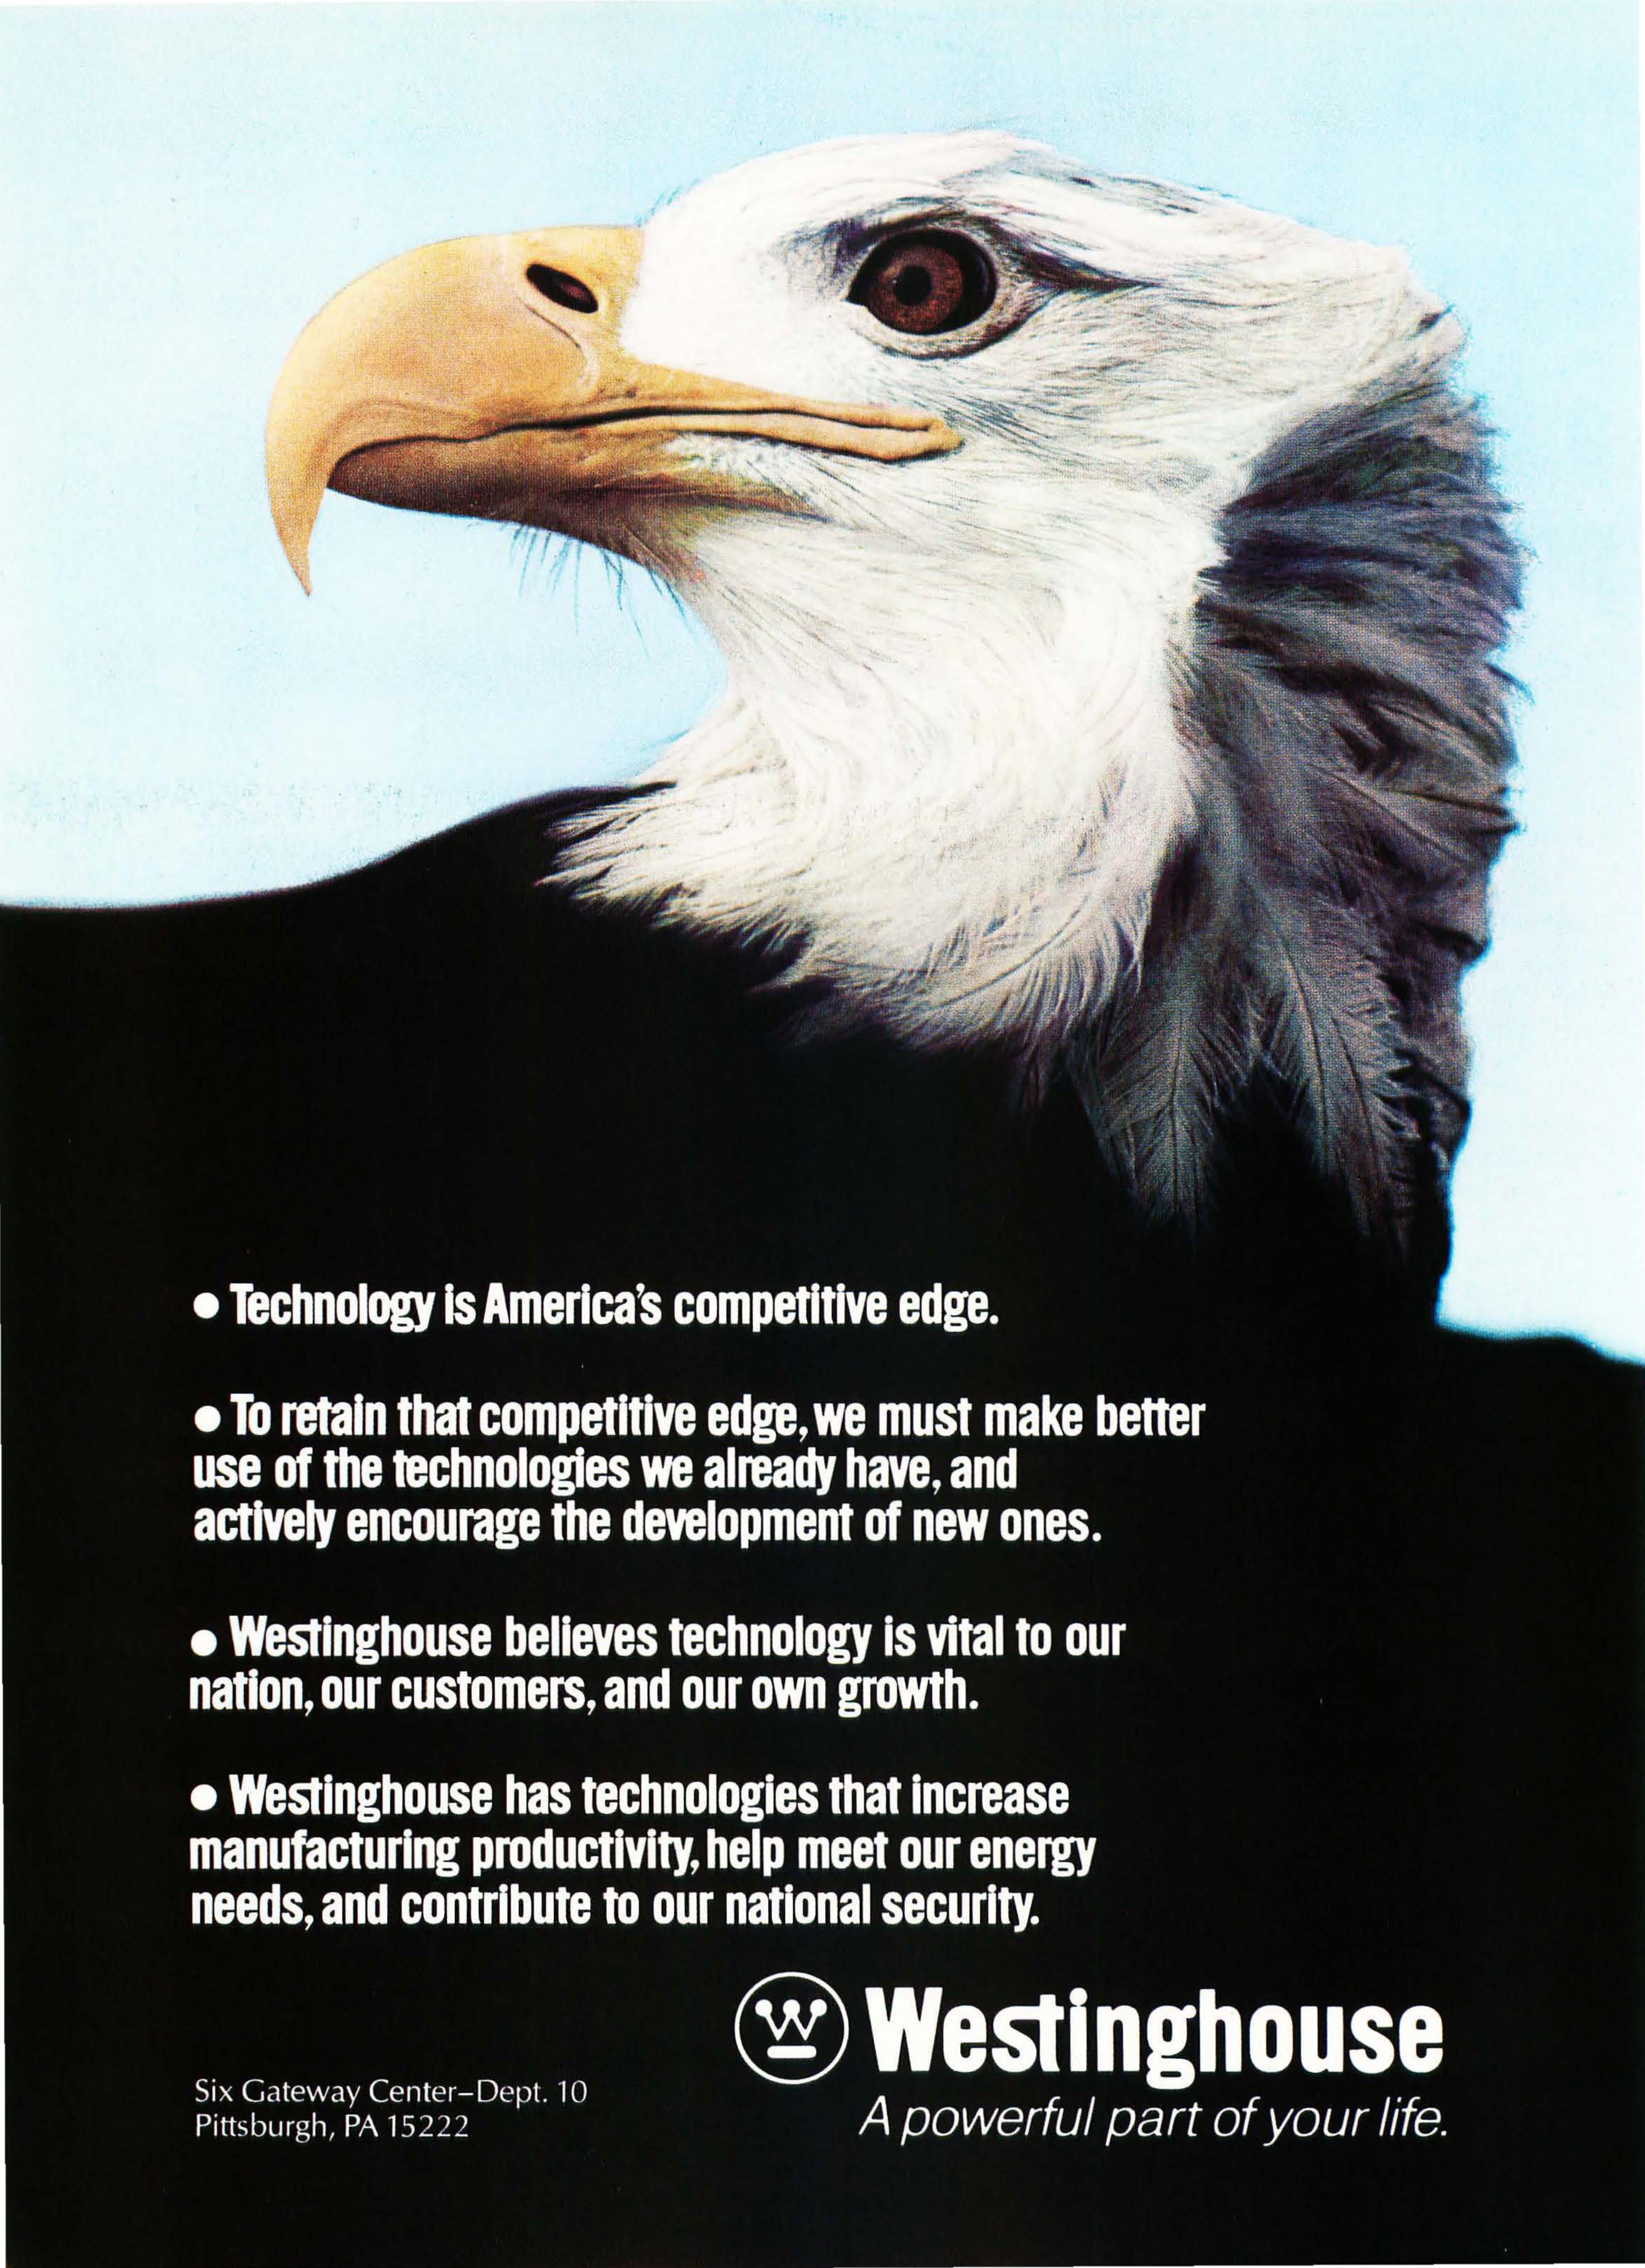

- Technology is America's competitive edge.
- To retain that competitive edge, we must make better use of the technologies we already have, and actively encourage the development of new ones.
- Westinghouse believes technology is vital to our nation, our customers, and our own growth.
- Westinghouse has technologies that increase manufacturing productivity, help meet our energy needs, and contribute to our national security.

Westinghouse
A powerful part of your life.

Six Gateway Center–Dept. 10
Pittsburgh, PA 15222

Listing 2: *Test program for the arithmetic subroutines. This program receives two numbers from the keyboard and displays their product. Note that the user must supply entry points to character input and output routines and to the system monitor (or any other program to be jumped to when this program ends).*

```
              ****************************************************************************
              *                                                                          *
              * TEST PROGRAM DISPLAYS PRODUCT OF 2 NUMBERS ENTERED FROM KEYBOARD         *
              *                                                                          *
              ****************************************************************************

              *             ***** NOTE: YOU MUST SUPPLY THESE 3 ENTRY POINTS: *****
              *
              CHIN    EQU   0          SUBROUTINE TO GET KEYBOARD CHAR. IN A REG.
              CHOUT   EQU   0          SUBROUTINE TO DISPLAY (A) AS ASCII CHAR.
              MONITOR EQU   0          ENTRY TO SYSTEM WHEN PROGRAM DONE
              *
                      ORG   3000H
3000   213B30 TEST    LXI   H,INBUF    INPUT BUFFER ADDRESS TO HL
3003   CD0000 TEST1   CALL  CHIN       GET AN ASCII CHARACTER IN A REGISTER
3006   77             MOV   M,A        STORE CHARACTER INTO BUFFER
3007   FE0D           CPI   13         AND IF ITS A CARRIAGE RETURN
3009   CA1030         JZ    TEST2      THEN BRANCH
300C   23             INX   H          ELSE, ADVANCE TO NEXT BYTE OF BUFFER
300D   C30330         JMP   TEST1      ...AND CONTINUE
3010   113B30 TEST2   LXI   D,INBUF    RECALL INPUT BUFFER STARTING ADDRESS
3013   CDD740         CALL  DECBIN     CONVERT ASCII DECIMAL TO BINARY NUMBER
3016   E5             PUSH  H          SAVE NUMBER
3017   13             INX   D          ADDRESS OF START OF SECOND NUMBER STRING
3018   CDD740         CALL  DECBIN     CONVERT SECOND NUMBER TO BINARY IN HL
301B   D1             POP   D          RECALL FIRST NUMBER
301C   CD3840         CALL  EMULT      FIND PRODUCT IN HL
301F   3E0A           MVI   A,10       ASCII LINE FEED
3021   CD0000         CALL  CHOUT      START ANSWER ON NEW LINE
3024   114F           LXI   D,OUTBUF   OUTPUT BUFFER STARTING ADDRESS
3027   CD2F41         CALL  BINDEC     CONVERT ANSWER TO ASCII STRING
302A   AF             XRA   A
302B   12             STAX  D          MARK END-OF-STRING WITH 0-BYTE
302C   214F30         LXI   H,OUTBUF   RECALL START OF BUFFER
302F   AF     TEST3   XRA   A
3030   86             ADD   M          FETCH NEXT CHARACTER
3031   CA0000         JZ    MONITOR    IF ITS 0-BYTE TERMINATOR, QUIT
3034   CD0000         CALL  CHOUT      ELSE, DISPLAY BYTE
3037   23             INX   H          ADVANCE BUFFER POINTER
3038   C32F30         JMP   TEST3

303B          INBUF   DS    20         INPUT BUFFER FOR 2 NUMBERS
304F          OUTBUF  DS    10         OUTPUT BUFFER FOR RESULT
```

Two's Complement of Binary Numbers

Two's complement is a method of representing negative numbers in binary radix. It is only one of several methods of negative number representation, but it has the advantage of eliminating subtraction as a separate operation; subtraction can be performed by taking the two's complement of the subtrahend and adding it to the minuend.

The two's complement of a number is found by complementing every bit in the number (changing 1s to 0s and vice versa) and adding 1 to the resulting value. For example, suppose we want to take the two's complement of the number 4 stored as an 8-bit value:

4 in binary is: 00000100
complementing each bit: 11111011
adding 1: 1
−4 in two's complement: 11111100

(By the way, the numeral 11111011 is called the one's complement of 4.)

To show that subtraction can be performed using straight binary addition with two's complement, take the example of subtracting 4 from 7:

7 in binary is: 00000111
two's complement of 4: 11111100
adding, we get: 1 00000011

The carry, 1, is thrown away, and the result, 00000011, is decimal 3 in binary.

In two's complement, negative numbers always have a leftmost bit of 1; on the other hand, nonnegative numbers have a leftmost bit of 0. However, the absolute value of a negative number cannot be found by simply evaluating the lower bits; as before, you must complement the number and add 1.

These routines run an order of magnitude faster than full floating-point routines.

Text continued from page 204:

treat values outside the range of −32,768 to +32,767 as an overflow condition.

When an overflow is detected, a call is made to a subroutine called OVERFLOW, which is not provided because you will want to implement it in a manner appropriate to your system. A simple error-processing routine would display an error message and jump to the system monitor. If desired, a more sophisticated error-processing routine could continue processing, because the top of the stack contains the return address to the routine where the overflow was detected. Similarly, you must provide an entry point called CONVERR, which will be called in the event of a string-numeric conversion error.

The string-numeric conversion routine, DECBIN, will convert any legitimate numeric decimal representation, including those with leading blanks or blanks between the sign and the leading digit. It will reject errors including two signs or an illegal character. Any nonnumeric character after the start of the number terminates the conversion, facilitating parsing of free-format data entries. This is illustrated by the sample test program of listing 2, which accepts two numbers on one line and prints their product on the next line. ■

The Largest and Smallest Numbers in Two's Complement Notation

Another property of two's complement numbers is that the absolute value of the largest positive number that can be represented is 1 less than the absolute value of the smallest negative number that can be represented. As an example, look at all the possible 3-bit two's complement numbers:

0 is 000; complementing and adding 1 gives 000 (or −0)
1 is 001; complementing and adding 1 gives 111 (or −1)
2 is 010; complementing and adding 1 gives 110 (or −2)
3 is 011; complementing and adding 1 gives 101 (or −3)
−1 is 111; complementing and adding 1 gives 001 (or 1)
−2 is 110; complementing and adding 1 gives 010 (or 2)
−3 is 101; complementing and adding 1 gives 011 (or 3)

But we have one number left over, 100. Inasmuch as the most significant bit is 1, it must be negative. To find its absolute value, take its two's complement:

the number is: 100
complement it: 011
add 1: 1
its two's complement is: 100
which is binary for 4

Therefore, 100 in two's complement notation must be −4. But notice that, given three bits for the binary representation of signed numbers, there is no way to represent positive 4 in two's complement notation. The largest positive number that can be represented is one less than that.

The DataTrack™ Floppy Disk Drives from Qume® Distributed by asap

The DataTrak™ 5 double-sided double-density drive uses state-of-the-art technology to give you superior data integrity through improved disk life, data reliability, and drive serviceability using 5¼" media.

Qume's independent head load yields wear characteristics far superior to competitive drives. This superior wear performance produces savings on both diskette usage and drive maintenance.

Improved data reliability, resulting from superior amplitude and bit shaft characteristics, optimizes operator efficiency and reduces processing time for end-users.

And DataTrak's unique modular design means simplified field servicing for you and your customers.

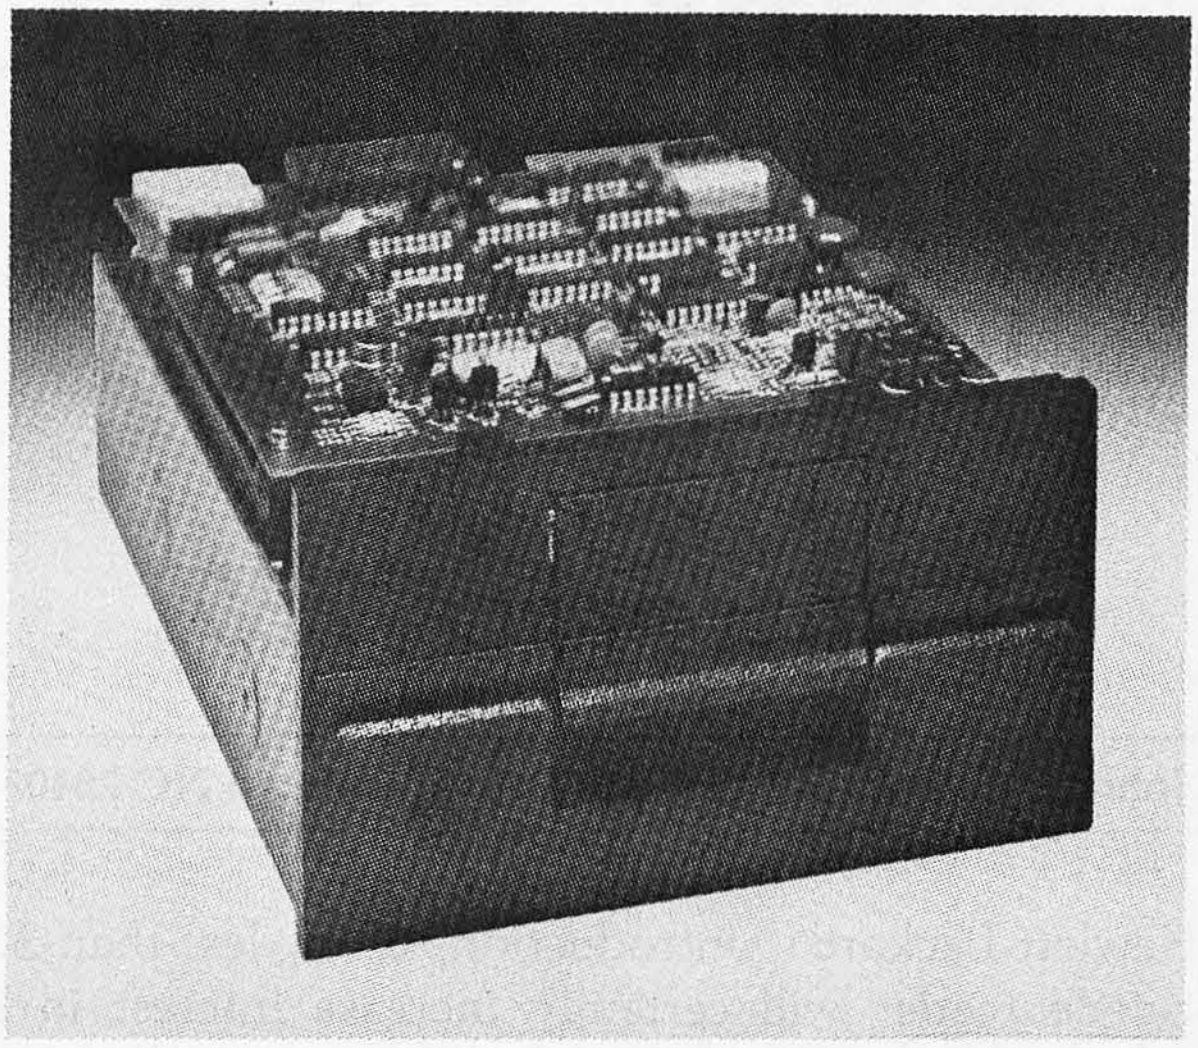

The DataTrack™ 5

Design Features

Expanded storage capacity • Two-sided, double density

Proven head carriage assembly • Ceramic head with tunnel erase • Dual-head flex mounting arrangement • Superior head load dynamics

Precise lead screw actuator • Fast access time-12 ms track-to-track • Low friction and minimum wear • Low power dissipation

Additional features • Industry standard 5¼" media format • ISO standard write protect • Door lock out for media protection • Requires DC voltage only • Daisy Chain up to 4 drives • Heads load on command independent of loading media

Product Specifications

Performance Specifications • Capacity: Unformatted: 437.5K or 500K bytes; Qume Formatted: 286.7K or 327.7K bytes • Recording Density: 5456 BPI • Track Density: 48 TPI • Cylinders: 35 or 40 • Tracks: 70 or 80 • Recording Method: FM or MFM • Rotational Speed: 300 RPM • Transfer Rate: 250K bits/second • Latency (avg.): 100 ms • Access Time: Track-to-track 12 ms; Settling 15 ms • Head Load Time: 50 ms

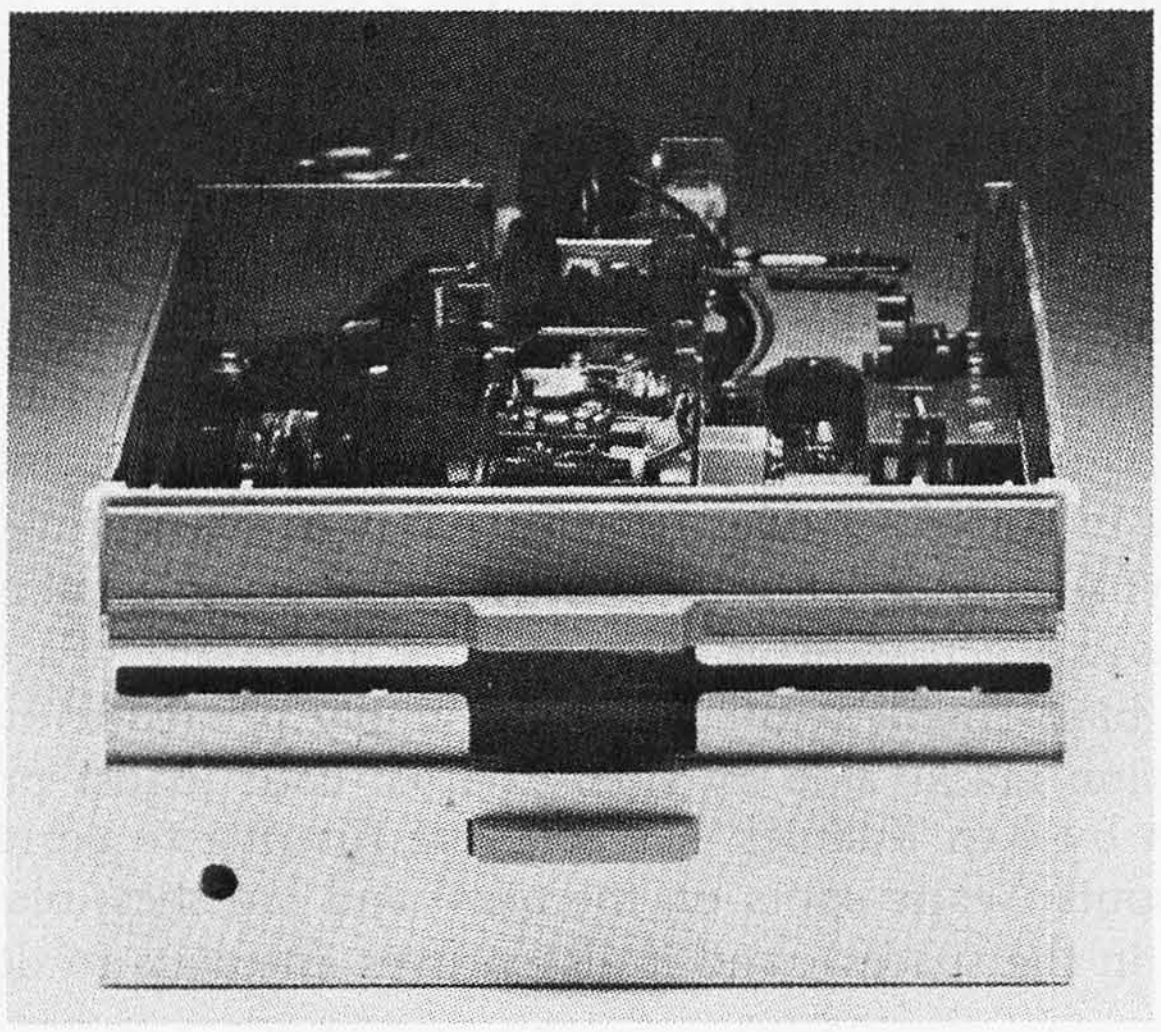

The DataTrack™ 8

The DataTrak™ 8 double-sided double-density drive uses state-of-the-art technology to give you superior data integrity through improved disk life, data reliability, and drive serviceability using 5¼" media.

Qume's innovative approach to controlling head load dynamics yields wear characteristics far superior to competitive drives. In independent evaluation, DataTrak 8 is setting industry standards for tap test performance. This superior wear performance produces savings on both diskette usage and drive maintenance.

Improved data reliability, resulting from superior amplitude and bit shift characteristics, optimizes operator efficiency and reduces processing time for end-users.

And DataTrak's unique modular design means simplified field servicing for you and your customers.

Design Features

Expanded storage capacity • Two-sided, double density

Fully IBM compatible • IBM 3740 and System 32 drives • IBM 3600 and 4964 drives • IBM System 34 drives

Proven head carriage assembly • Ceramic head with tunnel erase • Dual-head flex mounting arrangement • Superior head load dynamics

Fast, precise steel belt drive • Fast access time-3 ms track-to-track • Low friction and minimum wear • Low power dissipation

Additional features • ISO standard write protect • Programmable door lock • Negative DC voltage not required • Daisy Chain up to 4 drives • Side-by-side mounting in standard 19" RETMA rack • Compatible with Shugart SA850/SA851

Product Specifications

Performance Specifications • Capacity: Unformatted: 1.6 Mbytes/disk; IBM Format: 1.2 M/bytes/disk • Recording Density: 6816 BPI • Track Density: 48 TPI • Cylinders: 77 • Tracks: 154 • Recording Method: MFM • Rotational Speed: 360 RPM • Transfer Rate: 500K bits/second • Latency (avg.): 83 ms • Access Time: Track-to-track 3 ms; Settling 15 ms; Average 91 ms • Head Load Time: 35 ms • Disk: Diskette 2D or equivalent

asap computer products, inc.

1198 E. Willow
Signal Hill, CA 90806

AUTHORIZED DISTRIBUTOR FOR QUME
CALL FOR PRICE AND DELIVERY
(800) 421-7701 or (213) 595-6431 (In California)

Circle 32 on inquiry card.

Print Your Own Bar Codes

UPC Bar Codes With the Centronics 737

John Anderson, 149 Cliffside Dr, Wilmington NC 28403

Hewlett-Packard's introduction of a less-than-$100 bar-code reader will certainly increase interest in bar codes as a viable means of transporting program listings through the printed media. But reading bar codes is not enough. To maximize their usefulness, we must be able to generate them as well: only then will creative applications begin to emerge. There must be numerous instances where keyboard input to small-business data-processing systems can be replaced with bar-code input.

My interest in bar codes arose from a need for simple data entry in an educational application. The problem required easy generation as well as easy reading of bar codes. To generate bar code, you must be able to produce vertical lines and spaces of equal (or approximately equal) width. This can, of course, be done with a plotter or a high-resolution graphics printer. Or, it can be done with a low-cost, dot-matrix, proportional-spacing printer, such as the Centronics 737.

I had a Centronics 737, so I began to experiment with producing bar codes, and found that the printer can be used quite effectively. The Centronics 737 produces a high-density dot-matrix print in the proportional-spacing mode. With the concatenation symbol (|) as the basic vertical bar, the printer can be directed to backspace dot by *dot*, allowing the compression of vertical bars into a solid bar of variable width.

Text continued on page 276

PAPERBYTE® Bar Codes With Integral Data Systems Printers

Dr G Louis, OB/GYN Dept, St Michael's Hospital, 30 Bond St, Toronto M5B 1W8 Canada

The advent of Hewlett-Packard's low-cost bar-code reader, HEDS-3000, makes it possible to consider software distribution in machine-readable form via the printed page. The bar-code reader (described in Carl Helmers' editorial, "Bar Codes, Revisited...," April 1980 BYTE, page 6) can be interfaced to a computer for slightly more than $100.

This article will describe a program that uses the graphics plotting option of an Integral Data IP-225 (or IDS-440) printer to produce bar code. (The IP-225 sells for about $1000.) The format is the PAPERBYTE® format, described in Ken Budnick's book, *Bar-Code Loader* (Peterborough NH: BYTE Books, 1977).

In graphics mode, the Integral Data printers allow column by column control of the image printed. Each column is 7 dots high, and each dot is controlled by the corresponding bit in the byte of data sent. For example, if you send a question mark (hexadecimal 3F) to the printer while in graphics mode, a vertical bar of 6 dots is printed. If you send a NUL (0), the printer leaves a blank that is 1 dot-width across. This takes care of 0 bits and spaces. One bits (double-width bars) are simply printed as two question marks side by side. The bar-code loader program by Ken Budnick has software filtering to correct dropouts (white spots on the bars) and blotches (black dots in the spaces), and it also proves adequate to deal

Text continued on page 230

Editor's Note: *When we put the Hewlett-Packard HEDS-3000 bar-code wand on the cover of the April 1980 BYTE, we believed that the only major obstacle to the widespread use of bar codes—lack of a reliable wand at an affordable price—had been eliminated. You couldn't make your own bar codes (we thought), but you could read them. In the January 1981 BYTE, we published an article that showed how to make HP-41C bar codes on an expensive Diablo 1650 printer (see "Generating Bar Codes in the Hewlett-Packard Format," by Thomas McNeal, January 1981 BYTE, page 148). But few people have such an expensive printer, and (we thought) most people still couldn't make their own bar codes.*

*We were wrong. The two articles above show two different formats of bar codes produced on two different dot-matrix printers. All of the work is done in the software; the hardware only has to generate a thin vertical bar and place it anywhere on a line. With the proper bar-code reading software, even bar codes made with dot-matrix printers can be consistently and reliably read....*GW

TRS-80® MODEL III OWNERS

We think our disk system for expanding your capacity is just as good as theirs - and we know it costs much less . . .

COMPLETE SYSTEMS AND COMPONENTS*

TRS-80® MOD III SYSTEM

with 2
disk drives
SAVE $500
OFF LIST PRICE

$1,895

16K RAM, Model III Basic	$899
MTI DISK DRIVES for MODEL III	
Internal Kits	
Disk Drive 1	$649
Disk Drive 2	$279
External Add-on Kits	
Disk Drive 3	$379
Disk Drive 4	$359
Model III DOS & Manual	$21.95
16K RAM Kit	$59
RS-232 Serial Interface	$95
PRINTERS	
Anadex 9500	$1,449
Microline 82	$849
Microline 83	$1,060
Centronics 779	$1,069
Centronics 700	$1,129
Base 2	$649
Centronics 737	$839
Epson MX-80	$579
Malibu	$2,093
Daisy Wheel	$1,799

Save 5% Off with Purchase of MOD III System or Disk Drive

New low cost internal disk kit available to expand your storage capability. With this kit, now, you may expand your Model III computer up to four MTI 40 track disk drives, giving 175,000 bytes of storage per drive for a total of 700K.

The kit includes one 40 track disk drive, controller, power supply, cables, mounting hardware and installation documentation.

Manufacturer Direct
Price ONLY.................. **$649**

MICROCOMPUTER TECHNOLOGY, INC.
3304 W. MACARTHUR, SANTA ANA, CA 92704
★ PHONE (714) 979-9923 ★ TELEX #678401TAB IRIN

*Uses MTI Memory, Disk Drives & Components

® TRS-80® IS A REGISTERED TRADEMARK OF TANDY CORPORATION

MasterCard VISA

ALL PRICES CASH DISCOUNTED
FREIGHT FOB FACTORY
ASK FOR FREE CATALOG

Circle 254 on inquiry card.

Text continued from column 2, page 228:

with the tiny white spaces left between the dots in the double-width bars. The only restriction is that the printer ribbon *must* be in good condition; otherwise, the contrast between bar and space will not be sufficient for a reliable wand reading.

The program in listing 1 prints bar code from data in memory with start and stop addresses specified by the user. Tiny Pascal as described by K-M Chung and H Yuen (see reference 2) and implemented by me in 8080 assembly language (see reference 4) was used for this routine. Those who are unfamiliar with Pascal should have little difficulty following the algorithm: readability is one of the most important advantages of Pascal. Two minor points may give some trouble to BASIC programmers: percent signs (%) associated with numbers or variables indicate that the number or variable is expressed in hexadecimal, and the CASE X OF... statement is used to choose from among options to be executed depending on the value of X. However, interested readers

Figure 1: *Bar-code representation of part of listing 1, made on an Integral Data Systems IP-225.*

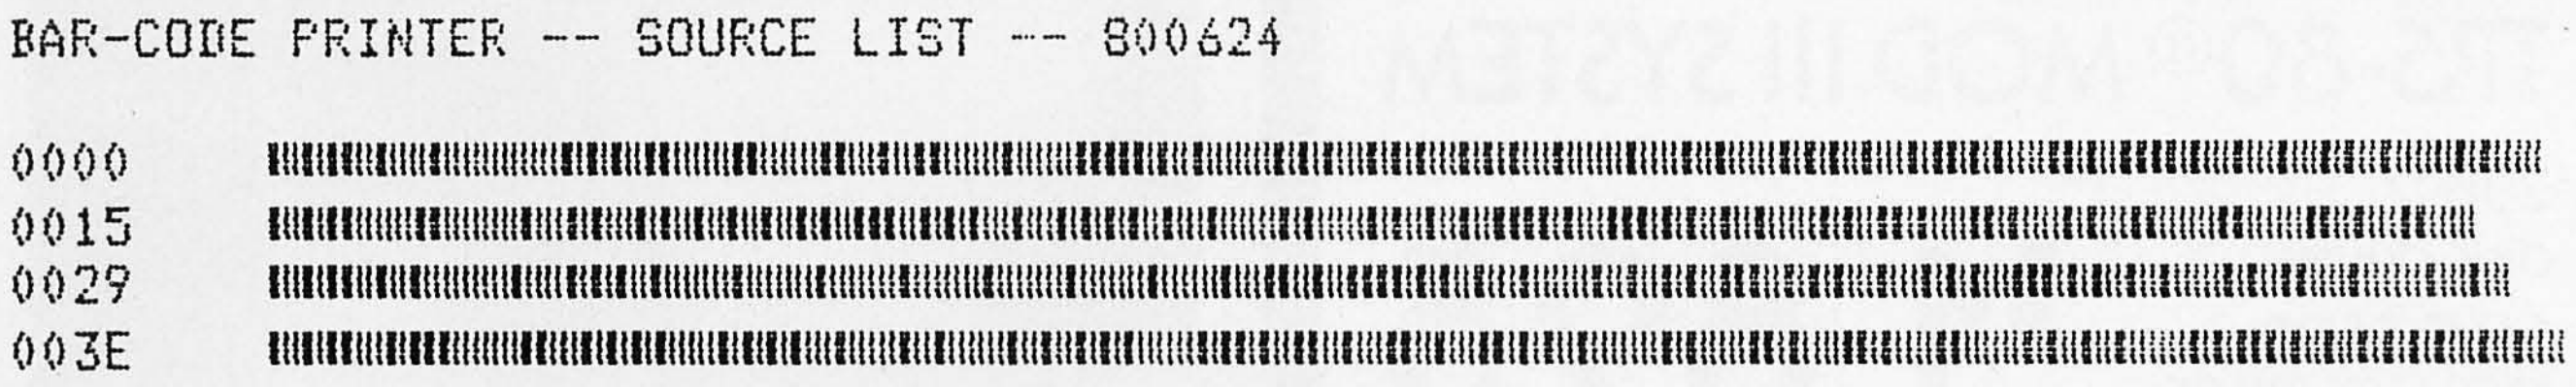

```
BAR-CODE PRINTER -- SOURCE LIST -- 800624

0000
0015
0029
003E
```

Listing 1: *Tiny Pascal source listing for a program that will generate printed bar codes from data in memory. Translation into BASIC or assembly language should prove fairly simple, even if the user is unfamiliar with Pascal.*

```
} *** BAR-CODE PRINTER PROGRAM
      FOR INTEGRAL DATA IP-225 (440) WITH GRAPHICS
      BY DR. G. LOUIS
         OB/GYN DEPT., ST. MICHAEL'S HOSPITAL
         30 BOND STREET, TORONTO, CANADA  M5B 1W8
      800501, LAST MODIFIED 800624
}
CONST MAXBAR=400   } MAX UNIT WIDTHS PER FRAME };
      PRINT=%85A   } DIRECTS OUTPUT TO PRINTER };
      NOPRINT=%84C   } NO OUTPUT TO PRINTER };
      DEL=127; CAN=24; FF=12; CR=13; TAB=9; } ASCII CTL }
      PLOT=3; PLTESCAP=3; NORMLPRT=2; } PLOT MODE CTL }
      CPI12=30   } SET PRINTER DENSITY 12 CHAR/IN };
      CPIMAX=31   } SET MAXIMUM DENSITY FOR PLOTTING };

VAR   I   } GENERAL-PURPOSE INDEX },
      IPT   } CHARACTER INPUT },
      ABSFLAG   } TRUE IF ABSOLUTE ADDRESSING CALLED FOR },
      ORIGIN   } ADDRESS OF 1ST BYTE TO BE CODED },
      LASTBYTE   } ADDRESS OF LAST BYTE TO CODE },
      POINTER   } ADDRESS OF NEXT BYTE TO CODE },
      FRAMEID   } VALUE OF ID BYTE OF NEXT FRAME }:
        INTEGER;
      JOBNAME: ARRAY [53] OF INTEGER;

FUNC WFRAME (START,STOP);
  } WRITE ONE FRAME BEGINNING AT START AND ENDING
    AT STOP OR WHEN THE PAGE IS FULL, WHICHEVER IS
    FIRST; RETURN THE ADDRESS OF THE BYTE FOLLOWING
    THE ONE LAST ENCODED }
  CONST SYNC=%96   } FIRST BYTE OF EVERY FRAME };
  VAR   ABSCK   } TRUE IF AN ABSOLUTE ADDRESS IS WANTED },
        BARCNT   } NUMBER OF UNIT WIDTHS IN FRAME },
        CKSUM   } HEX CHECKSUM },
        FRAMELEN   } NUMBER OF BYTES IN FRAME },
        I   } GENERAL-PURPOSE INDEX }:
          INTEGER;

  PROC WBYTE (VALUE);
  } WRITE BAR CODE FOR 8 LSB'S OF "VALUE" }
    VAR BUF, I: INTEGER;
    BEGIN
    BUF := VALUE AND 255;
    FOR I := 1 TO 8 DO BEGIN
      WRITE (SPACE, BAR); IF BUF > 127 THEN WRITE (BAR);
      BUF := (BUF SHL 1) AND 255 END
    END;

  FUNC SCANBYTE (VALUE);
  } RETURN THE NUMBER OF UNIT WIDTHS NEEDED TO WRITE
    BAR CODE FOR 8 LSB'S OF "VALUE" }
    VAR BUF, CNT, I: INTEGER;
    BEGIN
    BUF := VALUE AND 255; CNT := 0;
    FOR I := 1 TO 8 DO BEGIN
      CNT := CNT+2; IF BUF > 127 THEN CNT := CNT+1;
      } ONE SPACE + ONE BAR, + ONE MORE BAR IF BIT IS 1 }
      BUF := (BUF SHL 1) AND 255 END;
    SCANBYTE := CNT END;

  BEGIN  } WFRAME }
  ABSCK := ABSFLAG AND (START <= STOP);
  WRITE (CPI12);
  IF ABSFLAG THEN WRITE (START%)
    ELSE WRITE (START-ORIGIN%);
  WRITE (TAB,CPIMAX,PLOT); WBYTE (SYNC); FRAMELEN := 0;
  IF ABSCK THEN BEGIN
      CKSUM := (START SHR 8) + (START AND 255);
      BARCNT := SCANBYTE (START SHR 8) + SCANBYTE (START)
    END
    ELSE BEGIN CKSUM := 0; BARCNT := 0 END;
  IF START <= STOP THEN REPEAT
    I := MEM [START + FRAMELEN]; CKSUM := CKSUM + I;
    BARCNT := BARCNT + SCANBYTE (I);
    FRAMELEN := FRAMELEN + 1
  UNTIL (BARCNT > MAXBAR-24) OR (START+FRAMELEN = STOP+1);
  IF ABSCK THEN FRAMELEN := FRAMELEN+2;
  CKSUM := 256 - ((CKSUM + FRAMEID + FRAMELEN) AND 255);
  WBYTE (CKSUM); WBYTE (FRAMEID); WBYTE (FRAMELEN);
  IF ABSCK THEN BEGIN
    WBYTE (START SHR 8); WBYTE (START);
    FRAMELEN := FRAMELEN-2 END;
  FOR I := 1 TO FRAMELEN DO
    WBYTE (MEM [START + I - 1]);
  WRITE (SPACE, BAR, PLTESCAP, NORMLPRT, CPI12, CR);
  WFRAME := START + FRAMELEN
  END;

BEGIN  } *** MAIN PROGRAM *** }
CALL (NOPRINT); I := 0;
WRITE (FF,'BAR-CODE PRINTER',CR,CR,'JOB NAME: ');
WHILE I < 53 DO BEGIN
  READ (IPT); CASE IPT OF
    DEL: IF I > 0 THEN BEGIN WRITE (IPT); I := I-1 END;
    CAN: WHILE I > 0 DO BEGIN WRITE (DEL); I := I-1 END
    ELSE BEGIN
      WRITE (IPT); JOBNAME [I] := IPT; I := I+1;
      IF IPT = CR THEN I := 53  } TO GET OUT OF LOOP } END
    END  } CASE }
  END  } WHILE }; JOBNAME [53] := CR;
WRITE (CR,'START ADDRESS: '); READ (ORIGIN%);
WRITE (CR,'END ADDRESS: '); READ (LASTBYTE%);
WRITE (CR,'SPECIFY ABSOLUTE ADDRESSES? ');
REPEAT READ (IPT) UNTIL (IPT = 'Y') OR (IPT = 'N');
WRITE (IPT); ABSFLAG := (IPT='Y');
CALL (PRINT); WRITE (CPI12); I := -1;
REPEAT I := I+1; WRITE (JOBNAME [I])
UNTIL JOBNAME [I] = CR; WRITE (CR);
POINTER := ORIGIN; FRAMEID := 0;
REPEAT
  POINTER := WFRAME (POINTER,LASTBYTE);
  FRAMEID := FRAMEID+1;
  IF (0 = FRAMEID MOD 55) AND (POINTER <= LASTBYTE)
    THEN BEGIN WRITE (FF); I := -1;
    REPEAT I := I+1; WRITE (JOBNAME [I])
    UNTIL JOBNAME [I] = CR; WRITE (CR) END
UNTIL POINTER > LASTBYTE;
POINTER := WFRAME (POINTER,0)  } WRITE EOF FRAME }
WRITE (FF); CALL (NOPRINT)
END. } MAIN PROGRAM }
```

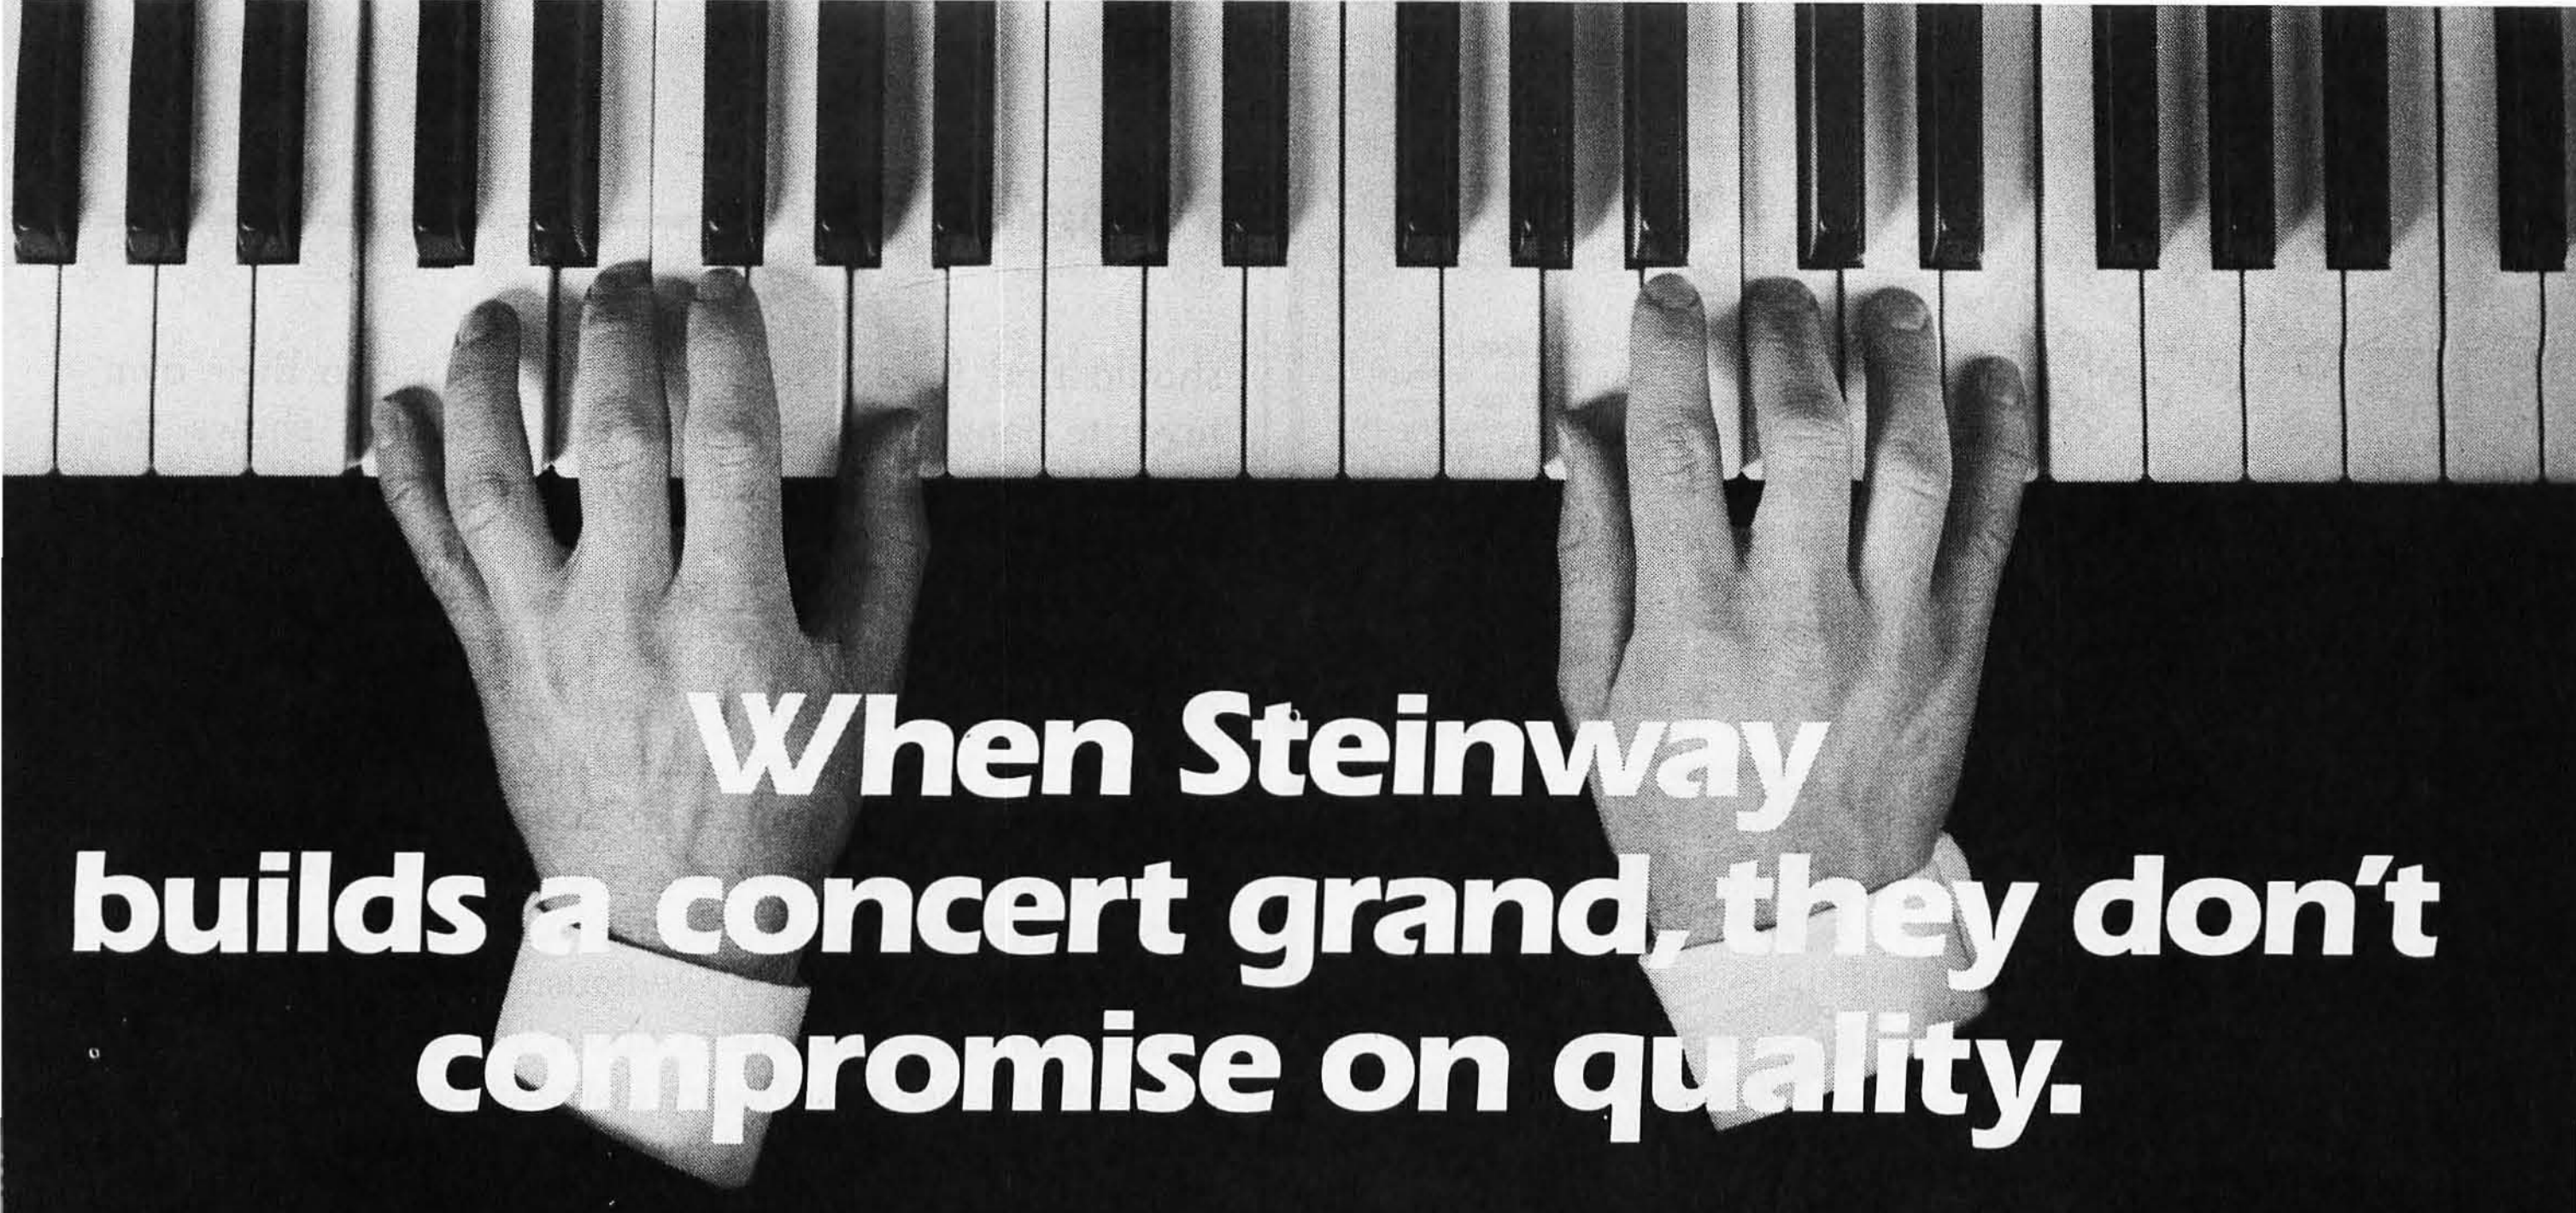

When Steinway builds a concert grand, they don't compromise on quality.

Neither do we.

The low price is deceiving. Synertek Systems Corporation allows no compromise in the versatility, reliability, and quality of the KTM-3.

This complete, low-cost terminal offers no-frills, solid performance. With its power supply and connecting cables, the KTM-3 requires only a CRT monitor or television screen to provide a functioning system for data entry and display.

The KTM-3 incorporates all the latest features of standard terminals such as:

- Choice of character screen size:
  - 24×80 characters in the KTM-3/80
  - 24×40 characters in the KTM-3
- 110 to 19.2K baud
- 7×9 character matrix in an 8×10 field
- "CAPS LOCK" key
- 128 ASCII characters with descenders
- Full and half duplex with modem control
- Built-in power supply and cables included
- Scrolling and full cursor control
- Display of framing and parity errors
- Auto key-repeat
- Debug mode (Display of control characters)
- Built-in diagnostics
- 50/60 Hz operation with 220 volt version available

STARTING AT **$389,**
OUR PRICE WILL BE MUSIC TO YOUR EARS.

Synertek Systems Corporation
150 S. Wolfe Road Sunnyvale, CA 94086
Telephone: (408) 988-5689
TWX: 910-338-0135

Dealer inquiries invited.


TOLL FREE OUTSIDE CAL. 1(800)421-0347, 1(800)423-5886

Order from the No 1 Dealer in the Country! TOLL FREE

1(800) 421-0347

commodore
Call for latest price on:

CBM 8000 Business computer
CBM 2001 Business computer
CBM 2001 PET
CBM 2022 Printer
CBM 2023 Printer
CBM2040 Dual Drive Floppy Disk
CBM 8050 Dual Drive Floppy Disk
CBM Modem
CBM Voice Synthesizer

Introducing The NEC Personal Computer

Here is THE computer from NEC. Centronics and RS232 interfaces are standard. Up to 64 K (RAM). **SEND FOR PRICE AND INFO., OR CALL TOLL FREE!**

apple II & II plus
16K-Call
32K-Call
48K-Call
toll free

monitors
9" Black and white. **Only $185.**
Also available in Sanyo
12" Black and white.
15" Black and white.

apple III is here
Call today and be the first to have the most powerful professional computer in its class!

TRS-80*
All TRS-80 Compatible Hardware and Software. Call us and tell us what you need! TRS 80 is a trademark of Tandy Corp.

ATARI 825 Printer..$799

print wheels and thimbles
Huge selection for **Qume, Diablo, NEC.** Plastic or metal. Call 1-800-421-0347.

apple cards

Hi-Speed Serial Interface	Call
Communications Interface	Call
Parallel Printer Interface	Call
Centronics Printer Interface	Call
Hobby/Prototype	Call
Integer Basic Firmware	Call
Applesoft Firmware	Call

atari 800
Everything that 400 has plus Basic Language Cartridge. 16K memory (expandable to 48K). **Only $798.**
FREE **Bonus 8K Memory Module good till 12/31/80.**
Atari Program Recorder. Only $68.95
Atari Expansion Memory. **8K $89.95**
16K $159.

NEC
Letter quality high speed printer, bi-directional, high resolution plotting, graphics.
RO with Tractor Feed **$2865.**
KSR with Tractor Feed **$2995.**
Paper Tiger (1P440) **$949.**
With Graphics
Anadex DP9500 **$1449**
DP8000 **$849.**
Epson MX 80 **$645.**

apple II inventory control system
The first truly professional system that can tackle up to **8,100 items,** transaction register/audit trail, inventory status report, re-order report, keeps track of purchase orders automatically, will handle multiple departments or divisions, fast data retrieval. Minimum hardware requirements: Apple II Plus with 48K, one disk drive and 80 column printer. Available also for the new DOS 3.3.

ZENITH DATA SYSTEMS
Smart Video Terminal
$795

dysan diskettes
8" (Box of 10)
3740/1 sgl side/sgl density **$4.50 ea.**
3740/1D sgl side/dbl den **$6.95 ea.**
5" (Box of 5)
104/1 soft sector,
107/1 10 sectors,
105/1 16 sectors **$4.50 ea.**

CALL FOR FREE CATALOG

THE HP-85!
The HP-85 is a powerful BASIC language computer complete with keyboard, CRT display, printer, and tape drive—all in one compact unit. Call

16K RAM
Set of 8 $39.95

modems
Micromodem 100 Call.
Micromodem II Only $325

In California Call (213) 996-2252

Prices subject to change without notice. Please allow ample time for checks to clear. Please add 2% for shipping and handling. California residents please add 6% sales tax. Sorry, no COD.
Copyright 1980 MICRO Business World

MICRO BUSINESS WORLD™
15818 Hawthorne Blvd.,
Lawndale, CA 90260

Immediate response to your orders

U.S. and International Dealer inquiries invited.

should find it easy to adapt this routine to their own favorite languages and printers. Figure 1 shows the textually-encoded bar-code representation of a portion of listing 1.

The program need not be used exclusively for software distribution. Transfer of data of any kind between computers with incompatible mass-storage devices is easy if the source computer can create bar code and the recipient can read it. In addition, cheap, compact, archival storage of seldom-used information is possible if the length of files and frequency of use are such that entry via the wand is not unreasonably tedious.

Lest there be any doubt about the suitability of this program for use in software distribution, I will conclude by mentioning a recent experiment. I produced the bar-code listing (partially reproduced in figure 1) and photocopied it on a high-quality electrostatic photocopier. Both the original and the copy were scanned five times with the bar-code wand. I counted the number of passes needed to read each line and calculated the average. For the original and the copy, 1.1 and 1.3 passes with the wand sufficed to obtain a good read. Total time to enter the code ranged from 10 to 15 minutes, but this time could be decreased if a portable drafting tool or a T-square were used instead of a ruler to guide the wand across the page. The most time-consuming step in the entry process involved alignment of the ruler. Clearly, it is perfectly feasible to use this method to distribute machine-readable code on paper.■

References

1. Budnick, K. *Bar Code Loader.* Peterborough NH: BYTE Books, 1977.
2. Chung, K-M and H Yuen. "A Tiny Pascal Compiler, Part 1: The P-Code Interpreter," September 1978 BYTE, page 58. Republished in *The BYTE Book of Pascal.* B W Liffick, editor. Peterborough NH: BYTE Books, 1979, page 59.
3. Helmers, Carl. "Bar Codes, Revisited...," April 1980 BYTE, page 6.
4. Louis, G. "Tiny Pascal in 8080 Assembly Language," July 1979 BYTE, page 174. Republished in *The BYTE Book of Pascal.* Blaise W Liffick, editor. Peterborough NH: BYTE Books, 1979.

BYTE's Bugs

Upside-Down Static Phoneme

Right in the middle of "Articulate Automata," there's an upside-down vowel spectrum! (See photo 3, page 170, February 1981 BYTE.)

Richard T Gagnon
R T Gagnon Associates
210 W Tienken
Rochester MI 48063

*Mr Gagnon is correct: our phoneme spectrum was inverted. Thanks for setting us upright....*CM■

Circle 240 on inquiry card.

A FUNNY THING HAPPENED ON OUR WAY TO GROWTH.

A year ago, the course for Marot Software Systems, Inc. was clear. We were on our way to becoming the world's best source for software. And we were going to accomplish that by distributing only the operating system and the application software that brought out the best in microcomputers. That was our course... and, in all modesty, we were most successful.

That's when something funny happened. The dealers, consultants and computer users with whom we had relationships began asking—and then demanding—that we at Marot apply our expertise and follow-through to the supply of reliable, quality-oriented hardware and complete computer systems. Systems that could solve specific problems in data-based management and analysis for business, law, medicine, science and government.

The marketplace told us of the need for support, too. Of the gap that existed in matching hardware, operating systems and software to application requirements. And of the need for assistance in evaluating options available to meet those requirements.

So, we thoroughly searched and found the best hardware we could distribute.

As a result, Marot Software Systems, Inc. has become Marot Systems, Inc. It's the one company you can rely on to handle total computer needs: from hardware, software, operating systems and support to total computer solutions.

If you're a computer dealer or a computer consultant, Marot's total backup and support could be the special something you need to make your operation grow. Call or write us today.

Here's the hardware we now distribute:

ONYX—Extremely powerful and reliable 5-user Z80-based micro, with 10 or 20 Mb hard disk and integral tape subsystem. Also available: 16 bit Z8000 operating UNIX™ Version 7, with up to 1 Mb RAM for as many as 8 users. 10 or 18 Mb hard disk with integral tape subsystem and additional storage available.

ALTOS—Cost-effective floppy disk system, 208 K RAM for up to 4 users. Expansion to 58 Mb hard disk with tape backup available.

marot

MAROT SYSTEMS
YOUR EASTERN SOURCE

Here are the products distributed by Marot Systems, Inc. Please check items of interest and return this coupon to:

Marot Systems, Inc.
310 Madison Avenue, Suite 408
New York, New York 10017
(212) 661-8550

TWX 710-581-2477

Please send me more information on the following:

Operating System

☐ OASIS® —*The* mini-like single and multi-user machine-independent operating system for Z80 commercial applications and serious programmers.

Software

☐ MAGIC WAND™—The most usable full-feature word processing system with extremely powerful text-formatting features.
☐ MAROT'S MAILING LIST PROGRAM—Maintains up to 65,000 entries in zip and name order, by ISAM files.
☐ COMPLETE BUSINESS PACKAGES—In standard ANSI '74 COBOL. Five module accounts receivable, accounts payable, general ledger, payroll, order entry/inventory plus financial modeling and job costing.
☐ ESQ-1™—Time and billing system for the legal profession.
☐ MAROT'S OFFICE APPOINTMENT SCHEDULER—Maintains complete office diary, with ability to compare schedules.

Hardware

☐ ONYX
☐ ALTOS
☐ CORVUS HARD DISKS—10 or 20 Mb, available for many computers including Tandy's TRS-80® Mod II
☐ PERKIN-ELMER TERMINALS
☐ TELEVIDEO® TERMINALS
☐ XEROX® PRINTERS

I am a ☐ computer dealer
☐ computer consultant
☐ computer user

Name ______________________ Title ______________
Company ______________________
Address ______________________
City/State/Zip ______________ Phone (   ) ______________

ESQ-1 is a trademark of Micro Information Systems, Inc.
TRS-80 is a trademark of Tandy Corp.
OASIS is a product of Phase One Systems.
MAGIC WAND is a trademark of Small Business Applications Inc.

Circle 228 on inquiry card.

HOW TO MAKE THE STARWRITER 25 WORD-PROCESSING PRINTER COMPATIBLE WITH YOUR APPLE, PET, TRS-80, OR BUSINESS SYSTEM:

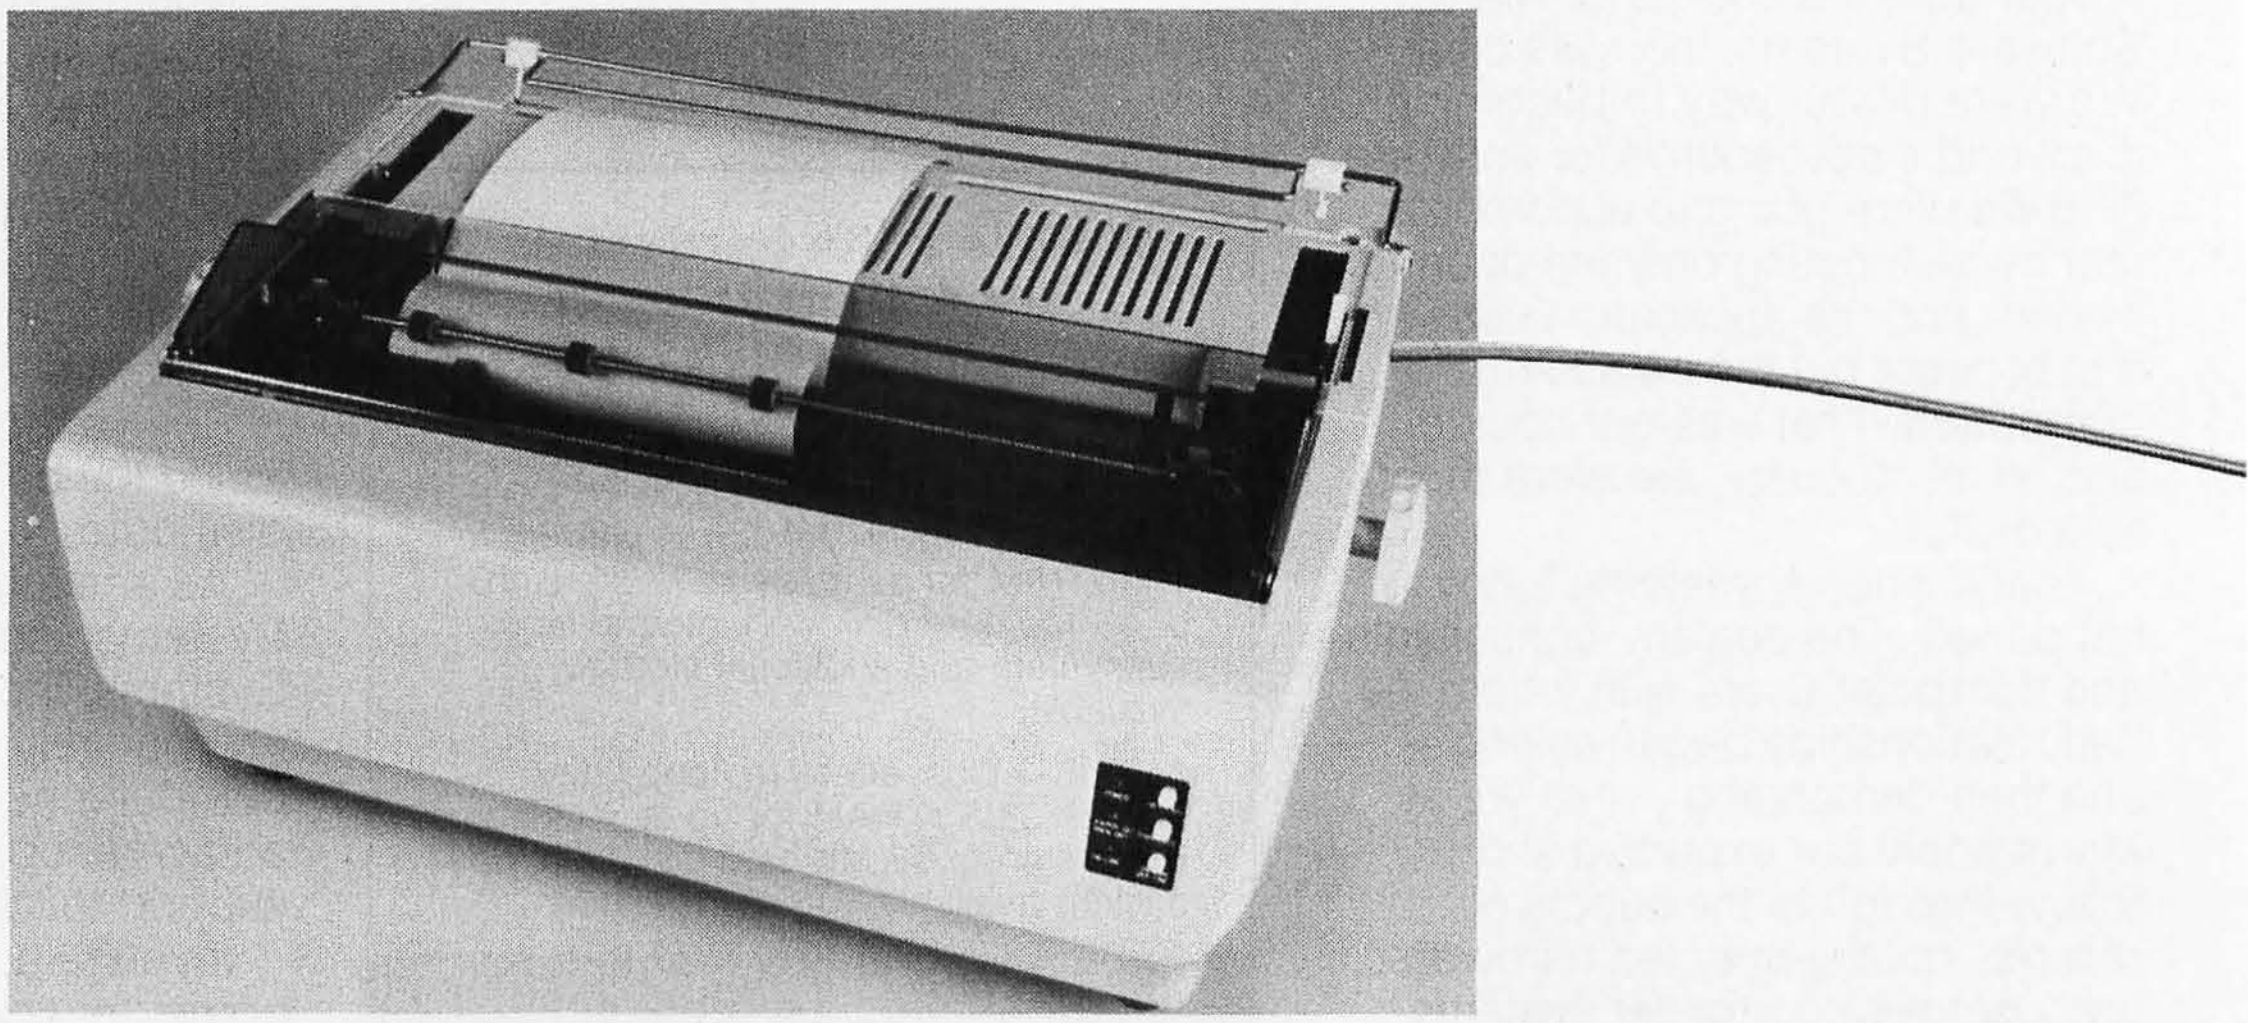

The Starwriter™ Daisy Wheel 25 cps printer.

There's one big difference between the Starwriter 25 and most other letter-quality printers:

About a grand. (Less.)

And yet it has some features—like painless interfacing—that are hard to find at *any* price. For instance:

Using a 96-character wheel, the C. Itoh Starwriter 25 produces excellent letter-quality printing on three sharp copies with up to 163 columns, and offers the most precise character-placement available for outstanding print performance.

The Starwriter 25 comes complete and ready-to-use, requiring no changes in hardware or software. It uses easily available, Diablo-compatible ribbon cartridges and daisy wheels, and is "plug-in" compatible with a wide variety of systems.

It also comes with a 3-month warranty from C. Itoh on parts and labor; supported by one of the best service organizations in the industry.

It can be yours for about $1,895. See your nearest dealer for details.

B-5

Leading Edge Products, Inc.,
225 Turnpike Street,
Canton, Massachusetts 02021

Dear Leading Edge:
The idea of saving $1,000 doesn't bother me, so I'd like to see my nearest dealer for details.
Now, if I just knew who he was . . .

Name ____________________
Title ____________________
Company ____________________
Street ____________________
City ____________________
State ____________ Zip ________
Phone: Area Code ________ No. ________

LEADING EDGE.®

Leading Edge Products,™ Inc., 225 Turnpike Street, Canton, Massachusetts 02021
DEALERS: For immediate delivery from the Leading Edge Inventory Bank™ call toll free 1-800-343-6833
In Massachusetts, call collect (617) 828-8150. Telex 951-624
Dealers, see us at the NCC show, Booth No. 5720/5722.

STEP #1. PLUG IT IN.

(THERE IS NO STEP #2.)



APPLET.M.

PETT.M.

TRS-80T.M.

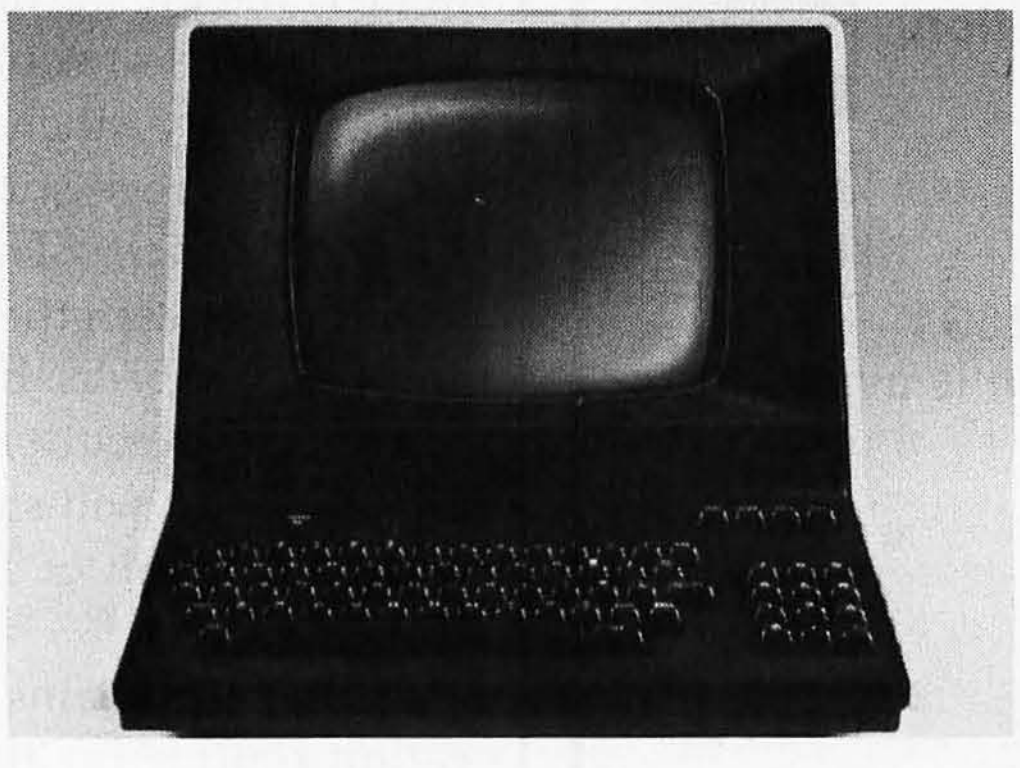

ETC.

System Notes

Faster BASIC for the Ohio Scientific

John A Sauter, Department of Biochemistry
5426 Med Sci I, University of Michigan, Ann Arbor MI 48109

"I don't believe it! The guy who wrote this program didn't know what he was doing." How many times have you seen a program and said that? Well, I never thought I would say it while looking at the Microsoft multiplication routines written for Ohio Scientific's BASIC.

Multiplication routines written in software are *slow*, especially when accurate to 9 digits. Programmers are always trying to optimize mathematical routines for speed. That's why I was surprised that the main loop for the multiplication routine contained line after line of inefficient instructions.

To comprehend the problem, you need to understand how a software multiplication routine works. For multiplication of large numbers, the process is similar to the longhand method taught in school. The two numbers to be multiplied, the multiplier and the multiplicand, are stored in the floating-point accumulator and the alternate floating-point accumulator, respectively. These accumulators are usually 4 to 5 bytes in length and preferably located in page 0 memory. The low bit of the multiplier is checked to see if it is set: if it is, the multiplicand is added to the product (initially 0); if it is not, no addition occurs.

Next, both the multiplier and the product are shifted 1 bit right (or, alternately, the multiplier is shifted right and the multiplicand is shifted left) and the low bit on the multiplier is checked again. This process is repeated for each bit in the multiplier. Four bytes are required for 9 digits of precision: a great deal of bit shifting must go on. In fact, the bit shifting uses most of the time required for a multiplication routine.

Fortunately, there is a convenient instruction in the 6502 microprocessor for shifting several contiguous bytes 1 bit to the right. The ROR instruction shifts a byte 1 bit to the right, with the carry shifted into the high-order bit, and the low-order bit of the byte shifted into the carry. Successive executions of the ROR instruction on contiguous bytes will shift all of the bytes 1 bit to the right, with the low bit of 1 byte shifting into the high bit of the next.

Listing 1 contains a portion of the Microsoft multiplication routine for the 6502. It is part of the routine that shifts the product 1 bit right. This sequence is repeated four more times in the subroutine, and requires a total time of 85 μs (with a 1 MHz clock rate while assuming

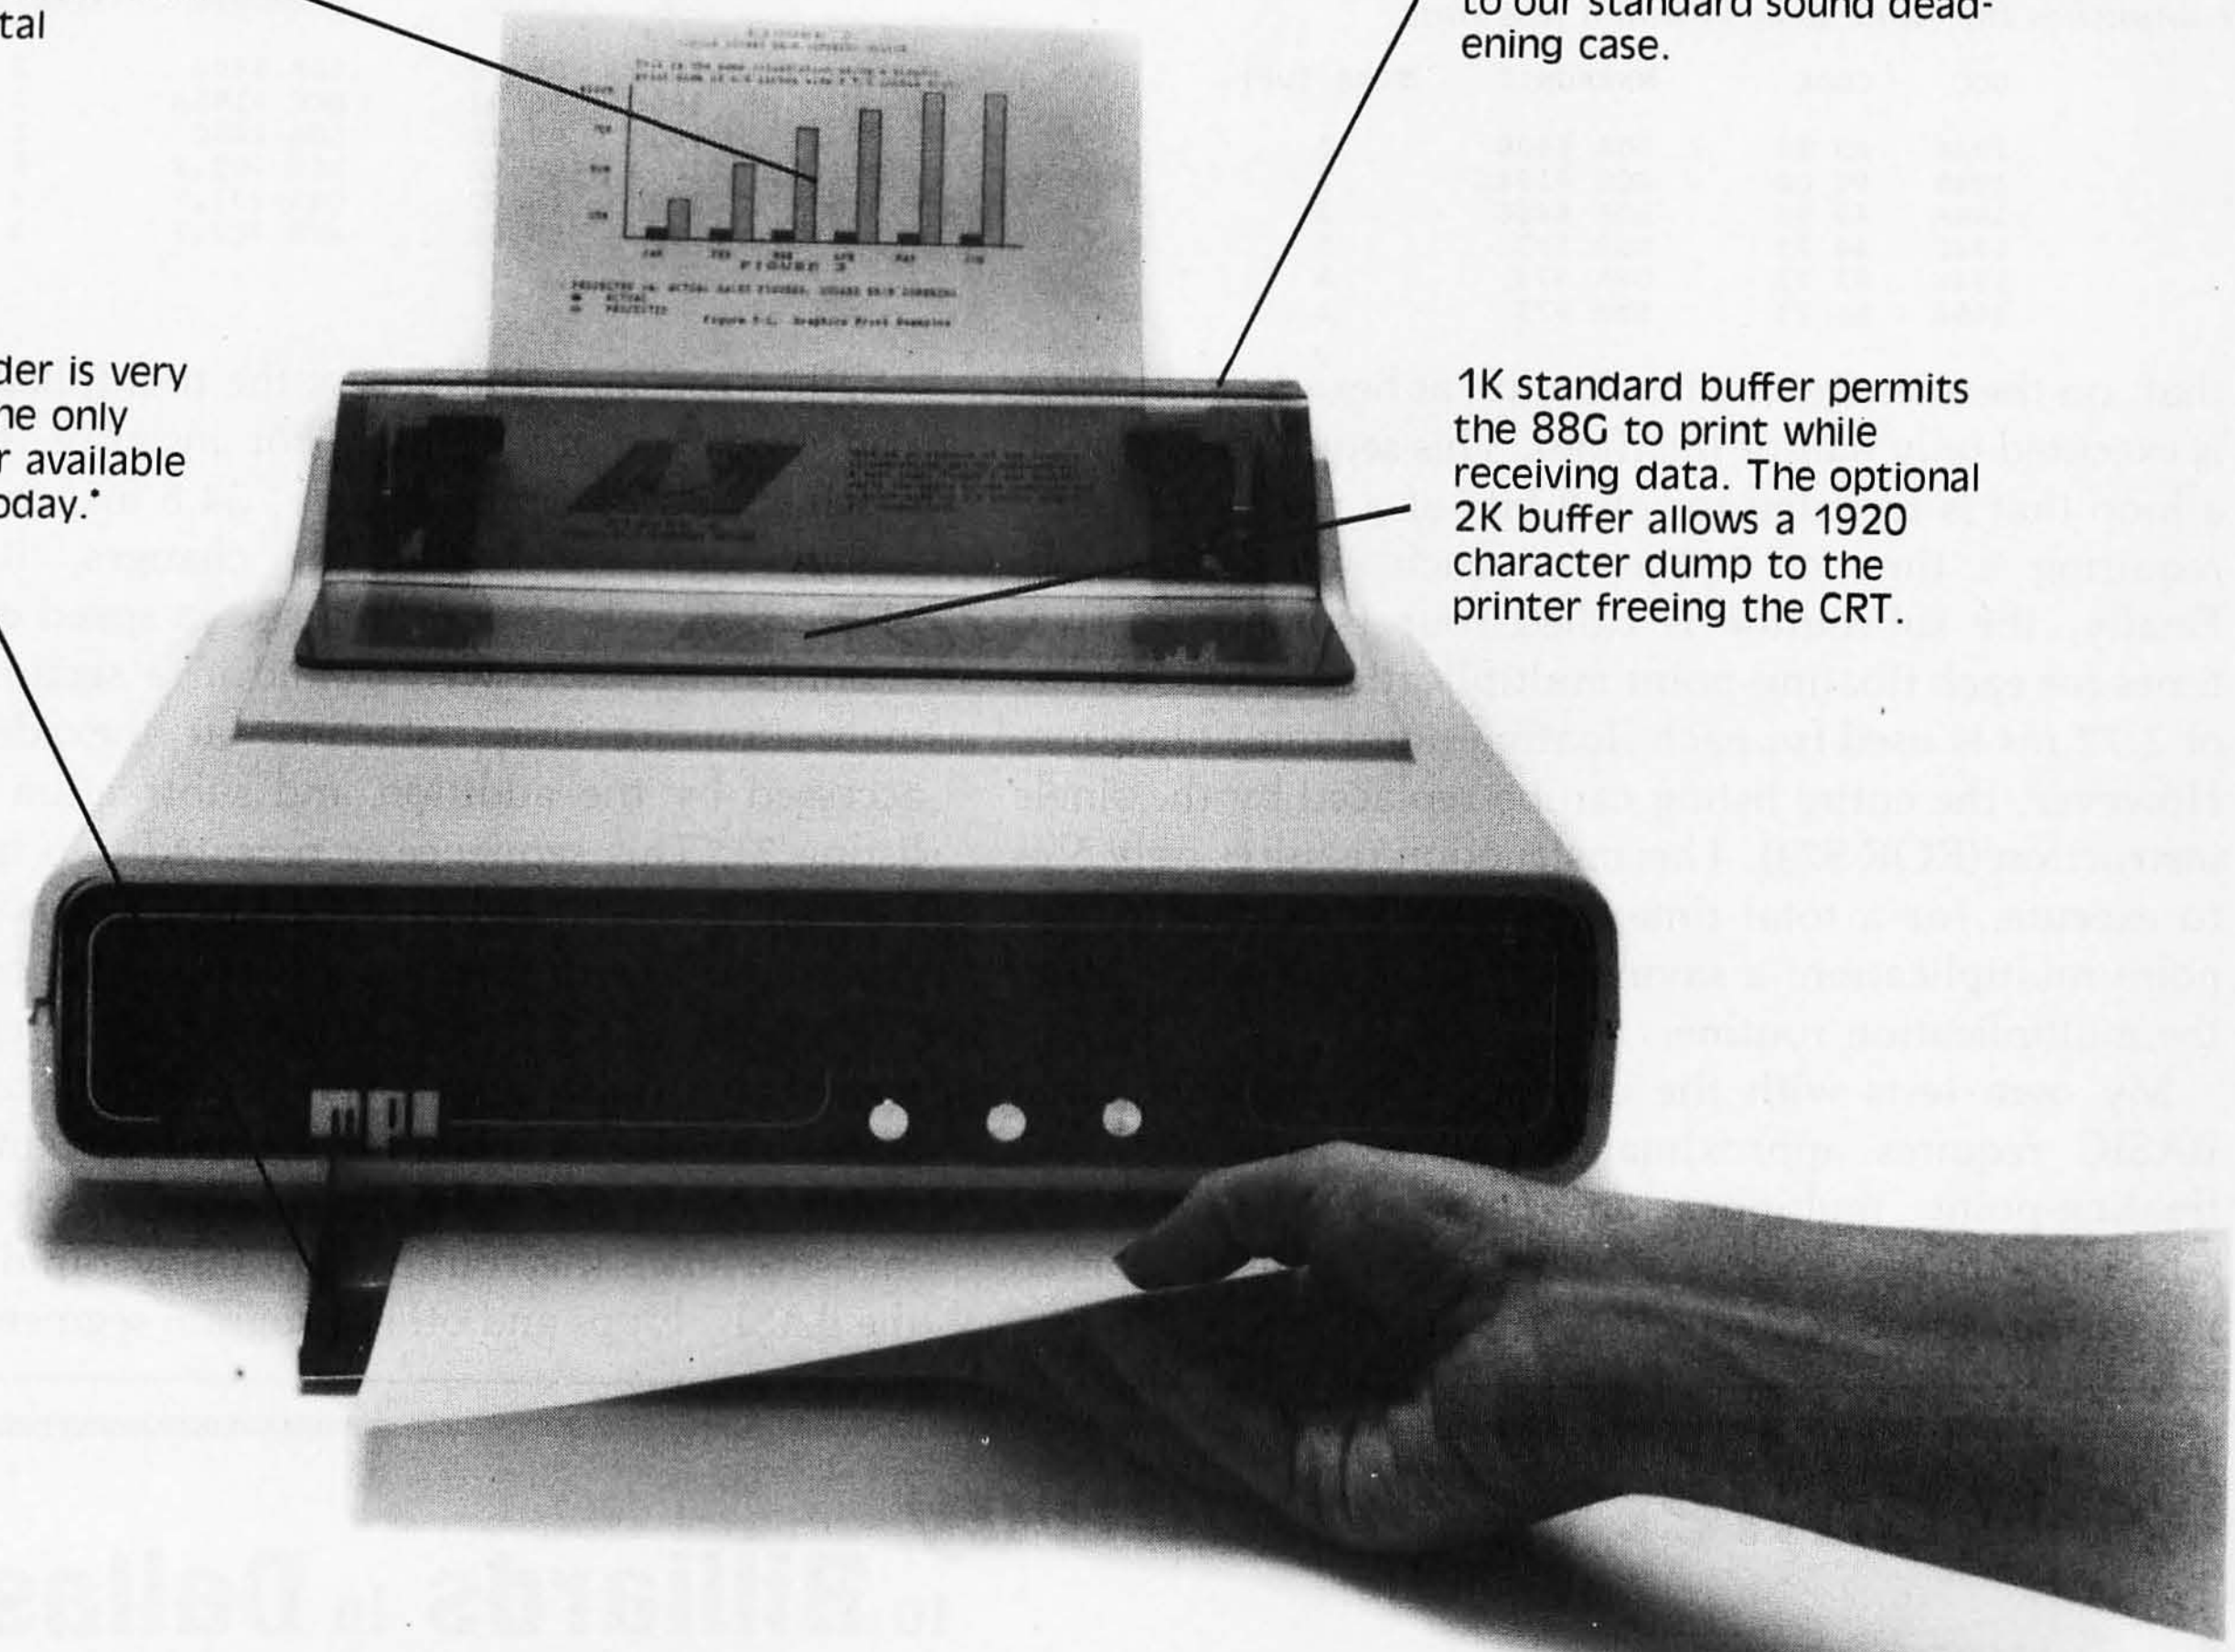

High resolution, dot addressable graphics with vertical resolution of 72 dots per inch and up to 82 dots per inch horizontal resolution.

"Q.T." cover reduces noise to an office comfort level. This is an optional feature to our standard sound deadening case.

Single sheet feeder is very simple to use. The only front load feeder available on the market today.*

1K standard buffer permits the 88G to print while receiving data. The optional 2K buffer allows a 1920 character dump to the printer freeing the CRT.

The Features Leader

Integrated Paper Handling System
Dual tractor/friction feed allows use of pin feed, roll or single sheet paper.

Versatile Interface
Data input from most computers can be supported by the 88G. RS232C serial and Centronics® type parallel is standard. Options can be added for current loop, IEEE 488 and high speed serial inputs.

Letter Quality Capability
The 88G provides a selectable 11 x 7 serif style dot matrix for correspondence printing.

Cost Effective
The 88G has more features than any other impact printer in its price class. First compare the quality of the 88G, then compare the price —the 88G wins! Single unit price is less than $800.

*Optional

mpi Micro Peripherals, Inc. 4426 South Century Drive Salt Lake City, Utah 84107 (801) 263-3081
The Printer People

California VITEK (714) 744-8305 **Colorado** PLS Associates (303) 773-1218 **Florida** GMI Distributors (305) 894-3354 **Illinois** Coombs & Associates (312) 298-4830 **Massachusetts** Eastmark (617) 449-0050 **Minnesota** Bohlig & Associates (612) 922-7011 **New Jersey** Hansen & Hughes (201) 652-7055 **Oregon** Microwave (503)620-8150 **Utah** PLS Associates (801)466-8729 Type-A-Line (801)521-5310 **International England** Russet Instruments, Ltd. (0734) 868147 Telex: 849721 **Phoenix** Sigma International (602) 994-3435 Telex: 165-745 Sigma **France** IER Tel. 333.67.81 Telex: 620-289 **Canada** Norango (416) 449-2761

Circle 248 on inquiry card.

Listing 1: *Section of the multiplication routine from Microsoft's disk BASIC, written for Ohio Scientific computers. This section can be replaced with a single ROR instruction (ROR $73, where the dollar sign denotes a hexadecimal 73). The replacement accomplishes the same task in much less time.*

```
LOC     CODE      MNEMONIC     TIME (uS)

1946    A9 80     LDA #$00       2
1948    90 02     BCC $194C      3
194A    A9 80     LDA #$80       2
194C    46 73     LSR $73        5
194E    05 73     ORA $73        3
1950    85 73     STA $73        3
```

that, on the average, the instruction at hexadecimal 194A is executed only half of the time). This sequence is also in a loop that is repeated for all 8 bits of a multiplier byte, requiring a time of 680 μs for each subroutine call. Finally, the subroutine is called four (sometimes five) times for each floating-point multiplication. Thus, a total of 2.72 ms is used for each floating-point multiplication. However, the entire listing can be replaced by the single instruction (ROR $73). This instruction requires only 5 μs to execute, for a total time of 800 μs for each floating-point multiplication: a saving of 1.92 ms for each call to the multiplication routine.

My own tests with the changes have indicated that BASIC requires approximately 4.9 ms to complete a floating-point multiplication on a 9-digit number, whereas with the changes, it takes only 3.1 ms. This is an increase in speed of 37%!

Listing 2: *Part of a routine accessed by the addition and subtraction routines in Ohio Scientific's disk BASIC. This section can be replaced by the single instruction ROR $02,X.*

```
LOC     CODE      MNEMONIC     TIME (uS)

1854    A9 00     LDA #$00       2
1856    90 02     BCC $185A      3
1858    A9 80     LDA #$80       2
185A    56 02     LSR $02,X      6
185C    15 02     ORA $02,X      4
185E    95 02     STA $02,X      4
```

Other routines that access the multiplication routines also execute more rapidly. For instance, the logarithm routine takes approximately 34.8 ms to complete a 9-digit logarithm; with the changes, it takes only 21.9 ms. This is also an increase in speed of 37%.

Similar mistakes were found in a section of the normalization routine (starting at hexadecimal 1854) accessed by the addition and subtraction routines (see listing 2). This sequence is repeated two more times. It can all be replaced by the instruction ROR $02,X. Another interesting section of the routine occurs at hexadecimal 1879 (see listing 3). This can be replaced by the instruction ROR A, which takes only 2 μs to execute. The actual increase in speed for the addition and subtraction routines with the changes installed was too difficult to measure since the routines are fairly rapid compared to the BASIC loops and other program segments used to test

LOWEST PRICE - BEST QUALITY

NORTH STAR



North Star Horizon 2

2-5¼ Disk Drives
32K Double Den
Factory assem. & tested
Factory guaranteed
List 3095

only **$2274**

POWERFUL NORTH STAR BASIC FREE
SUPERB FOR BUSINESS & SCIENCE

FACTORY ASSEMBLED & TESTED	LIST	ONLY
HORIZON-1-32K-DOUBLE DEN	$2695	$1980
HORIZON-2-32K-QUAD DENSITY	3595	2674
HORIZON-2-64K-QUAD + HARD DISK	9329	7149
HORIZON RAM ASSM	16K = $389.	32K = $579
HORIZON RAM KIT	SALE! 16K = $314	32K = $469
HORIZON DISK DRIVE SALE DOUB DEN	SAVE!	315
NORTH STAR HARD DISK 18 Mb	4999	$3929
PASCAL-PLUS 14,18 OR 36 DIGIT PRECISION		249

SUPERBRAIN
ZENITH



SUPERBRAIN QD 64K
List $3995 only $2995

Z-89 48K
List $2895 only $2299

TERMINALS Z-19 $725

INTERTUBE III only $725
DIP-81 PRINTER only $395



MICROTEK $675

NEC PRINTER $2569

TRACTOR, THIMBLE, RIBBON

InterSystems

ITHACA INTERSYSTEMS 2A



Z-80A CPU 4 MHz
64K Dynamic RAM
Front panel
V I/O—with interrupts
FDCII Disk Controller
20 slot motherboard

List $3595 You Pay Only **$2795**

PASCAL/Z + THE FASTEST PASCAL $375
GET READY FOR ITHACA'S Z-8000
8086 16 BIT CPU & SUPPORT CARD SEATTLE $575

MORROW 8" DISK

DISCUS 2D + CP/M® 600K ONLY $938
DISCUS 2 + 2 + CP/M® 1.2 MEGA B. $1259
ADD DRIVES 2D = $650 2 + 2 = $975
2D-DUAL + CP/M® ONLY $1555



MORROW HARD DISK
26,000,000 BYTES!!
LIST $4995 ONLY $3995
CP/M® IS INCLUDED!

SAVE ON MEMORY AND PROGRAMS

SYSTEMS MEMORY 64K A & T 4mHz	$599
SYSTEMS MEMORY 64K BANK SELECT	$789
CENTRAL DATA 64K RAM	$599
ITHACA MEMORY 8/16-bit 64K	$845
SEATTLE MEMORY 8/16 BIT 16K 4Mhz	$275
SSM KITS Z-80 CPU	$221
VIDEO BRD V83 4Mhz	$412
ANADEX PRINTER DP-9500-1	$1349
CAT NOVATION MODEM	$169
TARBELL DISK CONTROLLER DD	$445
ECONORAM 2A 8K ASSM	$179
NSSE 1-22 & P01 TERRIFIC PROGRAMS	ONLY $10. EACH
NORTHWORD 294 MAILMAN 234 INFOMAN	$364
TARBELL COMPUTER-PHONE	

RCA-COSMAC VP-111 99 RCA-COSMAC VP-711	$199
COLOR! RAINBOW 385 SPECTRUM	$289
EZ-80 Machine Language Tutor	$25
EZ-CODER Translates English to BASIC	$71
ECOSOFT FULL ACCOUNTING PKG	$315
BOX OF DISKETTES	$29
SECRETARY WORD PROCESSOR The Best!	$99
TEXTWRITER III Book Writing Program	$112
GOFAST NORTH STAR BASIC Speeder Upper	$71
Which Computers are BEST? BROCHURE	FREE
North Star Documentation refundable w/HRZ	$20

AMERICAN SQUARE COMPUTERS BEATS ADV. PRICES

American square Computers

919-889-4577 KIVETT DR. JAMESTOWN N.C. 27282 919-883-1105

® CP/M is a registered trademark of Digital Research, Inc.

Circle 16 on inquiry card.

Listing 3: *Section from the normalization routine used by the addition and subtraction routines in Ohio Scientific's disk BASIC. This section can be replaced by the instruction ROR A.*

```
LOC     CODE        MNEMONIC        TIME (uS)

1879    08          PHP                3
187A    4A          LSR A              2
187B    28          PLP                4
187C    90 02       BCC $1880          3
187E    09 80       ORA #$80           2
1880    C8          INY
```

them. I did notice that BASIC testing loops often executed approximately 10% faster with the changes. I attribute this to the faster addition routine.

I suspected that the division routines would also contain errors, but discovered that the ROL instruction was used wherever it was needed. (The ROR instruction isn't necessary in division.)

I immediately contacted Ohio Scientific and Microsoft to inform them of the problem. Both replied with an explanation that restored my faith in big-name software companies. Apparently, earlier versions of the 6502 microprocessor did not include an ROR instruction, but as customer demand grew, MOS Technology incorporated an ROR instruction in later versions of the 6502. Unfortunately, some of the earlier Ohio Scientific computers had already been sold with the old microprocessor. Therefore, Microsoft wrote its BASIC without any ROR instructions to make the software compatible with the earlier versions of the computer. Listings 1, 2, and 3 are actually macro expansions of the ROR instruction. [*Macros are one-line pseudoinstructions placed in an assembly-language source listing. When processed, they are replaced by a (predefined) set of assembly-language instructions and assembled into machine language....*GW] Microsoft assured me that this was done only for the KIM and Ohio Scientific computers. All other versions of 6502 BASIC were written using the ROR instruction.

For those who have later versions of Ohio Scientific computers and don't have BASIC permanently stored in read-only memory, there is a way to change Ohio Scientific's disk BASIC to use the ROR instruction. If you are using the OS-65D disk operating system, the program in listing 4 will permanently change your BASIC for 8-inch disks. It simply loads a part of the BASIC interpreter into memory, POKEs in the required changes, and stores the changed code back on disk. For 5-inch disks, statement 80 should be changed to read:

```
80 DISK!"CA 4200=03,1"
```

and statement 150 should be:

```
150 DISK!"SA 03,1=4200/8"
```

THUNDERCLOCK PLUS™

PUT TIME AND REMOTE CONTROL IN YOUR APPLE II

The THUNDERCLOCK PLUS is two peripheral systems on one card for your APPLE II OR II PLUS. An accurate, reliable, real-time clock/calendar and an interface for the popular BSR X-10 Home Control System.

The THUNDERCLOCK clock/calendar makes accurate time and date available to your programs: month, date, day-of-week, hour, minute, and second, in any of four software selectable formats. On-board batteries keep your THUNDERCLOCK running when your APPLE II is turned off - for up to four years before battery replacement. On-card 1K firmware makes reading or setting the time easy from APPLESOFT or INTEGER BASIC, PASCAL, or assembly language programs. And it provides software selectable interrupts at any of three rates: 64, 256, or 2048 interrupts/second.



THE PLUS

Add THUNDERWARE'S X-10 ULTRASONIC INTERFACE OPTION to your THUNDERCLOCK and your programs can send all 22 BSR X-10 commands so you can remotely control lights and appliances. A full 128 dim/bright levels. And a powerful disk software package! The THUNDERWARE SCHEDULER software lets you create schedules to control lights, appliances, security systems, or almost any other electrical device. The software includes: SCUTIL- the SCHEDULER utility that lets you make or change a schedule, and SCHED- executes your schedules in real-time using the THUNDERCLOCK. SCHED runs in the 'background' so you can run other programs in the 'foreground'.

The THUNDERCLOCK PLUS is a SYSTEM for your APPLE II. Supported by intelligent, easy to use firmware, a powerful software package, and good documentation!

Available through your dealer.



BSR X-10 is a trademark of BSR (USA) LTD.
APPLE II is a trademark of APPLE COMPUTER, INC

Suggested retail prices:
THUNDERCLOCK PLUS..................$139
Clock/calendar card with batteries and user's manual
X-10 INTERFACE OPTION................$49
BSR X-10 Ultrasonic interface, disk with SCHEDULER SOFTWARE & demos, and user's manual
PASCAL SOFTWARE...........................$29
Disk with PASCAL interface for clock and X-10 interface, and user's guide
MANUALS ONLY, each.........................$5
California residents add 6% sales tax

If your dealer doesn't carry the THUNDERCLOCK PLUS:
ORDER TOLL FREE (VISA/MC) CALL:
800-227-6204 EXT 307 (Outside California)
800-632-2131 EXT 307 (California Only)

OR WRITE TO:

THUNDERWARE INCORPORATED
P.O. Box 13322, Oakland, CA 94661

Circle 410 on inquiry card.

Announcing the new educational computer that's destined to be the head of the class!

The Monroe Educational Computer

What takes the Educational Computer to the head of the class is that so many of its "standards" wind up as costly "extras" on other microcomputers. Features like:

- 96K of system RAM including 32K of *user* RAM
- over 320,000 bytes of built-in flexible disc storage
- typewriter-style upper and lower case keyboard, 10-key numeric pad
- 8-key row of user-definable keys providing 16 additional keyboard functions
- extended BASIC language
- three serial RS232 ports for communications, printers and peripherals
- high and low resolution color graphics with color text

Monroe gives you much more than hardware. You will have access to a full-range, Monroe-developed, software library that makes this computer *so versatile, so powerful, it will serve educational needs from primary to secondary to college levels!*

With Monroe, you'll never be left alone with a computer and nowhere to go for help. The Educational Computer will be sold, leased, serviced and personally installed through Monroe's 350 branch offices nationwide.

For full details, fill out the coupon and send to Monroe Education Center.

Monroe Systems For Business (BYTE-5/81)
The American Road
Morris Plains, NJ 07950

Att.: Monroe Education Center

Name ____________________

Title ____________________

Educational facility ____________________

Address ____________________

City ____________________

State ____________ Zip ____________

Litton **MONROE**
Systems For Business

Circle 272 on inquiry card.

I have not been able to test these changes for the 5-inch systems, and I suggest that you exercise caution in using them. For systems that use the OS-65U operating system, the program in listing 5 should be used to change your BASIC.

Ohio Scientific often boasts of supporting the fastest BASIC of any of the popular personal computers, and it can give you a great sense of satisfaction to make it run even faster. I have run BASIC with these changes for four months and have noticed that all of my programs run faster than before, especially those loaded with mathematical equations. If you decide to incorporate these changes into your system, I suggest that you first try them on an old copy of your operating system to ensure that the changes work on your computer. ■

Listing 4: *Program used with the OS-65D operating system and 8-inch disks. Beginning at hexadecimal location 4800, the program loads a portion of BASIC into memory, then POKEs the appropriate ROR instructions into the mathematical routines and stores the revised BASIC back on the disk.*

```
10 REM DISK BASIC CORRECTION ROUTINE.  OS-65D, 8" DISKS
20 DATA 118,2,118,3,118,4,104,106,200,208,232,24,96
30 DATA 102,115,102,116,102,117,102,118,102,189,152
40 DATA 74,208,214,96
50 REM SET UP TOP OF MEMORY TO $47FF
60 POKE 132,255 : POKE 133,71 : POKE 128,255 : POKE 129,71
70 REM CALL IN A PORTION OF BASIC TO $4800
80 DISK!"CA 4800=04,1"
90 A1=18516 : REM 18516 = $4854
100 A2=18758 : REM 18758 = $4946
110 REM POKE IN THE CORRECTED CODE
120 FOR I=0 TO 12 : READ D : POKE A1+I,D : NEXT I
130 FOR I=0 TO 14 : READ D : POKE A2+I,D : NEXT I
140 REM SAVE THE CORRECTED BASIC BACK ON DISK
150 DISK!"SA 04,1=4800/B"
160 END
```

Listing 5: *Program used with the OS-65U operating system. This program does the same thing as listing 4, but begins at hexadecimal location 7800.*

```
10 REM DISK BASIC CORRECTION ROUTINE.  OS-65U
20 DATA 0,36,0,0,0,2,0,120
30 DATA 118,2,118,3,118,4,104,106,200,208,232,24,96
40 DATA 102,115,102,116,102,117,102,118,102,189,152
50 DATA 74,208,214,96
60 REM SET UP USR FUNCTION AND PUT AND GET ROUTINES
70 POKE 8778,192 : POKE 8779,36
80 POKE 9432,243 :POKE 9433,40
90 POKE 9435,232 : POKE 9436,40
100 REM DISK ADDRESS = $1800 + $0C00, NUMBER OF BYTES = $0200
110 REM RAM ADDRESS = $7800
120 CB=9889 : FOR I=1 TO 8 : READ D : POKE CB+I,D : NEXT I
130 REM CALL IN A PORTION OF BASIC TO $7800
140 ER=USR(0)
160 A1=30804 : REM 30804 = $7854
170 A2=31046 : REM 31046 = $7946
180 REM POKE IN THE CORRECTED CODE
190 FOR I=0 TO 12 : READ D : POKE A1+I,D : NEXT I
200 FOR I=0 TO 14 : READ D : POKE A2+I,D : NEXT I
210 REM SAVE THE CORRECTED BASIC BACK ON DISK
220 ER=USR(1):CLOSE
230 END
```

MICROBYTE INTRODUCES
MORE PROFIT FOR YOUR BOTTOM LINE

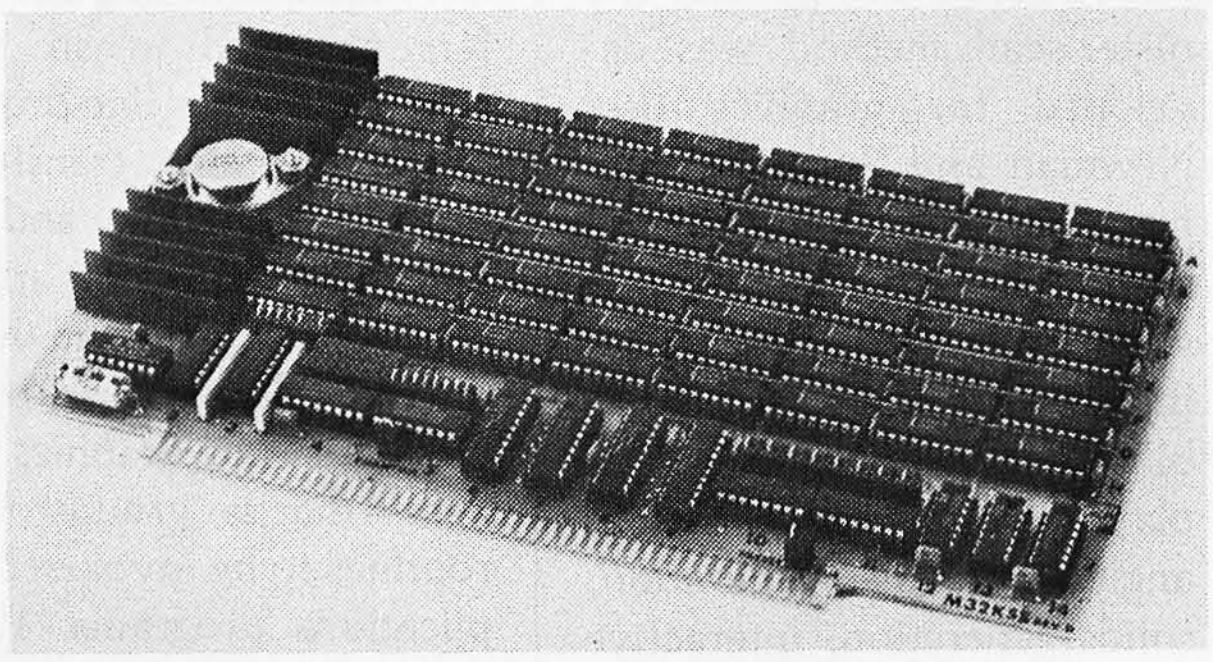

32K STATIC MEMORY BOARD

- Fully S100 bus compatible, IMSAI, SOL, ALTAIR, ALPHA MICRO
- Uses Intel low-power 2141L-4 4Kx1 Static RAM
- 2 MHz or 4 MHz operation
- Gold contacts for higher reliability
- Thermally designed heat sink (board operating temperature 0-70°C)
- Commercially designed power bus; 7 ground bus bars; 0.1 uf decoupling capacitors
- Fully tri-state buffered
- Inputs fully low-power Shottky Schmitt Trigger buffered on all address and data lines
- Phantom is jumper selectable to pin 67
- Each 4K bank addressable to any 4K slot within a 64K boundary
- 4K hardware or software selectable
- One on-board 8-bit output port enables or disables the 32K in 4K blocks
- Selectable port address
- 4K banks can be selected or disabled on power on clear or reset
- Will operate with or without front panel
- Compatible with Alpha Micro, with extended memory management for selection beyond 64K
- No DMA restriction
- Low power consumption 800mA
- Fully warranted for 120 days from date of shipment

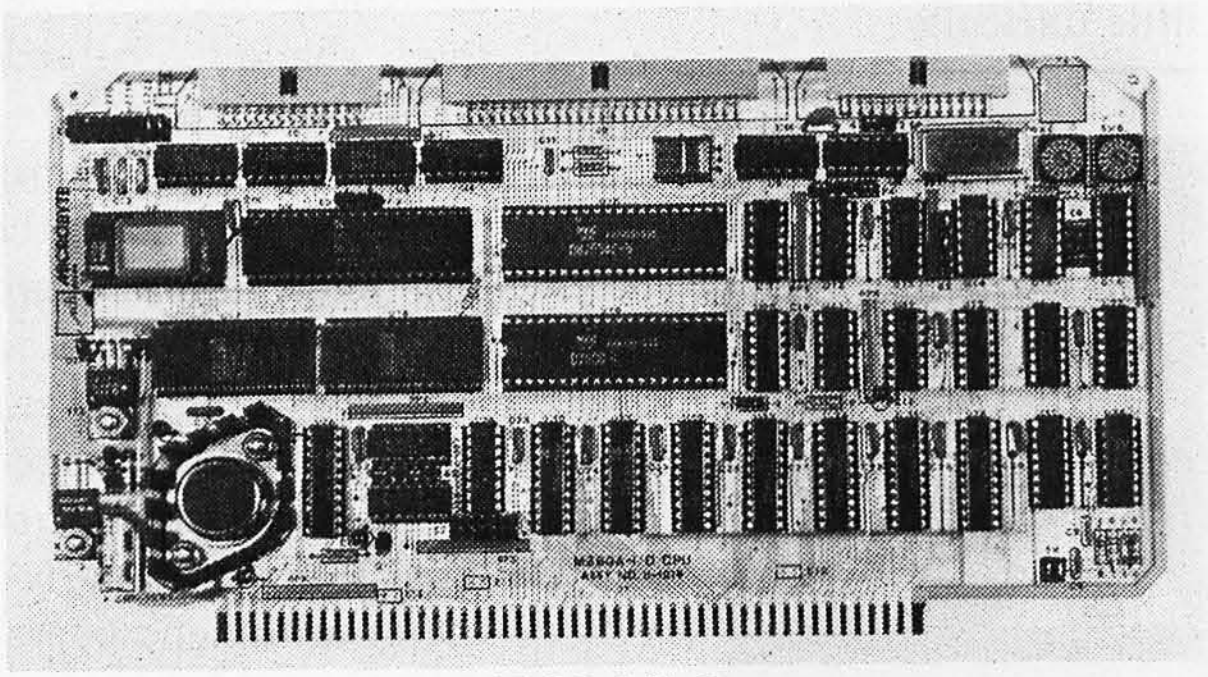

Z-80A/I-O

- A complete single board Z-80A CPU with serial/parallel interface
- Fully compatible with the proposed IEEE S-100 Bus Standard
- Z-80A CPU (4MHz version of the Z-80)
- 158 instructions—superset of and upward compatible from the 8080's 78 instructions
- Up to 4K of on board Eprom with optional Z-80 monitor program — 1K(2708), 2K(2716) or 4K(2732)
- Full vectored interrupt capability
- 2MHz or 4MHz operation is jumper selectable
- Selectable auto-wait state insertion for extending M1*, MREQ*, IORQ* and/or on board ROM
- Dual RS-232 serial I/O ports using the Z80A-DART with individual baud rate selection (16 baud rates from 50-19,200 baud)
- Up to 24 bit parallel I/O port—fully programmable Intel 8255A
- Up to 8 separate counter/timers using 2 Z-80A CTC

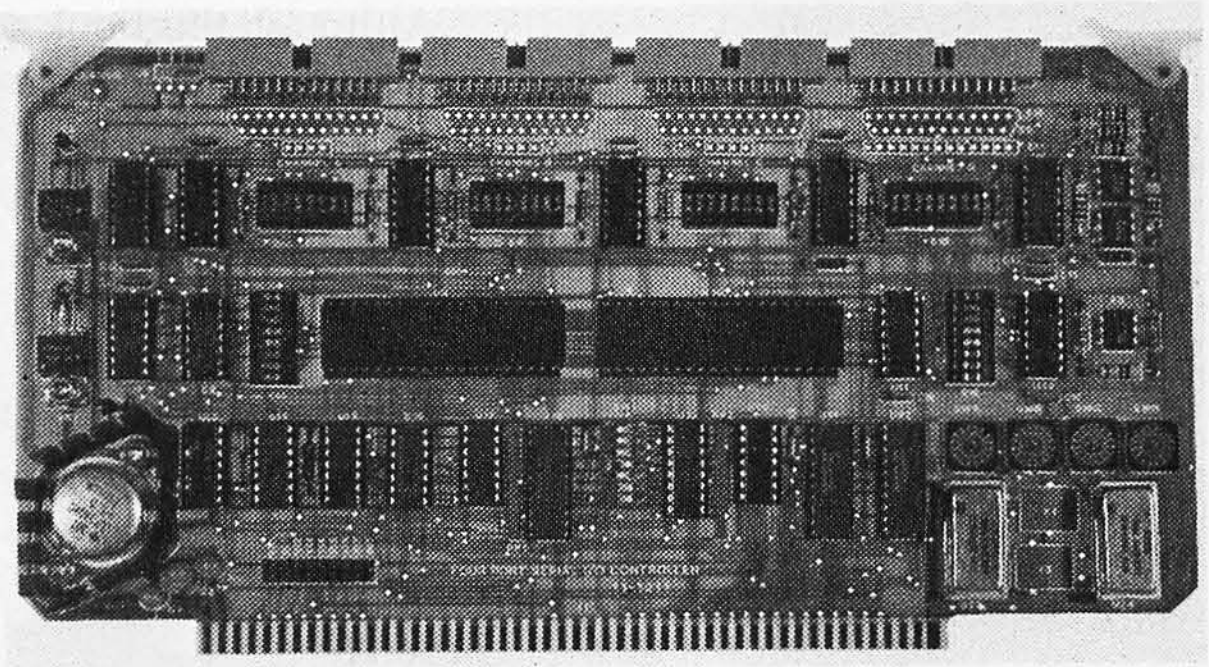

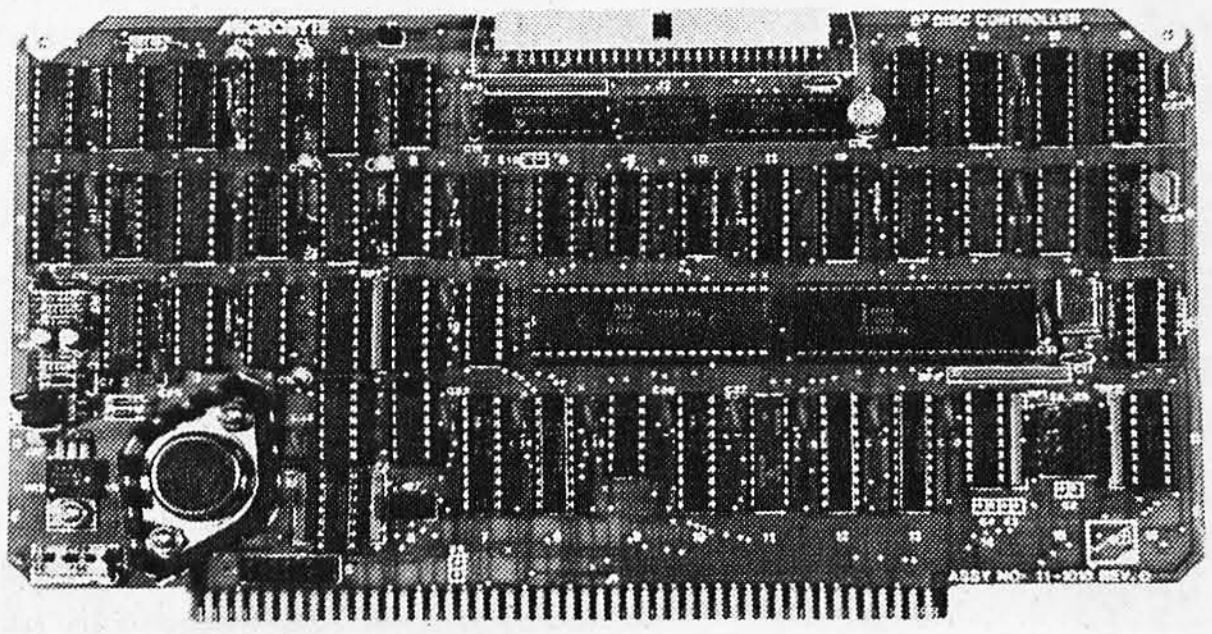

DISK CONTROLLER

- DMA to within 16M byte of memory
- State-of-the-art NEC765 LSI Controller
- IEEE-S100 compatible
- DMA arbitration allows use of multiple boards within a system
- PLL data recovery for totally reliable operation
- Write pre-comp switched at mid-disc for reliable double density operation
- Supports up to four (4) drives
- Power On, Power Off or Reset deselects drives to avoid damaging files
- Drive deselect Time Out, deselect drives not in use
- Single or double sided operation
- Single density/double density operation
- 8" standard drives
- Separate V_{CC} supply for data recovery to eliminate possible noise problems

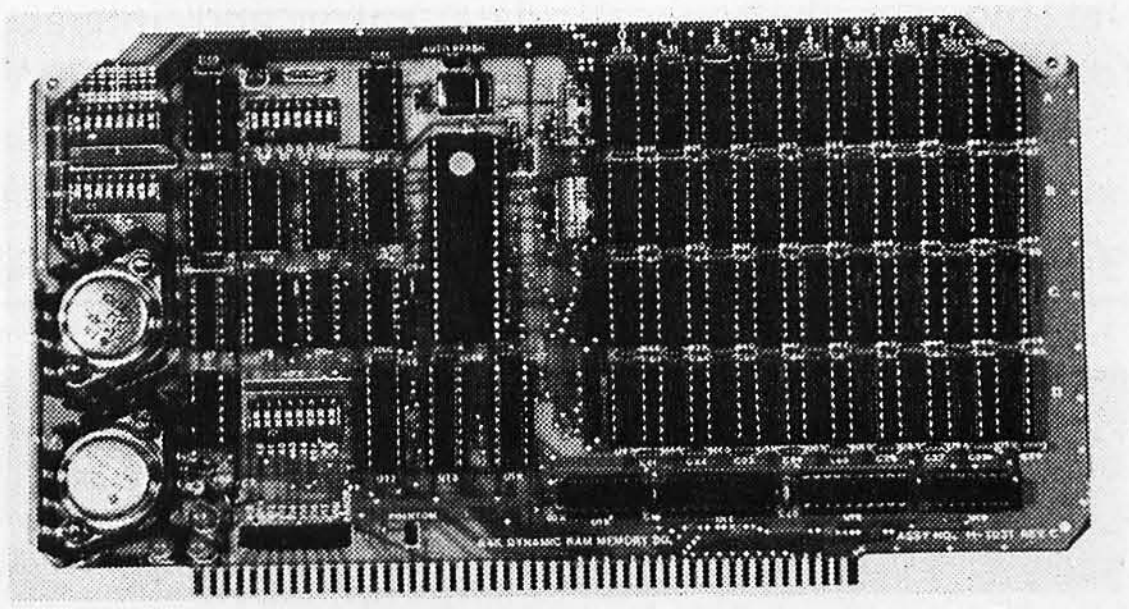

64K DYNAMIC RAM BOARD

- Fully S-100 bus compatible/Alpha Micro compatible
- 64K x 8 bit dynamic RAM
- Low power: + 8VDC @ 700 ma
  +16VDC @ 100 ma
  −16VDC @ 25 ma
- Built-in-parity with LED indicator and vector interrupt
- Memory addressable in four 16K banks
- Hidden refresh
- Gold contacts for high reliability
- 72-hour Burn-in
- Memory mapped via DIP switch
- Built-in programmable write-protect
- Programmable control port for parity and bank control

MICROBYTE has the products — from memory boards to complete S-100 systems, and we offer the rest of the value cluster — call today for the whole story on how you can become a Microbyte dealer.

4 PORT I/O

- Quad RS-232C Serial Ports, One 20mA Current Loop Port
- Fully IEEE S-100 Bus Compatible
- Asynchronous Communications with Z80A-Dart(TM) or Synchronous Communications with Z80A-SIO/0(TM)
- Full Set of Modem Control Signals, including RI (Ring Indicator)
- Easily Configurable to Any Type of Terminal Interface
- I/O Servicing Environments: (1) Polled; (2) Bus Vector; (3) Z80 Mode 2 Vector
- Off-Board Interrupt Daisy Chain Capability
- Special Receive Conditions: (1) Framing Error; (2) Parity Error; (3) Receiver Overrun Error
- Baud Rates Selected Individually from 50 Baud to 300K Baud
- 72 Hour Burn-In

MICROBYTE 1198 E. Willow St., Signal Hill, CA 90806•(213) 595-8571

Circle 253 on inquiry card.

Book Reviews

Principles of Interactive Computer Graphics, 2nd Edition

William M Newman and
Robert F Sproull
McGraw-Hill, 1979
541 pages, hardcover
$25.95

Reviewed by
Richard L Emery
559 Taos Ct
Saginaw TX 76179

Is your computer a glorified scorekeeper? Was zapping your 10,000th Klingon your most creative accomplishment? Perhaps you have tried to do more, to be more creative. However, the books you found were either too simple ("See Dick run the program. Run, Dick, run.") or too technical ("The vectored translation of a quadratic polynomial synthesizing imaginary roots and real constraints utilizing classical fourth-order Runge-Kutta numerical techniques...").

With the second edition of *Principles of Interactive Computer Graphics*, you can explore the special techniques of computer-generated graphics (see page 146 of the December 1977 BYTE for a review of the first edition). The first edition, published in 1973, discussed algorithms and hardware in reference to vector-drawing displays, because these were the most common type of display. At the time, raster-scan displays were available, but programmers mainly used them for data entry and interactive-program preparation. When experimenters needed inexpensive, human-readable output devices for microprocessor-based computers, the raster-scan method was developed for graphics use. Newman and Sproull recognize this and have included a section devoted to the software techniques needed to implement graphics capabilities on raster-scan displays. This section describes angle and line generation, solids generation, interactive computation, hardware, and language implementation.

Another major change is the use of Pascal to describe the algorithms. The first edition used a language called SAIL, which required the inclusion of a user's manual. Because of the wide use of Pascal, today's readers will more easily understand the material presented. Even those whose knowledge of Pascal is limited will comprehend the algorithms with little difficulty.

There are twenty-six chapters arranged in six parts. Part 1 discusses line drawing, point plotting, transformations, windowing, and clipping. This material is applicable to raster-scan and vector-drawing displays. In part 2, emphasis is on graphics packages—that is, groups of subroutines to be invoked by applications programs. Part 3 describes the man-to-machine interface. Here, the authors identify several input devices (keyboards, light pens, tablets, three-dimensional input) and methods to use them. In part 4, the following subjects dealing with raster-scan graphics are covered: fundamentals, solid-area conversion, interactive methods, and hardware.

Three-dimensional graphics techniques are more thoroughly examined in part 5, which includes perspective, shading, curved surfaces, and hidden-line/hidden-surface algorithms. Part 6 brings it all together by outlining various hardware display units, methods of user interfacing, and graphics languages. Two appendices are included. The first is a discussion of matrix- and vector-arithmetic operations; the second, homogeneous coordinate techniques. Many of the clipping, windowing, and transformation techniques require a fundamental knowledge of vector and matrix computation. These two appendices provide that knowledge, as long as you understand mathematical notation.

Although this book still is a basic tool for college- and graduate-level computer science courses, the novice or personal computerist will find it understandable. This book will spark your imagination and challenge your creative abilities. Once that challenge is accepted, zapping Klingons will be a bore.■

Software for the Apple II and Apple II Plus*

BENEATH APPLE DOS

A Technical Manual

By Don Worth and Pieter Lechner

Become an expert on the intricacies of Apple's DOS (Disk Operating System). BENEATH APPLE DOS is the perfect companion to Apple's DOS 3.3 Manual. Containing eight chapters, three appendices, a glossary, an index, and over 160 pages, this manual will serve to completely fill in the many gaps left by Apple's DOS 3.3 Manual. Written for Apple users with DOS 3.3, 3.2 or earlier versions, any Apple disk user would welcome having this carefully written manual at his fingertips.

LEARN . . .

- How DOS 3.3 differs from other DOS versions.
- How disks are protected.
- How to reconstruct a damaged diskette CATALOG.
- How tracks are formatted.
- How to use the disk directly, *without* DOS.
- How to call DOS's file manager.
- How *every* routine in DOS works.
- How to customize DOS to your needs.
- How to overcome DISK I/O ERRORS.
- About the "secret" file types — S and R.

INCLUDES . . .

- Large quantities of excellent diagrams and tables.
- Source listings of useful disk utilities.
- Glossary of over 150 technical terms.
- Exhaustive description of DOS program logic.
- Handy reference card.
- Useful patches to DOS.
- Many programming examples.

Book - $19.95

CROSS-REF by Jim Aalto

Applesoft programmers will be delighted to have this cross reference utility program in their 'tool kit' of software aids. What can CROSS-REF do to speed and facilitate your Applesoft program development? Consider these functions:

VARIABLE CROSS REFERENCE
FIND VARIABLE
REPLACE VARIABLE
LINE CROSS REFERENCE
FIND LINE NUMBER
VARIABLE ONLY LISTING
LINE ONLY LISTING

Features that make CROSS-REF easy to use include:

- Written in machine language, occupies less than 3K.
- Resides passively in memory while DOS or Applesoft is active.
- Can be loaded with your Applesoft program already resident.
- Very fast — a VARIABLE CROSS REFERENCE for a 16K Applesoft program can start printing in 5 seconds.
- Contains printer format controls and headers for documentation.
- Prints English language error messages.

Cassette - $22.95 Diskette - $24.95

LINKER by Don Worth.

Turn your Apple II or Apple II Plus into a powerful and productive software development machine with this superb linking loader/editor package. LINKER does the following and much more:

- Dynamically loads and relocates suitably prepared machine language programs anywhere in RAM.
- Combines a main program with subroutines. You can assemble a subroutine once and then use it with as many main programs as you wish.
- Produces a map of all loaded routines, giving their location and the total length of the resulting module.
- Contains a library of subroutines including binary multiplication and division, print text strings, delay, tone generator, and random number generator.

Linker works with virtually any assembler for the Apple II. Requires 32K of RAM and one disk drive.

Diskette - $49.95
Manual Only - $19.95



FASTGAMMON™ By Bob Christiansen.

Sound, hi res, color, and musical cartoons have helped make this the most popular backgammon playing game for the Apple II. But don't let these entertaining features fool you — FASTGAMMON plays serious backgammon. Runs on any Apple II with at least 24K of RAM.

Cassette - $19.95 Diskette - $24.95

METEOROIDS IN SPACE™
By Bruce Wallace

We have taken our popular space game, formerly called Asteroids in Space, and made some important improvements. To accent these improvements we have given it a new name — METEOROIDS IN SPACE. Your space ship travels through a shower of deadly meteoroids. If your ship is hit, it will be destroyed, so you use your laser gun to blast the meteoroids. Big meteoroids shatter into smaller meteoroids when hit, and the smaller ones are usually faster and just as deadly. From time to time you will encounter an alien space ship whose mission is to destroy you, so you'd better destroy it first. All the action is displayed in fast, smooth, high resolution graphics, accompanied by sound effects. You now can control your ship using one of two options — the Apple game paddles or the keyboard. One of the game paddle buttons controls the laser fire. In METEOROIDS IN SPACE, the spaceship's velocity gradually decreases unless more thrust is applied, adding an element of control. Also new to this version is a hyperspace feature — translate instantly to another spot in the galaxy. The game is over when five of your ships have been destroyed. An additional ship is added for every 10,000 points you score. Runs on any Apple II with at least 32K of RAM and one disk drive.

Diskette - $19.95

ASTROAPPLE™ by Bob Male.



Your Apple computer becomes your astrologer, generating horoscopes and forecasts based on the computed positions of the heavenly bodies. This program offers a delightful and stimulating way to entertain friends. ASTROAPPLE produces natal horoscopes (birth charts) for each person based on his or her birth data. Any two people may be compared for physical, emotional, and intellectual compatibility. The program is written in Applesoft BASIC with machine language subroutines. It requires either RAM or ROM Applesoft and at least 32K of memory.

Cassette - $14.95 Diskette - $19.95

FRACAS™ by Stuart Smith.

A fantastic adventure game like no other! Up to eight players can participate in FRACAS at the same time. Journey in the land of FAROPH, searching for hidden treasure while warding off all sorts of unfriendly and dangerous creatures. You and your friends can compete with each other or you can join forces and gang up on the monsters. Your location is presented graphically and sound effects enliven the battles. Save your adventure on diskette or cassette and continue it at some other time. Both integer BASIC and Applesoft versions included. Requires at least 32K of RAM.

Cassette - $19.95 Diskette - $24.95

BATTLESHIP COMMANDER™ by Erik Kilk and Matthew Jew.

A game of strategy. You and the computer each start out by positioning five ships of different sizes on a ten by ten grid. Then the shooting starts. Place your volleys skillfully — a combination of logic and luck are required to beat the computer. Cartoons show the ships sinking and announce the winner. Sound effects and flashing lights also add to the enjoyment of the game. Both Applesoft and integer BASIC versions are included. Requires at least 32K of RAM.

Cassette - $14.95 Diskette - $19.95

Also by Don Worth . . .

BENEATH APPLE MANOR — Adventure. Uses Integer BASIC.
Cassette - $14.95 Diskette - $19.95

BABBLE - Fun with words, sound, and graphics.
Cassette - $19.95 Diskette - $24.95

QS QUALITY SOFTWARE
6660 Reseda Blvd., Suite 105, Reseda, CA 91335
(213) 344-6599

Now exclusive distributors for products from The Software Factory, Newhall, California

*Apple II and Apple II Plus are trademarks of Apple Computer, Inc.

WHERE TO GET IT: Call us at (213) 344-6599 for the name of the Quality Software dealer nearest you. If necessary you may order directly from us. Mastercard and Visa cardholders may place orders by telephone. Or mail your check or bankcard number to Quality Software, 6660 Reseda Blvd., Suite 105, Reseda, CA 91335. California residents add 6% sales tax. SHIPPING CHARGES: Within North America orders must include $1.50 for first class shipping and handling. Outside North America the charge for airmail shipping and handling is $5.00. Pay in U.S. currency.

Circle 339 on inquiry card.

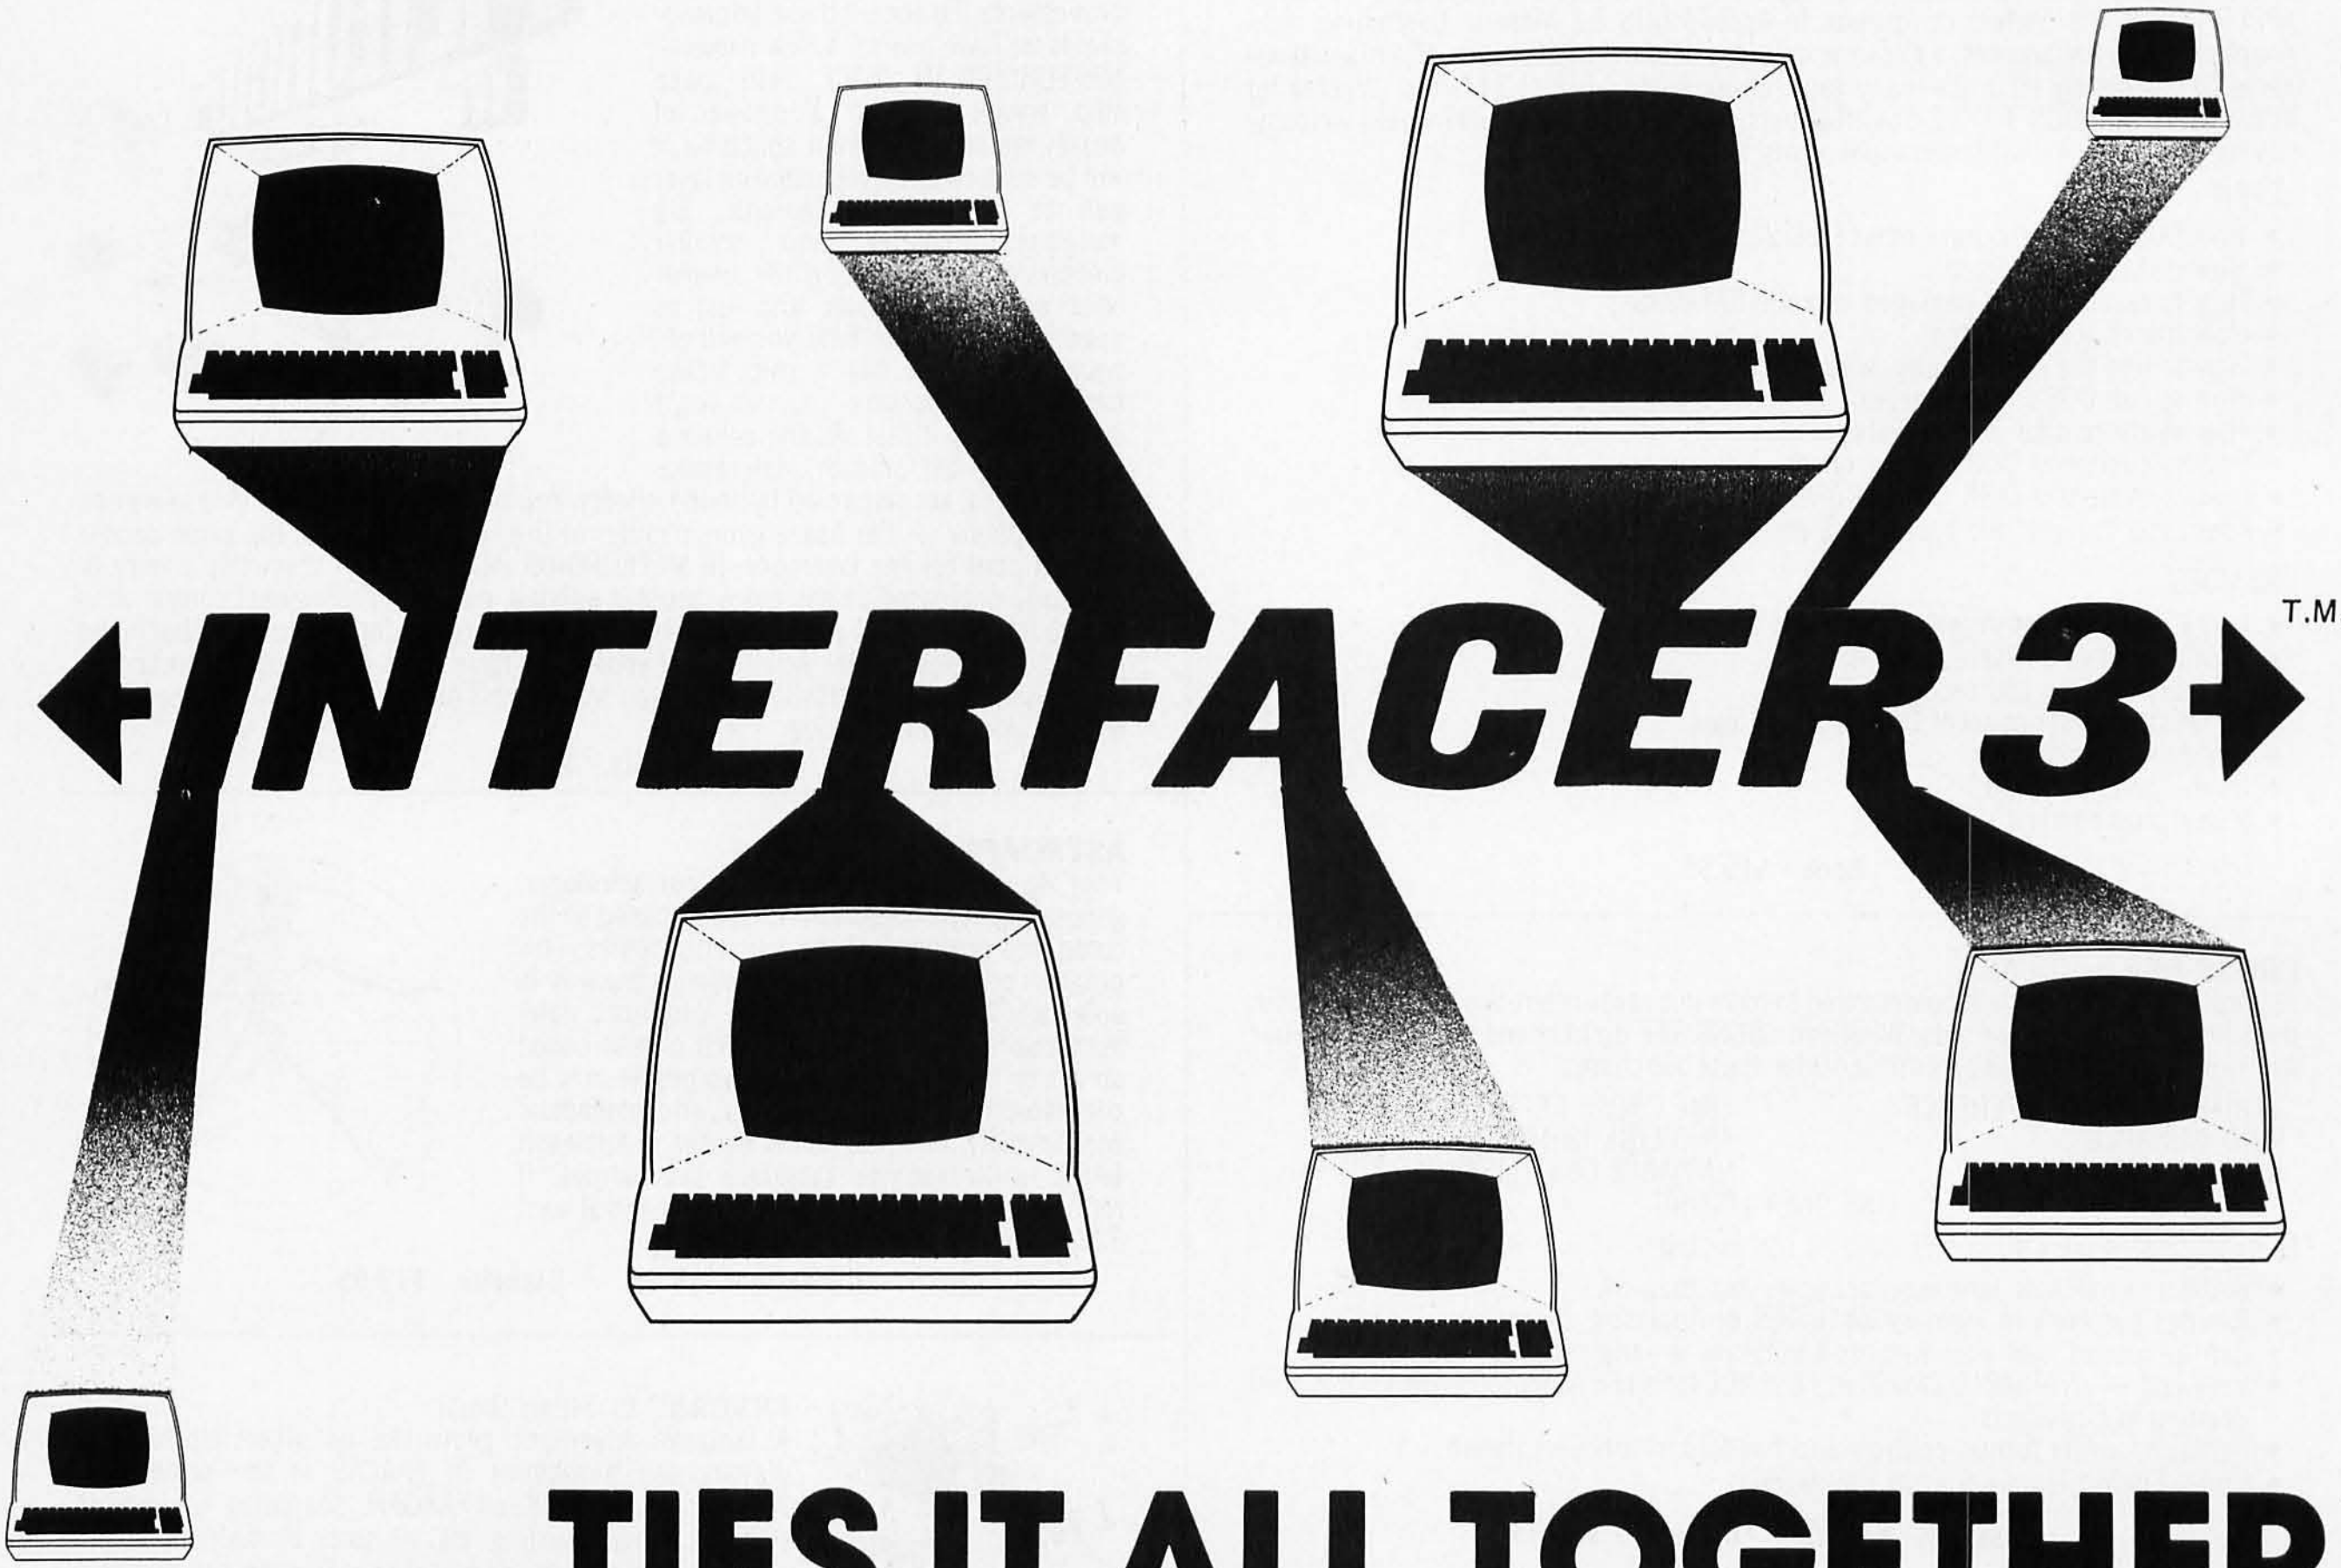
INTERFACER 3
T.M.

WHEN YOU TIRE OF TOYS... YOU'RE READY FOR CompuPro.

Sure, "all-in-one" computers can be great intelligent toys; but for scientific, industrial, and commercial applications, toys aren't good enough. You need a computer that works, works right, and keeps on working: you need a precision machine with **CompuPro**'s component-oriented design philosophy.

Like quality component systems for audiophiles, S-100 component computer systems offer flexibility, ease of maintenance, easy upgrading, resistance to obsolescence, and well- integrated systems performance. Full conformance to all IEEE 696/S-100 specifications ensures that **CompuPro** components will work with each other in a reliable, predictable fashion; and our S-100 engineering expertise, accumulated over 6 years of designing quality components for S-100 systems, allows us to deliver cost-effectiveness along with outstanding performance.

All **CompuPro** products meet the most demanding mechanical and electrical standards, and are backed with one of the best warranties in the business (1 year limited warranty on all products, 2 year limited warranty with exchange program for products qualified under the Certified System Component program).

If you depend on your computer, depend on CompuPro.

NEW! DISK 1: A SUPERB DISK CONTROLLER.

A/T $495, CSC $595

Finally, a disk controller worthy of the **CompuPro** name. This state of the art design uses properly implemented DMA **with arbitration**, meaning that **Disk 1** can co-exist–without any conflict whatsoever–on *the same bus* as other DMA devices. And because **Disk 1** has 24 bit DMA addressing capability, you have disk access to a full 16 megabyte memory map.

Speed? **Disk 1** transfers data independently of CPU speed, and operates efficiently with older 2 MHz CPUs as well as the new 10 MHz 8086s. Versatility? **Disk 1** handles up to four 8" or 5.25" floppy disk drives (including 96 track high density minifloppies), single or double sided, single or double density (soft sectored). Convenience? **Disk 1** includes BIOS for CP/M-80* as well as on-board boot for automatic startup and on-board 3 wire interface for system initialization. Compatibility? **Disk 1** is compatible with MP/M*, CP/M, OASIS*, CP/M-80, and CP/M-86. Reliability? Uses industry-standard, third generation controller chips and the same design excellence that is a part of every **CompuPro** product.

We weren't going to put out another me-too disk controller...and we didn't. The CompuPro Disk Controller is here.

S-100 HIGH SPEED MOTHERBOARDS

Actively terminated, fully shielded motherboards handle clock speeds up to 10 MHz. **Unkits** have edge connectors and termination resistors presoldered in place for easy assembly.

20 slot motherboard with edge connectors	–	Unkit $174, A/T $214
12 slot motherboard with edge connectors	–	Unkit $129, A/T $169
6 slot motherboard with edge connectors	–	Unkit $89, A/T $129

MEMORIES FROM THE MEMORY LEADER

CompuPro memories feature fully static design to eliminate dynamic timing problems, full conformance to all IEEE 696/S-100 specifications, high speed operation (4/5 MHz Unkit, 10 MHz A/T and CSC), low power consumption, extensive bypassing, and careful thermal design.

	Unkit	A/T	CSC
8K RAM 2A	$159	$189	$239
16K RAM 14 (extended addressing)	$279	$349	$429
16K RAM 20-16 (extended addressing and bank select)	$319	$399	$479
24K RAM 20-24 (extended addressing and bank select)	$429	$539	$629
32K RAM 20-32 (extended addressing and bank select)	$559	$699	$799

NEW! 64K RAM 17. Amazingly low power in a 64K **fully static** RAM board: draws less than 1.75 Watts typical, 2.5 Watts max! It's fast, too; runs with 6 MHz Z-80* CPUs, or up to 10 MHz with 8086/88 family CPUs. Uses IEEE extended addressing protocol; also, user may turn off 2K windows from E000 to FFFF in order to accommodate memory-mapped peripherals/disk controllers. (The **CompuPro** disk controller can use the full 64K since it employs properly implemented DMA techniques). **$1095** Unkit, **$1395** A/T, **$1595** CSC.

Most **CompuPro** products are available in **Unkit** form, **Assembled/Tested**, or qualified under the high-reliability **Certified System Component (CSC)** program (200 hour burn-in, more). Note: **Unkits** are not intended for novices, as de-bugging may be required due to problems such as IC infant mortality. Factory service is available for **Unkits** at a flat service charge.

SYSTEM SUPPORT 1

$295 Unkit, **$395** A/T, **$495** CSC

This multi-purpose S-100 board provides sockets for 4K of extended address EPROM or RAM (2716 pinout) with one battery backup socket; battery backup month/day/year/time crystal clock with BCD outputs; optional math processor (9511 or 9512); full RS-232 serial port; three 16 bit interval timers (cascade or use independently); two interrupt controllers service 15 levels of interrupts; power fail indicator; and comprehensive owner's manual with numerous software examples. Conforms fully to all IEEE 696/S-100 standards. (Add $195 to the above prices for the optional 9512 math processor.)

COMPUTER ENCLOSURE 2

$825 desk top version, **$895** rack mount version

Includes fused, constant voltage power supply (+8A at 25 Amps, +16V at 3 Amps, and −16V at 3 Amps); 20 slot shielded/active terminated motherboard; and rugged all-metal enclosure with dual AC outlets on rear, heavy-duty line filter, circuit breaker, quiet ventilation fan, and reset switch. Rack mount version includes slides for easy pull-out from rack frame.

Also available: **COMPUTER ENCLOSURE 1.** Same as above, but less power supply and motherboard. **$289** desktop, **$329** rack mount.

HIGH SPEED S-100 CPU BOARDS

CompuPro CPU boards meet all IEEE 696/S-100 specifications (including timing). **CPU 8085/88** uses two processors,an 8085 and 8088, to provide both 16 and 8 bit capability with a standard 8 bit bus.

8 Bit CPU Z (with Z80A* CPU)......... **$225** Unkit, **$295** A/T, **$395** CSC.
8 Bit CPU 8085.................... **$235** Unkit, **$325** A/T, **$425** CSC.
16/8 Bit CPU 8085/88......... **$295** Unkit, **$425** A/T (both operate at 5MHz); **$525** CSC (with 5 MHz 8085, 6 MHz 8088).

SOFTWARE

8088/8086 MONITOR-DEBUGGER: Supplied on single sided, single density, soft sectored 8" disk. CP/M* compatible. Great development tool; mnemonics used in debug conform as closely as possible to current CP/M* DDT mnemonics. **$35.**

PASCAL/M* FROM SORCIM: PASCAL–easy to learn, easy to apply–can give a microcomputer with CP/M* more power than many minis, and SORCIM's PASCAL is the best we've been able to find regardless of price. We supply a totally standard **Wirth PASCAL/M* 8" disk** *and* comprehensive manual. Specify Z-80* or 8080/8085 version. **$175.**

TERMS: Prices shown do not include dealer installation and support services. California residents add tax. Allow at least 5% shipping; excess refunded. Orders under $15 add $2 handling. VISA* and MASTERCARD* orders ($25 minimum) call our 24 hour order desk at **(415) 562-0636**. Include street address for UPS delivery. Prices are subject to change without notice.

*LEGAL CORNER: Z80A is a registered trademark of Zilog; TRS-80 is a trademark of the Tandy Corpration; PASCAL/M is a trademark of Sorcim; CP/M and MP/M are registered trademarks of Digital Research; OASIS is a trademard of Phase 1.

FREE CATALOG: Want more information? Then send for our free catalog. For fast 1st class delivery, add 41 cents in stamps; foreign orders add $2 (refundable with order).

CompuPro™ division of **GODBOUT ELECTRONICS**

BOX 2355, OAKLAND AIRPORT, CA 94614 **(415) 562-0636**

COMPUPRO PRODUCTS ARE AVAILABLE AT FINER COMPUTER STORES WORLD-WIDE ...CALL FOR THE STORE NEAREST YOU.

Circle 169 on inquiry card.

INTRODUCING
COGNIVOX Series VIO-1000
A Revolutionary New
Voice Input and Output Peripheral

High Fidelity Voice Response
Industrial Quality Recognition

PET — AIM-65 — APPLE II

COGNIVOX series VIO-1000 is a top-of-the-line voice I/O peripheral for business and educational applications and the demanding hobbyist.

It can be trained to recognize words or short phrases drawn from a vocabulary of 32 entries chosen by the user. It will talk back with up to 32 words or short phrases. In disk based systems, response vocabularies can be stored on the disk and brought to memory as needed, giving an effectively unlimited number of vocabulary entries. The quality of voice response is excellent, and it is far superior to that of speech synthesizers.

COGNIVOX series 1000 comes complete and ready to plug into your computer (the computer must have at least 16K of RAM). It connects to the parallel I/O port of the PET, to the game paddle connector on the Apple and to the J1 port on the AIM-65. Connectors are included as required. Also included are a microphone, cassette with software and extensive user manual. A built-in speaker/amplifier is provided as well as a jack for connecting an external speaker or amplifier.

Software supplied with COGNIVOX includes two voice operated, talking video games, VOTH and VOICETRAP. These games are absolutely captivating to play, and the only voice operated talking games that are commercially available.

Adding voice I/O to your own programs is very simple. A single statement in BASIC is all that is required to say or to recognize a word. Complete instructions on how to do it are provided in the manual.

In keeping with the VOICETEK tradition of high performance at affordable price, we have priced COGNIVOX series 1000 at the unbelievably low, introductory price of **$249** (plus $5 shipping in the US. CA add 6% tax. Foreign orders welcome, add 10% for handling and shipping via AIR MAIL). When ordering, please give the make and model of your computer, the amount of RAM and whether you have disks or not.

In addition to COGNIVOX series VIO-1000, VOICETEK manufactures a complete line of voice I/O peripherals for most of the popular personal computers. Speech recognition-only peripherals are available for the 8K PET and the 4K AIM.

For more information call us at 805-685-1854 or write at the address below.

Dealer Inquiries invited.

VOICETEK Dept B, P.O. Box 388
Goleta, CA 93116

Circle 430 on inquiry card.

Software Review

Super STEP

Stanley D Robbins, 249 Willow Ter, Sterling VA 22170

Super STEP is a machine-language utility that works with and is an extension of Radio Shack's T-Bug program. Super STEP allows you to run a *machine*-language program either by stopping at predefined locations (*breakpoints*) or stopping after each machine-language instruction is executed (*single-stepping*).

The TRS-80 video display shows a great deal of information that is useful during debugging, including the instruction currently executed, the contents of the top 5 bytes of the Z80 stack area, the status of all registers and status flags, and a user-specified area of memory. In addition, much of the information is printed twice in order to show these values before and after execution of the current machine-language instruction. Although it is not evident from the documentation supplied, Super STEP is not merely a utility that interrupts program execution after each instruction: it is a *simulation* (or *model*) that behaves like an actual Z80.

The instruction booklet that accompanies Super STEP creates the first impression—and that impression is not the best. The small type is difficult to read in good

At a Glance

Name
Super STEP Z80 Processor Model

Type
Debugging utility for assembly-language programming (runs as an extension of Radio Shack's T-Bug program)

Manufacturer
Allen Gelder Software
Box 11721
Main Post Office
San Francisco CA
94101

Price
$19.95

Format
Cassette tape

Language
Machine language

Computer
TRS-80 Model I, with Level II BASIC and 16 K bytes of memory

Documentation
Instruction booklet of 16 pages, 11.5 by 14 cm (4½ by 5½ inches)

Audience
Assembly-language programmers

Circle 182 on inquiry card. →


HEMENWAY ASSOCIATES, INC.
HEMENWAY ASSOCIATES INC
HEMENWAY ASSOCIATES INC
M68000 Operating Systems
M68000 Operating Systems
M68000 Assembler / Linker
M68000 Text Editor
M68000 Compilers

lighting; in reduced lighting (to facilitate reading of the TRS-80 video screen), the type is almost illegible.

The documentation is very detailed, but it took me a long time to fathom some of the obscure terminology. For example, the author, Alan Gelder, refers to "Z80 Processor Models" (plural), while more conventional terminology would refer to different "states" of the same model. An additional, but more aggravating, example occurs when he refers to "the left 1BH columns" and "the right 25H columns" of the TRS-80 video screen. After some thought, I realized that the H at the end of both "1BH" and "25H" referred to hexadecimal notation and that the author intended "1BH columns" to mean "(decimal) 27 columns" (hexadecimal 1B equals decimal 27). The video screen is a *human* interface and, as such, should be described with decimal values, not hexadecimal values.

Based on previous experience with a cassette-only system, I would assume that most (tape-oriented) assembly-language programmers have located their programs in memory to just above the top of the T-Bug program; in this way, they can use T-Bug while debugging their program. Since hexadecimal memory locations 4B00 thru 68FF are occupied by Super STEP, the user would be required to reassemble his programs to a location in memory above hexadecimal location 68FF in order to utilize this product (unless the program is relatively small and resides from hexadecimal locations 4980 to 4AFF). Of course, Allen Gelder Software also provides a product called Super TLEGS; it enables the user to relocate Super STEP (as well as T-Bug) but costs an additional $9.95, bringing the total to $29.90.

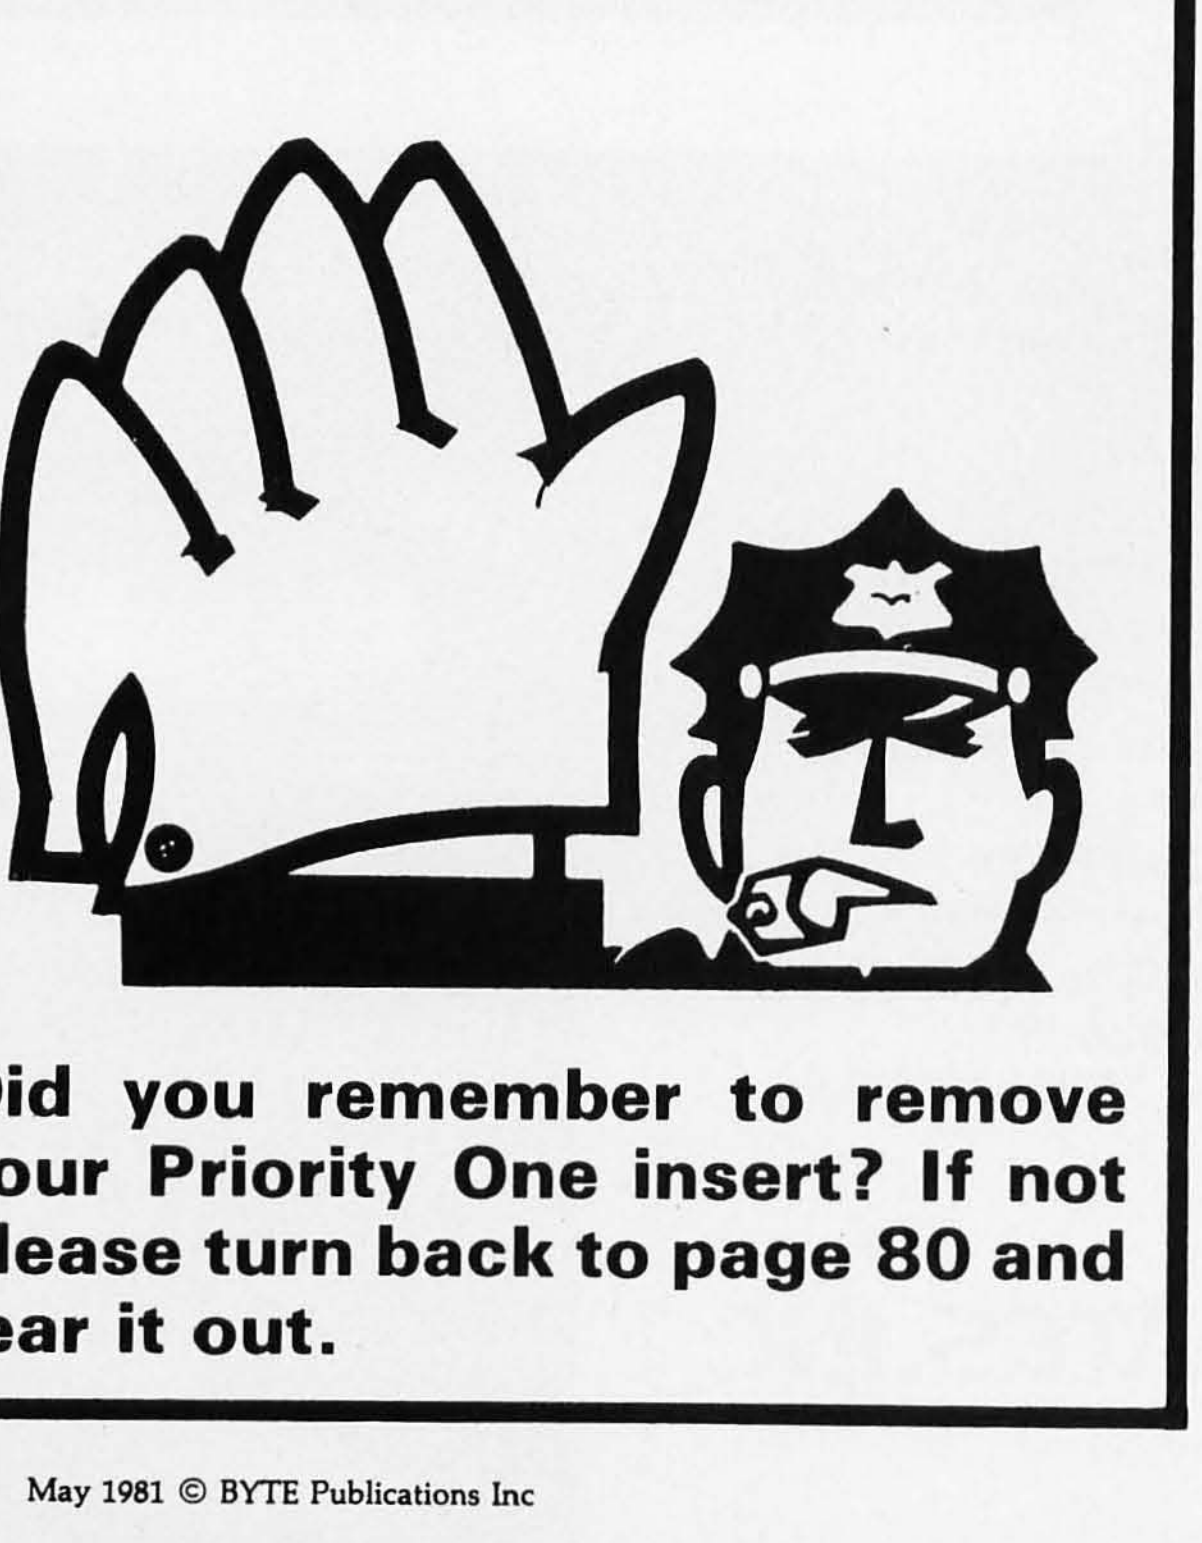

The Super STEP program is loaded as follows: load Radio Shack's T-Bug software as a standard "system" tape (from BASIC, type SYSTEM, press the ENTER key, type TBUG, press ENTER, wait for the tape to finish loading); load Super STEP in the same way, using the file name "SPRSTP"; execute the machine-language program by typing a slash followed by the ENTER key (the TRS-80 should respond with a # sign); type S and press the ENTER key. (This procedure is described in the Super STEP booklet.)

At this point, Super STEP fills the video display with information: the right 37 columns fill with a display that shows the current contents of the Z80 (both the prime and unprimed sets of registers), an annotated display of the status byte that shows the flag settings, and some other information. The part of this display that I did understand was very impressive, but I was unable to decipher most of the information in the lower portion. The author describes this display in a photograph on page 3 of the instruction booklet, but his description is neither clear nor thorough.

I then used the T-Bug load (L) command to load a reassembled version (with a new starting address in memory) of the program that I wanted to debug. During the load of a program from tape, Super STEP improves upon the T-Bug loading procedure by displaying the name of the object program on the screen.

(Since Super STEP is an add-on package to Radio Shack's T-Bug program, many of the required commands are explained only in the Radio Shack T-Bug documentation. Consequently, familiarity with the T-Bug program—or at least its documentation—is necessary.)

I displayed a memory location via the memory (M) command. To advance the display to the next location, I depressed the SPACE bar (as directed in the Super STEP instruction booklet), and the equivalent assembly instruction appeared to the right of the first byte of memory I had displayed (a feature that T-Bug doesn't offer); the following byte was then displayed on the following line (as in the normal T-Bug program). To single-step the Super STEP simulation model, depress the SPACE bar repeatedly. This will display memory one byte at a time and update the video display as each instruction is disassembled and executed.

While displaying memory, the semicolon (";") function allows you to view 16 bytes of memory simultaneously, versus the single-byte display of the normal T-Bug program. Another key determines whether this display is in hexadecimal or ASCII. Unfortunately, the display generated on the lefthand side of the video screen sometimes overwrites information on the righthand side. Although this information is correctly updated the next time an instruction is executed, the "garbage" characters remain in the spaces between information fields on the righthand side, making the screen harder to read.

QUALITY DISK SOFTWARE

BACKED BY ON-GOING APPLICATIONS SUPPORT

APPLE II Ⓐ *TRS•80* Ⓣ

HOME FINANCE PAK I: Entire Series $49.95 Ⓐ Ⓣ

CHECK REGISTER AND BUDGET: This comprehensive **CHECKING ACCOUNT MANAGEMENT SYSTEM** not only keeps complete records, it also gives you the analysis and control tools you need to actively manage your account. The system provides routines for **BUDGETING INCOME AND EXPENSE, AUTOMATIC CHECK SEARCH,** and **BANK STATEMENT RECONCILING. CRT** or printer reports are produced for **ACTUAL EXPENSE** vs **BUDGET, CHECK SEARCH DISPLAY RECONCILIATION REPORT** and **CHECK REGISTER DISPLAY** by month. Check entry is prompted by user-defined menus of standard purposes and recipient codes, speeding data entry and reducing disk storage and retrieval time. Six fields of data are stored for each check: amount, check no., date, purpose, recipient and **TAX DEDUCTIBLE REMINDER. CHECK SEARCH** routines allow searching on any of these data fields. Up to 100 checks/mo. storage $39.95

SAVINGS: Account management system for up to 20 separate Savings accounts. Organizes, files and displays deposits, withdrawals and interest earned for each account. $14.95

CREDIT CARD: Get Control of your credit cards with this program. Organizes, stores and displays purchases, payments and service charges for up to 20 separate cards or bank loans. $14.95

UNIVERSAL COMPUTING MACHINE: $49.95 Ⓐ

A user programmable computing system structured around a 50 row x 50 column table. User defines row and column names and equations forming a unique computing machine. Table elements can be multiplied, divided, subtracted or added to any other element. Hundreds of unique computing machines can be defined, used, stored, and recalled, for later use. Excellent for sales forecasts, budgets, inventory lists, income statements, production planning, project cost estimates-in short for any planning, analysis or reporting problem that can by solved with a table.

COLOR CALENDAR: $29.95 Ⓐ

Got a busy calendar? Organize it with Color Calendar. Whether it's birthdays, appointments, business meetings or a regular office schedule, this program is the perfect way to schedule your activities.
The calendar display is a beautiful **HI-RES** color graphics calendar of the selected month with each scheduled day highlighted in color. Using the daily schedule, you can review any day of the month and schedule an event or activity in any one of 20 time slots from 8:00 A.M. to 5:30 P.M.

BUSINESS SOFTWARE: Entire Series $159.95 Ⓐ Ⓣ

MICROACCOUNTANT: The ideal accounting system for small businesses. Based on classic T-accounts and double-entry booking, this efficient program provides a journal for recording posting and reviewing up to 1,000 transactions per month to any one of 300 accounts. The program produces **CRT** and printer reports covering:

TRANSACTION JOURNAL
ACCOUNT LEDGERS
BALANCE SHEET
INCOME AND EXPENSE STATEMENT

Includes a short primer on Financial Accounting. (48K) $49.95

UNIVERSAL BUSINESS MACHINE: This program is designed to **SIMPLIFY** and **SAVE TIME** for the serious businessman who must periodically Analyze, Plan and Estimate. The program was created using our Universal Computing Machine and it is programmed to provide the following planning and forecasting tools.

CASH FLOW ANALYSIS
PROFORMA PROFIT & LOSS
PROFORMA BALANCE SHEET
REAL ESTATE INVESTMENT
SALES FORECASTER
SOURCE AND USE OF FUNDS
JOB COST ESTIMATOR
INVENTORY ANALYSIS

Price, including a copy of the Universal Computing Machine $89.95

BUSINESS CHECK REGISTER AND BUDGET: Our Check Register and Budget programs expanded to include up to 50 budgetable items and up to 400 checks per month. Includes bank statement reconciling and automatic check search (48K) $49.95

ELECTRONICS SERIES VOL I & II: Entire Series $259.95

LOGIC SIMULATOR: SAVE TIME AND MONEY. Simulate your digital logic circuits before you build them. **CMOS, TTL,** or whatever, if it's digital logic, this program can handle it. The program is an interactive, menu driven, full-fledged logic simulator capable of simulating the bit-time response of a logic network to user-specified input patterns. It will handle up to 1000 gates, including **NANDS, NORS, INVERTERS, FLIP-FLOPS, SHIFT REGISTERS, COUNTERS** and user-defined **MACROS.** up to 40 user-defined random, or binary input patterns. Accepts network descriptions from keyboard or from **LOGIC DESIGNER** for simulation . . . . $159.95 Ⓐ Ⓣ

LOGIC DESIGNER: Interactive **HI-RES** graphics program for designing digital logic systems. Draw directly on the screen up to 10 different gate types, including **NAND, NOR, INVERTER, EX-OR, T-FLOP, JK-FLOP, D-FLOP, RS-FLOP, 4 BIT COUNTER** and **N-BIT SHIFT REGISTER.** User interconnects gates using line graphics commands. Network descriptions for **LOGIC SIMULATOR** generated simultaneously with the **CRT** diagram being drawn . . . . $159.95 Ⓐ

MANUAL AND DEMO DISK: Instruction Manual and demo disk illustrating capabilities of both program (s) . . . . $29.95 Ⓐ Ⓣ

ELECTRONIC SERIES VOL III & IV: Entire Series $259.95

CIRCUIT SIMULATOR: Tired of trial & error circuit design? Simulate & debug your designs before you build them! With **CIRCUIT SIMULATOR** you build a model of your circuit using **RESISTORS, CAPACITORS, INDUCTORS, TRANSISTORS, DIODES, VOLTAGE** and **CURRENT SOURCES** and simulate the waveform response to inputs such as **PULSES, SINUSOIDS, SAWTOOTHS,** etc. . .all fully programmable. The output is displayed as an **OSCILLOSCOPE-STYLE PLOT** of the selected waveforms (Apple only) or as a printed table of voltage vs time. Handles up to 200 notes and up to 20 sources. Requires 48 **RAM** . . . . $159.95 Ⓐ Ⓣ

CIRCUIT DESIGNER: Interactive **HI-RES** graphics program for designing electronic circuits. Draw directly on the screen up to 10 different component types, including those referenced above. Components interconnect list for **CIRCUIT SIMULATOR** generated automatically. Requires $159.95

MATHEMATICS SERIES: Entire Series $49.95

STATISTICAL ANALYSIS I: This menu driven program performs **LINEAR REGRESSION** analysis, determines the mean, standard deviation and plots the frequency distribution of user-supplied data sets. Printer, Disk, I/O routines $19.95

NUMERICAL ANALYSIS: **HI-RES** 2-Dimensional plot of any function. Automatic scaling. At your option, the program will plot the function, plot the **INTEGRAL,** plot the **DERIVATIVE,** determine the **ROOTS, MAXIMA, MINIMA, INTEGRAL VALUE** $19.95

MATRIX: A general purpose, menu driven program for determining the **INVERSE** and **DETERMINANT** of any matrix, as well as the **SOLUTION** to any set of **SIMULTANEOUS LINEAR EQUATIONS.** $19.95

3-D SURFACE PLOTTER: Explore the **ELEGANCE** and **BEAUTY** of **MATHEMATICS** by creating **HI-RES PLOTS** of 3-dimensional surfaces from any 3-variable equation. Disk save and recall routines for plots. Menu driven to vary surface parameters. Hidden line or transparent plotting $19.95

ACTION ADVENTURE GAMES: Entire Series $29.95 Ⓐ

RED BARON: Can you outfly the **RED BARON?** This fast action game simulates a machine-gun **DOGFIGHT** between your **WORLD WAR I BI-PLANE** and the baron's. You can **LOOP, DIVE, BANK** or **CLIMB**-and so can the **BARON.** In **HI-RES** graphics plus sound. $14.95

BATTLE OF MIDWAY: You are in command of the **U.S.S. HORNETS' DIVE-BOMBER** squadron. Your targets are the Aircraft carriers, Akagi, Soryu and Kaga. You must fly your way through **ZEROS** and **AA FIRE** to make your **DIVE-BOMB** run. In **HI-RES** graphics plus sound. $14.95

SUB ATTACK: It's April 1943. The enemy convoy is headed for the **CONTROL SEA.** Your sub, the **MORAY,** has just sighted the **CARRIERS** and **BATTLESHIPS'** Easy pickings. But watch out for the **DESTROYERS** - they're fast and deadly. In **HI-RES** graphics plus sound $14.95

FREE CATALOG-All programs are supplied on disk and run on Apple II w/Disk & Applesoft **ROM** Card & **TRS-80** Level II and require 32K **RAM** unless otherwise noted. Detailed instructions included. Orders shipped within 5 days. Card users include card number. Add $1.50 postage and handling with each order. California residents add 6½% sales tax. Foreign orders add $5.00 postage and handling.

SPECTRUM SOFTWARE
142 Carlow, P.O. Box 2084
Sunnyvale, CA 94087

FOR PHONE ORDERS: (408) 738-4387
DEALER INQUIRIES INVITED.

VISA master charge

Circle 384 on inquiry card.

Exiting the "M(emory)" mode and reentering it at the entry point of my program, I depressed the ":" key to invoke the Super STEP trace function (ie: automatic single-stepping). I then watched my program "execute" for a while, instruction by instruction! The ":" (trace) function more than justifies the inclusion of the word "super" in the name of this product.

An additional feature is the ability to run Super STEP at two different speeds while tracing; at the slow speed, you can see individual instructions as they execute, while at the fast speed, only the registers of the display are readable.

While tracing a program, I found an error in the interaction between the halt ("Z") and trace (":") commands. Use of the "Z" key is supposed to immediately stop the automatic tracing of program execution. It does, but it may stop in the middle of a 2- or 3-byte instruction. The problem at this point was only aesthetic, but when I resumed tracing by pressing the ":" key, Super STEP took the next byte (in the middle of an instruction) and tried to interpret it as the first byte of a new instruction. This can result in the execution of an incorrect Z80 instruction.

A potential annoyance arises in the processing of a CALL or a RST (restart) instruction when tracing or single-stepping a section of a program: if the invoked subroutine is bug-free, it is irritating to slowly single-step through all the subroutine code to get back to the main routine that is being debugged. Super STEP tries to solve that problem via the "*" function. If this function is turned on, CALLs and RSTs will not be followed but will be "directly executed" (ie: the single-stepping is turned off during the execution); if this function is turned off, Super STEP will trace or single-step through all program code. However, this command is inconvenient when you want to step through some subroutines but not others. When I'm single-stepping through some code, I can't turn the "*" function on before a routine I don't want to trace — by the time I see the CALL statement, I've already started single-stepping through the routine.

Some improvements come to mind. I would like to see some indication of interrupt status (enabled or disabled) on the video display. In addition, Super STEP would be greatly improved if the author provided three copies of the software (one each for the 16 K-byte, 32 K-byte, and 48 K-byte versions of the TRS-80) that would load in the top end of the computer's memory. It would be nice if Super STEP could be rewritten to include all of the T-Bug functions: it could then be sold as a stand-alone product. [*On the other hand, the additional time required to add such features is often unavailable to small software companies. If the author did incorporate these features, the necessary increase in price would probably be greater than the cost of T-Bug....*GW]

Conclusions

- One of the most outstanding features of Super STEP is its ability to single-step or trace through *any* Z80 code, even routines in ROM; this power is due to the fact that Super STEP is a software program that simulates the Z80, so it has complete control of any program it is executing.
- On the negative side, the documentation for Super STEP is inadequate. I had to reread the instruction manual and experiment with the software in order to figure out how to use it. Users with less patience or machine-language experience will probably have trouble with this product.
- Overall, I think that the Super STEP package (in conjunction with the Super TLEGS program for an additional $9.95) will be useful to the serious assembly-language programmer with a tape-based TRS-80. Its utility is decreased if you have a disk system (I don't know if you can save it to disk), but it still has some features that the TRSDOS DEBUG program (supplied with the TRS-80 disk operating system) doesn't have. ■

BYTE's Bugs

Problematic Problem Solving

The article entitled "Machine Problem Solving" (November 1980 BYTE, by Peter Frey) has a bug on line 230 of the "Treasure Search" game. (See page 258, listing 1.)

The line should read:

```
230  X$= RIGHT$(STR$
       (B(I),1)):GOSUB 1000
```

Many thanks to those who called us about this typographical error. ■

DOWN-TO-EARTH PRICES ON OUT-OF-THIS-WORLD PERSONAL COMPUTERS AND COMPONENTS.

Look at this!

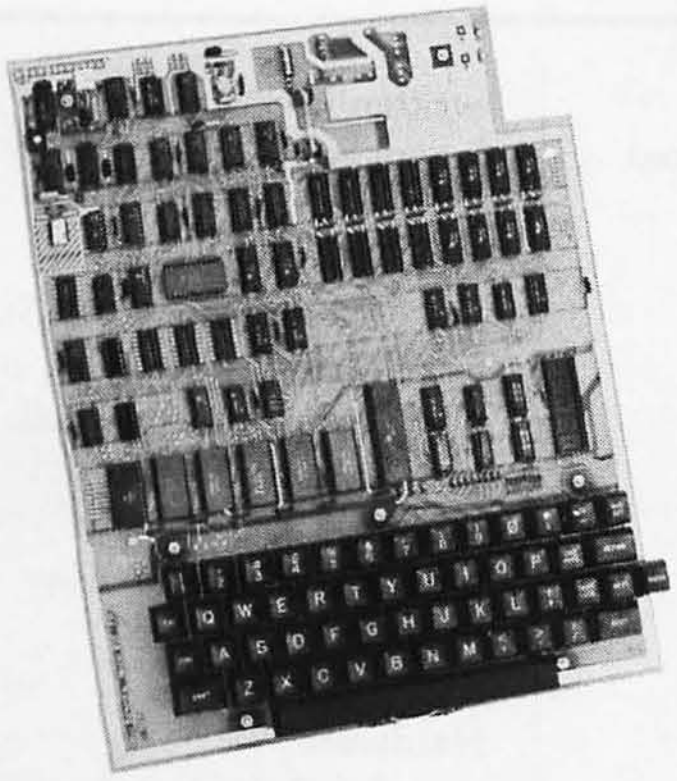

Ohio Scientific Superboard II

$299

- It's the first complete computer system on a board.
- Superboard II uses the ultra powerful 6502 Microprocessor
- 8K Microsoft BASIC-in-ROM
- 4K static RAM on board, expandable to 8K
- Full 53-key keyboard, with upper and lower case. Plus user expandability.
- Video interface and audio cassette interface.

The Ohio Scientific Superboard II at $299 — in today's economy — has got to be the best buy by far. It will entertain you with spectacular graphics made possible by its ultra high resolution graphics and super fast BASIC. It will help you in school or industry, as an ultra powerful scientific calculator. Advanced scientific functions and a built-in "immediate" mode allow you to solve complex problems without programming.

The Superboard II can be expanded economically, for business uses, or to remotely control your home appliances and security. Even communicate with other computers.

Read what's been written about Superboard II:

"We heartily recommend Superboard II for the beginner who wants to get into microcomputers with a minimum cost. A real computer with full expandability."

—POPULAR ELECTRONICS, MARCH 1979

"The Superboard II is an excellent choice for the personal computer enthusiast on a budget."

—BYTE, MAY 1979

Look at these easy hardware prices:

610 Board For use with Superboard II and Challenger 1P. 8K static RAM. Expandable to 24K or 32K system total. Accepts up to two mini-floppy disk drives. Requires +5V @4.5 amps.	**$ 298**
Mini-Floppy Disk Drive Includes Ohio Scientific's PICO DOS software and connector cable. Compatible with 610 expander board. Requires +12V @1.5 amps and +5V @ 0.7 amps. [Power supply & cabinet not included.]	**299**
630 Board Contact us for important details.	**229**
AC-3P 12″ combination black and white TV/video monitor.	**159**
4KP 4K RAM chip set.	**79**
PS-005 5V 4.5 amp power supply for Superboard II.	**45**
PS-003 12V power supply for mini-floppies.	**45**
RF Modulator Battery powered UHF Unit.	**35**
CS-900B Metal case for single floppy disk drive and power supply. [While stock lasts.]	**49**
AC-12P Wireless remote control system. Includes control console, two lamp modules and two appliance modules, for use with 630 board.	**175**
AC-17P Home security system. Includes console, fire detector, window protection devices and door unit for use with 630 board.	**249**
C1P Sams C1P Service manual	**8**
C4P Sams C4P Service manual	**16**
C3 Sams Challenger III manual	**40**

Ohio Scientific and independent suppliers offer hundreds of programs for the Superboard II, in cassette and mini-floppy form.

Freight Policies All orders of $100 or more are shipped freight prepaid. Orders of less than $100 please add $4.00 to cover shipping costs. Ohio residents add 5.5% Sales Tax.

VISA master charge

Hours: Call Monday thru Friday.
8:00 AM to 5:00 PM E.D.T.
TOLL FREE: 1-800-321-5805

Guaranteed Shipment Cleveland Consumer Computers & Components guarantees shipment of computer systems within 48 hours upon receipt of your order. **Our failure to ship within 48 hours entitles you to $35 of software, FREE.**

To Order: Or to get our free catalog **CALL 1-800-321-5805 TOLL FREE.** Charge your order to your **VISA** or **MASTER CHARGE** account. Ohio residents call: (216) 464-8047. Or write, including your check or money order, to the address listed below.

CLEVELAND CONSUMER
COMPUTERS & COMPONENTS
P.O. Box 46627
Cleveland, Ohio 44146

Order Form: CLEVELAND CONSUMER COMPUTERS & COMPONENTS P.O. Box 46627 Cleveland, Ohio 44146

☐ Superboard II $299.
☐ 610 Board $298.
☐ Mini-Floppy Disk Drive $299.
☐ RF Modulator $35.
☐ AC-3P 12″ B/W Monitor $159.
☐ C1P Sams Manual $8.

[Attach separate sheet for other items.]

NAME
ADDRESS:
CITY: STATE: ZIP:
PHONE:
Payment by: VISA MASTER CHARGE MONEY ORDER
Credit Card Account #
Expires Interbank #[Master Charge]
TOTAL CHARGED OR ENCLOSED $ [Ohio Residents add 6.5% Sales Tax]

Orders of less than $100, please add $4.00 to cover shipping costs. Orders will be accepted from U.S. and Canada only. All prices quoted are U.S., date of publication, standard UPS shipping FOB the factory. B

Circle 70 on inquiry card.

Wordsmith

Mark Dahmke, 1515 Superior Apt 15, Lincoln NE 68521

The greatest compliment I can give Scion Corporation's Wordsmith is that I am using it to write this review. I have searched long and hard for a word processor that would give me the features and capabilities of a big-system full-screen editor.

I used to do all of my writing on an IBM 370 computer, using a full-screen editor and a batch program that read in my text and formatted it for a high-speed printer. The full-screen editor was adequate, but the batch program was painful to use because you couldn't see the results without running it (over and over). It was like using a compiler instead of an interpreter—you had to wait.

Wordsmith combines the features of a good, full-screen editor (one of the nicest I have used) in a "what you see is what you get" format, thus allowing text to appear on the screen exactly as you want it printed.

Wordsmith Overview

Wordsmith runs on an 8080- or Z80-based microcomputer with either CP/M or North Star disk operating systems. The distribution disk also supplies a customization program that allows the user to define the ASCII codes of the special-function keys, the location of the memory-mapped video display, and the printer interface.

Unlike many other word processors, Wordsmith is page-oriented, ie: page boundaries are maintained in the disk file. Scion's Screensplitter video display has 86 characters per line and 40 lines, but Wordsmith uses the top line as a "scoreboard" to keep track of cursor position (line and column numbers), current page, total number of pages, and the maximum number of pages that can be used within the disk file that is currently open. The file name (fully qualified by the conventions of the operating system in use) is also shown on the scoreboard. The right portion of the scoreboard is used to enter commands. Getting to the command line is easy—just hit Break, or the key you have assigned to that function. The command line then becomes active, shows a cursor, and awaits your input. Hitting Break again terminates command entry and executes the command. If no command is entered (ie: if you hit Break twice without entering a command), nothing will happen. Wordsmith has over seventy commands, not including those used for cursor movement (up, down, left, right, etc).

About the Author

Mark Dahmke is a consulting editor for BYTE magazine. He also operates a computer consulting business called MCD Consulting and is involved in the design of office automation systems. His interests include astronomy, science fiction, writing, and painting.

At a Glance

Software
Wordsmith page-oriented word processor

Use
Word processing

Manufacturer
Scion Corporation
8455-D Tyco Rd
Vienna VA 22180
(703) 827-0888

Price
Wordsmith word processor (CP/M or North Star): $295; Screensplitter video board (86 characters by 40 lines) and firmware: $395. Video subsystem (Wordsmith, Screensplitter board, firmware, 15-inch green-phosphor video monitor, and high-quality word-processor keyboard IBM Selectric II style): $1795

Features
Wordsmith word processor (software) runs with a memory-mapped video display (the Screensplitter) with 86 characters per line and 40 lines. Wordsmith is completely reentrant and is written in 8080 assembly language

Operating System
CP/M 8-inch or North Star 5-inch (single-, double-, or quad-density) floppy-disk formats; also IMDOS, MDOS, CDOS (single-, double-, or quad-density formats)

Hardware
Any S-100 8080- or Z80-based microcomputer. Wordsmith will run in a CP/M system with only 16 K bytes of memory. The Scion Screensplitter memory-mapped video board is required.

Documentation
66-page manual, 21 by 27.5 cm (8½ by 11 inches), for Wordsmith; 70-page manual for Screensplitter (same size)

Firmware
1 K bytes of video-display software in a 2708 EPROM

Audience
Anyone requiring high-quality word-processing capability

Other Features

Wordsmith has many other features that make text entry less tedious. The *tab-stop line* allows you to set up any number of tabs in a given text file. When you enter the ET command, Wordsmith displays a reverse-video line just below the scoreboard. You can place a period wherever you want a tab stop, and Wordsmith will remember the tab-stop line (the line of periods) for each separate disk file. Once set up, the tab stops may be altered by entering the ET command again.

The *hold area* is a reserved area of memory that can be used to save up to an entire screen page (86 characters by 39 lines). Using this feature, any amount of text, from a single word or line to an entire screen page, may be copied to another part of the screen, another page in the file, or another disk file. Many commands are available for copying the held text back to the screen. For example, it may be put down "literally," meaning that it will be placed on the screen just as it was copied from the screen. The PF, or *put-formatted* command, will reformat the

COMPUTER CITY (CANADA) INC.

INTERNATIONAL MAIL ORDER DIVISION

DIMENSION 3 Color Graphics Board for your PET® TRS-80® • 256x192 Pixel Resolution • 15 Colors • 3 Channel Sound Synsthesiser • See ad this issue

PET® -CBM® Model **$755.00**

TRS-80® Model **$840.00**

PET® MEMORY Expansion for your 8K (Old PET®) • Fits entirely inside PET® • Installs in minutes • Built in POWER SUPPLY

16K Model • gives 24K total

$475.00

32K Model • gives 40K total

$575.00

PET® • ADE • Machine Language ASSEMBLER, DISASSEMBLER, EDITOR • Fast, easy to use • Supports disk and printer, BASIC 2.0, 3.0, 4.0 versions

$69.95

PET® • HELP ROM • offers on ROM-AID, APPEND (disk and tape), AUTO LINE, CHANGE, DELETE, FIND, RENUMBER, REPEAT, TRACE, BASIC 3.0, 4.0

$69.95

PET® • EPROMMER • Programs 2708, 2508, 2716, TMS2716, TMS2516, 2732, TMS2732, TMS2532 Plugs into PET® IEEE port

$495.00

DYNAMIC RAMS • upgrade your PET® , TRS-80® , APPLE® , SORCERER® , etc.

4116 • 150ns. set of 8

$69.95

4116 • 200ns. set of 8

$49.95

EPROMS • 2716, 2516 single 5V.2Kx8

$19.95

EPROMS • 2732, 2532 single 5V.4Kx8

$59.95

TMS 9918 Video Display Processor

$89.95

General Instruments AY8910 Sound Generator

$29.95

AXIOM • Miniprinters for your PET® , TRS-80® , APPLE® with intface

$1,295.00

MONITORS • Panasonic, Electrohome

9" B & W **$295.00**

11" Color **$695.00**

INTERTEC Intertube III

$1,495.00

MANNESMAN-TALLY printers in stock • **Call for prices**

COMMODORE 2000, 4000, 8000 products • **Call for prices**

APPLE® • Complete line of CPU'S and accessories

HEWLETT-PACKARD HP83 and HP85 • Complete line of software and accessories

DISKETTES • Box of 10 for 2040, 4040, TRS-80® and APPLE®

$59.50

Blank Cassette Tapes

C10, C20, C30 carton of 10

$16.95

COMPLETE Line of **PERSONAL SOFTWARE** products

Store Address

Winnipeg • 1353 Portage Avenue, Winnipeg, Manitoba R3G 0V5

Phone 204 786-3381

Hours • 10 A.M. to 5 P.M. Monday to Friday

Lethbridge • 2nd Avenue South, Lethbridge, Alberta

Phone 403 320-1264

Hours • 10 A.M. to 5 P.M. Monday to Friday

MASTERCHARGE and **VISA** cards are accepted, please add 5%

MAIL TO COMPUTER CITY (CANADA) INC.

1353 PORTAGE AVE., WINNIPEG, MANITOBA, R3G 0V5

(204) 786-3381

Circle 79 on inquiry card.

PET, CBM are registered TM's of Commodore International
TRS-80 is a registered TM of Tandy Corporation
APPLE is a registered TM of Apple Computer Inc.
SORCERER is a registered TM of Exidy Inc.

Last August, Chris Morgan and I went to Washington DC to see a networked office-automation system that Scion had installed in a congressman's office. The system, called Rosenet, consists of a network of Z80 microcomputers running a modified version of the North Star disk operating system. Each workstation also includes a Wordsmith video subsystem. All workstations are tied to a central microcomputer that maintains data bases and an electronic mail/memo system. The master system also provides printer and dial-up modem services to the workstations, which communicate with the master through RS-232C lines running at 19,200 bits per second.... **MCD**

text in the hold area to fit a new shape or region of the screen. This allows you to work easily with "newspaper columns."

Up to 20 text *windows* may be defined on each page. Wordsmith keeps track of the windows on each page and the cursor location within each window. This extra information is stored in blocks at the end of the text file, which allows the file to be read in by an assembler or compiler without interference. A window may be any size, from 1 by 2 characters to a whole screen page. This feature is most useful in "cut and paste" operations. When several windows are defined on a page (the screen itself is called the *base window*), you can move from window to window by hitting the Cycle key. This moves you to the next window in the loop, and eventually returns you to the one you started at. When a window is active, it is impossible to type text or move the cursor to a location outside the window. It's like having a miniature screen within a screen. Windows are also useful for setting up *templates*—files with no text, but with a window structure. A template might, for example, be set up to look like a standard letter format with header, body, closing, and so on. It is then a simple matter to fill in the blanks when writing the letter.

A large selection of cursor-movement commands is available, beginning with the obvious: up, down, left, right and home (move to the upper lefthand corner of the window). On the video-subsystem keyboard, typing Shift in combination with one of the cursor-direction keys causes movement of the cursor in increments of eight character positions, instead of one. Also included are: delete to end of line, move to end of line, delete character, backspace, insert blank, insert mode, delete left, and tab.

Line control and movement commands include: insert line, delete line, insert multiple lines, delete multiple lines, center line, hold multiple lines (in hold area), split line and join line, and search line for string.

Among the window control and movement commands are: open window, clear window, set mark, clear marks, open line window, open paragraph window, drop window, drop all windows, cycle (to next window), go to base window, jump window (to new location on screen), illuminate all windows (ie: set to reverse video), change size transparently, change size, fill window (from hold area), adjust window (right justify), hold window, put text literally (from hold area), put text formatted, erase window, search for string, and search and replace string.

Page Control and Movement

Pages may be inserted and deleted, up to the limit of pages allowed in a disk file. When a new file is created (using the new-file command), you must specify the number of pages you require. Other commands include: NP (flip to next page), PP (flip to previous page), PG*n* (go to page *n*), PG+*n* (go forward *n* pages), PG−*n* (go backward *n* pages), IP (insert page), DP (delete page), CP (reread current page off disk), SP (split page into two pages—split at the cursor), JP (join two pages), save and recall page templates (window structures).

Disk-File Management

Files can be created with the NF (new-file) command. For example, the command NF B:TEST-10 will create a file (under CP/M) on the B disk called TEST, with room for ten text pages. The command OF B:TEST will get the old file called TEST from the B disk. The page that was saved in the previous editing session will be redisplayed on the screen. CL (close file) ends an editing session and closes a file. Since text pages are not necessarily in sequential order in a file, the SQ (sequence file) command will sort them into order. (This is not needed for normal operations, except when Wordsmith files are being used to store programs or other information that will subsequently be read by another program, such as an assembler or BASIC compiler.) Other file-level commands include: SRF*s* (search file for string "*s*"), SUF*s* (substitute next occurrence) and SAF*s* (substitute all occurrences in file).

Into computers? Want to get started?

Take 4 books for $1.00

. . . and get one FREE!

(values to $68.75)

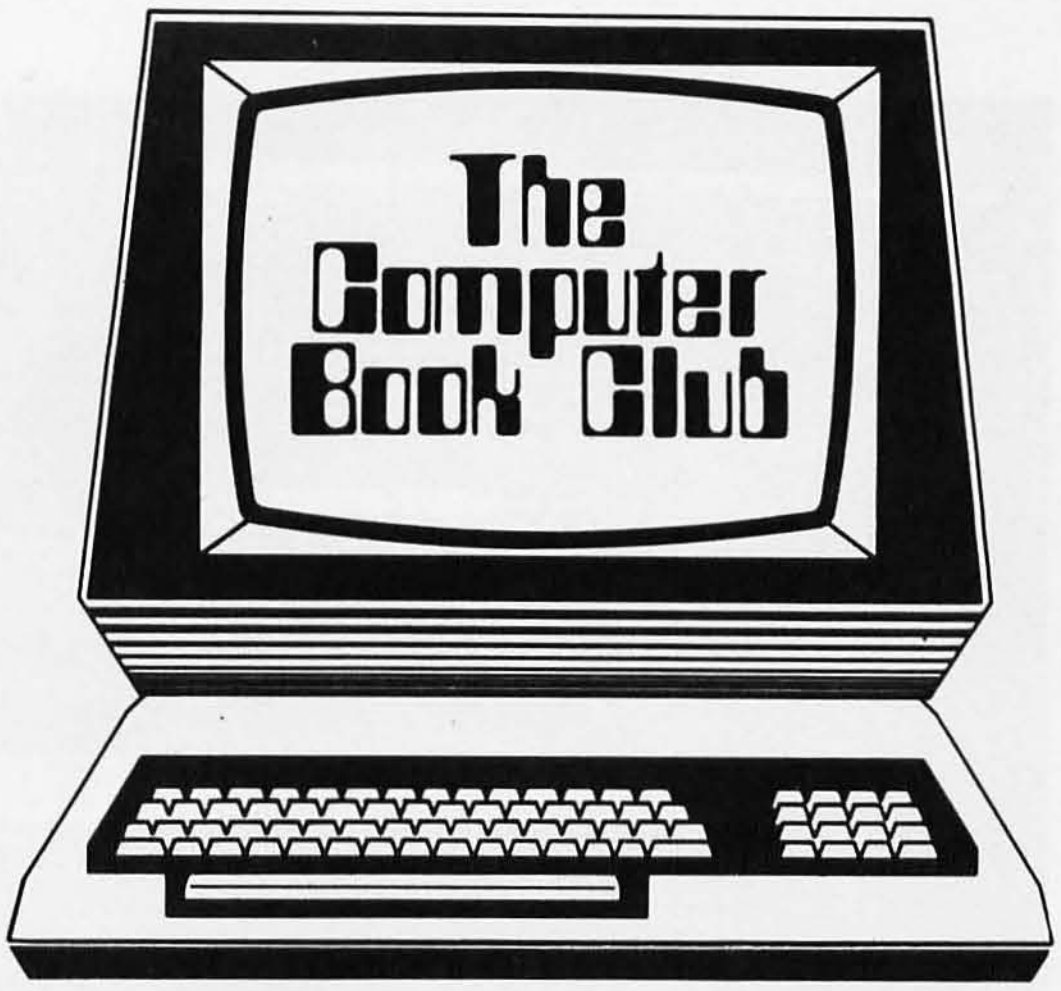

What is The Computer Book Club? An exciting new concept that puts hobbyists and businessmen on top of the fast-paced, dynamic world of computers. CBC will bring you info on software, hardware, applications, and theory . . . at savings up to 75% on hundreds of fact-packed volumes.

CBC is not just another book club! You can get in on Members' Bonus Benefits, like discounts on practical software packages, games, cassettes and disks, plus extra-value book dividends, and much, much more!

This introductory membership offer is for a limited time only. Join today!

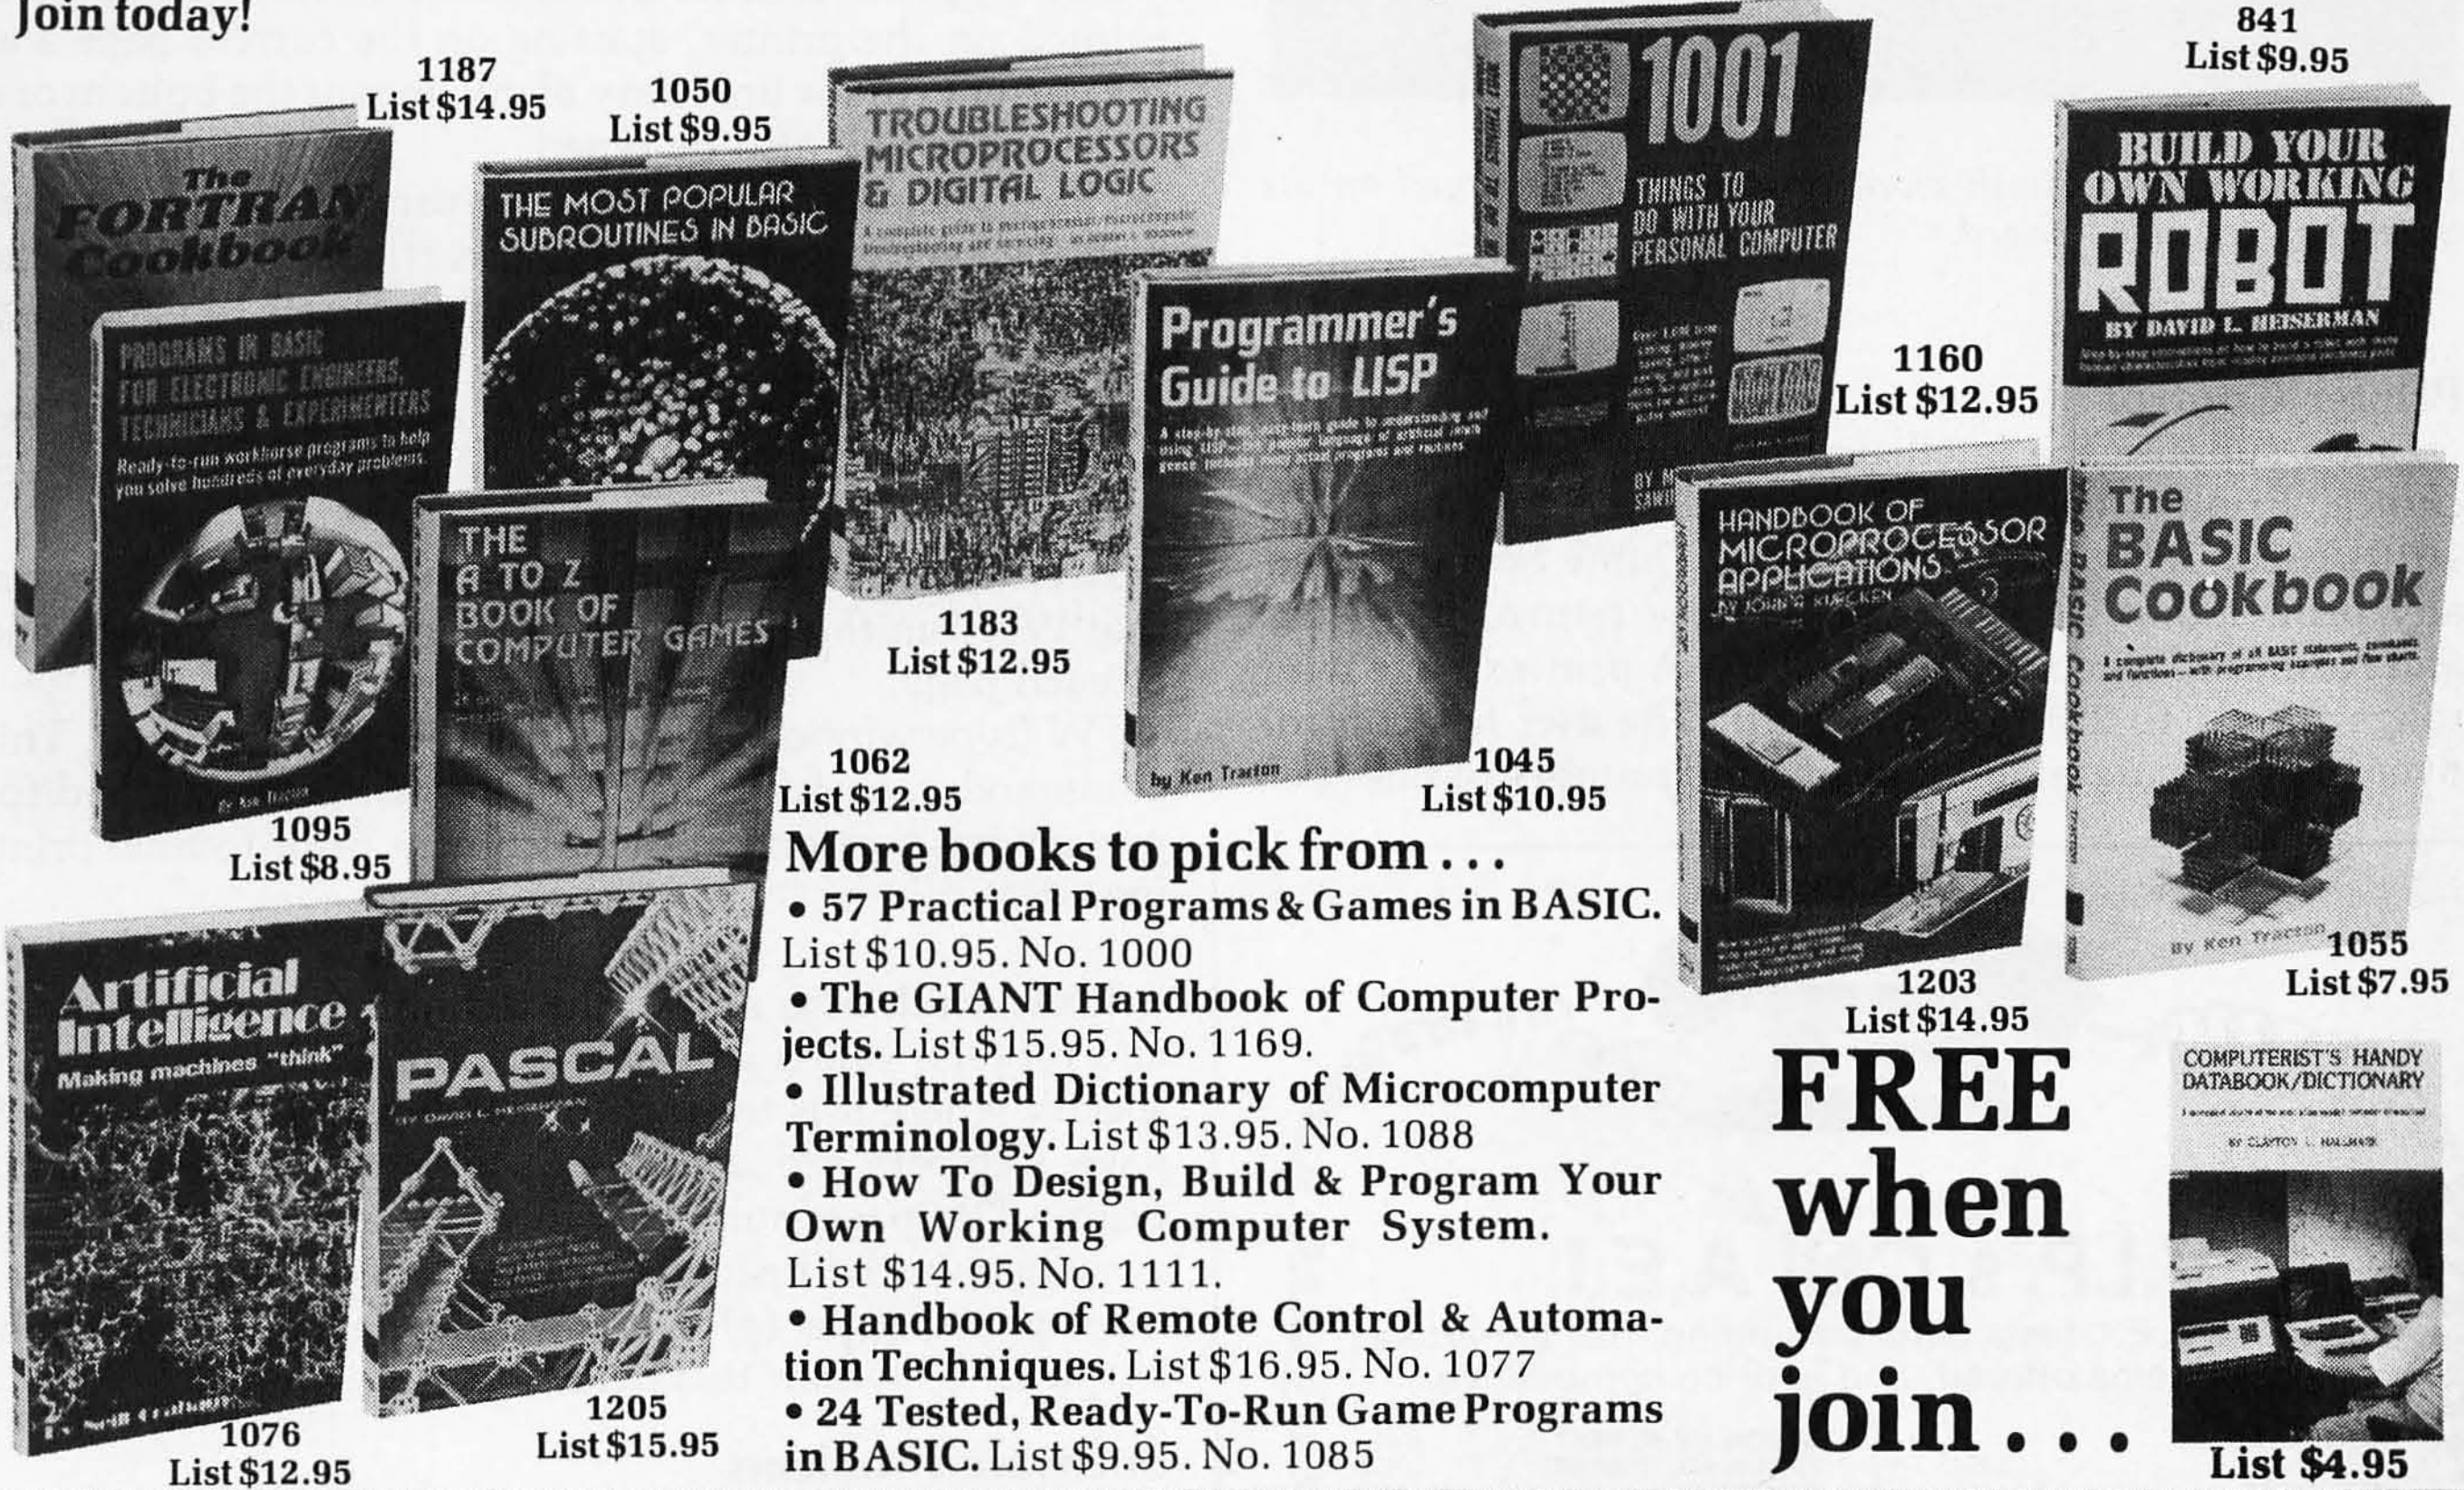

More books to pick from . . .

- **57 Practical Programs & Games in BASIC.** List $10.95. No. 1000
- **The GIANT Handbook of Computer Projects.** List $15.95. No. 1169.
- **Illustrated Dictionary of Microcomputer Terminology.** List $13.95. No. 1088
- **How To Design, Build & Program Your Own Working Computer System.** List $14.95. No. 1111.
- **Handbook of Remote Control & Automation Techniques.** List $16.95. No. 1077
- **24 Tested, Ready-To-Run Game Programs in BASIC.** List $9.95. No. 1085

FREE when you join . . .

7 very good reasons to try The Computer Book Club . . .

- **Reduced Member Prices.** Save up to 75% on books sure to increase your know-how.
- **Satisfaction Guaranteed.** All books returnable within 10 days without obligation.
- **Club News Bulletins.** All about current selections—mains, alternates, extras—plus bonus offers. Comes 10 times a year with dozens of up-to-the minute titles you can pick from
- **"Automatic Order".** Do nothing, and the Main selection will be shipped to you automatically! But . . . if you want an Alternate—or no books at all—we'll follow the instructions you give on the reply form provided with every News Bulletin
- **Continuing Benefits.** Get a Dividend Certificate with every book purchased after fulfilling Membership obligation, and qualify for discounts on many other volumes.
- **Extra Bonuses.** Take advantage of added-value promotions, plus special discounts on software, games, and more
- **Exceptional Quality.** All books are first-rate publisher's editions, filled with up-to-the-minute info

THE COMPUTER BOOK CLUB
Blue Ridge Summit, PA 17214

Please accept my Membership in The Computer Book Club and send the 4 volumes circled below, plus a free copy of *Computerist's Handy Databook/Dictionary*. I understand the cost of the books selected is $1.00 (plus shipping/handling). If not satisfied, I may return the books within ten days without obligation and have my Membership cancelled. I agree to purchase 4 or more books at reduced Club prices during the next 12 months, and may resign any time thereafter.

841 1000 1045 1050 1055 1062 1076 1077 1085
1088 1095 1111 1160 1169 1183 1187 1203 1205

Name________________ Phone________

Address________________________

City___________________________

State__________________ Zip______

(Valid for new members only. Foreign and Canada add 20%. Orders outside U.S. must be prepaid with interntional money orders in U.S. dollars.) BY-581

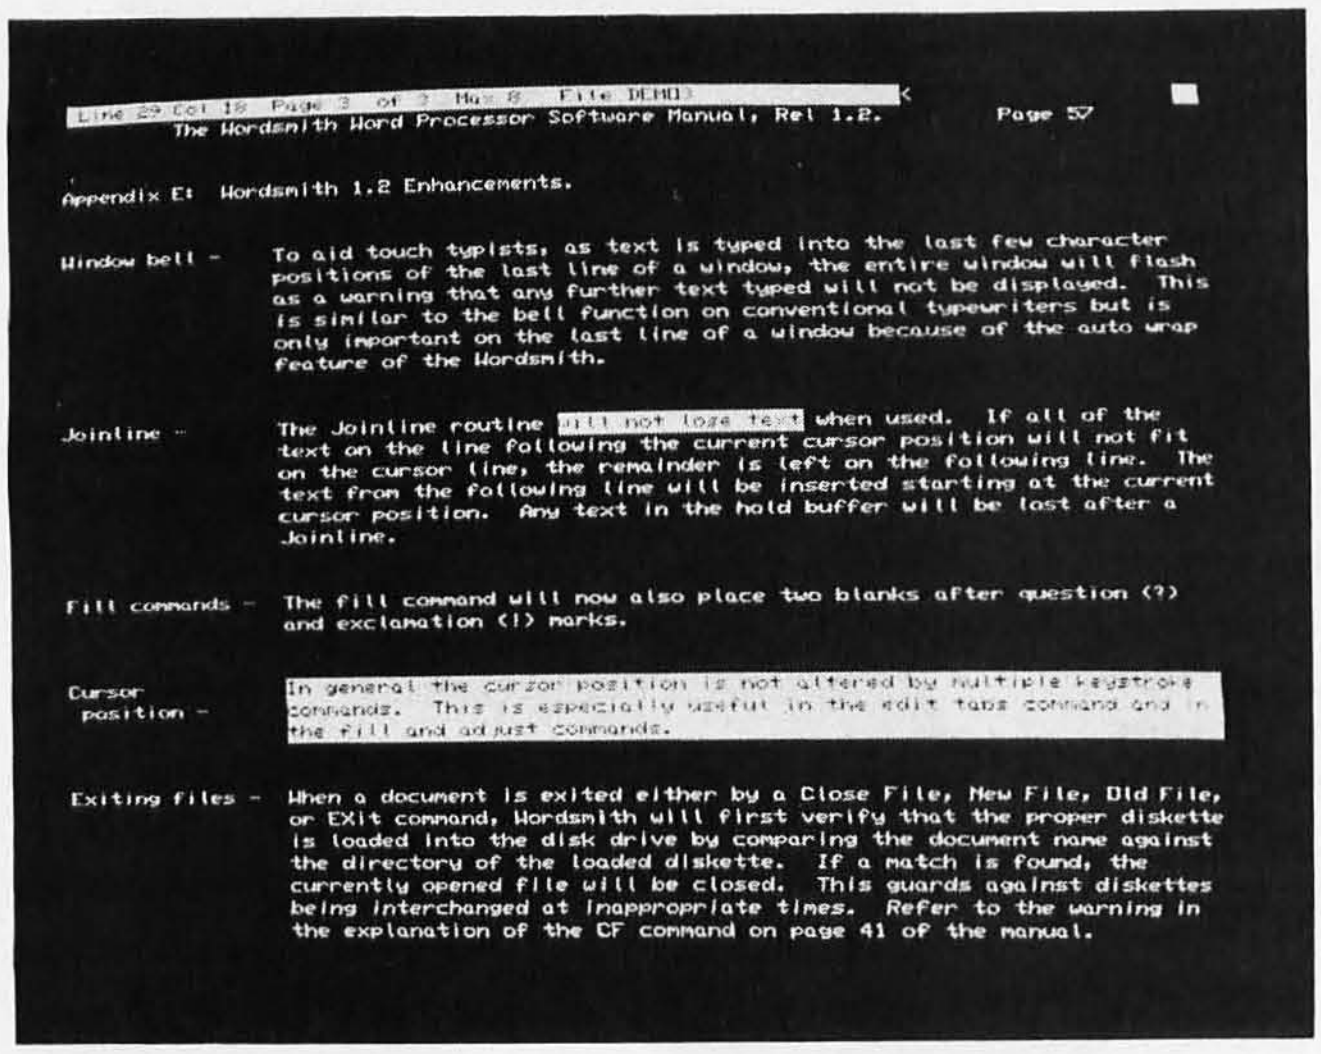

```
Line 29 Col 18  Page 3  of 3  Max 8  File DEMO3                    <
           The Wordsmith Word Processor Software Manual, Rel 1.2.       Page 57

Appendix E:  Wordsmith 1.2 Enhancements.

Window bell -      To aid touch typists, as text is typed into the last few character
                   positions of the last line of a window, the entire window will flash
                   as a warning that any further text typed will not be displayed.  This
                   is similar to the bell function on conventional typewriters but is
                   only important on the last line of a window because of the auto wrap
                   feature of the Wordsmith.

Joinline -         The Joinline routine will not lose text when used.  If all of the
                   text on the line following the current cursor position will not fit
                   on the cursor line, the remainder is left on the following line.  The
                   text from the following line will be inserted starting at the current
                   cursor position.  Any text in the hold buffer will be lost after a
                   Joinline.

Fill commands -    The fill command will now also place two blanks after question (?)
                   and exclamation (!) marks.

Cursor             In general the cursor position is not altered by multiple keystroke
 position -        commands.  This is especially useful in the edit tabs command and in
                   the fill and adjust commands.

Exiting files -    When a document is exited either by a Close File, New File, Old File,
                   or EXit command, Wordsmith will first verify that the proper diskette
                   is loaded into the disk drive by comparing the document name against
                   the directory of the loaded diskette.  If a match is found, the
                   currently opened file will be closed.  This guards against diskettes
                   being interchanged at inappropriate times.  Refer to the warning in
                   the explanation of the CF command on page 41 of the manual.
```

Photo 1: *The Wordsmith word processor as displayed on the Screensplitter video board.*

Printer Control

Scion supplies the intelligent printer interface of your choice. Printers currently supported include the Diablo 1610, 1620, 1650, NEC 1510, 1520, Qume Sprint 5, and any printer that accepts only carriage return, line feed, and form feed as control characters. A printed page may range from 1 to 255 lines in length. The user has control over the top margin, left margin, and number of lines per page. All hard-copy commands (except Type Window) begin printing from the cursor line and proceed through the file. The format for all five commands is:

$$(Command)\text{-}(t),(l),(h)$$

where t is the top margin (defaults to 4 lines), l is the left margin (defaults to 4 columns), h is the number of lines per page (defaults to 50).

If all defaults are used, Wordsmith will format output for an 8½- by 11-inch page. Control-S may be used to temporarily stop printing, and Control-K may be used to abort the print command.

The available printer commands are as follows:

- TCL (type continuous literally): The entire document is printed on the printer, starting on the current page and the current cursor line. Any blank lines at the bottom of a screen page will also be typed.
- TSL (type sheets literally): Wordsmith will pause after printing each page and await a carriage return from the keyboard. This permits use of single sheets of paper (eg: letterhead paper).
- TCC (type continuous compacted): Similar to TCL except that any blank lines at the end of each screen page will be ignored.
- TSC (type sheets compacted): Similar to TCC except that Wordsmith will wait for a carriage return at the end of each page.
- TW (type window): The current window is typed. This command is useful for cut-and-paste operations and for previewing portions of the document prior to final printing.

Wordsmith also allows the definition of page headers and footers. When a header or footer is set up, you may specify where it is to start (on what printed page) and, if page numbers are used, with which number it should begin. The page number will be inserted automatically anywhere in the header or footer where you have typed three pound signs (#) in a row. The page number will be left-justified within this field.

Software Problems

No software product is without its bugs, but Wordsmith is very reliable (it has never caused text to be lost). There are, however, some minor, annoying problems. First, the header and footer commands don't work properly if the default parameters are changed. Second, if no files are open and you issue a save-page command, the program may write over the file pointed to by the FCB (File Control Block) in the CP/M version. Otherwise, Wordsmith performs excellently, and the company, anxious to overcome any bugs, will often give you corrections over the phone (assuming you know 8080 assembly language).

Conclusions

The Wordsmith/Screensplitter combination forms one of the best word processors I have ever used, either on a microcomputer or a large system. The command repertoire is extensive, yet easy to use and learn. Many of its features are not available on word processors of any size or price. ■

NEECO

WHY BUY FROM THE BEST?

Service... Support... Software...

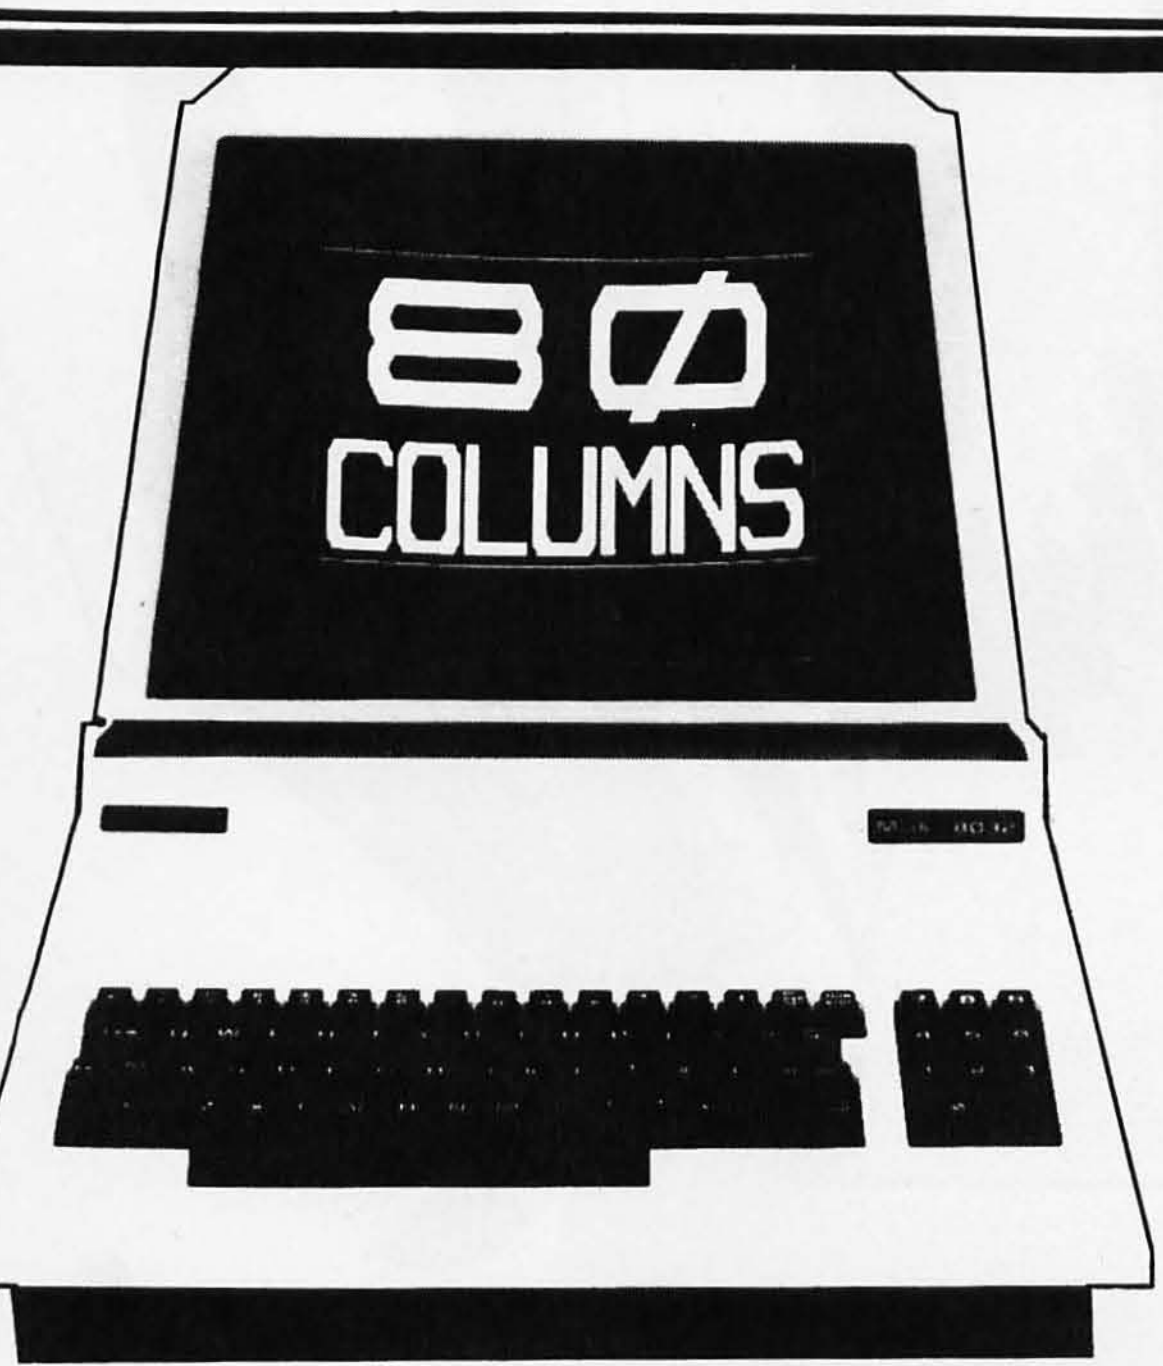

CBM™ 8000 SERIES BUSINESS COMPUTERS

The new Commodore 8000 series computers offer a wide screen display to show you up to 80-character lines of information. Text editing and report formatting are faster and easier with the new wide-screen display. The 8000 series also provides a resident Operating System with expanded functional capabilities. You can use BASIC on the 8000 computers in both interactive and program modes, with expanded commands and functions for arithmetic, editing, and disk file management. The CBM 8000 series computers are ideally suited for the computing needs of the business marketplace.

SCREEN
2000 character display, organized into twenty-five 80-column lines
64 ASCII, 64 graphic characters
3 x 8 dot matrix characters
Green phosphor screen
Brightness control
Line spacing: 1½ in Text Mode
1 in Graphics Mode

KEYBOARD
73-key typewriter style keyboard with graphic capabilities
Repeat key functional with all keys

MEMORY
CBM 8016: 16K (15359 net) random access memory (RAM)
CBM 8032: 32K (31743 net) random access memory (RAM)

POWER REQUIREMENTS
Volts: 110V
Cycles: 60 Hz
Watts: 100

SCREEN EDITING CAPABILITIES
Full cursor control (up, down, right, left)
Character insert and delete
Reverse character fields
Overstriking
Return key sends entire line to CPU regardless of cursor position

INPUT/OUTPUT
Parallel port
IEEE-488 bus
2 cassette ports
Memory and I/O expansion connectors

FIRMWARE
24K or ROM contains:
BASIC (version 4.0) with direct (interactive) and indirect (program) modes
9-digit floating binary arithmetic
Tape and disk file handling software

CBM 8032 Computer $1795

CBM™ 8050 DUAL DRIVE FLOPPY DISK

The CBM 8050 Dual Drive Floppy Disk in an enhanced version of the intelligent CBM 2040 Disk Drive. The CBM 8050 has all of the features of the CBM 2040, and provides more powerful software capabilities, as well as nearly one megabyte of online storage capacity. The CBM 8050 supplies relative record files and automatic diskette initialization. It can copy all the files from one diskette to another without copying unused space. The CBM 8050 also offers improved error recovery and the ability to append to sequential files.

HARDWARE SPECIFICATIONS
Dual Drives
Two microprocessors
974K Bytes storage on two 5.25" diskettes (ss)
Tracks 70
Sectors 17-21
Soft sector format
IEEE-488 interface
Combination power (green) and error (red) indicator lights
Drive Activity indicator lights
Disk Operating System Firmware (12K ROM)
Disk Buffer (4K RAM)

FIRMWARE
DOS version 2.0
Sequential file manipulation
Sequential user files
Relative record files
Append to sequential files
Improved error recovery
Automatic diskette initialization
Automatic directory search
Command parser for syntax validation
Program load and save

CBM 8050 Dual Price $1795

CBM	PRODUCT DESCRIPTION	PRICE
4016	16K RAM-Graphics(N) or Business(B) Keyboard	$ 995.00
4032	32K RAM-Graphics(N) or Business(B) Keyboard	$1295.00
8032	32K RAM-80 Col. Screen-Business Keyboard	$1795.00
4022	Tractor Feed Printer	$ 795.00
4040	Dual Floppy-343K-DOS 2.0	$1295.00
8050	Dual Floppy-974K-DOS 2.0	$1795.00
4010	Voice Synthesizer	$ 395.00
8010	300 Baud IEEE Modem	$ 279.95
C2N Cassette	External Cassette Drive	$ 95.00
CBMto IEEE	CBM to 1st IEEE Peripheral	$ 39.95
IEEE to IEEE	IEEE to 2nd IEEE Peripheral	$ 49.95
2.1 DOS	DOS Upgrade for 2040	$ 100.00
4.0 DOS	O/S Upgrade for 40 Column Computer	$ 100.00
Word Pro 4+	Word Processing Software used w/8032	$ 450.00

*CBM is a registered trademark of Commodore. All prices and specifications are subject to change without notice.

commodore

NEECO

679 HIGHLAND AVE.
NEEDHAM, MA 02194

NEECO WILL MATCH ANY ADVERTISED PRICE ON CBM EQUIPMENT.

(617) 449-1760
Telex: 951021

MON-FRI 9:00 - 5:00
MasterCharge and VISA Accepted

Circle 283 on inquiry card.

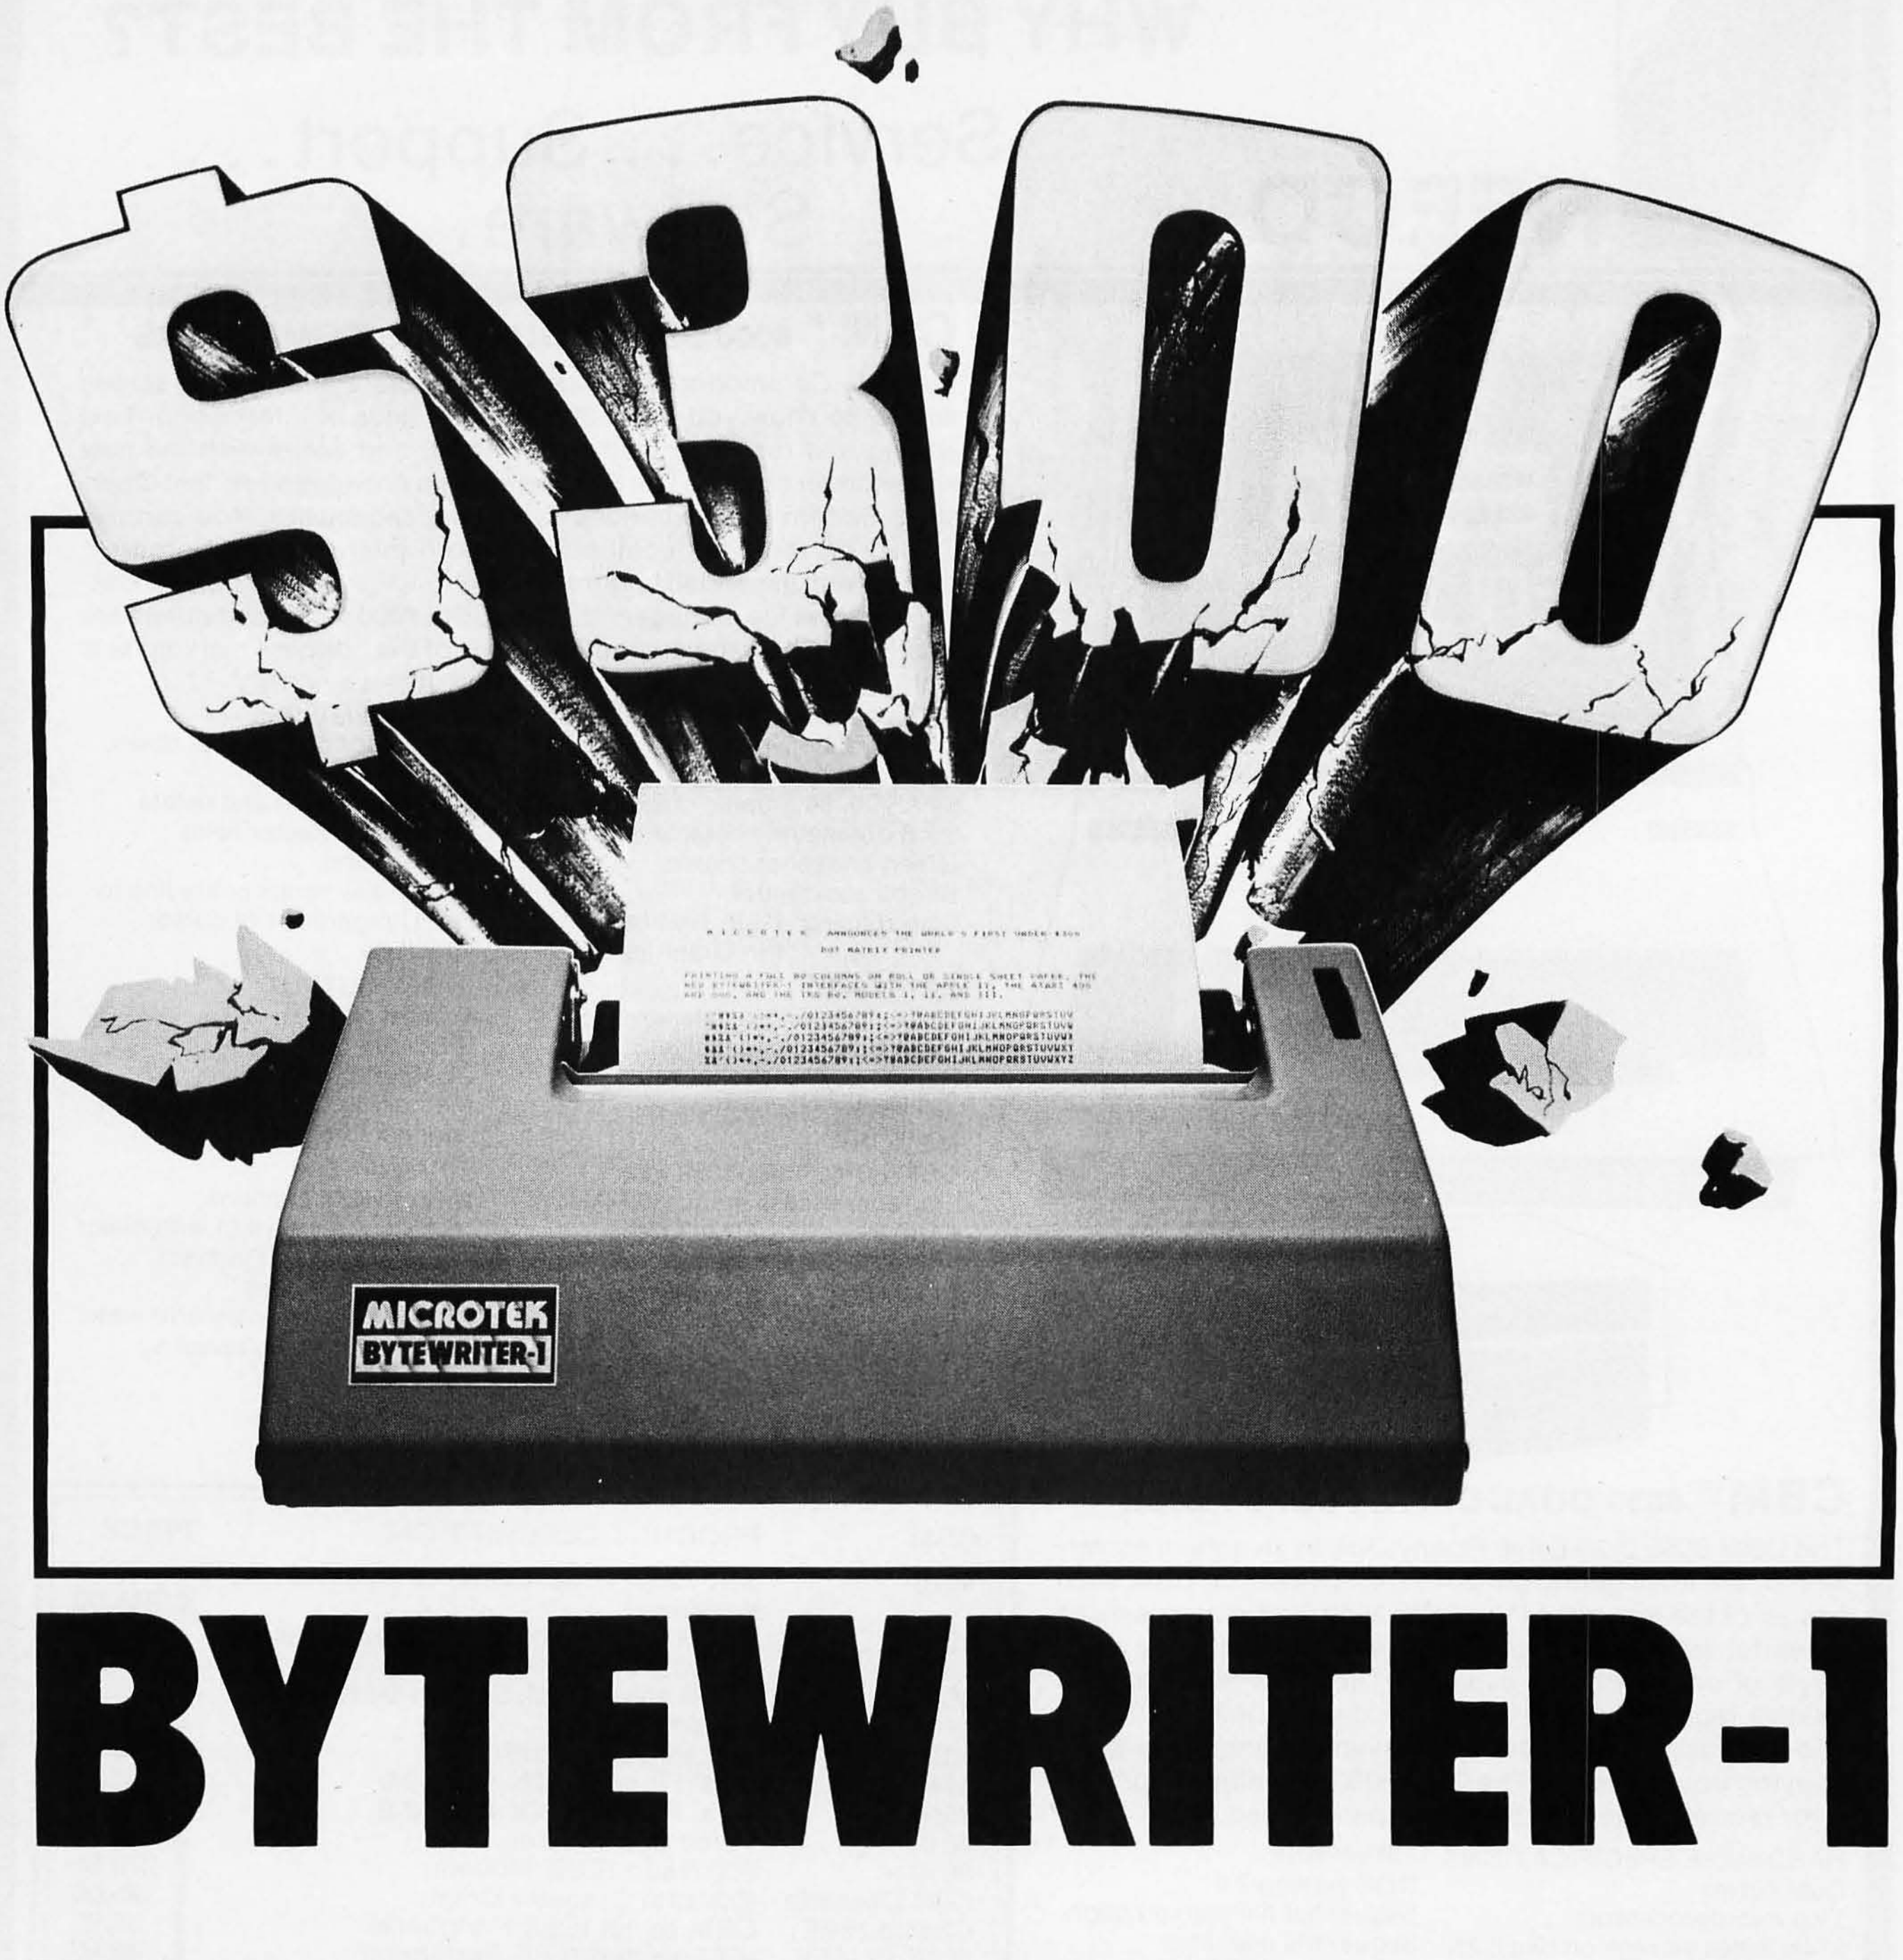

BYTEWRITER-1

Price Breakthrough from

MICROTEK inc.

The World's First Under $300 80 Column Dot Matrix Printer

WHY DID IT HAPPEN?

We were approached recently by a man with an idea. He is one of the leading American manufacturers of dot matrix print mechanisms. He had observed, as we had, that in recent months certain foreign printer manufacturers were increasing their share of the low-cost printer market at an alarming rate.

He thought there MUST be a way to fight back. And he was right. We've since formed a working alliance with this manufacturer, and have brought our first joint offering to the market.

HOW DID WE MAKE IT POSSIBLE?

We set out to combine his proven low cost print mechanism with the simplest possible control electronics. Advances in single-chip microprocessor technology and price erosion of components during the last year helped to make this long awaited dream come true - a printer that can be sold for less than half the cost of the computer that drives it. A $299 printer.

But cost-effective designs and efficient manufacturing operations weren't enough. Computer retailers can make up to a $250 markup on the foreign models. Could we hold to a $299 list price and give the dealer enough incentive to sell the Bytewriter-1? No way. We had to try a more direct approach.

YOUR BUY DECISION - DEALER OR MAIL ORDER

There are some very good reasons to buy your first computer through a dealer. There is a certain amount of hand-holding required when you decide to buy a personal computer. This is one of the main functions of the retail computer store. And most of them perform this function very well.

But why would anyone want to buy add-on equipment through a dealer? If you find a product that has been designed for and tested with your particular computer, you can safely bypass the computer dealer. You can have the best of both worlds. You can save money by buying direct from the manufacturer, and you can be certain that your new device will work when you get it.

We've done extensive testing with the most popular computers - the TRS-80, the Apple II, and the Atari 400 and 800. If you own one of these computers, we guarantee you won't have any interface problems with the Bytewriter-1.

TRS-80 is a trademark of Radio Shack, Div. of Tandy Corp.
Apple II is a trademark of Apple Computer, Inc.
Atari 400 & 800 are trademarks of Atari, Inc.
Bytewriter-1 is a trademark of Microtek, Inc.

FOUR THINGS YOU SHOULD KNOW BEFORE YOU BUY THIS PRINTER

We don't want any unhappy customers. We'd like you to know the limitations of our printer, as well as its advantages. There are some differences between the Bytewriter-1 and the higher priced printers you may be looking at:

1) The Bytewriter-1 takes single sheet and roll paper only. No pin feed paper.
2) We've used a 7-wire print head. No fancy lower case descenders.
3) There aren't any software frills in the Bytewriter-1, like VFU controls. However, if your main interest is getting software listings or printing letters, you won't care. And, with a bit of ingenuity, you can provide VFU functions in your own programs.
4) You can't go into a computer store and pick up a Bytewriter-1. They're sold direct only by MICROTEK.

We realize it's unusual to point out the limitations of a product in an ad that promotes it, but we think it's important for mail order buyers to fully understand what they're buying.

The Bytewriter-1 will fill the needs of most people. People who don't see the sense in spending extra money for features they'll never use.

ORDER THE CONFIGURATION THAT'S JUST RIGHT FOR YOU

The Bytewriter-1 is available with an interface cable and complete instructions for use with three of the most popular small computers on the market today, the Apple II, the Atari 400/800, and TRS-80 Models I, II, and III. One of our divisions, MICROTEK PERIPHERALS CORP., can even provide you with the expansion card or module that your computer may require to drive a printer.

CALL OR WRITE TODAY FOR MORE INFORMATION.

We have people standing by to answer your questions.

MICROTEK inc.

Microtek, Inc.
9514 Chesapeake Drive
San Diego, CA 92123
Tel. 714-278-0633
Outside Calif. call
toll free: 800-854-1081
TWX. 910-335-1269

Circle 262 on inquiry card.

BYTELINES

News and Speculation About Personal Computing

Conducted by Sol Libes

An Apple III Emulation Mode: Axlon Inc is working on a project that will allow an Apple II to run most of the software designed for the Apple III—including the Apple III disk operating system, SOS. The product has its roots in another product recently introduced by Axlon, the Axlon 256 Memory System. The unit consists of an interface card and a card cage that contains up to 256 K bytes of memory. There are separate versions for the Atari and Apple II, and one for the Apple III is in the works. Expressed simply, the unit can exchange 32 K-byte blocks of its memory for the top 32 K bytes in the 48 K machine connected to it.

Special disk-operating-system software included with the unit makes its operation transparent to the user. The hardware/software combination looks to the host computer like a large-capacity disk drive. Program files in the memory of the unit can be run as if they were on floppy disk, and data files can be accessed in both random and serial fashion. There are two advantages to this unit: one, information can be accessed in microseconds (as opposed to milliseconds or longer for floppy-disk drives); and two, the increased *main*-memory space makes both existing and proposed programs that crowd the current 48 K-byte limit more feasible.

The Sunnyvale, California-based Axlon is working with Apple Computer to finalize the design of the Apple III emulation hardware/software combination. The proposed unit will include the Axlon 256 Memory System, a special hardware board, special software, and an 80-column adapter for the Apple II.

EEPROM Is Coming: Several IC designers are predicting that the EEPROM (electrically erasable programmable read-only memory) will replace the ultraviolet-light EPROM within three to four years and may, perhaps, be used as nonvolatile main memory. Several companies are now putting finishing touches on these devices for introduction later this year. For example, Hitachi has announced the HN48016, a 16 K-bit EEPROM (2 K by 8 bits) that is pin-compatible with the popular 2716 UV-EPROM. It uses the same voltages, takes 10 ms per byte to program, and can be completely erased with a 1-second pulse. Data retention is claimed to be more than ten years. Intel has a similar device called the 2816. Prices and access times are comparable to their EPROM equivalents.

Microsoft Adds Graphics Commands To BASIC: Microsoft is offering OEMs who have hardware graphics capability an enhanced version of the popular BASIC-80 interpreter. The added commands will allow you to create lines, boxes, circles, curves, do object painting and relocation, and save all your work. Seven new commands have been added: CIRCLE, PAINT, GETSET, LINE, DRAW, PUT, and PRESET.

Continuing AMSAT OSCAR Activity: AMSAT, the Radio Amateur Satellite Corporation, has survived the loss of its Phase-IIIA OSCAR satellite. (See "BYTELINES," September 1980 BYTE, page 166.)

Construction of a new Phase-IIIB satellite is underway in Marburg, West Germany; Budapest, Hungary; and Washington DC. AMSAT has scheduled the satellite's launch for February 24, 1982 on a European Space Agency Arriane-booster flight.

As part of its planned use, the satellite will relay computer data by amateur radio operators in personal-computer networks.

For information on how to join AMSAT and receive *Orbit* magazine, write to AMSAT, POB 27, Washington DC 20044.

Details On 32-Bit Microprocessors: Intel released more information on its new 32-bit microprocessor, called the iAPX432. The microprocessor, under development for six years, features an object-oriented architecture that treats high-level entities as elementary software components that can be easily manipulated. These entities include records, queues, tasks, and collections of procedures.

In its simplest form, the microprocessor consists of two integrated circuits. More processors can be added later to obtain multiprocessing without altering software. It is expected that samples will be available in the fall.

$100,000 Computer-Chess Prize Offered: Carnegie-Mellon University (CMU) is offering a prize of $100,000 to the first person to develop a computer program that can defeat the world chess champion. Dr Hans Berliner, a computer scientist at CMU and a former world chess champion, heads the competition-rules committee. He feels that the prize may be won by 1990 or sooner, but certainly no later than the year 2000.

Last year a $1000 CMU prize was won when Jack Gibson, a chess expert, was defeated by Belle, a computer-chess machine developed by Ken Thompson and Dr Joe Condon, researchers at Bell Laboratories, Murray Hill, New Jersey.

Mini-Winchester Update: Five companies have announced 5-inch Winchester drives. The drives' storage capacity ranges from 1.8 to 12.3 megabytes (unformatted), and prices vary from $690 to $1600 (500-unit quantity prices). Most suppliers are now shipping evaluation units to OEMs (original equipment manufacturers), with limited production expected by late summer. Don't expect full production until next year.

The five companies which have already announced mini-Winchester hard disks are Shugart Associates, Seagate Technology, Irwin International, Tandon Magnetics, and New World Computer Company. The price leader appears to be Shugart, with its SA602 3.3-megabyte drive at $660. The maximum storage leader is the 12.3-megabyte

SOFTWARE
SOFTWARE
DIGITAL MARKETING
DIGITAL MARKETING^{TM}

May 1981

DIGITAL MARKETING • 2670 CHERRY LANE • WALNUT CREEK • CALIFORNIA 94596 • (415) 938-2880

MILESTONE^{TM} - $295. Manual alone - $30.

"Critical path" network analysis program for scheduling manpower, dollars and time to maximize productivity.

An interactive project management program that runs under CP/M and can relate together different skills, hourly pay rates and projects to maximize efficiency. MILESTONE could be used to track paper flow, build a computer, check a salesman's performance, or build a bridge. MILESTONE can be used by exeutives, engineers, managers, and small businessmen to:

- Find the critical tasks which can't be delayed.
- Discover which tasks are not time critical.
- See how manpower and expenses vary versus time.
- Investigate tradeoffs between manpower, dollars and time.
- Communicate plans to others using a printed project schedule.
- Change details of the project and immediately see the results on the screen.

Requires 48K RAM and CP/M. Also available for Apple Pascal or UCSD Pascal Operating Systems.

Formats: 8, NS, MP, CDOS, SB, TRS2, APPL

DATEBOOK II^{TM} - $295. Manual alone $25.

- **NOW SCHEDULES APPOINTMENTS FOR UP TO 27 DIFFERENT PEOPLE**
- **IMPROVED FILE STRUCTURE ALLOWS APPOINTMENTS UP TO ONE YEAR**
- Replaces your office appointment calendar
- Searches for openings that fit time of day, day of week & day of year contraints
- Appointments made, modified or cancelled by a few key strokes
- Copies of day's appointments can be quickly printed

Requires 48K RAM and CP/M. Also available for Apple Pascal or UCSD Pascal Operating Systems.

Formats: 8, NS, MP, CDOS, SB, APPL, TRS2

baZic^{TM} - $150. Manual alone - $25.

Written entirely in Z80^{TM} code baZic runs as much as 30% faster than NorthStar^{TM} BASIC. With minor exceptions, it is 100% compatible with existing NorthStar BASIC programs. Can be used on any Z80-based microcomputer operating under either CP/M or NorthStar DOS. baZic adds new functions to assist in screen formatting, as well as features to simplify programming, e.g. APPEND command/statement, ON GOSUB, cursor-addressable PRINT, etc.

Requires Z80 CPU, CP/M or NorthStar DOS. Formats: 8, NS, MP, SB, TRS2, APPL

MAGIC WAND^{TM} - $395. Manual alone - $35.

Word Processing System

- Full screen text editing
- Full text formatting commands
- Merging with external data files
- Variables
- Conditional commands
- True proportional printing

Specify disk format, terminal and printer.

MAGIC MENU^{TM} - $75.

With Spellguard option - $95.

Turns Magic Wand into a turnkey system. Allows move from EDIT to PRINT, backup of files or disks, system status, etc. from menu without returning to CP/M 2.x

Requires 56K RAM, CP/M and Magic Wand.

Formats: 8, NS, MP, SB, TRS2, APPL

PASCAL/M^{TM}. $225. Manual alone - $20.

CP/M^{TM} compatible language for 8080/Z80 CPUs, supports full Jensen & Wirth plus 45 extensions to Standard Pascal including Random access files, 40 segment procedures & 16 bit BCD real type. **NOW INCLUDES** symbolic debugger which features trapping on stores, examining and changing varibles and tracing of program execution.

Requires CP/M & 54K RAM. Formats: 8, NS, CDOS, APPL, TRS2

PASCAL/M for 8086/88 - $270.

Manual alone - $20.

All features of Pascal/M for the 8086 and 8088 processors running under the 8086/88 version of CP/M.

Requires CP/M-86^{TM} & 128K RAM. Format: 8

TRANS 86^{TM} - $125. Manual alone - $20.

8086/88 Translator for existing 8080/Z80 programs. The new source code can be easily edited and assembled using ACT II to produce hex code which can be executed by 8086/88. Emphasizes the extensions and features available in the 8086/88.

Requires CP/M and 32K RAM
Formats: 8, NS CDOS, APPL

ACT I^{TM}. $125. Manual alone - $15.

CP/M compatible macro assembler for Z80, 8080/85, 6502 & 6800.

One assembler that supports all major 8 bit micros. ACT features include full macro capabilities, comprehensive pseudo-ops, link-file structures, cross reference map, and algebraic expression processor. Requires 24K RAM & CP/M.

ACT II - $175. Manual alone - $20.

CP/M 2.x compatible cross assembler for 8086/88

ACT III - $125. Manual alone - $20.

CP/M 2.x compatible cross assembler for 6809.

ACT I and ACT II together - $225.

Formats: 8, NS, CDOS, MP/M, TRS2, APPL

PEARL^{TM} The application software generator

Pearl asks questions that a programmer would have to answer to code the system. You answer the questions & Pearl uses built-in logic to construct both subroutines & mainline programs. The system then compiles & executes your program code.

	PRODUCT/MANUAL
Level 1: For Personal Computing -	$130./$35.
Level 2: The Business Assistant -	$350./$35.
Level 3: Adv. Software Develop. -	$650./$50.

Requires CP/M and CBASIC2. Formats: 8, NS, MP, SB, TRS2

CBASIC2^{TM} - $120.

Industry standard intermediate code compiler with run-time interpreter. Features include chaining, integer & external precision arithmetic.

ULTRASORT-II^{TM} - $175.

The sort/merge/select utility for CBASIC2 written in assembly language. Can be loaded by CBASIC2 during run-time; also can be used as a stand-alone utility. **NOW also supports Basic 80^{TM} & the Microsoft Basic Compiler.**

FABS^{TM} - $175. Manual alone - $20.

Fast Access Btree Structure. Key sequential multi-path balanced tree structure. Faster than ISAM. Can be loaded by CBASIC2 during run-time. **NOW also supports Microsoft Basic Compiler, Basic 80, PL/1-80^{TM}, Pascal M/T^{TM}, Fortran-80^{TM} and S-Basic^{TM}.**

Requires CP/M. Formats: 8, NS, MP, SB, TRS2, CDOS

COPYWRITER^{TM} $395. Manual alone - $35.

A powerful CP/M Word Processing System which includes a fast screen editor and is exceptionally easy to learn and use. Copywriter supports both vertical and horizontal scrolling for 132 column printers. File size is limited only by disk size. The print formating program allows control over output word processing files, and permits the insertion of variable data into form letters. Full proportional printing is also supported.

MAILING LIST - $195. Manual alone - $35.

An integrated mailing list system which can **select** any range of zip codes for printing; **select** which fields to fill into merge; **select** by title, position or department within a company. Output can sort for bulk mailings by state and zip code.

Copywriter Screen Editor alone - $195.

COPYPROOF^{TM} - $295. Manual alone - $35.

Copywriter version of Spellguard.

DICTION I^{TM} - $95.

22,000 dictionary words not included in Copyproof or Spellguard. Compatible with any word processor using Spellguard.

DICTION II - $195.

40,000 more words not included in Diction I, Copyproof or Spellguard.

Copywriter System requires 60K RAM & CP/M. Formats: 8, SB

SPELLGUARD^{TM} - $295. Manual alone - $20.

20,000+ word dictionary containing commonly used words that find spelling & typographical errors in text files. Allows review of mis-matched words & speedy search routine. Proofs at 10,000 words/min.

Requires CP/M, 48K RAM & Magic Wand, WordStar^{TM} or Spellbinder^{TM}
Formats: 8, NS. MP. SB, TRS2, CDOS

SPELLBINDER^{TM} - $495. Manual alone - $50.

Full feature word processing system with Office Management capabilities. It's special features include ease-of-use by office personnel, flexible print formatting & output, and a powerful macro capability which allows features to be added for the unique requirements of each user. Mail list macro is included for mail merge with form letters.

Requires CP/M & 32K RAM. Formats: 8, NS, MP, CDOS, SB, APPL

SPELL MENU^{TM} - $95. Spellbinder version of Magic Menu.

MCALL^{TM} - $85.

Communications program designed to drive an acoustic coupler. Features include:

- Time sharing Terminal emulation
- Disk file transfer between CP/M computer & Time Sharing Computer in either direction
- Disk file transfer between two CP/M computers with error detection and correction

AMCALL^{TM} - $95.

Auto-answer, auto dial version of MCALL currently supports IDS 88-modem & Potomac Micro-Magic MM-103 boards.

Requires CP/M. Formats: 8, NS, MP, SB, CDOS

MICROSTAT^{TM} - $250. Manual alone - $25.

Powerful statistical analysis package.

Includes data management sub-system for editing, sorting, ranking, lagging, data file transfers PLUS eleven data transformations (e.g. linear, reciprocal, exponential, etc.)

- Frequency distributions, 8 probability distributions
- Multiple regression, correction analysis
- Time series
- Crosstabs/Chi-Square, non-parametrics
- Factorials, permutations, combinations
- Scatterplots
- ANOVA (one and two-way)

Requires 48K RAM, NorthStar Basic or CP/M & CBASIC2 or Microsoft Basic 80.

Formats: 8, NS, MP, SB, TRS2, CDOS, APPL

SPECIAL OFFER: Magic Wand, Magic Menu & Spellguard - $750.

FORMAT CODES: 8 (8″ single density IBM soft-sectored) NS (NorthStar DD) MP (Micropolis Mod II/Vector MZ) SB (Superbrain 3.0) CDOS (8″ Cromemco CDOS) TRS2 (TRS-80 Mod II) APPL (Apple II)

Apple Pascal trademark Apple Computers Pearl trademark CPU Int'l Pascal/M, ACT, Trans 86 trademarks Sorcim CBASIC2 trademark Compiler Systems Magic Wand trademark Small Business Applications Datebook II, Milestone trademark Organic Software Ultrasort-II, FABS trademark Computer Control Systems Magic Menu, Spell Menu trademarks Charles Merritt Spellguard trademark ISA CP/M, MP/M, CP/M-86, PL/1-80 trademarks Digital Research TRS-80 trademark Tandy Superbrain trademark Intertec Data Systems Copywriter, Copyproof, Diction trademarks Systronics Microstat trademark Ecosoft S-Basic trademark Topaz Programming UCSD trademark Regents University CA WordStar trademark Micro Pro Int'l Spellbinder trademark Lexisoft MCALL, AMCALL trademarks Micro-Call Services Basic 80, Fortran-80 trademarks Microsoft Pascal M/T trademark MT Microsystems Z80 trademark Zilog NorthStar trademark NorthStar Computers baZic trademark Micro Mike's **Prices subject to change without notice For shipping add $7. per package** California residents add tax Terms: Prepaid-check, M/C, VISA or in US COD (UPS) Dealer inquiries invited Prices quoted do not include dealer installation & training

Circle 127 on inquiry card.

Model 510 from Irwin. It costs $1500, which includes integral tape-cartridge backup.

TI Improves The 99/4 Home Computer: Texas Instruments is determined to make its TI 99/4 home computer a success. TI has improved the competitive position of the 99/4 by substantial price cuts and software improvements, the two areas in which the machine fared poorly. The new list price for the console is $649.95, a reduction of $300, and the radio-frequency (RF) modulator's price has been reduced from $75 to $50.

TI has introduced a software-development system that includes UCSD Pascal and a ROM (read-only memory) module with an assembly-language debugger. The console has been modified and includes dual floppy-disk drives and RS-232C interfaces. TI has also announced third-party software-incentive programs for software developers. TI plans to introduce extended BASIC and memory-expansion capabilities in the TI 99/4. Regrettably, TI has not seen fit to improve the keyboard or make any substantial hardware improvements other than the addition of memory.

More On Daisy-Wheel Printers: Daisy-wheel printers are the most widely used printers for letter-quality hard copy, but the market is undergoing substantial change. Last year, the number of daisy-wheel-printer manufacturers doubled. More competition meant lower prices and increased performance. The new entries came from Olivetti, Fujitsu, Ricoh, C Itoh, and Pertec. Qume and Diablo still dominate the market, but competitors are broadening their performance range from the traditional 45 to 55 cps (characters per second) to 15 to 80 cps.

The 45 to 55 cps range is dominated by Qume, an ITT subsidiary with 45% of the market, and Diablo, a Xerox subsidiary with 40% of the market. NEC also has a 10% market share, with the other companies dividing the remaining 5%. The prices of these machines should drop about $1000, to $2700 within the next two to three years, and the printer manufacturers will most likely introduce 30 cps versions selling for under $2000. Look for the 30 cps machines by year-end.

Expect a price war between the manufacturers of the lower-speed 15 to 20 cps printers. Prices may drop to $1200 or less by year-end. Those companies at loggerheads in this marketing war are Ricoh (which supplies Tandy), Olivetti, Pertec (which supplies machines made by Triumph-Adler), and C Itoh.

Fujitsu has already demonstrated an 80 cps daisy-wheel printer. Look for it in computer stores this summer. Qume, Diablo, and NEC are expected to introduce 80 cps machines, and some companies are working on 100 cps machines.

Ada On Microcomputers: At a recent ACM/SIGPLAN-sponsored meeting, TeleSoftware demonstrated the new Ada language on a 16-bit microcomputer. The compiler is 50 K bytes, supports run-time utilities, and produces pseudocode that runs directly on a Western Digital Pascal/Ada Microengine system. TeleSoftware said that the Ada code could be converted to the native code of some other microprocessor by use of a simple p-code interpreter (p-code is the machine language executed by the Microengine). Ken Bowles, the developer of UCSD Pascal and founder of TeleSoftware, said the company also intends to provide Ada compilers for 8086-, 68000-, and Z8000-based systems.

Western Digital will manufacture the Pascal/Ada Microengine for $12,750. It will include 128 K bytes of programmable memory, five I/O ports, a 10-slot chassis, video-display terminal, dual floppy-disk drives, and a line printer. The basic system will cost $6210. Western Digital also said that it soon expects to release a hard-disk controller, a cryptographic security module, a distributed multiprogramming operating system, and an X.25 packet-switching and local network product for the processor.

Computer Bulletin Boards Grow In Popularity: There are over 200 CBBS (computer bulletin board systems) in this country and their number grows weekly. Anyone with a terminal, modem, and telephone can access them. (If you use an Apple computer, they are called ABBS.) Most CBBS and ABBS serve as message centers for computer clubs. Some systems distribute software; for this service, a caller needs a computer with modem-driver software for file transfers.

Other bulletin board systems serve special interests (eg: AMRAD's Blind Service CBBS 703-281-2222, the Family Historians' CBBS 703-978-7561, and Aviators' BBS 916-393-4459). For more information on all of these systems and how to access them, call the MAG-MEDIA-80 CBBS (415) 573-8768.

Here Come The Japanese: Expect to see several Japanese personal-computer systems in US stores this fall. Most of the systems will compete directly with the Apple II, Commodore PET, and Radio Shack TRS-80. They'll sell for the same price, perhaps slightly less, but offer extra features. NEC (Nippon Electric Company) will market the PC-8001 at the same price as the Apple II. (See "The NEC PC-8001: A New Japanese Personal Computer," by Michael Keith and C P Kocher, January 1981 BYTE, page 72.) Its features will match or exceed the Apple's. Matsushita (known in America as Quasar and Panasonic) and Sharp are also expected to have their systems on dealer shelves this fall. The Z80-based Sharp system is already on sale in England. One English distributor has already adapted CP/M for it.

Shopping Via Computer: Comparison retail shopping by home computer appears to be the wave of the future. One of the first computerized retailers is Comp-U-Card of Stamford, Connecticut. It claims to have 1.5 million members, of which 5000 already have computer I/O capability. To become a member it costs $18 per year, or $9 if you come under a group plan. To access the service's base of more than 30,000 items, you call it either via a toll-free telephone number or a two-way cable TV hookup. Comp-U-Card presents product specifications, price, and delivery charges. You can order any item at a typical savings of 20 to 40% or just use the service to compare prices.

Data-Base Systems Ex-

The VP-111 hobby computer: Start programming for only $99.

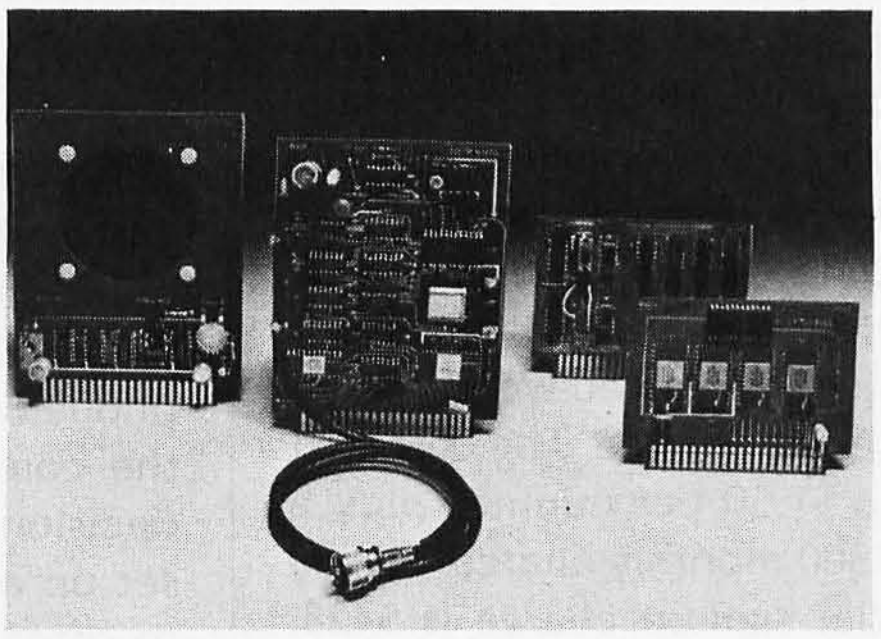

New! VP-111 Microcomputer .... $99. Assembled* and tested.

Features:

- RCA 1802 Microprocessor.
- 1K Bytes static RAM.

Expandable on-board to 4K.
Expandable to 32K Bytes total.

- 512 Byte ROM operating system.
- CHIP-8 interpretive language or machine language programmable.
- Hexidecimal keypad.
- Audio tone generator.
- Single 5-volt operation.
- Video output to monitor or modulator.
- Cassette interface—100 Bytes/sec.
- Instruction Manual with 5 video game listings, schematics, CHIP-8, much more!

Ideal for low-cost control applications. Expandable to full VP-711 capability with VP-114 Kit.

*User need only connect cables (included), a 5-volt power supply and speaker.

New low price! VP-711, only......... $199. Completely assembled and tested.

All the features of the VP-111 plus:

- A total of 2K Bytes static RAM.
- Power supply.
- 8 Bit input port.
- 8 Bit output port.
- I/O port connector.
- System expansion connector.
- Built-in speaker.
- Plastic cover.

Three comprehensive manuals:

- Instruction Manual—20 video game listings, schematics, much more.
- User's Guide—operating instructions and CHIP-8 for the beginner.
- RCA 1802 User's Manual (MPM-201B)—complete 1802 reference guide.

Add computer power a board at a time.

With easy-to-buy options, the versatile RCA hobby computer means even more excitement. More challenges in graphics, games and control functions. For everyone, from youngster to serious hobbyist.

Built around an RCA COSMAC microprocessor, our hobby computer is easy to program and operate. Powerful CHIP-8 interpretive language gets you into programming the first evening. Complete documentation provided.

Send the coupon now...
Complete the coupon below and mail to:
RCA MicroComputer Customer Service,
New Holland Ave., Lancaster, PA 17604.

Or call toll free (800) 233-0094 to place your Master Charge or VISA credit card order. In Pennsylvania, call (717) 397-7661, extension 3179.

RCA

Please send me the items indicated.

☐	**VP-111**	New low cost Microcomputer (See description above)	$ 99
☐	**VP-114**	Expansion Kit for VP-111—Includes 3K RAM, I/O Port and connectors	$ 76
☐	**VP-711**	The original VIP Microcomputer (See description above)	$199
☐	**VP-44**	RAM On-Board Expansion Kit—Four 2114 RAM ICs. Expands VP-711 memory to 4K Bytes	$ 36
☐	**VP-590**	Color Board—Adds color. Four background and eight foreground colors	$ 69
☐	**VP-595**	Simple Sound Board—Provides 256 programmable frequencies. For simple music or sound effects. Includes speaker	$ 30
☐	**VP-550**	Super Sound Board—Turns VP-111/711 into a music synthesizer! Two independent sound channels. Outputs to audio	$ 49
☐	**VP-551**	4-Channel Super Sound—Includes VP-576 and demo cassette. Requires VP-550 and 4K RAM	$ 74
☐	**VP-570**	Memory Expansion Board—Plug-in 4K RAM memory	$ 95
☐	**VP-580**	Auxillary Keypad—Adds two-player interactive capability. Connects to VP-590 or VP-585	$ 20
☐	**VP-585**	Keypad Interface Board—Interfaces two VP-580 Auxiliary Keypads to VP-111/711	$ 15
☐	**VP-560**	EPROM Board—Interfaces two 2716 EPROMS to VP-111/711 ..	$ 34
☐	**VP-565**	EPROM Programmer Board—Programs 2716 EPROMs. With software	$ 99
☐	**VP-575**	Expansion Board—Provides 4 buffered and one unbuffered expansion sockets	$ 59
☐	**VP-576**	Two-Board Expander—Allows use of 2 Accessory Boards in either I/O or Expansion Socket	$ 20
☐	**VP-700**	Tiny BASIC ROM Board—BASIC code stored in 4K of ROM	$ 39
☐	**VP-701**	Floating point BASIC for VP-711 on cassette. Requires 16K Bytes RAM (avail. 7/80)	$ 49
☐	**VP-710**	Game Manual—Listing for 16 exciting games	$ 10
☐	**VP-720**	Game Manual-II—More games ..	$ 15

Keyboards & Terminals

☐	**VP-601**	Keyboard—128-character ASCII encoded alphanumeric 8-bit parallel output	$ 69
☐	**VP-606**	Keyboard—Same as VP-601. Asynchronous serial output	$ 99
☐	**VP-611**	Keyboard—Same as VP-601 plus 16-key numeric keypad	$ 89
☐	**VP-616**	Keyboard—Same as VP-606 plus 16-key numeric keypad	$119
☐	**VP-620**	Cable—Connects VP-601/611 to VP-111/711	$ 20
☐	**VP-623**	Cable—Unterminated for VP-601/611	$ 20
☐	**VP-626**	Connector—Male "D" mates to VP-606/616	$ 7
☐	**VP-3301**	Interactive Data Terminal	$369
☐	**VP-3303**	Interactive Data Terminal with built-in RF output...........	$389

Enclosed is $_____ for items checked plus shipping & handling charge of $3.00.
Add your state and local taxes $_____ Total enclosed $_____
I enclose ☐ check or ☐ money order. Or charge my ☐ VISA ☐ Master Charge.
Credit card account No. _____
Master Charge Interbank No. _____ Expiration date _____
Signature (required for credit orders): _____
Name (please type or print): _____
Street address: _____ City: _____
State & Zip: _____ Telephone:( )

Make checks payable to RCA Corp. Prices and specifications are subject to change without notice.

Circle 351 on inquiry card.

panding: The need to access reference material has become much easier because of computerized database distributors. For example, a lawyer can access the Nexis system from Mead Data Central, 200 Park Ave, New York NY 10017, for a special keyed-word newssearch service. The cost is $1 to $1.50 per minute, plus a $300 monthly charge. The initial sign-up charge is $425. There are many lower-cost data-base services catering to the special needs of various professionals.

For information on database systems, consult the *Directory of On-Line Data Bases*, published by Cuadra Associates, 1523 Sixth St, Suite 12, Santa Monica CA 90401. The price is $60 per year (four issues).

Computer Makers To Market Private Software: If you develop software for the HP-85 desk-top system in your spare time, Hewlett-Packard has a plan for marketing it. Hewlett-Packard will pay a royalty for the software and offer to sell you a system at a discount. Burroughs has a similar plan.

GM On Robotics Shopping Spree: GM has ordered 25 robots for its transmission-machining lines at its Warren, Michigan, facility. This is the largest undertaking of its kind in the automotive industry. The robots will cost almost $2 million. GM plans to buy as many as 1800 programmable robots between now and 1984.

In a related development, GM will use laser checking devices on its J-car-body assembly lines; the devices will check 20 to 30 points on each car for proper body fit and panel alignment. There will be no contact with the auto during this checking procedure.

AT&T To Enter Computer Market: In a landmark decision, the FCC will allow AT&T (American Telephone & Telegraph) to enter the computer business. The decision requires AT&T to set up a separate subsidiary to offer terminals and computer-enhanced services. Industry pundits speculate that AT&T will position itself to capitalize on the marriage of the telephone and computer technologies.

Used Word-Processor Market Burgeoning: You can save quite a bit of money by buying a used word processor. IBM, Xerox, Lanier, and Vydec systems are becoming available as companies upgrade to newer, more powerful machines. In Minneapolis, Word Systems Inc specializes in selling used word-processor systems, although they are also available through many other dealers.

Extra-Life Printer Ribbons: Replacing printer ribbons is expensive. Here's how to revive worn-out closed-loop ribbons housed in plastic cases: carefully pry open the case without disturbing the ribbon. Spray the ribbon lightly (don't overspray) with an all-purpose lubricant such as WD-40, close the case, and let it stand overnight. The lubricant causes the ink from the moist unused portions of the ribbon to flow down into the dry areas of the ribbon. This renewal process can usually be repeated several times before the ribbon is completely exhausted.

Random News Bits: United States Robots, Conshocken, Pennsylvania, claims to have developed a five-jointed robot arm using seven microprocessors—one for each joint, one for math calculations, and one for overall coordination. The microprocessors do multiprocessing on a shared bus and memory system. ...Toshiba and Hitachi have demonstrated "pocketbook TVs" that typically use 120- by 160-element LCDs (liquid-crystal displays). Matsushita and Hitachi reportedly will introduce products next year using these displays. ...Interested in learning more about possible health hazards associated with CRT (cathode-ray tube) terminals? Then you should get a copy of the 16-page pamphlet entitled *Health Protection for Operators of DCTs/CRTs*. It's published by the New York Committee for Occupational Safety and Health, 32 Union Sq, Rm 404, New York NY 10003 ($1 for individuals; $3 for institutions).

Random Rumors: Apple Computer may put off its plans to build 5-inch Winchester-disk drives for the Apple III and the rumored Apple IV. Apple has reportedly inked a contract for 10,000 six-megabyte ST-506 drives from Seagate Technology. Apple still plans to produce a hard-disk drive for introduction next year. ...It is rumored that Digital Equipment Corporation has developed a single-integrated-circuit version of the PDP-11 and that it exists in prototype form. No production plans have as yet been established. ...There is a lot of talk circulating that Xerox will soon release a version of the Smalltalk programming language and a complete book describing it. Most likely it will be released to universities who presently have the Xerox Alto system (an experimental personal computer). ...*Electronic News* recently reported that IBM and Tandy were holding discussions on the possibility of IBM 3103 video terminals being sold through Radio Shack stores. ...According to a report issued by International Resource Development Inc (IRD) in Norwalk, Connecticut, IBM, Xerox, and Matsushita will introduce typewriters with voice input by 1983. IRD predicts that the typewriters will correctly recognize 93% of "typical business English as spoken by the average executive," and that the unit will have a video screen that displays the spoken words. Corrections and changes can be made on the screen....

MAIL: I receive a large number of letters each month as a result of this column. If you write to me and wish a response, please include a self-addressed, stamped envelope.

Sol Libes
POB 1192
Mountainside NJ 07081

LAST 60 DAYS TO SAVE $200 ON OUR

8 Mhz. 8086 CPU Set

Now $595 — Price returns to $795 on July 1

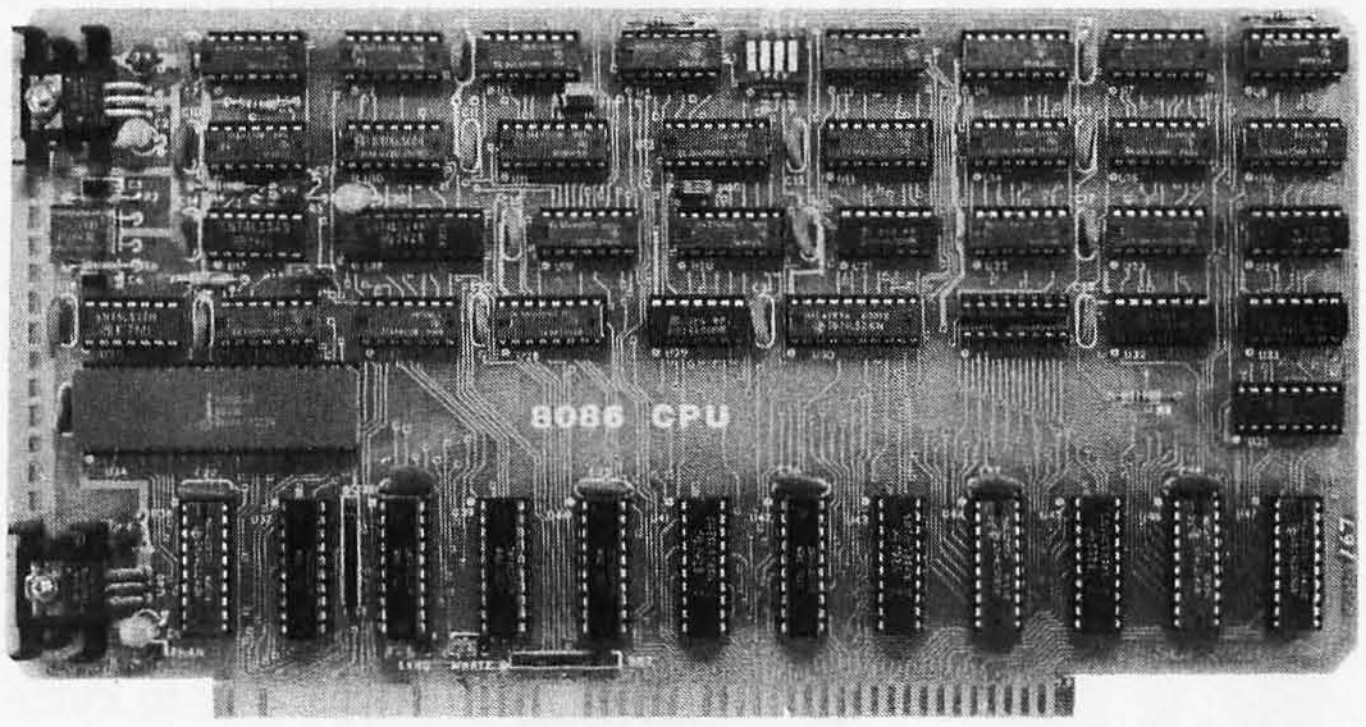

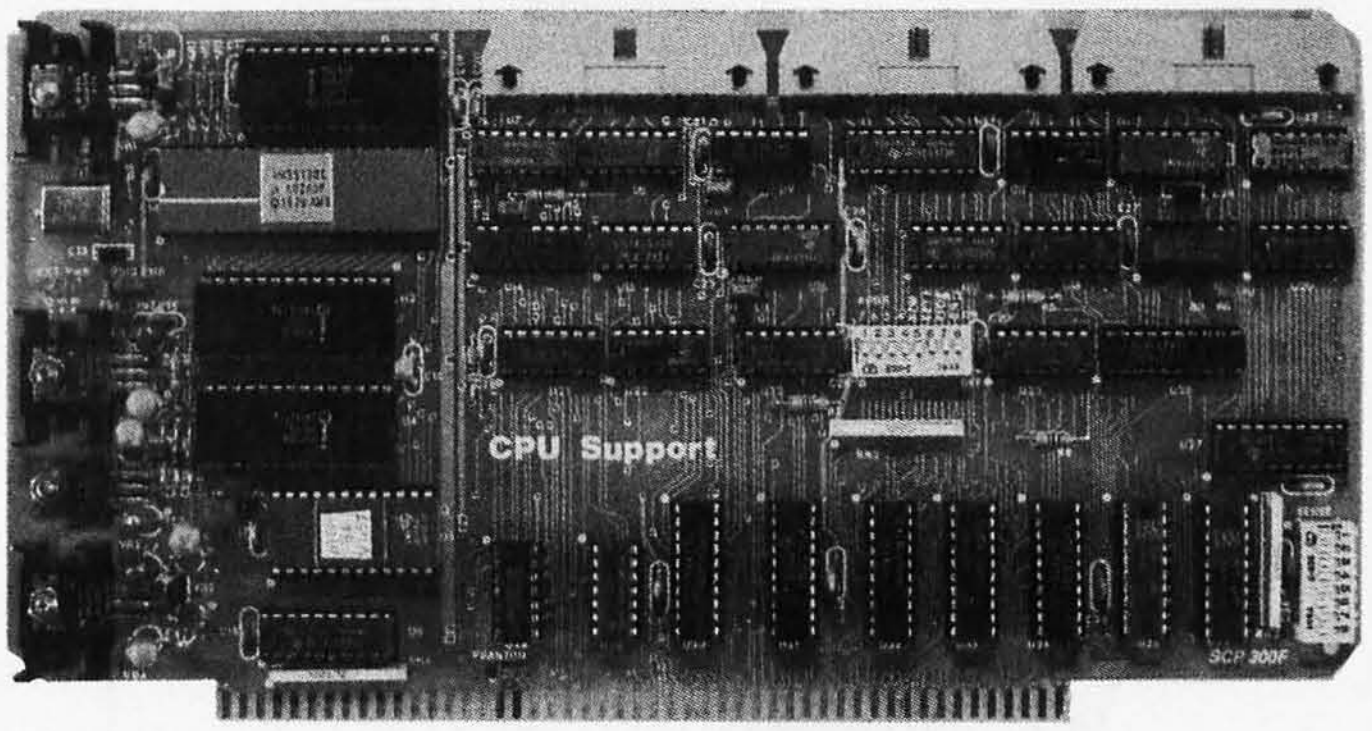

MEMORY — Our two card 8086 CPU set is the only high-performance 16-bit processor for the S-100 bus that allows using standard 8-bit memories for economy or IEEE 16-bit memories for speed — in any mix.

16-BIT OR EXTENDED ADDRESSING — Special circuitry is included to allow memories without IEEE extended addressing to be used in systems with more than 64K (uses PHANTOM).

FAST 8 MHZ. OPERATION — Gives you high performance without requiring expensive memory. Most any 250 nsec. static memory board will do the job. Or, at the flip of a switch, a 4 Mhz. clock may be selected and/or a wait state may be added.

2-CARD CPU SET — Includes serial I/O, parallel I/O, a monitor in 2716 EPROM, a time-of-day clock, and a very flexible and expandable vectored interrupt system.

Price includes 86-DOS™

DEVELOPMENT SOFTWARE — 86-DOS provides a complete package of development software, including editor, assembler, debugger, Z80 to 8086 source code translator, and utilities.

I/O CONFIGURATION — The hardware-dependent portions of the I/O system have been isolated into a single module. Full specifications are provided to allow customizing the module for a given hardware configuration.

MICROSOFT BASIC-86

IT'S THE STANDARD — This BASIC is essentially identical to version 5 of Microsoft's BASIC interpreter, the accepted standard with widely available application programs. Programs distributed in CP/M® format are easily converted to the 86-DOS system. (CP/M is a registered trademark of Digital Research.)

IT'S FAST — It is two to seven times faster than BASIC-80 on a 4 Mhz. Z-80, depending upon application.

BREAKING THE 64K BARRIER — How many of you can run an extended disk BASIC and see the message "63309 Bytes free" when it signs on?

RUNS UNDER 86-DOS — Our high-performance operating system can load the 30K BASIC interpreter in less than 2 seconds. Loading BASIC programs is done with similar speed. This is several times faster than competing operating systems.

PRICE: $350 To registered SCP 8086 CPU owner, $500 to others.

8 Mhz. 2-card CPU Set With 86-DOS

ASSEMBLED, TESTED, GUARANTEED

$595

DRIVERS AVAILABLE for following disk controllers: Tarbell SD, Tarbell DD, Cromemco 4FDC, Northstar SD.

Please specify disk controller from among those supported.

Seattle Computer Products, Inc.
1114 Industry Drive, Seattle, WA. 98188
(206) 575-1830

Circle 363 on inquiry card.

Continued from page 20:

Resistible Puzzle

John Moore revived the earlier-published problem of creating a network with resistance of 355/113 (a very close approximation to π) with a minimum number of unit-valued resistors. (See the January 1981 BYTE, page 16.) He improved greatly on W Lloyd Milligan's 26-unit solution (see the August 1980 BYTE, page 20) by presenting two 18-unit solutions and asking if anyone could find a solution with 17 or fewer resistors.

By abandoning their continued-fraction method in favor of one based on Diophantine equations (those having positive, non-zero integer solutions), I was able to come up with two different 15-unit solutions. (See figures 1a and 1b.)

I believe these two to be minimal, and essentially the only minimal solutions (ie: except for other solutions created by trivial transpositions of series and parallel elements in one of these resistors) within the class of networks examined by this method and by the continued-fraction method (ie: all simple series-parallel networks).

But there are many more ways to connect a handful of resistors than just in simple series-parallel networks!

I looked for a solution with a bridge as a part of the total network. With the help of a TI-58 programmable calculator, I was able to find a 14-unit solution. (See figures 2 and 3 on page 270.)

Of course, with 12 or 13 resistances to connect together in an arbitrary fashion, much more complicated figures than bridges are possible. Unfortunately, the calculation of resulting network impedance, and the searching through the various configurations, becomes correspondingly complex. I suspect that the 14-unit solution can be improved upon.

David F Smith
3033 Turk Blvd, #3
San Francisco CA 94118

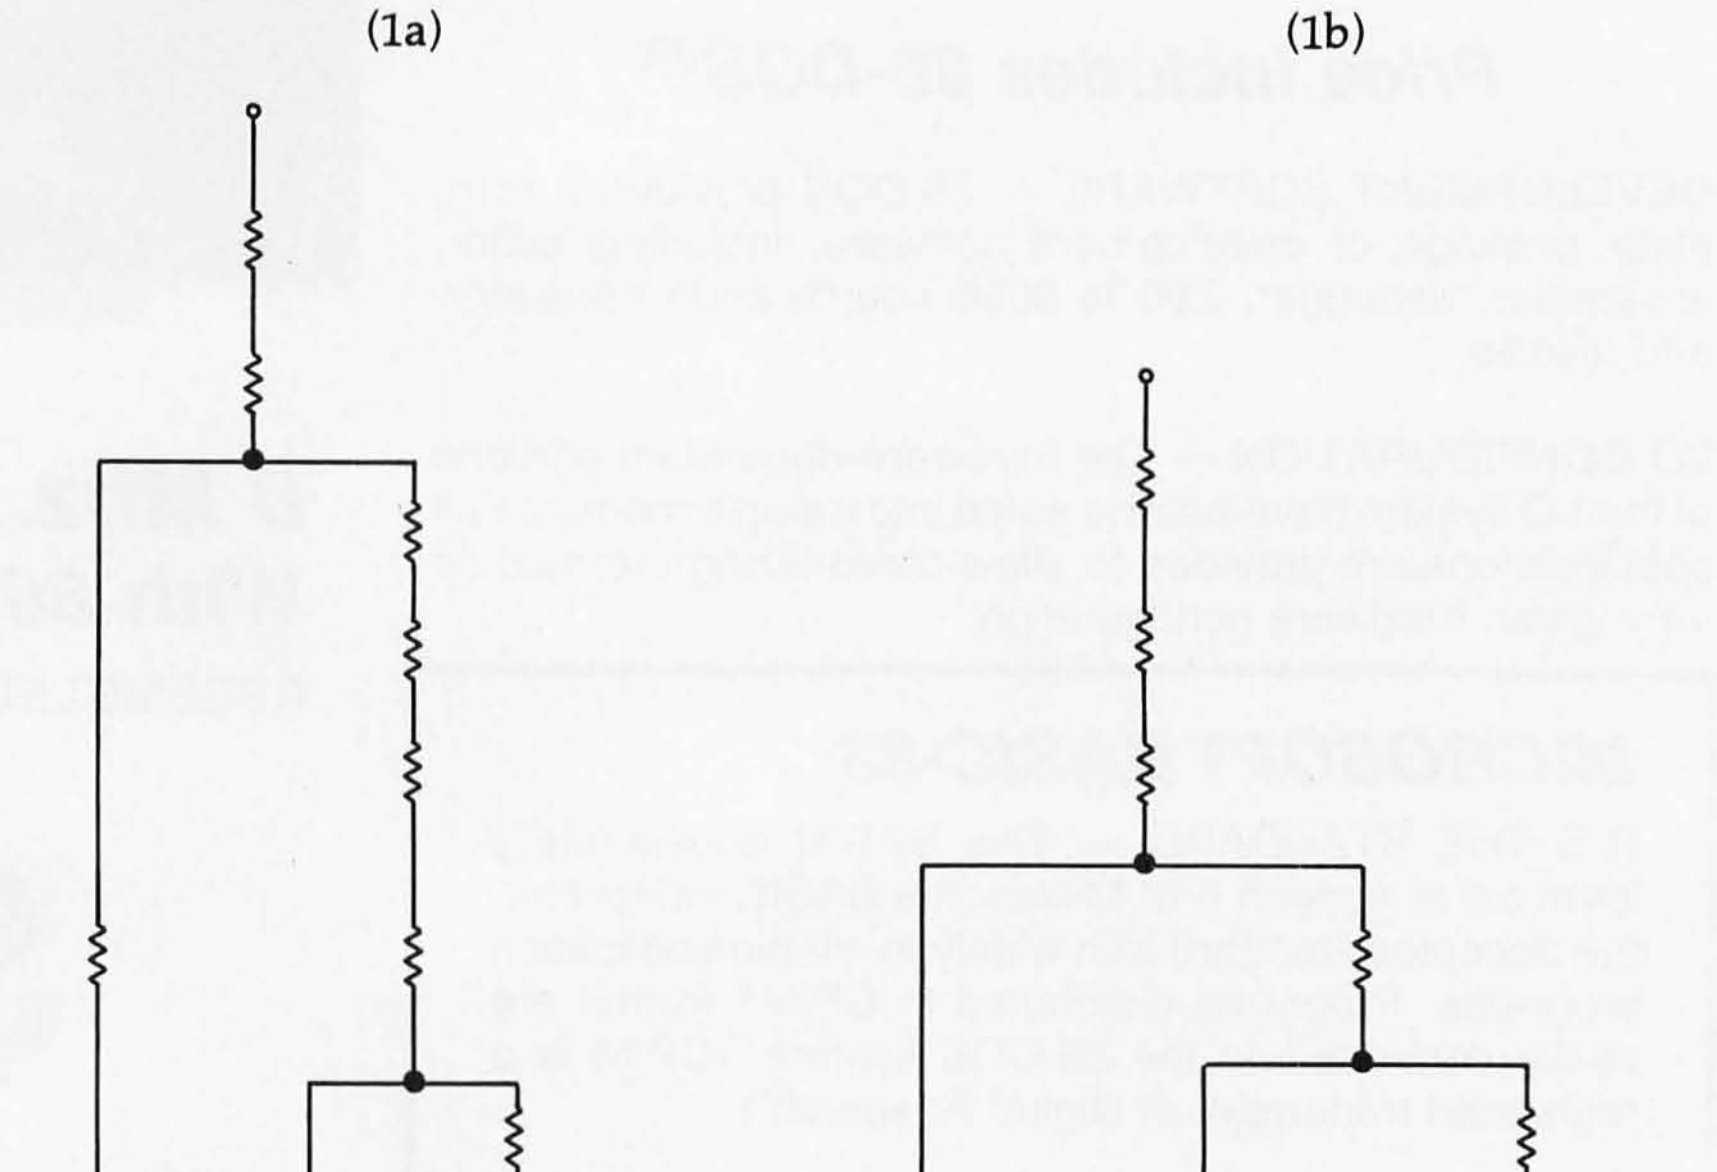

Figure 1: *Two 15-unit networks with* $Z = \frac{355}{113}$

COLLECTOR EDITION

BYTE COVERS

#1

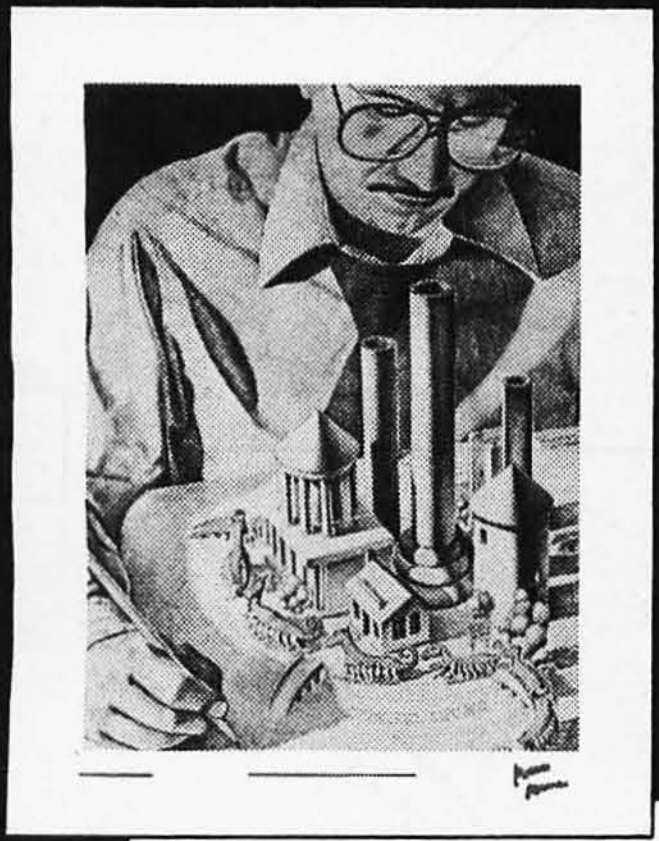

#5

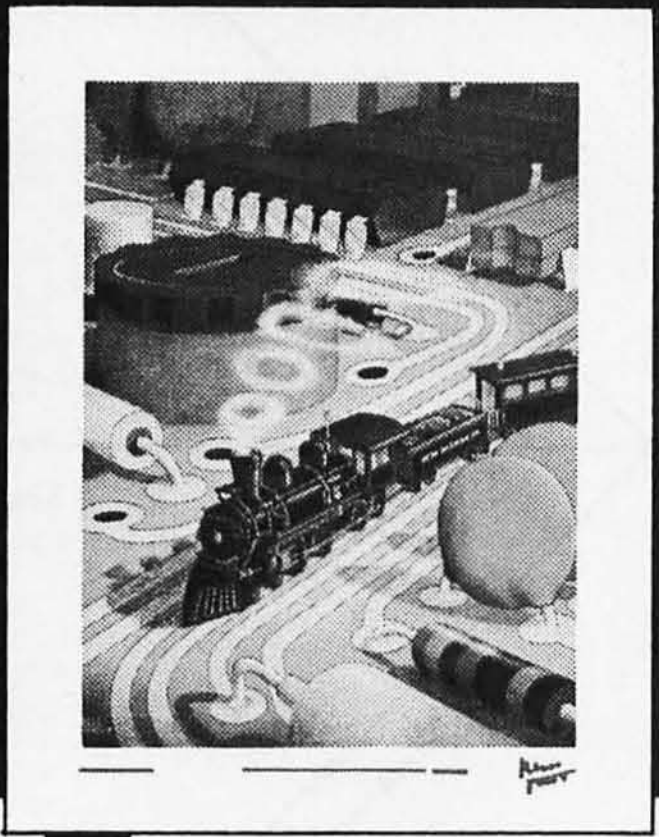

#2

#6

#3

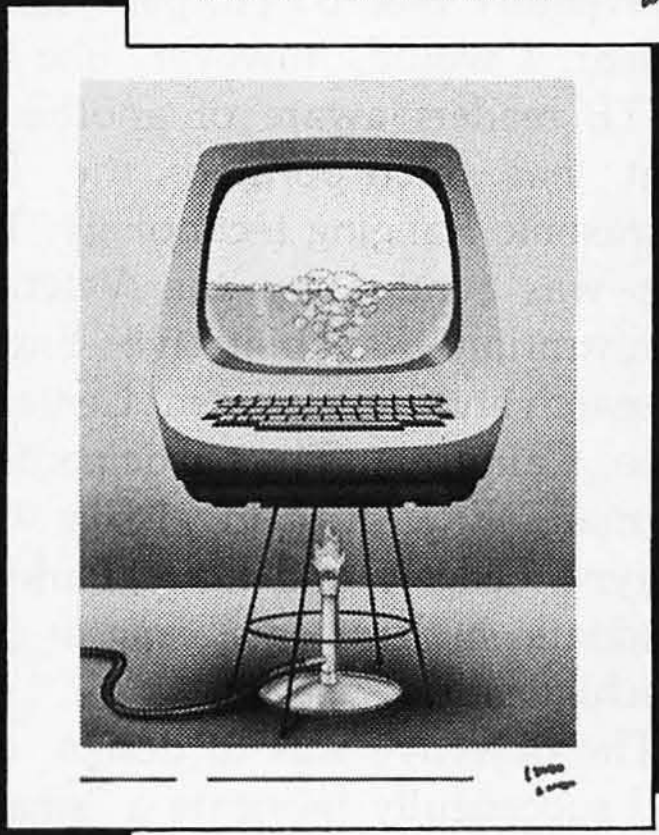

#7

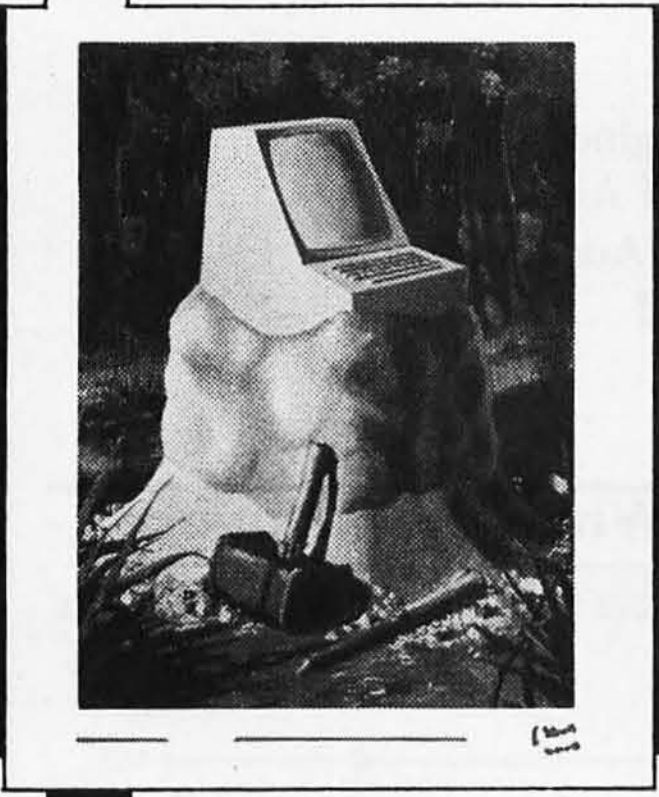

#4

#8

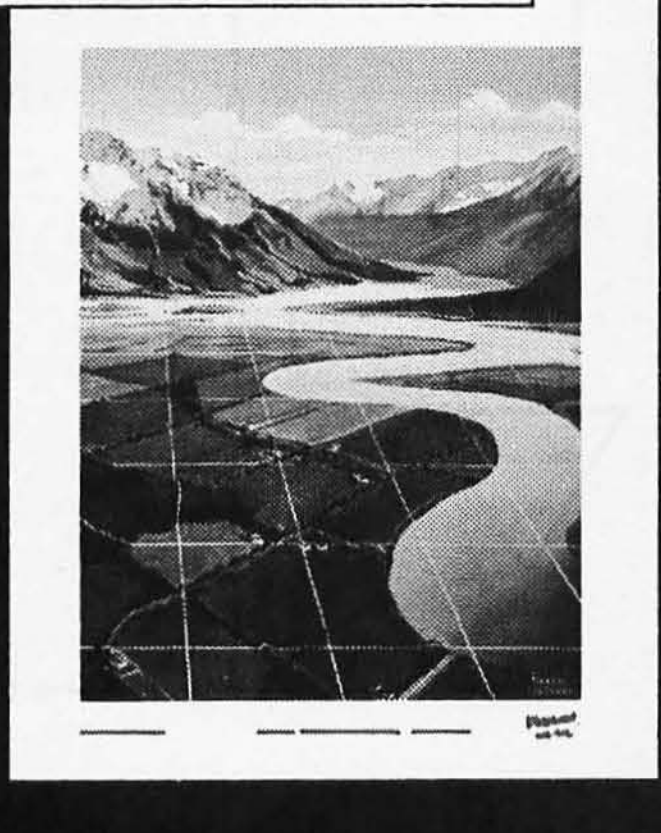

The Byte Covers shown at left are available as Collector Edition Prints. Each full color print is:

- 11″ X 14″ including a 1½″ border.
- Part of an edition strictly limited to only 100 prints.
- Personally inspected, signed and numbered by the artist, Robert Tinney.
- Accompanied by a Certificate of Authenticity.
- Carefully packed and shipped first class.
- Priced at $20, plus $3 ($6 overseas) for postage and handling. If Set 1-4 or Set 5-8 is ordered, the price for all 4 prints is only $70.

To order, use the coupon below. Visa or MasterCharge orders may call Toll Free.

Please send me the following Collector Edition Byte Covers and Certificates of Authenticity.

Qty.	Cover	Amount
____	#1-7 Bridges of Konigsberg	$20
____	#2-Fun and Games	$20
____	#3-Homebrew	$20
____	#4-Software Mirage	$20
____	#5-Computer Engineering	$20
____	#6-Total Eclipse	$20
____	#7-Computer Hardware	$20
____	#8-Perspectives	$20
____	No.'s 1-4	$70
____	No.'s 5-8	$70

Post. & hand. ($3 in US , $6 overseas) $ ______

Total $ ______

☐ I have enclosed check or money order

☐ Visa ☐ MasterCharge

Card # ______

Expiration Date ______

Send my print(s) to:

Name ______

Address ______

City ______

State ______ Zip ______

Mail this coupon to:

robert tinney graphics
1864 N. Pamela Dr.
Baton Rouge, LA
70815

FOR VISA OR MASTERCHARGE ORDERS

CALL TOLL FREE!

1-800-854-0562/Ext. 910

Calif.: 1-800-432-7257/Ext. 910

24 HOURS A DAY! 7 DAYS A WEEK!

Figure 2: *A 14-unit network with Z =* $\frac{355}{113}$

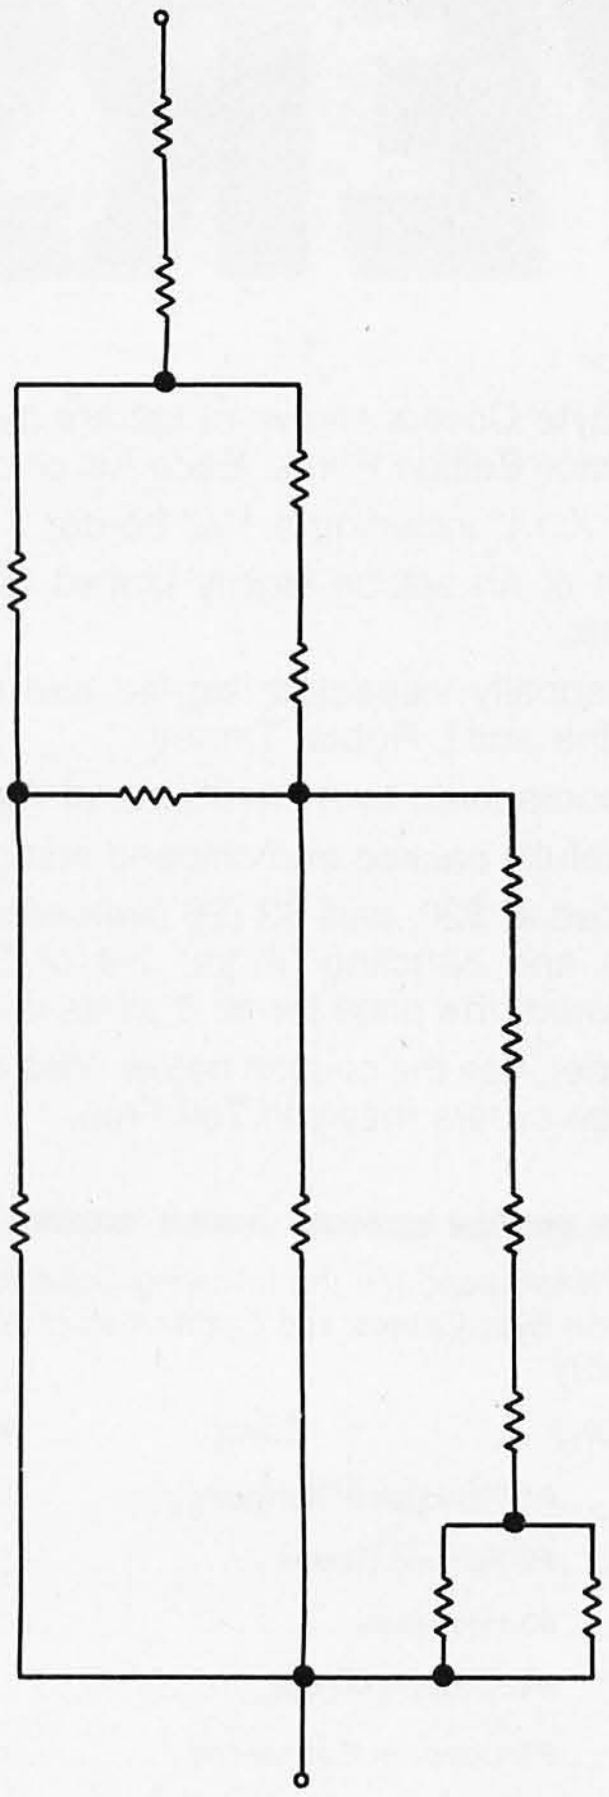

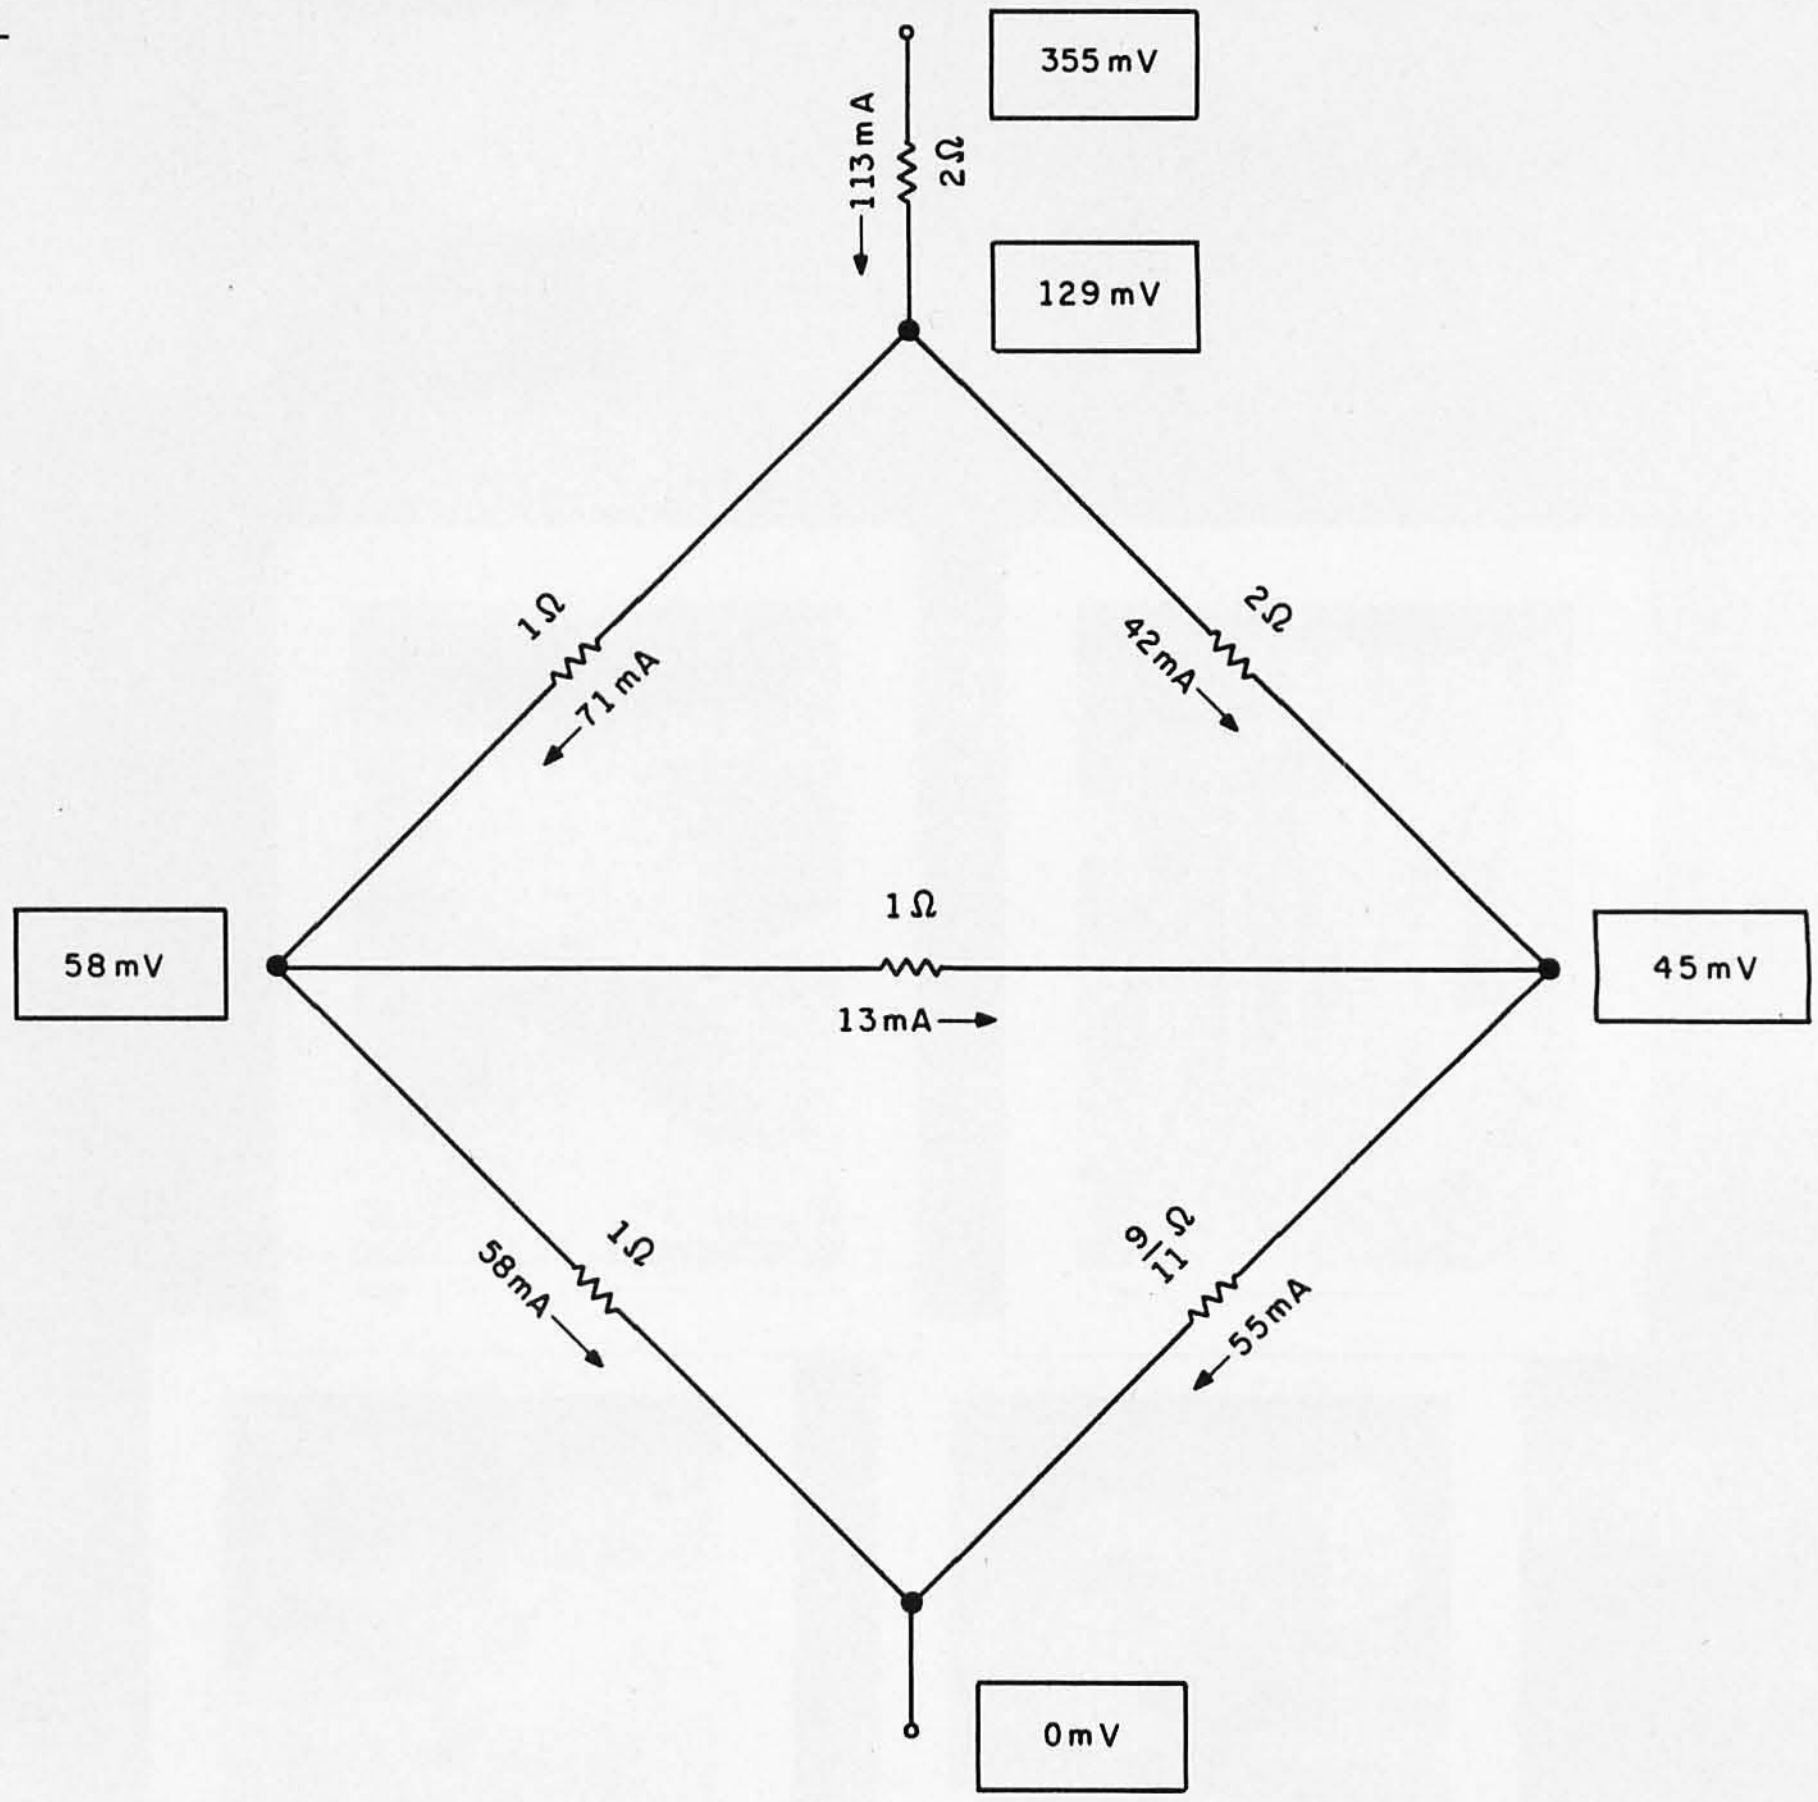

Figure 3: *Voltages and currents in the 14-unit network with 355 mV across it.*

Easier Communication in Two Directions

Mark R Titchener's article "Communications in Two Directions" (June 1980 BYTE, page 96) presents a circuit to communicate bidirectionally on a single line; however, it requires too many components. An easier way to do it is shown in figure 4. This circuit will work for both analog and digital signals. Using standard op-amp theory, it is easily shown that V4 = V2 and V3 = V1. Line impedance can be compensated for by making R0 variable.

R Gupta
Electrical Engineering
University of Auckland
Private Bas, Auckland
New Zealand

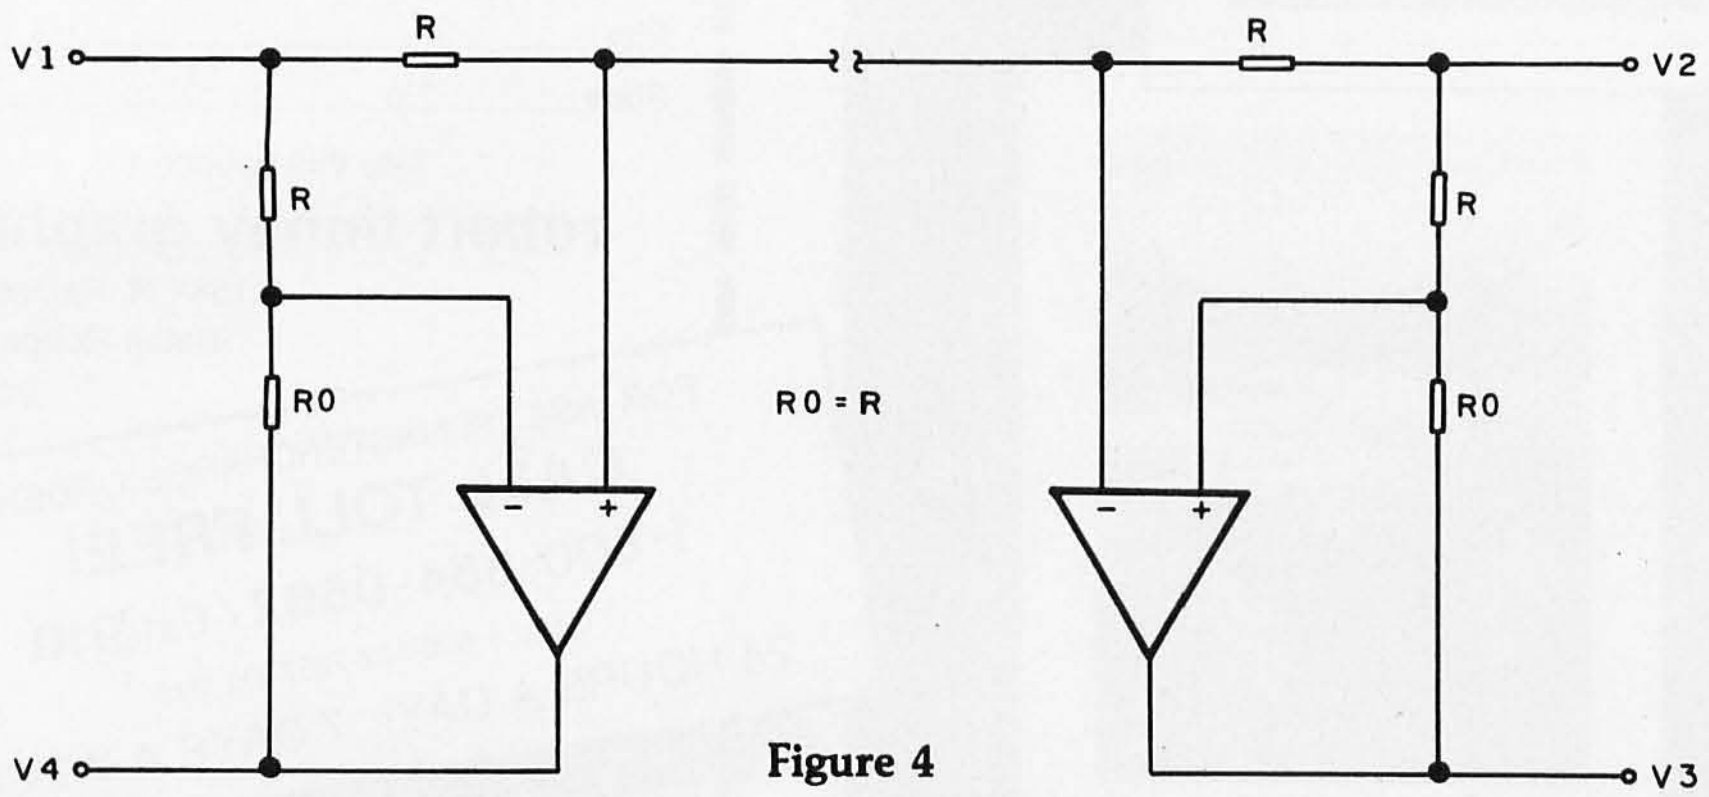

Figure 4

Smart Wheelchair Project

Steve Ciarcia's article "Home in on the Range! An Ultrasonic Ranging System" (November 1980 BYTE, page 32) was excellent. I would, however, like to make BYTE readers aware of another project that has incorporated the Polaroid Ultrasonic Ranging technology. The project was funded by the Veterans Administration Rehabilitative Engineering Research and Development Center of Palo Alto, California. The participants, Karen Altman, Rick Epstein, Leslie Gerding, Wayne Ledger, and Dave Parker, were graduate students last year at Stanford Mechanical Engineering.

The objective was to design, develop, and successfully fabricate a "smart" electronic wheelchair. Its construction included ten ultrasonic sensors, eight of which were used to detect approaching obstacles or the presence of a wall on either side of the chair. The remaining sensors were focused on the user's head from two angles.

The chair has many modes of operation: the most important is the head-control mode. Here, the user directs the movements of the chair by head motions. To move the chair forward, the user posi-

SUPERBRAIN®* & COMPUSTAR™*
USERS' GROUP

We're Celebrating!

Won't You Join Us?

We will not be undersold by any regularly advertised price.

NOW FOR A LIMITED TIME, THIS SPECIAL OFFER

JOIN SUPER★STAR INTERNATIONAL FOR THE REGULAR YEARLY MEMBERSHIP FEE AND RECEIVE A FREE DISKETTE WITH THE FOLLOWING PROGRAMS:

- "RECOVER", it allows you to recover an erased program
- "AUTO LOAD", it enables you to load and run a program automatically
- "RETURN", it gets you back into a crashed program from CP/M[1]
- the game "OTHELLO".

Since our first ad in March 1981, we have been contacted from as far away as South America, Europe, Australia, and Indonesia. Super★Star International is becoming a world-wide family whose members will enjoy the benefits of a wide range of hardware and software developments.

Our full color, monthly magazine will print a free program in every issue—programs like an appointment calendar and personal finance record keeping. You'll also find technical information, tips for beginners, special business uses, equipment reviews, and the Intertec Story—the people, ideas, and machines behind your computer.

WE GIVE YOU VALUE!

Purchase just one commercial program and you will save more than the price of our membership fee. Rent a car or stay in a hotel offered in our discount program and save even more, not to mention insurance discounts, a market place for your own software, and a shoulder to lean on if something isn't working quite right.

Super★Star International—with savings, service, and efficiency—we're here to win your heart.

SUPER★STAR

SUPER★STAR INTERNATIONAL CORPORATION
3722 Chestnut Place, Denver, Colorado 80216 • (303) 623-7973

Dealers are invited to contact us concerning a special dealer program.

* TRADEMARKS OF INTERTEC DATA SYSTEMS
1 REGISTERED TRADEMARK OF DIGITAL RESEARCH
2 REGISTERED TRADEMARKS OF MICROPRO INTERNATIONAL CORPORATION
3 REGISTERED TRADEMARK OF SMALL BUSINESS APPLICATIONS INC

WE NOW OFFER A WIDE RANGE OF PRODUCTS

A few may still be under development at the date of this issue.

Software

- Diagnostics—for the CPU, Memory, Disk Drives and more
- Word Processing—WordStar[2], MailMerge[2], WordMaster[2], Magic Wand[3]
- Languages—Cobol, Fortran, Pascal, Forth, etc.
- Utilities—Assemblers, Disassemblers, Monitor
- Games—Chess, Adventure, Star Trek, and more
- Business—Accounts Payable, Accounts Receivable, General Ledger, Inventory, SuperSort[2], DataStar[2], and the most powerful, easy to use business package for the CompuStar, which automatically updates all the information at the point of entry, eliminating time consuming sorts and reducing errors

Hardware

- S-100 Adaptor
- External Controls
- Add-on Disk Storage

Enhancements

- Upgrades for ALL SuperBrains
- SuperDOS (Fantastic!)
- Add-on character sets-including graphics

AND MUCH, MUCH MORE!

Yearly membership fee is $50.00 U.S., $58.00 Canada, $74.00 Europe and So. America, $81.00 Australia.

Your fee may be tax deductible.

Send checks with your name and address, made out to: Super★Star International.

I would like to join Super★Star International. Enclosed in my check for $__________
Name __________ Company __________
Address __________ Phone __________
City/State/Zip __________
Computer Model __________ Version __________

Circle 450 on inquiry card.

tions his or her head toward the front of the chair. Similar operations control the three remaining directions. In effect, the user's head is a proportional-control joystick. One can readily see that this type of noncontacting control would be helpful for people who have no usable arm function.

In operation, the front-facing ultrasound sensors detect the presence of obstacles in the chair's path. When such an obstacle comes within a predetermined distance, the chair automatically slows and stops before running into it. If the "obstacle" moves away, the chair will follow at a fixed distance.

Side sensors serve to detect walls. A mode to "follow that wall" enables a chair to travel parallel to the chosen wall at a fixed distance. Open doorways are detected and passed over, but a discontinuity of more than a few feet disables the wall-following mode and waits for further commands from the user.

A "cruise control" mode does not use any additional sensors, but instead relies on wheel-speed data obtained from two optical shaft encoders. Once in this mode, the chair proceeds at a constant speed and heading despite changes in terrain.

A final mode allows the head to be moved without affecting the chair.

The user initializes the system to the range of his or her head motion by means of a "training" program that instructs the user to center the head, to move it to the left or right, and forward or backward. The program uses this information to calibrate the position/speed algorithm as well as set up a dead band around the user's rest position.

The hardware presently consists of a Z80 microprocessor, 64 K bytes of memory, and an external disk-drive system. Once the program is loaded, the disk is disconnected and the user drives off. The software executive is written in BASIC, with a majority of the actual real-time program coded in machine language and as arithmetic function calls. The listing consumes 40 pages.

The current construction phase will shrink the initial hardware and software configuration by one-third. A final design will capture the features on a single printed-circuit board.

The approach taken in pursuit of the interface between the ultrasound sensors and the microprocessor is considerably different from the method described in Steve's article. Since the Polaroid kits were not available at the time of construction, several new cameras were sacrificed to acquire the parts required. In addition, the computer interface was done not at the EDB level, but at the custom ultrasound board level. To perform a ranging, the computer generates a transmit request pulse via a convenient parallel output bit. The output from the board is then interrogated to start a software timing loop that is terminated by the received echo signal. The number of times the loop is performed gives a fairly precise measure of the range. Dividing this value by an appropriate factor will yield the range in whatever units are required. In the course of the project, a resolution of about a quarter of an inch was obtained over distances ranging from 9 inches to 20 feet (depending on surface characteristics).

Additional information about this ongoing project can be obtained by writing me at the address below.

David L Jaffe
Palo Alto VA Medical Center
Rehabilitative Engineering Research and Development Center
3801 Miranda (153)
Palo Alto CA 94304■

dBASE™ II vs. the Bilge Pumps.

by Hal Pawluk

We all know that bilge pumps suck.

And by now, we've found out—the hard way—that a lot of software seems to work the same way.

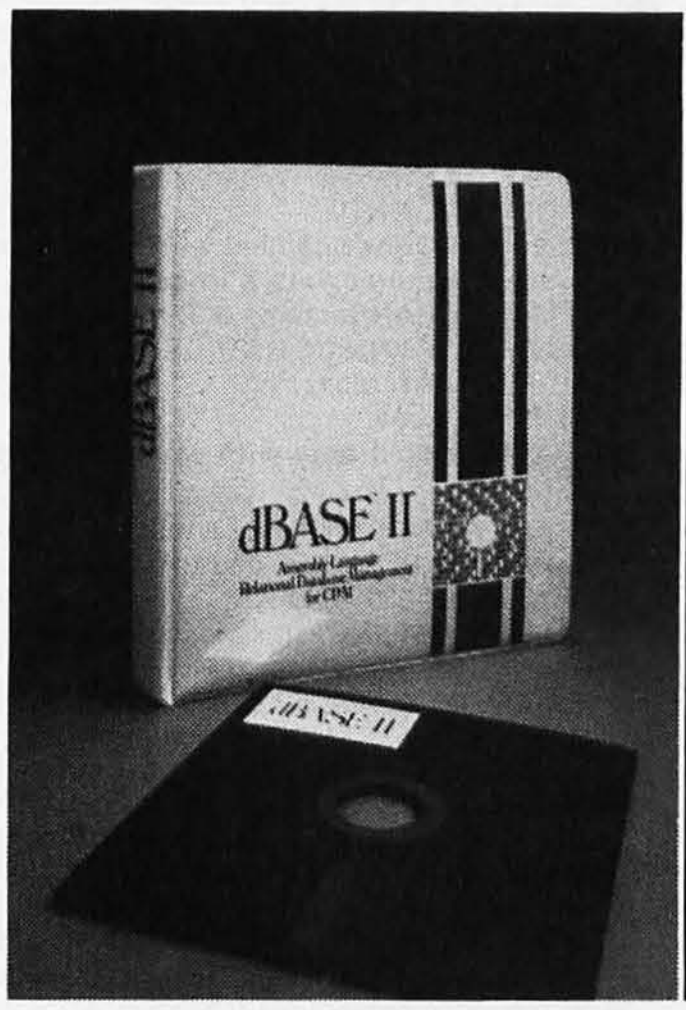

So I got pretty excited when I ran across **dBASE II**, an assembly-language relational Database Management System for CP/M. It works! And even a rank beginner like myself got it up and running the first time I sat down with it.

If you're looking for software to deal with your data, too, here are some tips that will help:

Tip #1: Database Management vs. File Handling:

Any list or collection of data is, loosely, a data base, but most of those "data base management" articles in the buzzbooks are really about file handling programs for specific applications. A real Database Management System gives you data and program independence (no reprogramming when data changes), eliminates data duplication and makes it easy to turn data into information.

Tip #2: Assembly Language vs. BASIC:

This one's easy: if you're setting up a DBMS, you're going to be doing a lot of sorting, and Basic sorts are s-l-o-w. Run a benchmark on a Basic system like S*-IV against a relational DBMS like **dBASE II** and you'll see what I mean. (But watch it: I've also seen one extremely slow assembly-language file management system.)

Tip #3: Relational vs. Hierarchal & Network DBMS.

CODASYL-like hierarchal and network systems, around since the 1960's, are being phased out on the big machines so why get stuck with an old-fashioned system for your micro? A relational DBMS like **dBASE II** eliminates the predefined sets, pointers and complex data structures of a CODASYL-type DBMS. And you don't need to be a programmer to use it.

dBASE II vs. everything else.

dBASE II really impressed me.

Written in assembly language (with no need for a host language), it handles up to 65,000 records (up to 32 fields and 1000 bytes each), stores numeric data as packed strings so there are no round-off errors, has a super-fast multiple-key sort, and supports ISAM based on B* trees.

You can use it interactively with English-like commands (DISPLAY 10 PRODUCTS), or program it (so when you've set up the formats, your secretary can do the work). Its report generator and user-definable full screen operations mean that you can even use your existing forms.

And if all this makes your mouth water, but you've already got all your data on a disk, that's okay: **dBASE II** reads your ASCII files and adds the data to its own database.

Right now, I'm using **dBASE II** with my word processor for budgeting, scheduling and preparing reports for my clients.

Next come job costing, time billing and accounting.

An Unheard-of Money-Back Guarantee.

dBASE II is the first software I've seen with a full money-back guarantee.

To check it out, just send $700 (plus tax in California) to Ashton-Tate, 3600 Wilshire Blvd., Suite 1510, Los Angeles, CA 90010. (213) 666-4409. Test **dBASE II** doing your jobs on your computer for 30 days. If, for some strange reason, you don't want to keep it, send it back and they'll refund your money.

No questions asked.

They know you don't need your bilge pumped.

Ashton-Tate

Circle 34 on inquiry card.

SuperSoft's Gallery of CP/M Masterworks

DIAGNOSTICS I: A system diagnostic package.
Tests:
• Memory • CPU (8080/8085/Z80) • Terminal • Disk • Printer
To our knowledge the CPU test is the first of its kind anywhere. Diagnostics I can help you find problems before they become serious. A good set of diagnostic routines are a must in any program library. Minimal requirements: 32K CP/M. Supplied with complete user manual: $75.00 Manual alone: $15.00

DIAGNOSTICS II: The most comprehensive set of CP/M compatible system check-out programs ever assembled. Includes all of Diagnostics I, plus:

- Every test is "submit"-able
- A complete Spinwriter/Diablo/Qume test has been added (Serial Interface only)
- Output may be logged to disk
- Expanded memory test
- Expanded terminal test
- Expanded disk test

Diagnostics II provides the next level in system maintenance.
Requires: 32K CP/M
Price: $100.00 Manual only: $15.00

SYSTEM MAINTENANCE

SUPER-M-LIST: A complete, easy to use mailing list program package. Allows for two names, two addresses, city, state, zip and a three digit code field for added flexibility. Super-M-List can sort on any field and produce mailing labels direct to printer or disk file for later printing or use by other programs. Super-M-List is the perfect companion to TFS. Handles 1981 Zip Codes!
Requires: 48K CP/M
Supplied with complete user manual: $75.00 manual alone: $10.00

TFS-Text Formatting System: An extremely powerful formatter. More than 50 commands. Supports all major features including:
• left & right margin justification • user defined macros
• dynamic insertion from disk file • underlining and backspace
TFS lets you make multiple copies of any text. For example: Personalized form letters complete with name, address & other insertions from a disk file. Text is not limited to the size of RAM making TFS perfect for reports or any big job. Text is entered using CP/M standard editor or most any CP/M compatible editor.
Requires: 24K CP/M
Supplied with extensive user manual: $85.00 manual alone: $20.00
Source to TFS in 8080 assembler (can be assembled using standard CP/M assembler) plus user manual: $250.00.

TEXT PROCESSING

UTILITIES I: A collection of programs that you will find useful and maybe even necessary in your daily work (we did!).
Includes:
GREP: Searches files for a specified string
SORT: In core sort of variable length records
CMP: Compare two files for equality
PRINT: Formatted listings to printer
PG: Lists files to CRT a page at a time
. . . plus more . . .
Requires: 24K CP/M
Supplied with manual on discette: $60.00

UTILITIES II: Many new programs not available elsewhere. Includes these "file" utilities:
DIFF: Source comparitor
PR: Powerful multicolumn output formatter
DC: Desk calculator
RPL: Substitute strings in files
. . . plus more . . .
Requires: 24K CP/M $60.00
Supplied with manual on discette

UTILITIES

ANALIZA: An amazingly accurate simulation of a session with a psychiatrist. Better than the famous "ELIZA" program. Enlightening as well as fun. An excellent example of Artificial Intelligence.
Requires: 48K CP/M, CBASIC2
Cost: $35.00

ENTERTAINMENT

Z8000 CROSS ASSEMBLER: Supports: full Z8000 syntax, segmented and unsegmented mode, full 32-bit arithmetic, hex output, listing output, "downloader".
Requires: 56K CP/M $500.00
1 year maintenance $300.00
manual alone $ 50.00

Z8000 too!

On line "Help" system provided with every program package.

NOW!! All Products available for APPLE II+ with CP/M

SSS FORTRAN: The SSS FORTRAN compiler is fast, efficient, and complete (full 1966 ANSI standard with extensions). The RATFOR compiler compiles into FORTRAN allowing the user to write structured code while retaining the benefits of FORTRAN. The FORTRAN supports many advanced features not found in less complete implementations, including: complex arithmetic, character variables, and functions. Complete sequencial and random disk I/O are supported. SSS FORTRAN will compile up to 600 lines per minute! Recursive subroutines with static variables are supported. ROMable ".COM" files may be generated. SSS RATFOR allows the use of contemporary loop control and structured programming techniques. SSS RATFOR is similar to FORTRAN '77 in that it supports such things as:
• REPEAT...UNTIL • WHILE • IF...THEN...ELSE
SSS RATFOR is supplied with *source code* in FORTRAN and RATFOR.
System Requirements & Prices:
SSS FORTRAN requires a 32K CP/M system.
SSS FORTRAN with RATFOR: $325.00 Documentation alone. $25.00
SS FORTRAN alone: $250.00
RATFOR alone: $100.00
(RATFOR sold only with valid SSS FORTRAN license)

STACKWORK'S FORTH: A full, extended Forth interpreter/compiler produces COMPACT, ROMABLE code. As fast as compiled FORTRAN, as easy to use as interactive BASIC.
SELF COMPILING: Includes every line of source code necessary to recompile itself.
EXTENSIBLE: Add functions at will.
Z80 or 8080 ASSEMBLER included.
Single license, OEM licensing available.
Please specify CPU type: Z80 or 8080
Supplied with extensive user manual and tutorial: $175.00
Documentation alone: $25.00

'TINY' PASCAL II: We still call it 'Tiny' but it's bigger and better than ever! This is the famous Chung-Yuen 'Tiny' Pascal with more features added. Features include:
• recursive procedures/functions • integer arithmetic • CASE
• FOR (loop) • sequential disk I/O • 1 dimensional arrays
• IF...THEN...ELSE • WHILE • PEAK & POKE
• READ & WRITE • REPEAT...UNTIL • more
'Tiny' Pascal is fast. Programs execute up to ten times faster than similar BASIC programs. SOURCE TOO! We still distribute source, in 'Tiny' Pascal, on each discette sold. You can even recompile the compiler, add features or just gain insight into compiler construction.
Requires: 36K CP/M. Supplied with complete user manual and source on discette: $85.00. Manual alone: $10.00

PROGRAMMING LANGUAGES

TERM: A complete intercommunications package for linking your computer to other computers. Link either to other CP/M computers or to large timesharing systems. TERM is comparable to other systems but costs less, delivers more and source is provided on discette! With TERM you can send and receive ASCII and Hex files (COM too, with included conversion program) with any other real time communication between users on separate systems as well as acting as timesharing terminal.
• Engage/disengage printer • error checking and auto retry
• terminal mode for timesharing between systems
• conversational mode • send files • receive files
Requires: 32K CP/M
Supplied with user manual and 8080 source code: $150.00
Manual alone: $15.00

INTERCOMPUTER COMMUNICATIONS

ENCODE/DECODE: A complete software security system for CP/M. Encode/Decode is a sophisticated coding program package which transforms data stored on disk into coded text which is completely unrecognizable. Encode/Decode supports multiple security levels and passwords. A user defined combination (One billion possible) is used to code and decode a file. Uses are unlimited. Below are a few examples:
• data bases • payroll files • programs • tax records
Encode/Decode is available in two versions:
Encode/Decode I provides a level of security suitable for normal use.
Encode/Decode II provides enhanced security for the most demanding needs.
Encode/Decode I: $50.00 Encode/Decode II: $100.00 manual alone: $15.00

SOFTWARE SECURITY

CP/M Formats: 8" soft sectored, 5" Northstar, 5" Micropolis Mod II, Vector MZ, Superbrain DD/QD

VISA
master charge

All Orders and General Information:
SUPERSOFT ASSOCIATES
P.O. BOX 1628
CHAMPAIGN, IL 61820
(217) 359-2112
Technical Hot Line: (217) 359-2691
(answered only when technician is available)

Far East Distribution:
ASR International
3-15-8, NISHI-SHIMBASHI, MINATO-KU, TOKYO 〒105 JAPAN
(03) 437-5471

SuperSoft
First in Software Technology

SuperSoft's Masterpiece of the Month

CP/M REGISTERED TRADEMARK DIGITAL RESEARCH

StackWork's

FORTH

A full, extended FORTH interpreter/compiler produces COMPACT, ROMABLE code. As fast as compiled FORTRAN, as easy to use as interactive BASIC.

SELF COMPILING
Includes every line of source code necessary to recompile itself.

EXTENSIBLE
Add functions at will.

CP/M* COMPATIBLE

Z80 & 8080 ASSEMBLERS included

Single license
Supplied with extensive user manual and tutorial:
$175.00
Documentation alone: $25.00
Please specify CPU type.
Z80 or 8080
OEM's, we have a deal for you!
CP/M Formats:
8" soft sectored, 5" Northstar,
5" *Micropolis* Mod II, Vector MC,
Superbrain DD/QD

4TH

All Orders and General Information:
SUPERSOFT ASSOCIATES
P.O. BOX 1628
CHAMPAIGN, IL 61820
(217) 359-2112
Technical Hot Line: (217) 359-2691
(answered only when technician is available)

VISA

master charge

SuperSoft
First in Software Technology

*CP/M registered trademark Digital Research

StackWork's FORTH is the copyright of
StackWork's, 321 E. Kirkwood
Bloomington, Indiana 47401

Text continued from page 228:

My application required that I code the 10 decimal digits (0 thru 9). I borrowed the 7-bit-per-digit bar code used in the UPC (Universal Product Code) to represent those digits. [*Note that UPC bar codes, as shown in figure 1, have a different appearance from PAPERBYTE® and other bar-code formats....***GW**] Each of the identifiers that is generated consists of 6 digits, thereby allowing the printer to operate close to the left margin. This was a distinct advantage for my application. The dot-backspacing feature of the printer reduces the dot-position counter by the amount the user specifies, returns the carriage to the left margin, and then back to the new position indicated by the pointer. Because of this method of printing, the time required to print a line increases disproportionately with its length. Thus, short lines are desirable.

The following procedure was used to generate bar codes with the Centronics 737:

- Set the proportional-spacing mode on the printer by issuing the command:

```
LPRINT CHR$(27); CHR$(17);
```

This can be done either in, or before running the program, but I suggest doing it in the program to avoid problems that arise in the monospacing mode.

- Read the character codes into a binary array.
- Use the INKEY$ function to enter a character to be printed in bar code. Use the entered value to retrieve the binary code for the character from the array. The 1s and 0s are values of the variable J, and are used as follows in the LPRINT statement:

```
LPRINT CHR$(92 * J + 32);
```

If J=1, then CHR$(124) causes a bar to be printed. If J=0, then CHR$(32) results in a blank space.

- Backspace to the dot position immediately following the one just printed, by issuing the following printer command:

```
LPRINT CHR$(08); CHR$(4);
```

In my application, I placed equivalent Arabic numerals

Figure 1: *Bar codes generated by a Centronics 737 dot-matrix printer and a TRS-80 computer, using the program in listing 1. The program also prints the equivalent Arabic numerals under the code.*

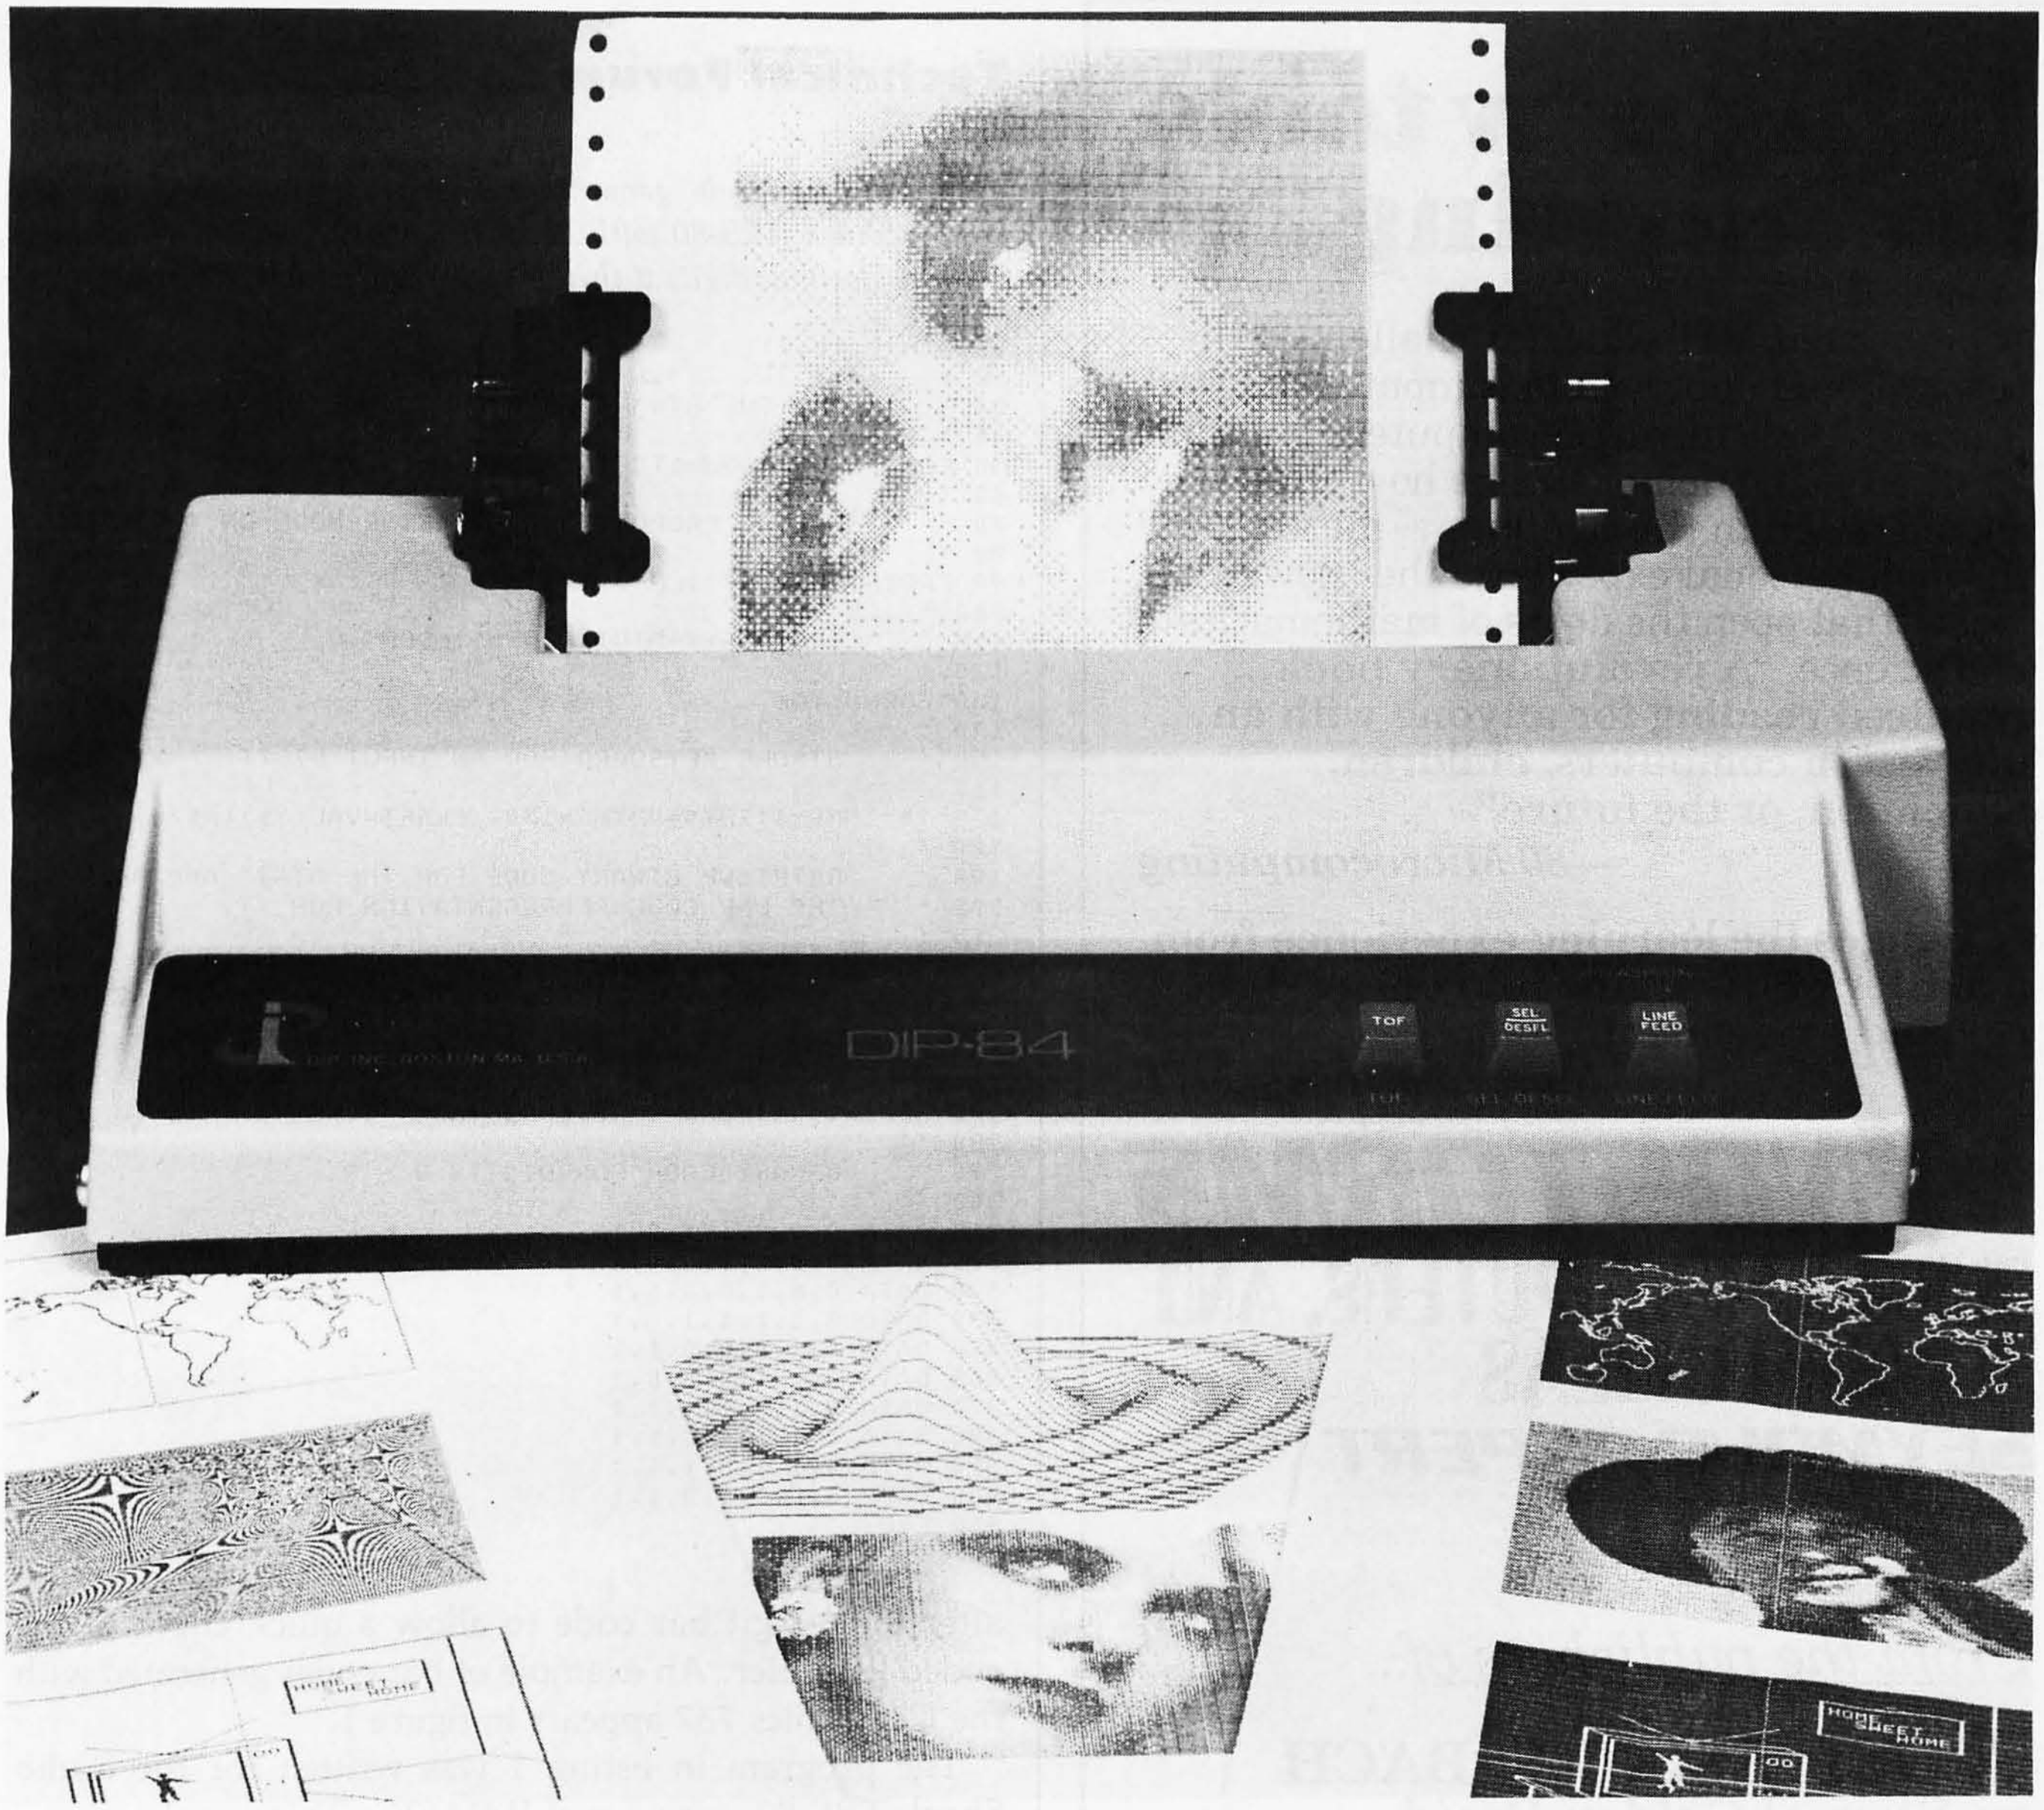

Hi-Q* Printers

*FROM $369.00 to $580.00

- One for every need
- 4 models (DIP-81, 82, 84, 85) & many features to choose from
- Friction, Tractor, or both; Sheet, Roll or Fan Fold Paper
- Standard, enhanced, double or Graphic Printing
- Disposable print head rated 100 million characters
- 100 CPS bidirectional printing, 60-150 lpm with short-line cancelling
- 80, 800, or 2K FIFO buffer
- X-on X-off, or RS232C to 9600 baud and/or parallel
- Reliability 100% continuous duty cycle

DISTRIBUTOR INQUIRIES INVITED

DIP, inc. 745 Atlantic Avenue • Boston, MA 02111 • (617) 482-4214

**High-Quotient of performance to cost.*

**OEM quantity 500*

Circle 130 on inquiry card.

Listing 1: *Bar-code generator. The program, written for the Radio Shack TRS-80 with Level II BASIC, generates bar codes for the decimal digits 0 thru 9 on a Centronics 737 printer.*

```
10 DIM B(10,7)
20 '
30 '     LOAD THE BINARY ARRAY
40 '
50 FORI=0TO9:FORJ=1TO7:READB(I,J):NEXTJ:NEXTI
60 '
70 '     SET THE PROPORTIONAL SPACING MODE ON THE PRINTER
80 '
90 LPRINTCHR$(27);CHR$(17);
100 '
110 '     BEGIN SIX-DIGIT INPUT LOOP
120 '
130 FORN=1TO6
140 '
150 '     STROBE KEYBOARD FOR AN INPUT DIGIT
160 '
170 Y$=INKEY$:IFY$=""THEN170  ELSEI=VAL(Y$):A$(N)=Y$
180 '
190 '     RETRIEVE BINARY CODE FOR THE DIGIT AND PRINT
200 '     THE BAR CODE REPRESENTATION FOR IT.
210 '
220 FOR K=1TO7:J=B(I,K)
230 LPRINTCHR$(92*J+32);CHR$(08);CHR$(4);:NEXTK:NEXTN
240 '
250 '     PRINT THE ARABIC NUMERALS
260 '
270 LPRINT" ":FORN=1TO6:LPRINTA$(N);:NEXTN
280 '
290 '     BINARY CODE FOR DIGITS 0 - 9
300 '
310 DATA 0,0,0,1,1,0,1
320 DATA 0,0,1,1,0,0,1
330 DATA 0,0,1,0,0,1,1
340 DATA 0,1,1,1,1,0,1
350 DATA 0,1,0,0,0,1,1
360 DATA 0,1,1,0,0,0,1
370 DATA 0,1,0,1,1,1,1
380 DATA 0,1,1,1,0,1,1
390 DATA 0,1,1,0,1,1,1
400 DATA 0,0,0,1,0,1,1
410 END
```

after the 6-digit bar code to allow a quick check of the coded identifier. An example of bar codes generated with the Centronics 737 appears in figure 1.

The program in listing 1 was written for the Radio Shack TRS-80 using Level II BASIC. This is only a sample program that can be modified to suit your taste, but it demonstrates how you can generate bar codes on a low-cost printer. ■

BYTE's Bits

Chess Challenger Upgrade

Fidelity Electronics Ltd has announced a free upgrading service for certain units of its Chess Challenger Electronic Game, Model CCX. The service is available only for units with serial numbers from 150871 to 174517.

If you have a unit with a serial number in this range, send a *postcard* with your name, address, and the serial number of your Chess Challenger to:

Fidelity Electronics Ltd
Customer Service Dept
8800 NW 36th St
Miami FL 33178.

You will receive notification if the unit requires the upgrading modification. ■

STATE OF THE ART MEMORY SYSTEMS

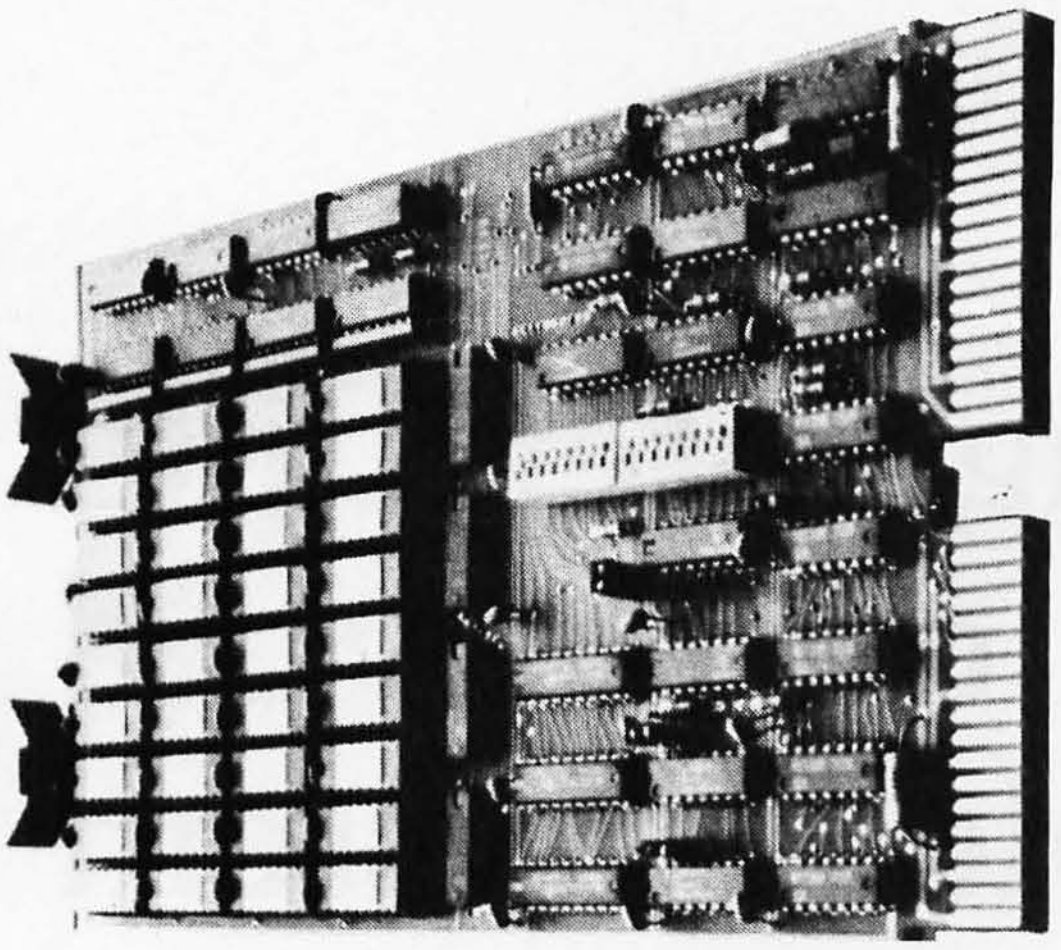

256KB LSI 11/23® SINGLE DUAL WIDTH BOARD

The First and Only 256KB Memory on a Single Dual Board.

4 MEGABYTE ADDRESS FIELD — Most memories available for the DEC PDP 11/23 are only addressable to 256K bytes (18 address lines). The CI-1123 is addressable to 4 mega bytes (22 address lines) so there is no need to worry about obsolescence.

FAST ACCESS AND CYCLE TIME — With an access time of 240 NSEC and cycle time of 400 NSEC one is insured the best throughput on the PDP 11/23 system.

PARITY — The CI-1123 generates and checks parity for each byte of memory. Totally DEC compatible.

BATTERY BACKUP POWER CONSUMPTION — Power requirement for the module is only 1.2 AMP from the 5 volt supply. The CI-1123 is easily configured for battery back-up mode of operation requiring only 300MA from a single 5 V back-up supply for 256KB memory in the down state.

SINGLE QTY. PRICE: 32K x 18 **$575.** 128K x 18 **$1925.**

512KB SINGLE BOARD MULTIBUS® MEMORY

State of the Art Multibus Memory Design.
First to Offer 512KB on One Board.

The CI-8086 module is compatible with both 8 or 16 bit Multibus Systems.

PARITY — The CI-8086 generates and checks even parity with selectable interrupt on parity error.

FAST ACCESS AND CYCLE TIME — Data access is 270 NSEC and cycle time is 375 NSEC.

16 MEGA BYTE ADDRESSING — The memory is addressable in 16K increments up to 16 mega bytes.

LOW POWER CONSUMPTION — Total power consumption is under 8 watts.

SINGLE QTY. PRICE: 128K x 9 **$1350.** 512K x 9 **$2995.**

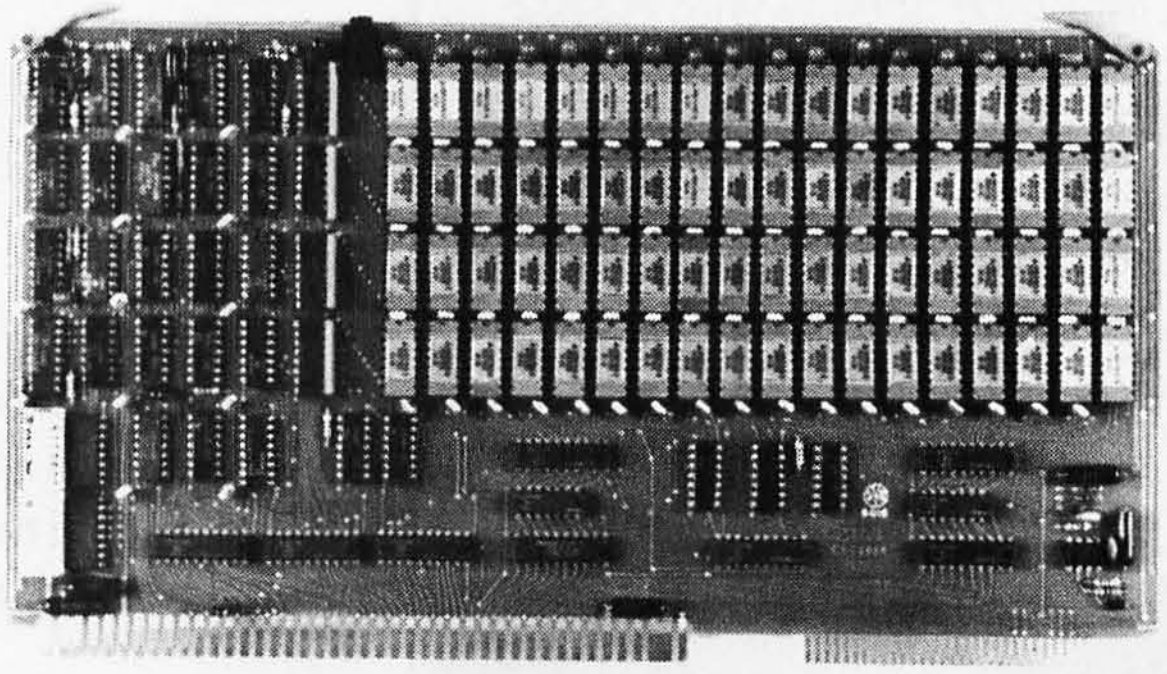

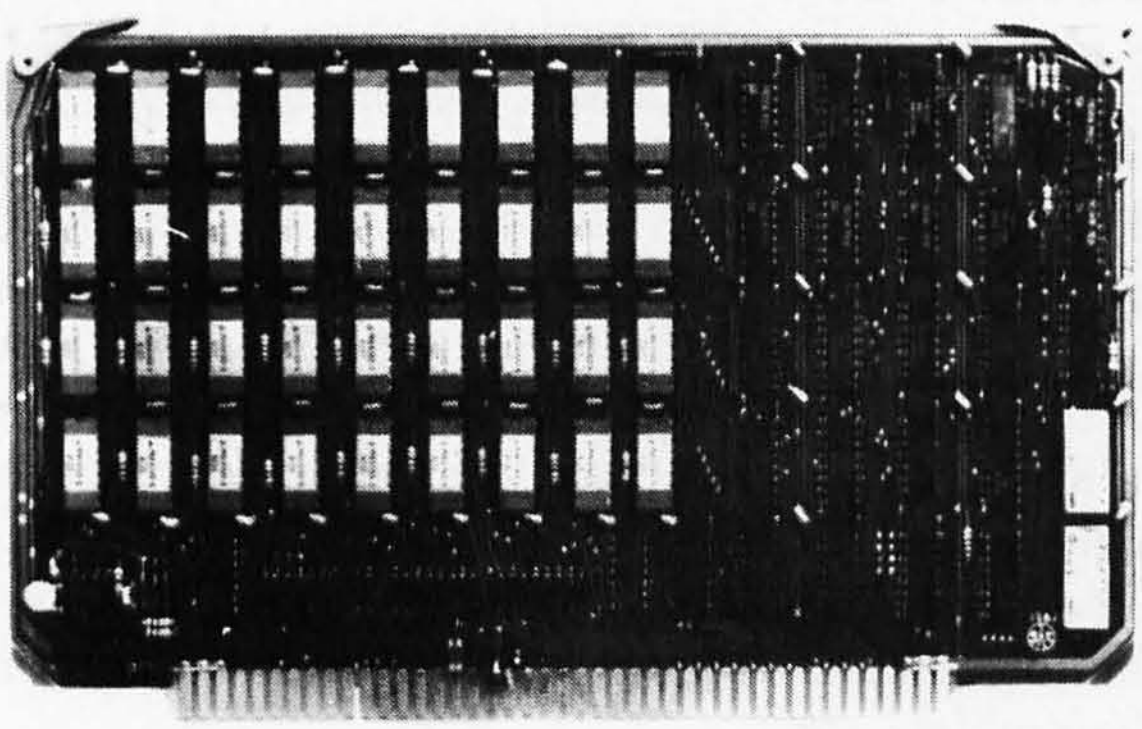

64K x 9 EXORCISER® I SINGLE BOARD MEMORY

For Exorciser I, Exorciser II and Rockwell System 65.

FAST ACCESS AND CYCLE TIME — Data access time is 225 NSEC and cycle time is 400 NSEC, allowing the unit to work as a static RAM at clock rates in excess of 1.5 mega hertz. For 2 mega hertz operation the board can be easily configured to utilize a cycle stealing refresh operation.

ADDRESSING — On-board memory select is available in 4K increments up to 64K words of memory on either the VUA or VXA control inputs.

PARITY — On board even parity with output jumper select to the system bus as a parity error or non-maskable interrupt.

Complete board power consumption is under 7 watts.

SINGLE QTY. PRICE: 64K x 9 **$575.**

Tested and burned in. Full year warranty.

DON'T ASK WHY WE CHARGE SO LITTLE, ASK WHY THEY CHARGE SO MUCH.

Chrislin Industries, Inc.

31352 Via Colinas • Westlake Village, CA 91362 • 213-991-2254

Multibus is a trademark of the Intel Corp. LSI II is a trademark of Digital Equipment Corp. EXORciser is a trademark of Motorola

Circle 69 on inquiry card.

Using Interrupts on the Apple II System

George M White
Computer Science Department
University of Ottawa
Ottawa, Ontario K1N 6N5 Canada

The designers of the Apple II personal computer made a judicious choice of software/hardware tradeoffs. The most important software systems are stored in ROM (read-only memory) at high addresses where they are, for the most part, out of sight. Since the monitor, BASIC interpreter, and miniassembler are stored in ROM, they cannot be destroyed by user programs running out of control, nor can they be altered to produce strange results.

A surprising feature of the Apple II's system software is that it makes little use of the 6502 interrupt system.

A surprising feature of the Apple II's system software is that it makes little use of the interrupt system of the 6502 microprocessor. However, the creators of the monitor have correctly assumed that some users might want to make use of interrupts, so they have provided several facilities to aid the user in doing so. The hardware and software facilities permit the user to write interrupt-service routines and to wire up interrupt generators that easily fit into one or more of the eight I/O (input/output) card slots, conveniently located under the Apple's removable plastic cover.

Interrupt-Service Software

Let's compare interrupt-service routines to program subroutines. In the BASIC language, subroutines are called at a known *location* within a program by a GOSUB statement. The subroutine is not executed (or shouldn't be) until the GOSUB statement is encountered during the course

Acknowledgment
Most of this article was written while the author was enjoying the incomparable hospitalité of L'Institut de Recherche d'Informatique et d'Automatique in Rocquencourt, France.


BASF FlexyDisk® 1
No.
Sectors: soft
Record Length 128 Bytes
BASF
BASF
BASF FlexyDisk®

of the program. Subroutines are usually written to perform a specific action such as altering values of variables, I/O operations, etc.

Interrupt routines, on the other hand, are called at a specific point in *time*. An interrupt signal arrives, and the interrupt-service routine is called. There is no warning. The signal can arrive at any time, and the program being executed can be interrupted at any point.

The interrupt routine is a program like any other program. It can do everything an ordinary program can do, such as calculate numbers, manipulate strings, ring bells, or print messages on the console. Usually, the interrupt system found on microprocessors is used to control a computer peripheral device or to monitor and control external machinery.

The interrupt system can continuously watch the temperature of a furnace, the condition of a fire or burglar alarm, or the time of day. When something unusual happens, when the temperature goes too high or a burglar alarm sounds, the interrupt system alerts the computer to respond to the unusual condition and perform necessary actions.

However, the writing of such a program is a demanding task. The programmer must be aware of five aspects of interrupts that involve both the hardware and software of the system.

Necessary Conditions

1. *There must be an external device capable of sending an interrupt signal to the computer.*

The smaller systems used by novice BASIC programmers usually do not contain devices capable of generating interrupts. Even if they did, the BASIC language system available is not able to handle them directly, because most versions of BASIC do not recognize that interrupts exist.

The external device that sends the interrupt can be anything external to the processor and memory; it does not have to be physically located outside the computer box itself. Some common devices used as sources of interrupts are real-time clocks, terminals, and other computers. This list is not exhaustive. *Anything* capable of generating an electrical signal—automobile, household appliance, or burglar alarm—can be used as a source of interrupts.

2. *The processor must be capable of receiving and acting upon the interrupt signal.*

This implies not only that the signal must be wired into the computer with all its voltages having the correct values, but also that the processor must be set up to respond to the signal. We shall see later that the 6502 microprocessor can actually ignore some kinds of interrupts if the programmer has told it to ignore them.

Anything capable of generating an electrical signal—automobile, household appliance, or burglar alarm—can be used as a source of interrupts.

3. *The processor must be able to tell which of several possible devices generated the interrupt.*

If there is only one interrupt-generating device wired into the system, there won't be any problem identifying the source of the interrupt when it arrives. But if there are several interrupt sources—all trying to get the attention of the processor—the computer must have some way of telling which interrupt source is responsible for sending the signal, so it can take appropriate action.

4. *The processor must respond to the interrupt by doing something.*

When an interrupt signal arrives and is accepted by the computer, the program must perform an appropriate action (ie: "service" the interrupt). In some cases, this action is very simple, such as printing a character on a terminal. In other cases, the system may have to do something much more complicated, like placing a telephone call, sounding an alarm, or aborting the program it was executing.

Energy Management

Security Systems

Control and monitoring of home and office made easy.

Now any computer with an RS-232 port, or any APPLE II, can communicate directly with the real world using our ever expanding line of carrier communications interfaces. Using the AC powerline for data eliminates running long wires to remote locations.

The SRIO (Serial Remote I/O interface)

Operates up to 256 BSR System X-10 compatible control modules. Contains a real time clock and calendar with battery backup. Carrier receiver allows monitoring of remote input modules and receiving messages from the BSR command console or from other computers.

The ARIO (Apple Remote I/O interface)



Provides Apple II users the additional benefit of background operation. On board software includes a scheduler program.

TRADEMARKS—APPLE II: Apple Computer, Inc., System X-10: BSR Ltd.

The Remote Input Modules which connect to temperature, security and other sensors will be announced soon. Also additional types of remote I/O modules are in development.

ORDER NOW! Orders received in May get a certificate for $10.00 off the price of your first remote input module.

PRICES:		
SRIO	$250	Quantity discounts available.
SRIO less clock	$200	Add $5 per order for ship/hand.
ARIO	$185	MN residents add 4% sales tax.

Circle the reader service number for our new catalog.

Intelligent Control Systems, Inc.

P.O. Box 14571
Minneapolis, MN 55414
(612) 699-4342

We are in control.

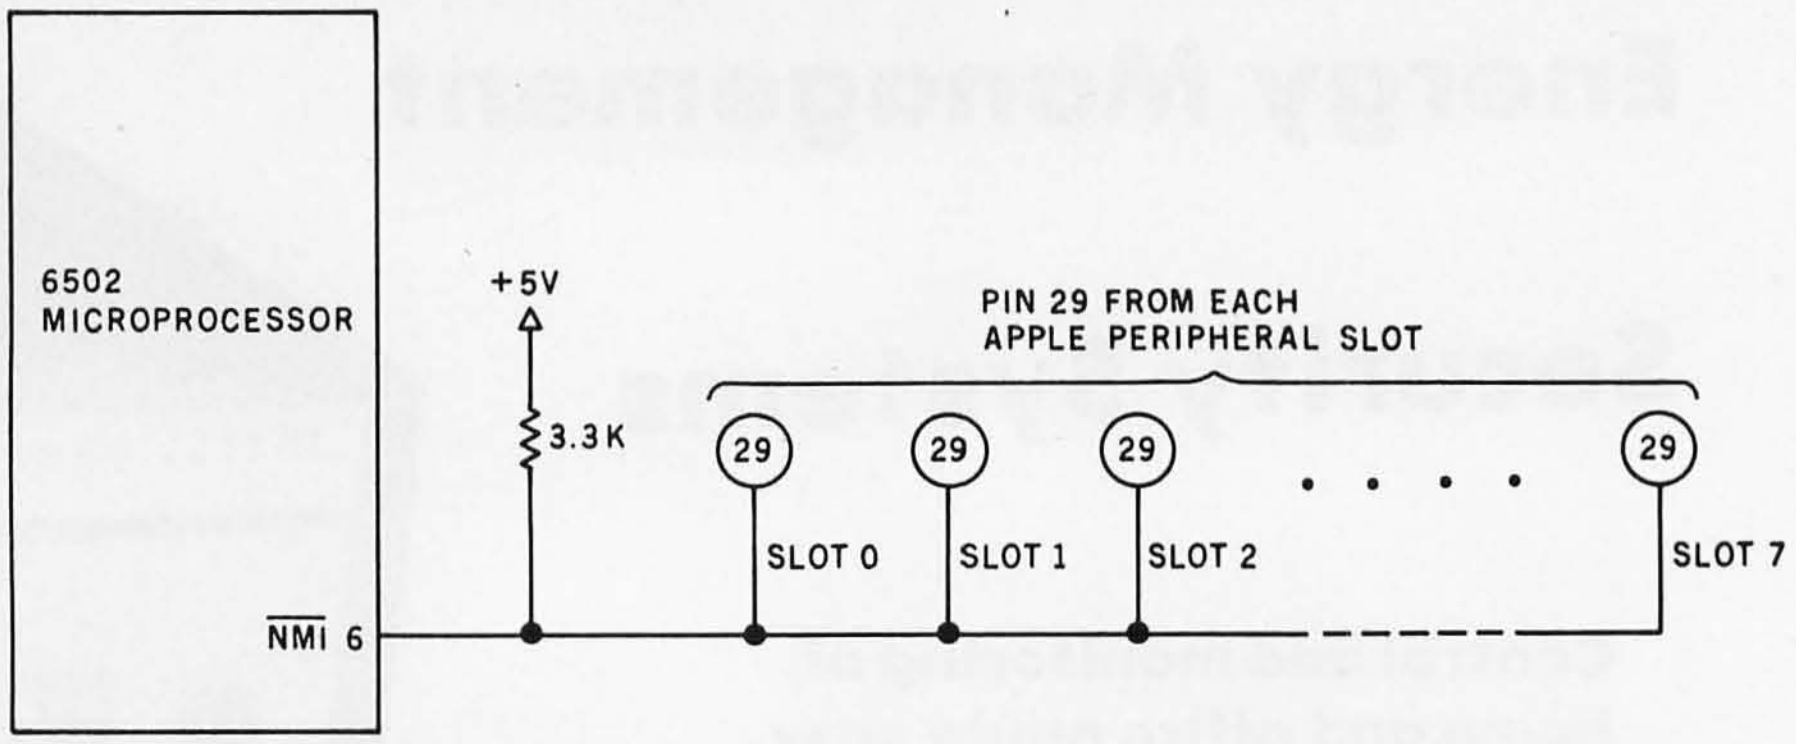

Figure 1: *The 6502 $\overline{\text{NMI}}$ signal and the Apple II peripheral slots. The $\overline{\text{NMI}}$ signal is connected to pin 29 of each of the slots and is held high by the pull-up resistor shown. An interrupt is generated if the peripheral card in* any *of the slots presents a low impedance to ground to its pin 29.*

5. *After the service has been performed, the processor usually must return to the interrupted program and continue from the point of interruption.*

When an interrupt signal arrives and is accepted by the computer, the program must perform an appropriate action.

Usually (but not always), the interrupt has interfered with the execution of a program. After the interrupt has been successfully serviced, control should return to the interrupted program or process at the point of interruption without modifying the process in any way. Sometimes this program is nothing other than an endless loop waiting for interrupts to arrive.

Nonmaskable Interrupts

The Apple II has two separate interrupt lines entering its 6502 processor. They work somewhat differently.

Pin number 6 on the 6502 package is an active-low signal input called the *nonmaskable interrupt*, $\overline{\text{NMI}}$. It is connected through the printed-circuit board to a pull-up resistor and to pin 29 in each of the eight I/O slots shown in figure 1.

If none of the circuit cards in the slots has anything attached to its pin 29, the potential at the $\overline{\text{NMI}}$ input observed by the 6502 is always held high by the pull-up resistor. This is the normal mode of operation. If a low impedance to ground is presented to pin 29 by *any* of the slots, the $\overline{\text{NMI}}$ line goes low, causing an interrupt condition to be generated in the 6502. This is the definition of the nonmaskable interrupt. This interrupt can be better understood by examining each of the five aspects presented earlier.

1. Any external device can generate an interrupt by presenting a ground (or low impedance to ground) potential to pin 29 in any of the I/O slots. Thus, the Apple II can have eight different interrupt sources, and they all may decide to interrupt at once.

2. The $\overline{\text{NMI}}$ signal is always recognized by the 6502 microprocessor, because it is nonmaskable. (Maskable interrupts will be discussed shortly.)

3. If there is only one device capable of sending the $\overline{\text{NMI}}$ signal, there is no question which device sent it. But if there are two or more interrupting devices, a problem arises. The 6502 microprocessor has only a single $\overline{\text{NMI}}$ input line, and every $\overline{\text{NMI}}$ signal goes there. In the Apple II, the processor can differentiate among several possible sources by *polling* the devices.

Polling is done by asking each device if it sent the interrupt signal or not. A program directs the computer

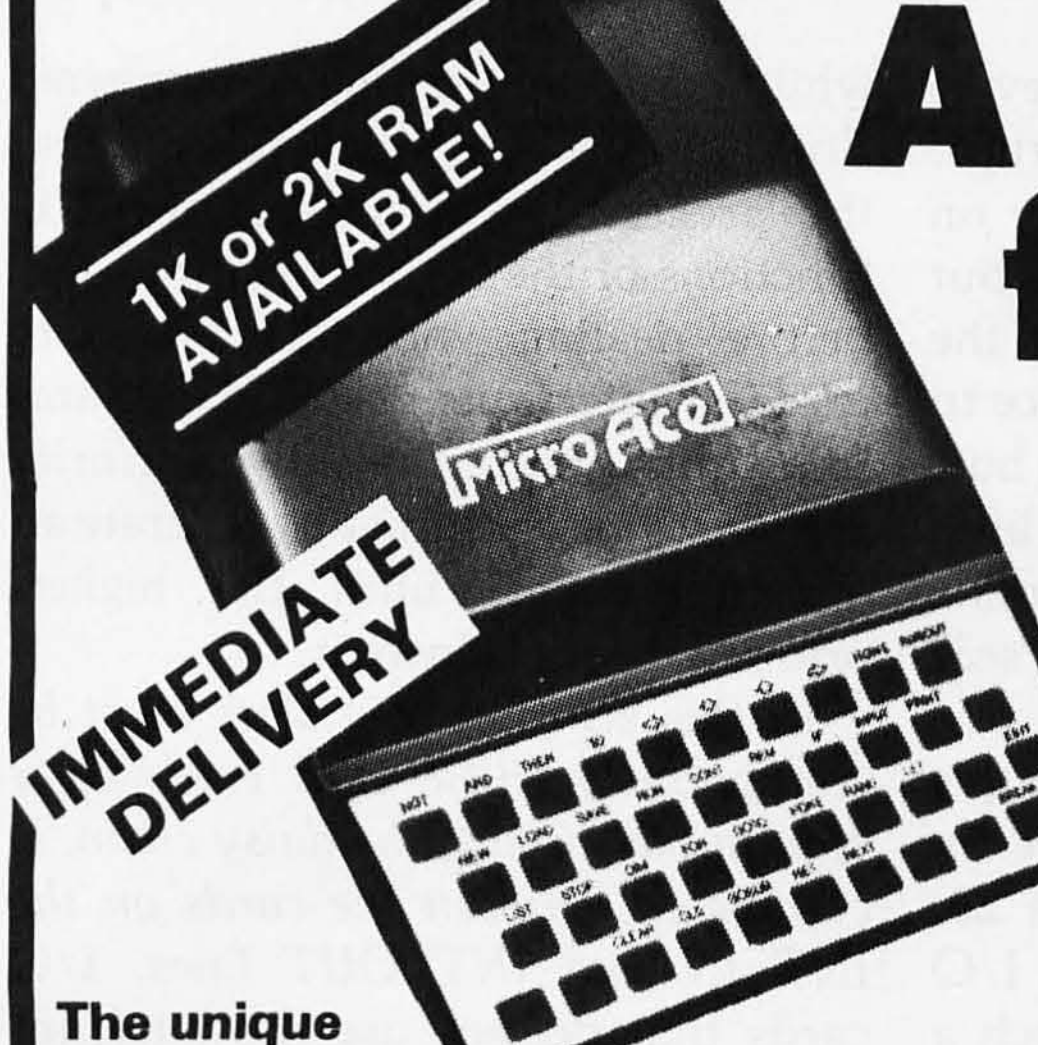

Licenced by Sinclair Research Ltd.

A Microcomputer for everyone at a Micro Price

The MicroAce - a new generation of miniature computers



A COMPLETE COMPUTER for $149.00 for 1K Kit

Post and Packing FREE
(Add 6% Tax for Shipments inside California)

The unique and valuable components of the MicroAce

The MicroAce is not just another personal computer. Quite apart from its exceptionally low price, the MicroAce has two uniquely advanced components: the powerful BASIC interpreter, and the simple teach yourself BASIC manual.

The unique versatile BASIC interpreter offers remarkable programming advantages:

- **Unique 'one-touch' key word entry: the MicroAce eliminates a great deal of tiresome typing. Key words (RUN, PRINT, LIST, etc.) have their own single-key entry.**
- Unique syntax check. Only lines with correct syntax are accepted into programs. A cursor identifies errors immediately. This prevents entry of long and complicated programs with faults only discovered when you try to run them.
- Excellent string-handling capability — takes up to 26 string variables of any length. All strings can undergo all relational tests (e.g. comparison). The MicroAce also has string input — to request a line of text when necessary. Strings do not need to be dimensioned.
- Up to 26 single dimension arrays.
- FOR/NEXT loops nested up 26.
- Variable names of any length.
- BASIC language also handles full Boolean arithmetic, conditional expressions, etc.
- Exceptionally powerful edit facilities, allows modification of existing program lines.
- Randomise function, useful for games and secret codes, as well as more serious applications
- Timer under program control.
- PEEK and POKE enable entry of machine code instructions, USR causes jump to a user's machine language sub-routine.
- High-resolution graphics with 22 standard graphic symbols.
- All characters printable in reverse under program control.
- Lines of unlimited length.

'Excellent value' indeed!

For just $149.00 (including handling charge) you get everything you need to build a personal computer at home... PCB, with IC sockets for all ICs; case; leads for direct connection to a cassette recorder and television (black and white or color); everything!

Yet the MicroAce really is a complete, powerful, full-facility computer, matching or surpassing other personal computers at several times the price.

The MicroAce is programmed in BASIC, and you can use it to do quite literally anything, from playing chess to managing a business.

The MicroAce is pleasantly straightforward to assemble, using a fine-tipped soldering iron. It immediately proves what a good job you've done: connect it to your TV ... link it to the mains adaptor ... and you're ready to go.

Fewer chips, compact design, volume production-more power per Dollar!

The MicroAce owes its remarkable low price to its remarkable design: the whole system is packed on to fewer, newer, more powerful and advanced LSI chips. A single SUPER ROM, for instance, contains the BASIC interpreter, the character set, operating system, and monitor. And the MicroAce 1K byte RAM (expandable to 2K on board) is roughly equivalent to 4K bytes in a conventional computer typically storing 100 lines of BASIC. (Key words occupy only a single byte.)

The display shows 32 characters by 24 lines.

And Benchmark tests show that the MicroAce is faster than all other personal computers.

No other personal computer offers this unique combination of high capability and low price.

The MicroAce teach-yourself BASIC manual.

If the features of the BASIC interpreter mean little to you-don't worry. They're all explained in the specially-written book *free* with every kit! The book makes learning easy, exciting and enjoyable, and represents a complete course in BASIC programming-from first principles to complex programs. (Available separately-purchase price refunded if you buy a MicroAce later.)

A hardware manual is also included with every kit.

The MicroAce Kit:
$149.00 with IK COMPLETE
$169.00 with 2K

Demand for the MicroAce is very high: use the coupon to order today for the earliest possible delivery. All orders will be despatched in strict rotation. If you are unsuccessful in constructing your kit, we will repair it for a fee of $20.00, post and packing FREE. Of course, you may return your MicroAce as received within 14 days for a full refund. We want you to be satisfied beyond all doubt — and we have no doubt that you will be.

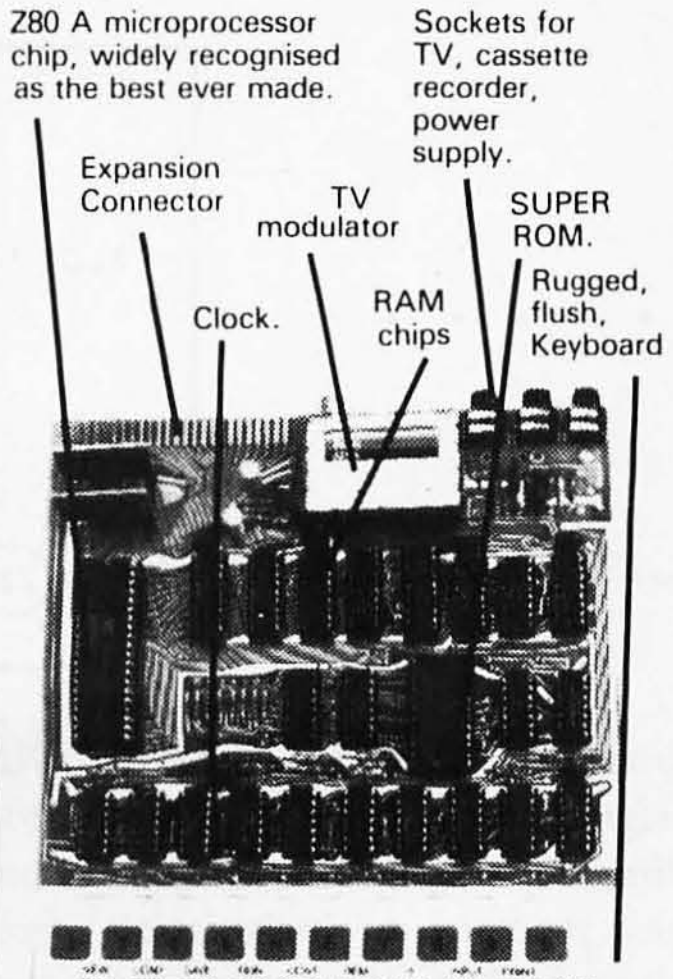

Your MicroAce kit contains...

- Printed circuit board, with IC sockets for all ICs.
- Complete components set, including all ICs-all manufactured by selected world-leading suppliers.
- New rugged keyboard, touch-sensitive, wipe-clean.
- Ready-moulded case.
- Leads and plugs for connection to domestic TV and cassette recorder. (Programs can be SAVEd and LOADed on to a portable cassette recorder.)
- Mains adaptor of 600 mA at 9VDC nominal unregulated.
- FREE course in BASIC programming and user manual.

JOIN THE REVOLUTION - DON'T GET LEFT BEHIND - ORDER YOUR MICRO ACE NOW!!

Send Check, Money Order or quote your Credit Card No. to:
MicroAce 1348 East Edinger, Santa Ana, California, Zip Code 92705.
or phone (714) 547 2526 quoting your Credit Card Number.

Quantity	Description	Unit Price	TOTAL
	MicroAce Kit 1K	$149.00	
	MicroAce Kit 2K	$169.00	
	Manual	$10.00	
	1K Upgrade Kit	$29.00	
Shipments inside California add 6% TAX		**TOTAL**	

☐ Amex.
☐ Diners
☐ Check
☐ Money Order
☐ Master Charge
☐ Visa

Card No. ____________
____
Exp. Date ____________

Name ____________
Address ____________
City ____________ State ____________ Zip ____________

Circle 252 on inquiry card.

to examine the status of each device which might have sent the interrupt. The details of this depend greatly on the way the devices are wired up, but in principle some of the 50 lines in the I/O slots can be used by the device to present logical flags or form data buffers. Examination of these signal lines by the program can then determine whether the device in question sent the $\overline{\text{NMI}}$ or not.

Daisy-chain inhibition of interrupts can be provided for in hardware by using control lines INT IN (pin 28) and INT OUT (pin 23) on the I/O slots, which are reserved for such a purpose. Various I/O devices can thereby have different priorities for interrupt servicing.

The Apple II's motherboard contains the wiring that links the boards together. This arrangement is shown in figure 2. Pin 28 (the INT IN line) of slot 0 has no connection, but pin 23 (INT OUT) of slot 0 connects to pin 28 of slot 1. Pin 23 of slot 1 connects to pin 28 of slot 2, and so on, up to slot 7. Pin 23 of slot 7 has no connection.

There are several methods for wiring the daisy chain, but in the most common configuration there is a low impedance (or a direct connection) on each interrupt-using card between INT IN and INT OUT. I/O cards have priority in interrupt service according to their physical position in the I/O slots. Cards in the lower-numbered slots have higher priority, while cards in the higher-numbered slots have lower priority: it is not that the processor will process the I/O functions of the higher-priority cards before dealing with lower-priority cards if interrupts occur at the same time, but that the lower-priority cards are *not permitted* to generate an interrupt signal until the higher-priority device allows it.

In this scheme, *I/O slots must be contiguously filled with cards so a continuous circuit, the daisy chain, is completed between the cards on the INT IN and INT OUT lines.* I/O cards that do not use the interrupt system can be placed between cards that do if the noninterrupting cards have a jumper or connection between the contacts for pins 28 and 23 to maintain circuit continuity.

The highest-priority I/O card must reside in a lower-numbered slot than any other interrupt-generating card. The highest-priority card is special: it is responsible for placing a voltage indicating a high logic condition (usually +5 V) on the INT OUT pin for its slot. The lower-priority cards need not have this capability. They need only have the capability of opening the circuit between the INT IN and INT OUT pins for their slots.

Suppose, for example, that there are interrupt-generating I/O interface cards in slots 5, 6, and 7. The card in slot 5 must be capable of placing a potential of +5 V on the INT OUT connection. The card in slot 6 must

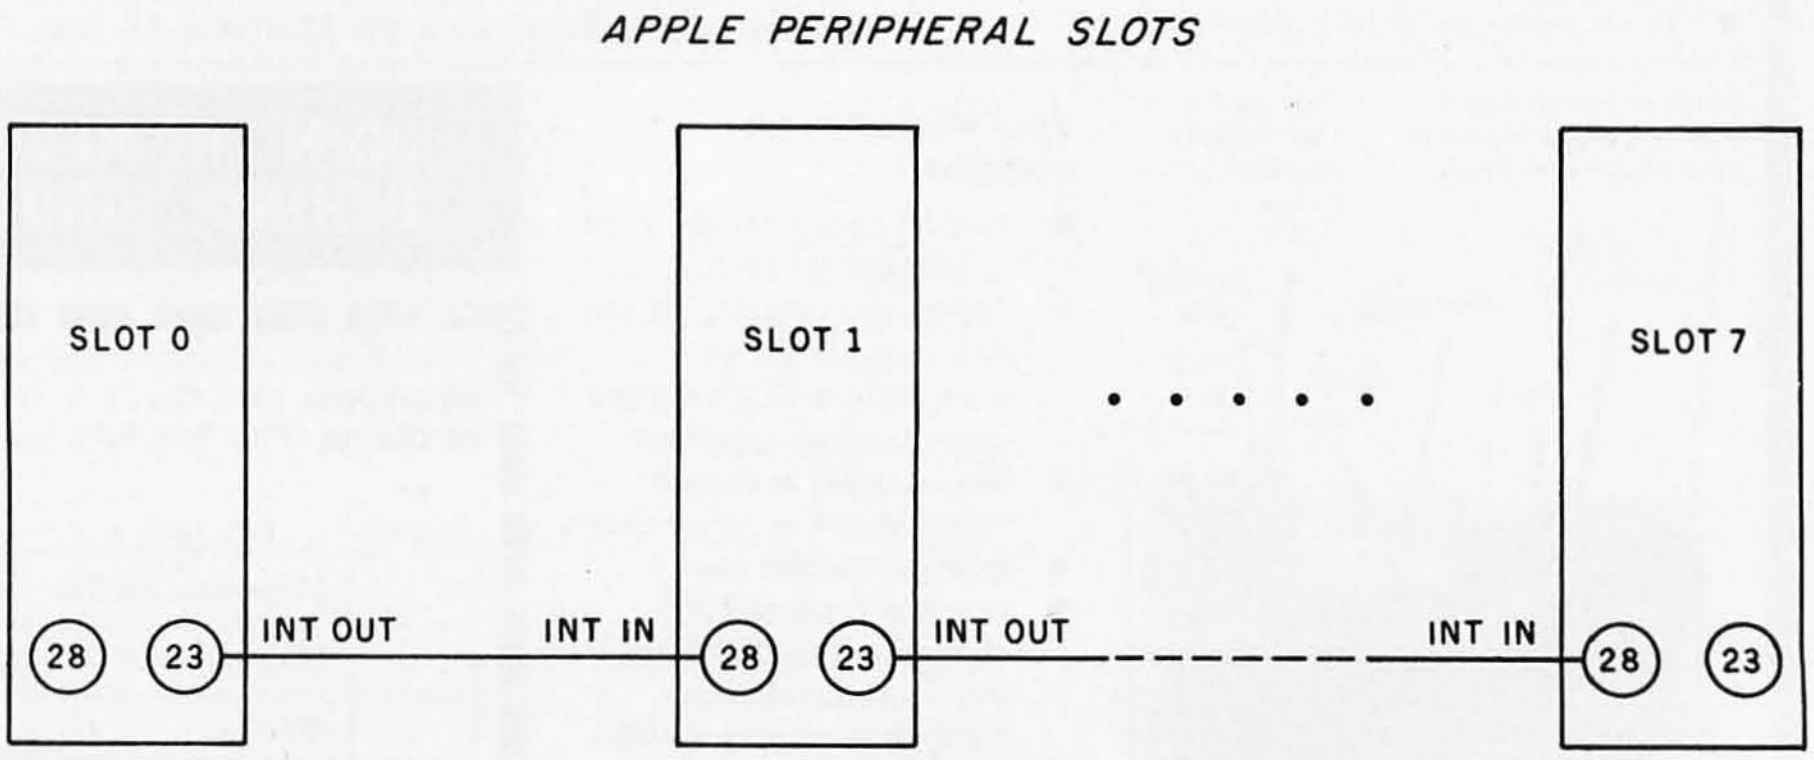

Figure 2: *Using daisy chaining to create a priority system of interrupts. The INT OUT (pin 23 of each slot) and INT IN (pin 28 of each slot) signals are connected to each other to create a daisy chain that is broken by an interrupting slot. A peripheral device is not allowed to generate an interrupt unless it has highest priority or "permission" from higher-priority devices. Peripherals in lower slots have a higher interrupt priority than peripherals in higher slots. See the text for details.*

The Text Solution for APPLE II®

Now APPLE II® Owners Can Solve Text Problems
With VIDEOTERM 80 Column by 24 Line Video Display
Utilizing 7 X 9 Dot Character Matrix

Perhaps the most annoying shortcoming of the Apple II® is its limitation of displaying only 40 columns by 24 lines of text, all in uppercase. At last, Apple II® owners have a reliable, trouble-free answer to their text display problem. VIDEOTERM generates a full 80 columns by 24 lines of text, in upper and lower case. Twice the number of characters as the standard Apple II® display. And by utilizing a 7 by 9 character matrix, lower case letters have true descenders. But this is only the start.

VIDEOTERM, MANUAL, SWITCHPLATE

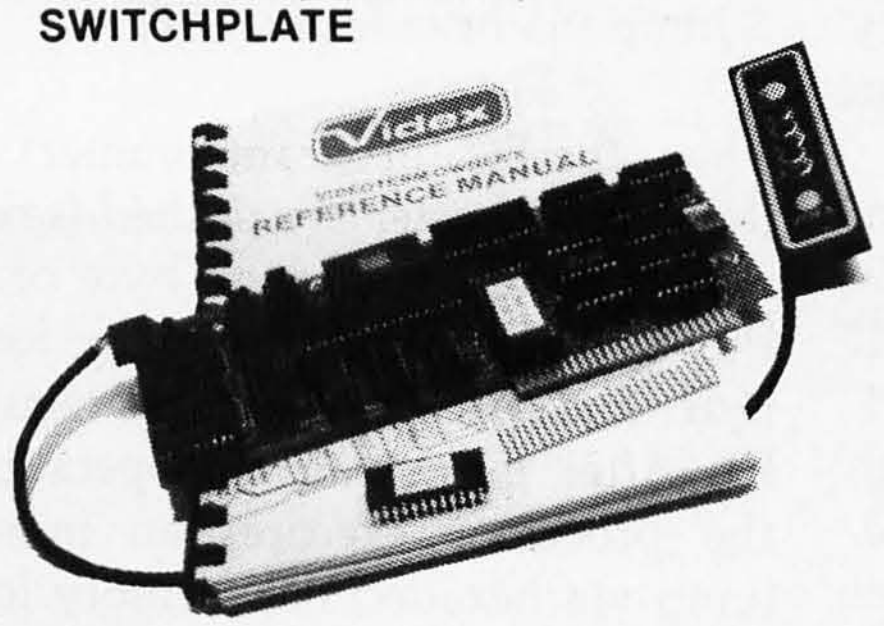

7X12 MATRIX
18X80 OPTIONAL



7X9 MATRIX
24X80 STANDARD

VIDEOTERM

BASICs VIDEOTERM lists BASIC programs, both Integer and Applesoft, using the entire 80 columns. Without splitting keywords. Full editing capabilities are offered using the ESCape key sequences for cursor movement. With provision for stop/start text scrolling utilizing the standard Control-S entry. And simultaneous on-screen display of text being printed.

Pascal Installation of VIDEOTERM in slot 3 provides Pascal immediate control of the display since Pascal recognizes the board as a standard video display terminal and treats it as such. No changes are needed to Pascal's MISC.INFO or GOTOXY files, although customization directions are provided. All cursor control characters are identical to standard Pascal defaults.

Other Boards The new Microsoft Softcard* is supported. So is the popular D. C. Hayes Micromodem II*, utilizing customized PROM firmware available from VIDEX. The powerful EasyWriter* Professional Word Processing System and other word processors are now compatible with VIDEOTERM. Or use the Mountain Hardware ROMWriter* (or other PROM programmer) to generate your own custom character sets. Naturally, VIDEOTERM conforms to all Apple OEM guidelines, assurance that you will have no conflicts with current or future Apple II* expansion boards.

Advanced Hardware Design VIDEOTERM's on-board asynchronous crystal clock ensures flicker-free character display. Only the size of the Pascal Language card, VIDEOTERM utilizes CMOS and low power consumption ICs, ensuring cool, reliable operation. All ICs are fully socketed for easy maintenance. Add to that 2K of on-board RAM, 50 or 60 Hz operation, and provision of power and input connectors for a light pen. Problems are designed out, not in.

Available Options The entire display may be altered to inverse video, displaying black characters on a white field. PROMs containing alternate character sets and graphic symbols are available from Videx. A switchplate option allows you to use the same video monitor for either the VIDEOTERM or the standard Apple II* display, instantly changing displays by flipping a single toggle switch. The switchplate assembly inserts into one of the rear cut-outs in the Apple II* case so that the toggle switch is readily accessible. And the Videx KEYBOARD ENHANCER can be installed, allowing upper and lower case character entry directly from your Apple II* keyboard.

Firmware 1K of on-board ROM firmware controls all operation of the VIDEOTERM. No machine language patches are needed for normal VIDEOTERM use.

Firmware Version 2.0

Characters	7 x 9 matrix
Options	7 x 12 matrix option; Alternate user definable character set option; Inverse video option.
Display	24 x 80 (full descenders) 18 x 80 (7 x 12 matrix with full descenders)

Want to know more? Contact your local Apple dealer today for a demonstration. VIDEOTERM is available through your local dealer or direct from Videx in Corvallis, Oregon. Or send for the VIDEOTERM Owners Reference Manual and deduct the amount if you decide to purchase. Upgrade your Apple II* to full terminal capabilities for half the cost of a terminal. VIDEOTERM. At last.

Apple II* is a trademark of Apple Computer Inc.
ROMWriter* is a trademark of Mountain Hardware Inc.
Micromodem II* is a trademark of D. C. Hayes Associates Inc.
Softcard* is a trademark of Microsoft
EasyWriter* is a trademark of Information Unlimited Software Inc.

PRICE:

• VIDEOTERM includes manual	$345
• SWITCHPLATE	$ 19
• MANUAL refund with purchase	$ 19
• 7 x 12 CHARACTER SET	$ 39
• MICROMODEM FIRMWARE	$ 25

APPLE II® OWNERS!

introducing the
KEYBOARD & DISPLAY
ENHANCER

- *PUT THE SHIFT AND SHIFT LOCK BACK WHERE IT BELONGS*
- *SEE REAL UPPER AND lower CASE ON THE SCREEN*
- *ACCESS ALL YOUR KEYBOARD ASCII CHARACTERS*

Videx has the perfect companion for your word processor software: the **KEYBOARD AND DISPLAY ENHANCER**. Install the enhancer in your APPLE II and be typing in lower case just like a typewriter. If you want an upper case character, use the SHIFT key or the CTRL key for shift lock. Not only that, but you see upper and lower case on the screen as you type. Perfectly compatible with Apple Writer and other word processors like, for example, Super-Text.

If you want to program in BASIC, just put it back into the alpha lock mode; and you have the original keyboard back with a few improvements. Now you can enter those elusive 9 characters directly from the keyboard, or require the Control key to be pressed with the RESET to prevent accidental resets.

KEYBOARD AND DISPLAY ENHANCER is recommended for use with all revisions of the APPLE II. It includes 6 ICs, and EPROM and dip-switches mounted on a PC board, and a jumper cable. Easy installation, meaning no soldering or cutting traces. Alternate default modes are dip-switch selectable. You can even remap the keyboard, selecting an alternate character set, for custom applications.

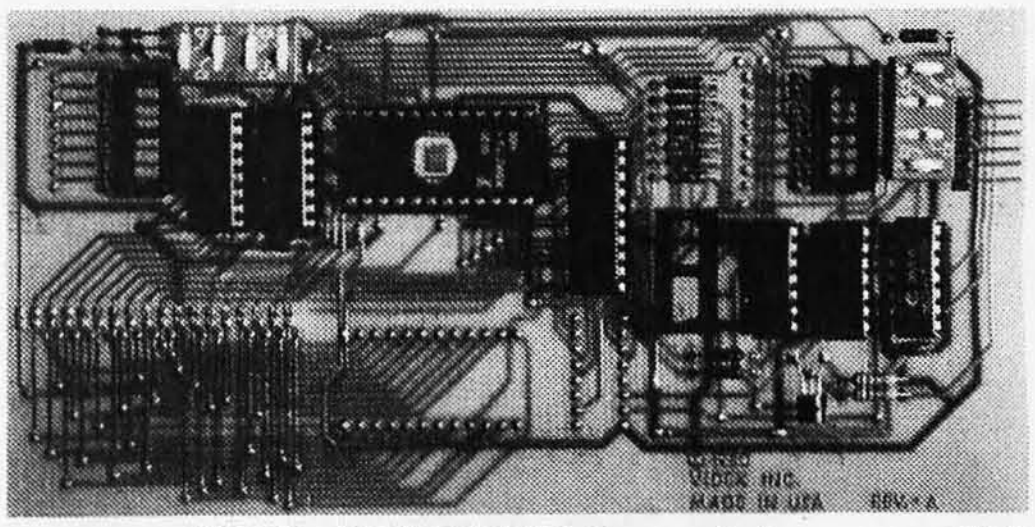

PRICE

• KDE-700 (REV. 7 or greater)	$129.
• KDE-000 (REV. 6 or less)	$129.

Apple II® is a trademark of Apple Computer, Inc.

Videx INC

VIDEX
897 N.W. Grant Avenue
Corvallis, Oregon 97330
Phone (503) 758-0521

VISA

have a low impedance from INT IN to INT OUT as a normal condition (so the card in slot 7 will be able to "see" the +5 V provided by the card in slot 5), and the cards in both 6 and 7 must be able to detect the absence of the +5 V potential on the INT IN line. The controlling circuitry of the slot-6 and slot-7 cards must recognize the absence of the INT IN high logic level and interpret it as denoting a condition in which the lower-priority cards are not permitted to generate an interrupt.

When the slot-5 device needs to interrupt the processor, it causes a low logic level to be placed on the $\overline{NMI}$ line, pin 29, as previously described. At the same time, it removes the high logic level from the INT OUT line, pin 23. The slot-6 and slot-7 devices sense the low level on their INT IN pins, and they refrain from issuing an interrupt signal as long as this condition persists.

Meanwhile, the polling software in the processor polls the slot-5 card, as it has been set up to do first; the software polls the I/O cards in order of priority. Finding the slot-5 card needing attention, the software branches to the appropriate interrupt-servicing routine.

When the interrupt routine for the slot-5 device has finished its business, the interrupt condition is cleared, and control returns to the interrupted processing. At this point, the slot-5 card restores the +5 V potential to the INT OUT line, and the slot-6 and slot-7 cards can issue interrupts as necessary.

If the slot-6 card needs to issue an interrupt (and +5 V is present on its INT IN pin), it activates the $\overline{NMI}$ line in the same way. But because it is not the source of the +5 V on the INT IN/INT OUT path, it merely activates logic to create a high impedance between the INT IN and INT OUT pins for its own slot, thereby preventing the slot-7 device from seeing the +5 V INT IN level. In this way, the slot-6 card asserts its higher interrupt priority over the slot-7 card. When the slot-6 interrupt has been serviced by the processor, the low impedance is restored between the INT IN and INT OUT pins of slot 6, and the +5 V potential propagates once more along the motherboard traces to slot 7.

4. When an interrupt arrives at the 6502, the microprocessor responds by performing the following operations on its stack:

Push program-counter high byte
Push program-counter low byte
Push status register
Jump via hexadecimal FFFA

Thus, the PC (program counter) and the status register are pushed (saved) onto the stack (the high byte of the PC is pushed first, then the lower byte, and, finally, the status register, P). After these stacking operations, the processor executes an indirect jump via hexadecimal memory location FFFA (ie: the location jumped to is the contents of FFFB (high byte) and FFFA (low byte) considered as a 16-bit number). In the Apple II computer, this is a ROM address, and Apple Computer Inc has set its contents to hexadecimal 03FB (remember that the lower byte contains the low-order address). Therefore, the system jumps to hexadecimal location 03FB and starts executing what it finds there. This area contains programmable memory, and it is the user's responsibility to start the interrupt-service routine there. Unfortunately, this area is organized so there are only 3 bytes of memory actually available here. Because of this, the user must store a jump instruction in these 3 bytes that will direct execution to another area of memory, typically to the page beginning at hexadecimal location 0300 or to some higher area such as hexadecimal 0800 or 1000.

Generally, the first instructions in the interrupt-service routine are those to save the present value of the A, X, and Y registers on the stack. After that, the interrupt service is performed, and the A, X, and Y registers are restored. The routine should always be terminated with an RTI (return from interrupt) instruction. This instruction will unstack the status registers and program counter, and execution will continue from the point it had reached just before the occurrence of the interrupt. The inter-

DYNACOMP

Quality software for⁺:

ATARI
PET
APPLE II Plus
TRS-80 (Level II)*
NORTH STAR
CP/M 8" Disk

GAMES, SIMULATIONS, EDUCATION and MISCELLANEOUS

BRIDGE 2.0 (Available for all computers) **Price: $17.95 Cassette/$21.95 Diskette**

An all-inclusive version of this most popular of card games. This program both BIDS and PLAYS either contract or duplicate bridge. Depending on the contract, your computer opponents will either play the offense OR defense. If you bid too high, the computer will double your contract! BRIDGE 2.0 provides challenging entertainment for advanced players and is an excellent learning tool for the bridge novice.

HEARTS 1.5 (Available for all computers) **Price: $14.95 Cassette/$18.95 Diskette**

An exciting and entertaining computer version of this popular card game. Hearts is a trick-oriented game in which the purpose is not to take any hearts or the queen of spades. Play against two computer opponents who are armed with hard-to-beat playing strategies.

CRIBBAGE (TRS-80 only) **Price: $14.95 Cassette/$18.95 Diskette**

This is simply the best cribbage game available. It is an excellent program for the cribbage player in search of a worthy opponent as well as for the novice wishing to improve his game. The graphics are superb and assembly language routines provide rapid execution.

STUD POKER (ATARI only) **Price: $11.95 Cassette/$15.95 Diskette**

This is the classic gambler's card game. The computer deals the cards one at a time and you (and the computer) bet on what you see. The computer does not cheat and *usually* bets the odds. However, it sometimes bluffs! Also included is a five card draw poker betting practice program. This package will run on a 16K ATARI. Color, graphics, sound.

POKER PARTY (Available for all computers) **Price: $17.95 Cassette/$21.95 Diskette**

POKER PARTY is a draw poker simulation based on the book, POKER, by Oswald Jacoby. This is the most comprehensive version available for microcomputers. The party consists of yourself and six other (computer) players. Each of these players (you will get to know them) has a different personality in the form of a varying propensity to bluff or fold under pressure. Practice with POKER PARTY before going to that expensive game tonight! Apple Cassette and diskette versions require a 32 K (or larger) Apple II.

NOMINOES JIGSAW (Atari, Apple and TRS-80 only) **Price: $16.95 Cassette/$20.95 Diskette**

A jigsaw puzzle on your computer! Complete the puzzle by selecting your pieces from a table consisting of 60 different shapes. NOMINOES JIGSAW is a virtuoso programming effort. The graphics are superlative and the puzzle will challenge you with its three levels of difficulty. Scoring is based upon the number of guesses taken and by the difficulty of the board set-up.

CRANSTON MANOR ADVENTURE (North Star only) **Price: $19.95**

At last! A comprehensive Adventure game for the North Star. CRANSTON MANOR ADVENTURE takes you in mysterious CRANSTON MANOR where you attempt to gather fabulous treasures. Lurking in the manor are wild animals and robots who will not give up the treasures without a fight. The number of rooms is greater and the associated descriptions are much more elaborate than the current popular series of Adventure programs, making this game the top in its class. Play can be stopped at any time and the status stored on diskette. Requires 32K.

VALDEZ (Available for all computers) **Price: $14.95 Cassette/$18.95 Diskette**

A simulation of supertanker navigation in the Prince William Sound and Valdez Narrows. The program uses an extensive 256X256 element radar map and employs physical models of ship response and tidal patterns. Chart your own course through ship and iceberg traffic. Any standard terminal may be used for display.

FLIGHT SIMULATOR (Available for all computers) **Price: $17.95 Cassette/$21.95 Diskette**

A realistic and extensive mathematical simulation of take-off, flight and landing. The program utilizes aerodynamic equations and the characteristics of a real airfoil. You can practice instrument approaches and navigation using radials and compass headings. The more advanced flyer can also perform loops, half-rolls and similar aerobatic maneuvers.

STARTREK 3.2 (Available for all computers) **Price: $ 9.95 Cassette/$13.95 Diskette**

This is the classic Startrek simulation, but with several new features. For example, the Klingons now shoot at the Enterprise without warning while also attacking starbases in other quadrants. The Klingons also attack with both light and heavy cruisers and move when shot at! The situation is hectic when the Enterprise is besieged by three heavy cruisers and a starbase S.O.S. is received! The Klingons get even!

CHESS MASTER (North Star and TRS-80 only) **Price: $19.95 Cassette/$23.95 Diskette**

This complete and very powerful program provides five levels of play. It includes castling, en passant captures and the promotion of pawns. Additionally, the board may be preset before the start of play, permitting the examination of "book" plays. To maximize execution speed, the program is written in assembly language (by SOFTWARE SPECIALISTS of California). Full graphics are employed in the TRS-80 version, and two widths of alphanumeric display are provided to accommodate North Star users.

BLACK HOLE (Apple only) **Price: $14.95 Cassette/$18.95 Diskette**

This is an exciting graphical simulation of the problems involved in closely observing a black hole with a space probe. The object is to enter and maintain, for a prescribed time, an orbit close to a small black hole. This is to be achieved without coming so near the anomaly that the tidal stress destroys the probe. Control of the craft is realistically simulated using side jets for rotation and main thrusters for acceleration. This program employs Hi-Res graphics and is educational as well as challenging.

HODGE PODGE (Apple only, 48K Integer BASIC) **Price: $19.95 Cassette/$23.95 Diskette**

Let HODGE PODGE be your child's baby sitter. Pressing any key on your Apple will result in a different and intriguing "happening" related to the letter or number of the chosen key. The program's graphics, color and sound are a delight for children from ages 1½ to 9. HODGE PODGE is a non-intimidating teaching device which brings a new dimension to the use of computers in education. HODGE PODGE requires a 48K Apple running with Integer BASIC.

TEACHER'S PET I (Available for all computers) **Price: $ 9.95 Cassette/$13.95 Diskette**

This is the first of DYNACOMP's educational packages. Primarily intended for pre-school to grade 3, TEACHER'S PET provides the young student with counting practice, letter-word recognition and three levels of math skill exercises.

SPACE TILT (Apple only) **Price: $10.95 Cassette/$14.95 Diskette**

Use the game paddles to tilt the plane of the TV screen to "roll" a ball into a hole in the screen. Sound simple? Not when the hole gets smaller and smaller! A built-in timer allows you to measure your skill against others in this habit-forming action game.

MOVING MAZE (Apple only) **Price: $10.95 Cassette/$14.95 Diskette**

MOVING MAZE employs the games paddles to direct a puck from one side of a maze to the other. However, the maze is dynamically (and randomly) built and is continually being modified. The objective is to cross the maze without touching (or being hit by) a wall. Scoring is by an elapsed time indicator, and three levels of play are provided.

ALPHA FIGHTER (Atari only) **Price: $14.95 Cassette/$18.95 Diskette**

Two excellent graphics and action programs in one! ALPHA FIGHTER requires you to destroy the alien starships passing through your sector of the galaxy. ALPHA BASE is in the path of an alien UFO invasion; let five UFO's get by and the game ends. Both games require the joystick and get progressively more difficult the higher you score!

INTRUDER ALERT (Atari only) **Price: $16.95 Cassette/$20.95 Diskette**

This is a fast paced graphics game which places you in the middle of the "Dreadstar" having just stolen its plans. The droids have been alerted and are directed to destroy you at all costs. You must find and enter your ship to escape with the plans. Five levels of difficulty are provided. INTRUDER ALERT requires a joystick and will run on 16K systems.

GIANT SLALOM (Atari only) **Price: $14.95 Cassette/$18.95 Diskette**

This real-time action game is guaranteed addictive! Use the joystick to control your path through slalom courses consisting of both open and closed gates. Choose from different levels of difficulty, race against other players or simply take practice runs against the clock. GIANT SLALOM will run on 16K systems.

CRYSTALS (ATARI only) **Price: $ 9.95 Cassette/$13.95 Diskette**

A unique algorithm randomly produces fascinating graphics displays accompanied with tones which vary as the patterns are built. No two patterns are the same, and the combined effect of the sound and graphics are mesmerizing. CRYSTALS has been used in local stores to demonstrate the sound and color features of the Atari.

CHOMP-OTHELLO (Atari only) **Price: $11.95 Cassette/$15.95 Diskette**

CHOMP-OTHELLO? It's really two challenging games in one. CHOMP is similar in concept to NIM; you must bite off part of a cookie, but avoid taking the poisoned portion. OTHELLO is the popular board game set to fully utilize the Atari's graphics capability. It is also very hard to beat! This package will run on a 16K system.

GAMES PACK I (Available for all computers) **Price: $9.95 Cassette/$13.95 Diskette**

GAMES PACK I contains the classic computer games of BLACKJACK, LUNAR LANDER, CRAPS, HORSERACE, SWITCH and more. These games have been combined into one large program for ease in loading. They are individually accessed by a convenient menu.

GAMES PACK II (Available for all computers) **Price: $9.95 Cassette/$13.95 Diskette**

GAMES PACK II includes the games CRAZY EIGHTS, JOTTO, ACEY-DUCEY, LIFE, WUMPUS and others. As with GAMES PACK I, all the games are loaded as one program and are called from a menu.

Why pay $7.95 or more per program when you can buy a DYNACOMP collection for just $9.95?

NORTH STAR SOFTWARE EXCHANGE (NSSE) LIBRARY **Price $9.95 Diskette**

DYNACOMP now distributes the 20 + volume NSSE library. Most of these diskettes offer an outstanding value for the purchase price. Write for details regarding the contents of this library and quantity (four or more) purchases.

Availability

DYNACOMP software is supplied with complete documentation containing clear explanations and examples. Unless otherwise specified, all programs will run within 16K program memory space (ATARI requires 24K). Except where noted, programs are available on ATARI, PET, TRS-80 (Level II) and Apple (Applesoft) cassette and diskette as well as North Star single density (double density compatible) diskette. Additionally, most programs can be obtained on standard (IBM format) 8" CP/M floppy disks for systems running under MBASIC.

BUSINESS and UTILITIES

MAIL LIST 2.2 (Apple, Atari and North Star diskette only) **Price: $34.95**

This program is unmatched in its ability to store a maximum number of addresses on one diskette (minimum of 1100 per diskette, more than 2200 for "double density" systems!). Its many features include alphabetic and zip code sorting, label printing, merging of files and a unique keyword seeking routine which retrieves entries by a virtually limitless selection of user defined codes. A very valuable program!

FORM LETTER SYSTEM (FLS) (Apple and North Star diskette only) **Price: $21.95**

Use FLS to create and edit form letters and address lists. Form letters are produced by automatically inserting each address into a predetermined portion of your letter. FLS is completely compatible with MAIL LIST 2.2, which may be used to manage your address files.

FLS and MAIL LIST 2.2 are available as a combined package for $49.95.

PERSONAL FINANCE SYSTEM (ATARI only) **Price: $34.95 Diskette**

PFS is a single disk menu oriented system composed of 10 programs designed to organize and simplify your personal finances. Features include a 300 transaction capacity; fast access; 26 optional user codes; data retrieval by month, code or payee; optional printing of reports; checkbook balancing; bar graph plotting and more. Also provides on the diskette is ATARI DOS 2.

FINDIT (North Star only) **Price: $19.95**

This is a three-in-one program which maintains information accessible by keywords of three types: Personal (eg: last name), Commercial (eg: plumbers) and Reference (eg: magazine articles, record albums, etc). In addition to keyword searches, there are birthday, anniversary and appointment searches for the personal records and appointment searches for the commercial records. Reference records are accessed by a single keyword or by cross-referencing two or three keywords.

DFILE (North Star only) **Price: $19.95**

This handy program allows North Star users to maintain a specialized data base of all files and programs in the stack of disks which invariably accumulates. DFILE is easy to set up and use. It will organize your disks to provide efficient locating of the desired file or program.

GRAFIX (TRS-80 only) **Price: $12.95 Cassette/$16.95 Diskette**

This unique program allows you to easily create graphics directly from the keyboard. You "draw" your figure using the program's extensive cursor controls. Once the figure is made, it is automatically appended to your BASIC program as a string variable. Draw a "happy face", call it H$ and then print it from your program using PRINT H$! This is a very easy way to create and save graphics.

TIDY (TRS-80 only) **Price: $10.95 Cassette/$14.95 Diskette**

TIDY is an assembly language program which allows you to renumber the lines in your BASIC programs. TIDY also removes unnecessary spaces and REMark statements. The result is a compacted BASIC program which uses much less memory space and executes significantly faster. Once loaded, TIDY remains in memory; you may load any number of BASIC programs without having to reload TIDY!

STATISTICS and ENGINEERING

DATA SMOOTHER (Not available for ATARI) **Price: $14.95 Cassette/$18.95 Diskette**

This special data smoothing program may be used to rapidly derive useful information from noisy business and engineering data which are equally spaced. The software features choice in degree and range of fit, as well as smoothed first and second derivative calculation. Also included is automatic plotting of the input data and smoothed results.

FOURIER ANALYZER (Available for all computers) **Price: $14.95 Cassette/$18.95 Diskette**

Use this program to examine the frequency spectra of limited duration signals. The program features automatic scaling and plotting of the input data and results. Practical applications include the analysis of complicated patterns in such fields as electronics, communications and business.

TFA (Transfer Function Analyzer) **Price: $19.95 Cassette/$23.95 Diskette**

This is a special software package which may be used to evaluate the transfer functions of systems such as hi-fi amplifiers and filters by examining their response to pulsed inputs. TFA is a major modification of FOURIER ANALYZER and contains an engineering-oriented decibel versus log-frequency plot as well as data editing features. Whereas FOURIER ANALYZER is designed for educational and scientific use, TFA is an engineering tool. Available for all computers.

HARMONIC ANALYZER (Available for all computers) **Price: $24.95 Cassette/$28.95 Diskette**

HARMONIC ANALYZER was designed for the spectrum analysis of repetitive waveforms. Features include data file generation, editing and storage/retrieval as well as data and spectrum plotting. One particularly unique facility is that the input data need not be equally spaced or in order. The original data is sorted and a cubic spline interpolation is used to create the data file required by the FFT algorithm.

FOURIER ANALYZER, TFA and HARMONIC ANALYZER may be purchased together for a combined price of $44.95 (three cassettes) and $56.95 (three diskettes).

REGRESSION I (Available for all computers) **Price: $19.95 Cassette/$23.95 Diskette**

REGRESSION I is a unique and exceptionally versatile one-dimensional least squares "polynomial" curve fitting program. Features include very high accuracy; an automatic degree determination option; an extensive internal library of fitting functions; data editing; automatic data and curve plotting; a statistical analysis (eg: standard deviation, correlation coefficient, etc.) and much more. In addition, new fits may be tried without reentering the data. REGRESSION I is certainly the cornerstone program in any data analysis software library.

REGRESSION II (PARAFIT) (Available for all computers) **Price: $19.95 Cassette/$23.95 Diskette**

PARAFIT is designed to handle those cases in which the parameters are imbedded (possibly nonlinearly) in the fitting function. The user simply inserts the functional form, including the parameters (A(1), A(2), etc.) as one or more BASIC statement lines. Data and results may be manipulated and plotted as with REGRESSION I. Use REGRESSION I for polynomial fitting, and PARAFIT for those complicated functions.

MULTILINEAR REGRESSION (MLR) (Available for all computers) **Price: $24.95 Cassette**
$28.95 Diskette

MLR is a professional software package for analyzing data sets containing two or more linearly independent variables. Besides performing the basic regression calculation, this program also provides easy to use data entry, storage, retrieval and editing functions. In addition, the user may interrogate the solution by supplying values for the independent variables. The number of variables and data size is limited only by the available memory.

REGRESSION I, II and MULTILINEAR REGRESSION may be purchased together for $49.95 (three cassettes) or $61.95 (three diskettes).

BASIC SCIENTIFIC SUBROUTINES, Volume I (Not available for ATARI)

DYNACOMP is the exclusive distributor for the software keyed to the text *BASIC Scientific Subroutines, Volume I* by F. Ruckdeschel (see the BYTE/McGraw-Hill advertisement in BYTE magazine, January 1981). These subroutines have been assembled according to chapter. Included with each collection is a menu program which selects and demonstrates each subroutine.

Collection #1:	Chapters 2 and 3:	Data and function plotting, complex variables
Collection #2:	Chapter 4:	Matrix and vector operations
Collection #3:	Chapters 5 and 6:	Random number generators, series approximations

Price per collection: $14.95 Cassette/$18.95 Diskette

All three collections are available for $39.95 (three cassettes) and $49.95 (three diskettes).

Because the text is a vital part of the documentation, *BASIC Scientific Subroutines, Volume I* is available from DYNACOMP for $19.95 plus 75¢ postage and handling.

ROOTS (Available for all computers) **Price $9.95 Cassette/$13.95 Diskette**

In a nutshell, ROOTS simultaneously determines all the zeroes of a polynomial having real coefficients. There is no limit on the degree of the polynomial, and because the procedure is iterative, the accuracy is generally very good. No initial guesses are required as input, and the calculated roots are substituted back into the polynomial and the residuals displayed.

Ordering Information

All orders are processed and shipped postpaid within 48 hours. Please enclose payment with order along with computer information. If paying by VISA or Master Card, include all numbers on card. For orders outside North America add 10% for shipping and handling.

Add $2.50 to diskette price for 8" floppy disk (IBM format soft sectored, CP/M, Microsoft BASIC)

*TRS-80 diskettes are not supplied with DOS or BASIC.

Deduct 10% when ordering 3 or more programs.

Ask for **DYNACOMP** programs at your local software dealer. Write for detailed descriptions of these and other programs from **DYNACOMP**.

DYNACOMP, Inc.
1427 Monroe Avenue
Rochester, New York 14618
24 hour mail order phone: (716)586-7579
Office phone (9AM-5PM EST): (716)442-8960

VISA

MasterCard

New York State residents please add 7% NYS sales tax.

⁺ *ATARI, PET, APPLE II, TRS-80, NORTH STAR, CP/M and IBM are registered trade names and/or trademarks.*

Circle 140 on inquiry card.

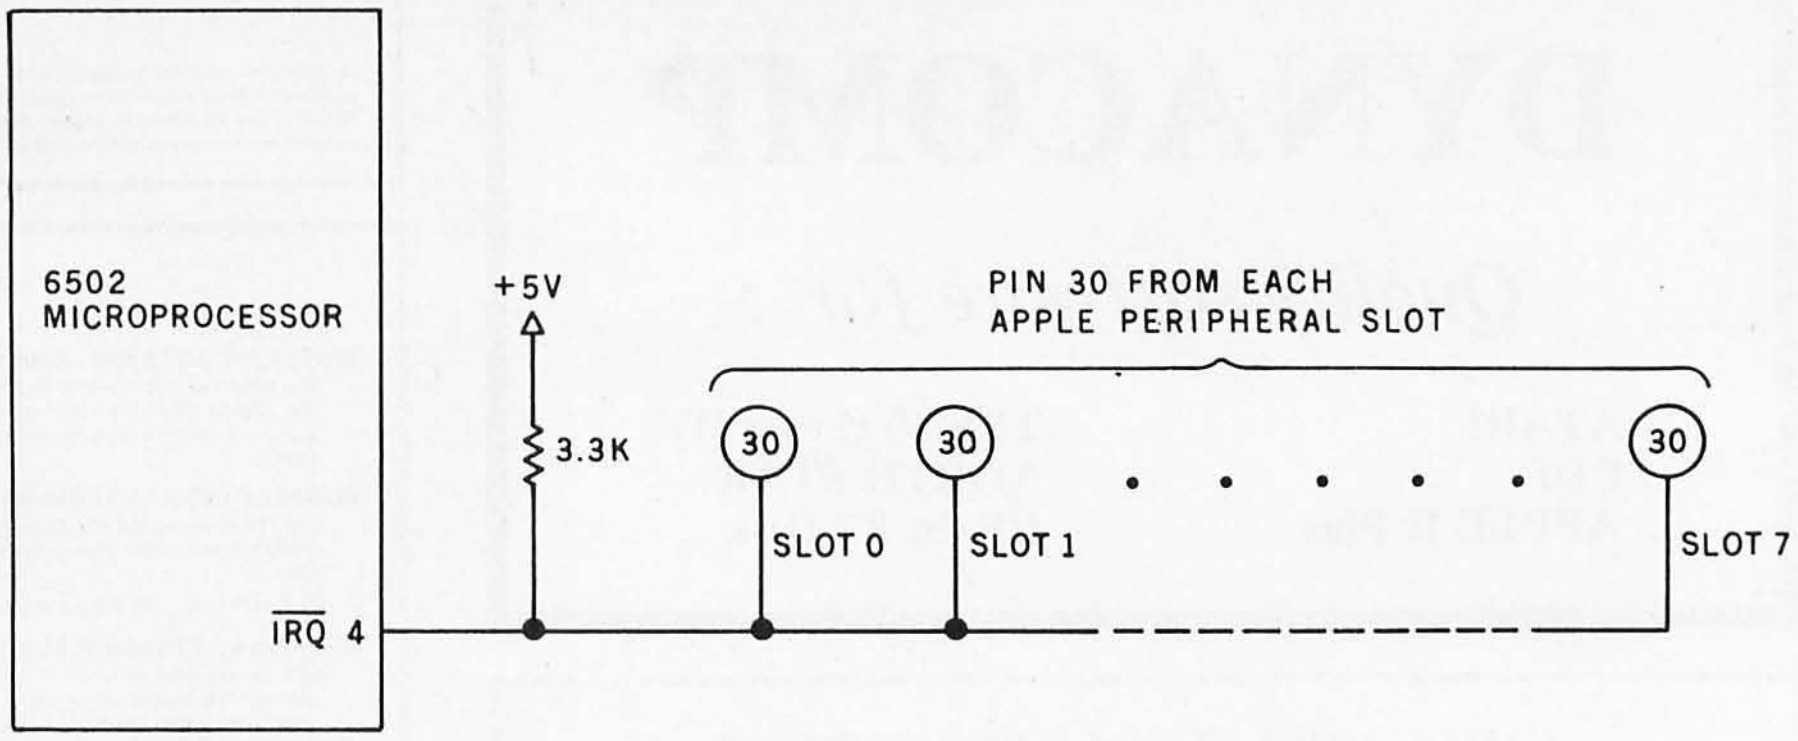

Figure 3: *The 6502 $\overline{IRQ}$ signal and the Apple II peripheral slots. The $\overline{IRQ}$ signal is connected to pin 30 of each of the slots and is held high by the pull-up resistor shown. A maskable interrupt is generated if the peripheral card in* any *of the slots presents a low impedance to ground to its pin 30.*

rupt-service routine itself must be written very carefully. It must, of course, perform whatever service you wish it to—such as printing a message on the console, ringing a bell, dialing a telephone, or turning on the furnace. But while it is doing these things, the service routine must not disturb any code used by the other routines stored in memory. The stacks should be in exactly the same state upon exit as they were when the service routine began.

5. The RTI instruction at the end of the service routine unstacks the status registers and program counter. This ensures that execution will continue from the point reached just before the arrival of the interrupt. Functionally, it is equivalent to:

Pop status register
Pop program-counter low byte
Pop program-counter high byte
Execute next instruction

Maskable Interrupts

Pin number 4 on the 6502 chip is an input signal called the interrupt request, $\overline{IRQ}$. This is a *maskable* interrupt. In the Apple II, $\overline{IRQ}$ is connected through the printed-circuit board to a pull-up resistor and to each of the eight I/O slots, as shown in figure 3.

This is the same scheme used for the $\overline{NMI}$ except that the interrupt request will not be accepted if the interrupt-disable bit, I, in the status register, P, is set (ie: contains a 1). As before, this interrupt scheme can be better understood by considering the five aspects of interrupts.

1. Any external device can generate an interrupt request by driving pin 30 on any I/O slot to ground potential. Once again, the Apple II can have eight different interrupt sources, and they all may decide to fire at the same time.

2. The 6502 microprocessor will respond to this request only if the interrupt-disable bit, I, in the status register, P, is cleared (ie: bit I must be a 0). This is done by executing a CLI (clear interrupt-disable bit) instruction any time before the arrival of the interrupt request. However, the 6502 will completely ignore the request if bit I has been set by executing an SEI (set interrupt-disable bit) instruction before the arrival of the interrupt.

3. Once again, the microprocessor is unable to determine the source of the interrupt. If there is only one device capable of sending an $\overline{IRQ}$ signal, there is no problem. If more than one device can do this, the same factors apply that were discussed earlier in the section on the nonmaskable interrupt, and polling can be used to determine which device caused the $\overline{IRQ}$.

4. If bit I has been cleared and the $\overline{IRQ}$ signal arrives at the 6502, the following actions occur:

Push program-counter high byte
Push program-counter low byte
Push status register
Jump via hexadecimal FFFE

Text continued on page 294

MODEL II

$ DISCOUNT $

TRS-80® DEALER A301

MODEL III

COMPUTER SPECIALISTS

26-4002
64K 1 Drive
$3440.00

26-4160 1 Drive EXP.	$1035.00
26-4161 2 Drive EXP.	1575.00
26-4162 3 Drive EXP.	2115.00
26-4501 Gen. Ledger	180.00
26-4502 Inventory	180.00
26-4503 Payroll	360.00
26-4554 Acct. Rec.	180.00
26-4701 Fortran	270.00
26-1157A Daisy Wheel	2290.00
26-1158 Daisy Wheel II	1799.00

26-1155 Quick Printer II	$187.00
26-1145 RS-232 Board	84.00
26-1140 "O" K Interface	249.00
26-1141 "16" K Interface	359.00
26-1142 "32" K Interface	469.00
26-1160 Mini Disk - Drive O	419.00
26-1161 Mini Disk - Additional	419.00
26-1154 Lineprinter II	699.00
26-1165 Line Printer V	1710.00
26-1159 Lineprinter IV	859.00
26-1166 Line Printer VI	1080.00
26-1563 Scripsit - Disk	79.00
26-1566 Visicalc	83.00
26-1562 Profile	72.00

26-1061 4K I	$630.00
26-1062 16K III	888.00
26-1063 32K III	
2-Drives, RS232	2225.00

COLOR



26-3001 4K	$360.00
26-3002 16K	540.00
26-3010 Color Video	360.00
26-1206 Recorder	54.00
26-3008 Joysticks	22.50

ALL OTHER R.S. SOFTWARE FURNITURE, STANDS, CABLES AND ACCESSORIES AT DISCOUNT FROM CATALOG PRICE.

Novation Cat Modem	$149.00
CCA Data Management System	72.00
Adventure Games Games 1-9 each	14.00

CENTRONICS

Fast 100 CPS Centronics 730 Printer	577.00
Text Quality Centronics 737 Printer	737.00

Model II Cobol Compiler
$360.00
Cobol Run Time Package
$36.00

Pocket Computer



26-3501 1.9K P.C.	$225.00
26-3503 Cassette I/F	45.00
14-812 Recorder	72.00

Acorn Software Products, Inc.

GAMES:	
Alien Invasion	$9.00
Stock Market	9.00
Star Trek	9.00
Block Em	9.00
Ting-Tong	9.00
UTILITIES:	
System Savers	14.00
EDUCATION:	
Language Teacher	18.00

FREE: COMPUTER CATALOG UPON REQUEST

1-800-841-0860 Toll Free Order Entry

MICRO MANAGEMENT SYSTEMS, INC.

No Taxes on Out Of State Shipments

Immediate Shipment From Stock on Most Items

DOWNTOWN PLAZA SHOPPING CENTER
115 C SECOND AVE. S.W.
CAIRO, GEORGIA 31728
(912) 377-7120 Ga. Phone No.

R.S. 90 Day Limited Warranty
F-48 Form Provided

Largest Inventory In the S.E. U.S.A.

*TRS-80 is a registered trademark of the Tandy Corp.

Circle 247 on inquiry card.





Listing 1: *Assembly-language routines to test maskable and nonmaskable interrupts. Routines RNMI and RIRQ print the messages "NMI" and "IRQ", respectively, 255 times when the appropriate interrupt is generated. The short routines at hexadecimal 352 (decimal 850) and hexadecimal 354 (decimal 852) are meant to be called from BASIC to enable and disable, respectively, the maskable interrupt. See the text for details on generating the interrupts necessary to test these routines.*

```
                        1000 *TEST OF INTERRUPT SYSTEM
                        1010        .OR   $3FB
03FB-   4C  00 03       1020        JMP   RNMI
03FE-   21  03          1030        .DA   RIRQ
                        1040        .OR   $300
                        1050 **************************************************
                        1060 *                                                *
                        1070 ***********  ROUTINE  FOR  NMI  ***********
                        1080 *                                                *
                        1090 **************************************************
0300-   48              1100 RNMI   PHA               SAVE REGISTERS
0301-   8A              1110        TXA
0302-   48              1120        PHA
0303-   98              1130        TYA
0304-   48              1140        PHA
0305-   A2  FF          1150        LDX   #$FF
0307-   A9  CE          1160 L1     LDA   #$CE        PRINT "N"
0309-   20  ED FD       1170        JSR   $FDED
030C-   A9  CD          1180        LDA   #$CD        PRINT "M"
030E-   20  ED FD       1190        JSR   $FDED
0311-   A9  C9          1200        LDA   #$C9        PRINT "I"
0313-   20  ED FD       1210        JSR   $FDED
0316-   CA              1220        DEX
0317-   E0  00          1230        CPX   #0
0319-   D0  EC          1240        BNE   L1
031B-   68              1250        PLA               RESTORE REGISTERS
031C-   A8              1260        TAY
031D-   68              1270        PLA
031E-   AA              1280        TAX
031F-   68              1290        PLA
0320-   40              1300        RTI               GO BACK
                        1310 **************************************************
                        1320 *                                                *
                        1330 ***********  ROUTINE  FOR  IRQ  ***********
                        1340 *                                                *
                        1350 **************************************************
0321-   48              1360 RIRQ   PHA               SAVE REGISTERS
0322-   8A              1370        TXA
0323-   48              1380        PHA
0324-   98              1390        TYA
0325-   48              1400        PHA
0326-   A2  FF          1410        LDX   #$FF
0328-   A9  C9          1420 L2     LDA   #$C9        PRINT "I"
032A-   20  ED FD       1430        JSR   $FDED
032D-   A9  D2          1440        LDA   #$D2        PRINT "R"
032F-   20  ED FD       1450        JSR   $FDED
0332-   A9  D1          1460        LDA   #$D1        PRINT "Q"
0334-   20  ED FD       1470        JSR   $FDED
0337-   CA              1480        DEX
0338-   E0  00          1490        CPX   #0
033A-   D0  EC          1500        BNE   L2
033C-   68              1510        PLA               RESTORE REGISTERS
033D-   A8              1520        TAY
033E-   68              1530        PLA
033F-   AA              1540        TAX
0340-   68              1550        PLA
0341-   40              1560        RTI               GO BACK
                        1570 **************************************************
                        1580 *                                                *
                        1590 *********  ROUTINES  FOR  BASIC  *********
                        1600 *                                                *
                        1610 **************************************************
                        1620        .OR   850
0352-   58              1630        CLI               ENABLE INTERRUPTS
0353-   60              1640        RTS
0354-   78              1650        SEI               DISABLE INTERRUPTS
0355-   60              1660        RTS
                        1670        .EN

SYMBOL TABLE

RNMI    0300    L1    0307    RIRQ    0321
L 2     0328
```

A definite breakthrough in Hard Disk Controllers: The HOP™ from ACT.

How we HOP™ up 5¼″ Hard Disks.

Take a close look at the industry and you'll find lots of folks clamoring for the chance to utilize the new 5¼″ Winchester-type Hard Disk microcomputer systems. The reason for this is obvious: the 5¼″ Hard Disk packs millions of bytes of on-line data storage in the same space as a 5¼″ standard floppy. Hard Disks also offer a degree of high reliability and high access mass storage that instantly obsoletes the floppies.

The problem most people had was finding a 5¼″ Winchester-type Hard Disk with a decent controller package. For a while it seemed like an industry-wide problem. Until now. A company named ACT is announcing the HOP™! It's a whole new approach to affordable Hard Disk Controllers. And it works great!

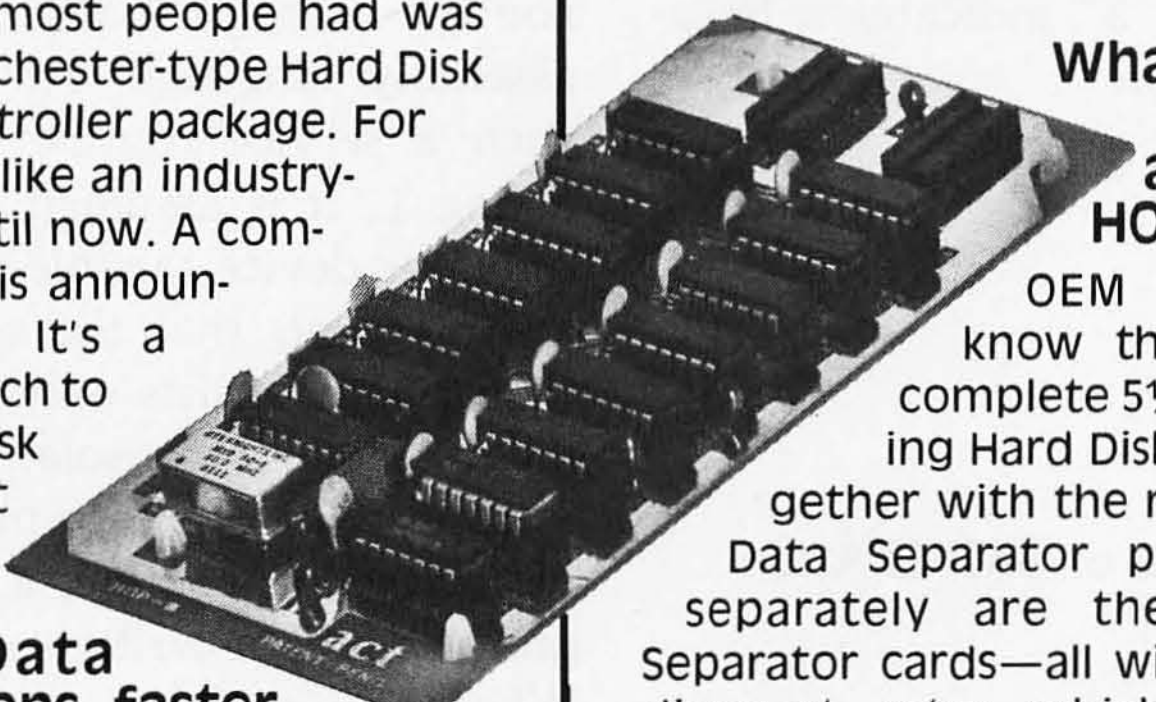

Our Digital Data Separator means faster, more reliable throughput than Analog Separators.

The secret to our success lies in a new approach to Data/Clock separation. While others struggle to manhandle an Analog Data Separator into their controller cards, we at ACT took a completely different approach—a digital one.

What we came up with is the HOP™. It is a Digital Data Separator that fits the 5¼″ Winchester-types like hand-in-glove. We created a package that'll beat the pants off any other 5¼″ Hard Disk or floppy it comes up against—all at a price you can't ignore.

Finally, a 5¼″ Hard Disk micro-sequencing controller package with an efficient, floppy-like interface. We're talking about megabytes of formatted data storage to match the demands of today's (and tomorrow's) sophisticated programming. Your multi-terminal and real-time transaction oriented systems never had it so good. Or, so affordable.

What OEM buyers should know about the ACT HOP™ package.

OEM buyers should know that ACT offers a complete 5¼″ micro-sequencing Hard Disk Controller together with the remarkable HOP™ Data Separator package. Offered separately are the HOP™ Digital Separator cards—all with OEM quantity discount rates which are positively attractive.

If all this sounds good on paper, just wait until you see the HOP™ in action! Your horizons will dramatically shift—upwards.

Clip and mail the coupon for quick response to your questions. Or better yet, give us a call at (703) 471-9750, TELEX: 440-388 ACTSYS, for some no-nonsense reasons to get off the stick . . . and on the HOP™!

act

American Computer and Telecommunications Corporation

Clip and mail coupon to:

11301 Sunset Hills Road
Suite A-4, Reston, VA 22090
(703) 471-6288

HOP™ To It!

☐ Tell me more: send technical specs.
☐ Please set up an OEM demonstration for us.
☐ Send me Quantity Pricing Schedules.
☐ Have an ACT representative contact me.

My interest is: ☐ immediate ☐ 3months
☐ 6 months ☐ 9 months ☐ longer

My 5¼″ Hard Disk Drive interests center on:
☐ S-100 Microcomputer Systems
☐ H-89 Heathkit Computer Systems
☐ TRS-80 Radio Shack Computer Systems
☐ Other, specify ____________

My Hard Disk/HOP™ package interests center on:
☐ Seagate Technology-ACT 5¼″ Hard Disk package
☐ Shugart Associates
☐ Olivetti Peripheral Equipment
☐ Tandon
☐ Irwin International
☐ International Memories
☐ New World Computers

Name ____________
Title ____________
Company ____________
Address ____________
City/State/ZIP ____________
Phone (____) ____________
(H-B581)

A HOP™ above the Rest.

The new, high performance 5¼″ Hard Disk Controller Package that's taking the industry by storm.

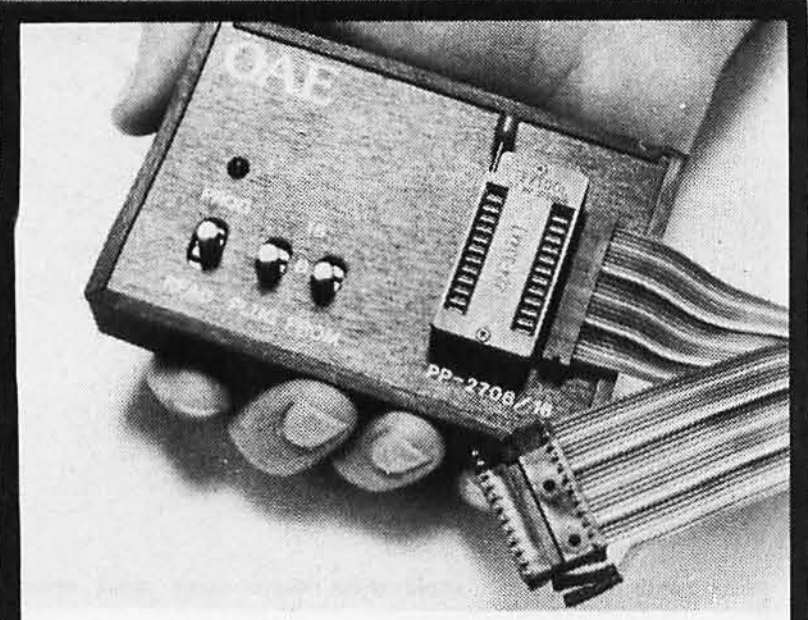



Text continued from page 290:

As before, the program counter and the status register are placed on the stack, and the processor executes an indirect jump via hexadecimal location FFFE. This is again a ROM area in the Apple II and has been set by Apple Computer Inc to the value hexadecimal FA86 (or FA40 in the autostart version), which is an address in ROM. Thus, the processor starts executing at location FA86 (or FA40), where it finds the following instructions (a "$" indicates a hexadecimal address):

```
STA $45
PLA
PHA
ASL A
ASL A
ASL A
BMI $FA92 or BMI $FA4C
JMP ($03FE)
```

This section of code stores the accumulator at hexadecimal location 45 in page zero and checks to see if the fourth bit in the status register, the "break" bit B, is high or not. An interrupt request, IRQ, always forces this bit low, so the BMI instruction never succeeds and finally the indirect jump, JMP ($03FE), is encountered. The hexadecimal address 03FE is in programmable memory, and the writer of the service routine must place the address of the routine here. Note that this is somewhat different from the way in which the NMI request is routed. For the IRQ interrupts, the *address* of the service routine rather than a jump instruction including an address must be stored in the 2 bytes, hexadecimal 03FE and 03FF. Also, remember that the lower byte of the 2-byte address must be stored first.

As before, the registers are usually stacked first, although this time the accumulator can be left alone, since it has already been stored at hexadecimal location 45 by the program in ROM. Then the interrupt service is performed, the registers are restored, and, finally, an RTI is executed.

5. The processor returns to its original program after it encounters the RTI. As before, this instruction will:

Pop status register
Pop program-counter low byte
Pop program-counter high byte
Execute next instruction

In principle, any program in any language can be interrupted by an external signal, and the interrupts can be serviced using the techniques described above. In microprocessor systems such as the Apple II, the interrupted program is usually a BASIC program, and the interrupt-service routines are usually written in assembly language. An example of such a service routine is shown in listing 1. It is assumed that there is only one device capable of generating an interrupt, that the service to be performed consists only of writing a message to the console, and that interrupts will not interrupt themselves.

To test this routine, a BASIC program should be written and executed. When you wish to enable the IRQ signal from your BASIC program, it is only necessary to execute:

```
CALL 850
```

and when you wish to disable the IRQ, all you have to do is:

```
CALL 852
```

If you do not have any device in your I/O slots capable of generating an interrupt request, you can easily make one by bending a resistor with a pair of long leads so that the leads are about one-half inch apart. A 100-ohm resistor works well. Then *very carefully* connect pin 29 (for the NMI) or pin 30 (for the IRQ) through the resistor to the ground pin (pin 26) on any of the I/O slots. This technique is crude but effective, and will generate the interrupt request whenever you wish. The NMI signal will always set the interrupt system in motion, but the IRQ signal will be accepted only if you have executed the BASIC instruction CALL 850.

Once you have mastered the fundamentals of interrupt handling, the number of interrupts that can be serviced and the complexity of the service are limited only by the speed of the interrupting devices and ingenuity of the servicing programs. ■

16 BIT 8086 MICRO SYSTEM

Tec-86 / 8086 System **$3990**

CP/M™ -86
T E C -86
BASIC -86

- Available Now Basic-86™ - $350 CP/M-86™ - $250
- IEEE 696 S-100 • CPU w/Vectored Interrupts • Two RS-232 Ports
- 24 Parallel I/O lines (3 ports) • Independent baud rate for each serial port
- Baud rates from 50 to 19200 • Attractive, all metal desk top enclosure
- ROM boot for CP/M-86™ • Dual 8-inch Shugart floppies with controller
- 32K static RAM (Expandable) • 64K Dynamic RAM opt. - Available Soon

S-100 Boards


8086 CPU with Vectored Interrupts


16 Kilobyte Static RAM
8 and 16 bit transfer


PROM and I/O
2 RS 232 - PIO
CP/M-86 ROM Boot


Analog to Digital Converter and Timer/Counter
16 channels expandable to 256
12,14,or 16 bit accuracy
30,40,100,or 125 KHz


Real Time Video Digitizer and Display



Expansion Multiplexer


Digital to Analog Converter
4 channels - 12 bit accuracy
3 microsecond conversion rate


Analog to Digital Converter
16 channels - 12 bit accuracy
30 KHz Conversion rate


4 PIO and Timer/Counter


Digital to Analog Companion
4-20 mA output - Filters

Apple Boards




Analog to Digital Converter
16 channels
12, 14, or 16 bit accuracy
30, 40, 100, or 125 KHz


Digital to Analog Companion
4-20 mA output - Filters


Digital to Analog Converter
2 channels - 12 bit accuracy
3 microsecond conversion rate
1 parallel output port

TECMAR INC.

Data Acquisition Systems and
Video Digitization Systems Available
23600 Mercantile Rd. • Cleveland, OH 44122

TECMAR, INC.
(216)382-7599
464-7410

Basic 86™ registered tradeMark Microsoft

CP M™ registered tradeMark Digital Research

Circle 401 on inquiry card.

Digital Plotting with the Apple II Computer

Dr Richard C Hallgren
Department of Biomechanics
Michigan State University
East Lansing MI 48824

The first attempts to use personal computers in the research laboratory have met with considerable success. Not only are these machines functioning as computational tools, they are also being used with custom interface circuits to digitize analog signals and to process data using routines such as the fast Fourier transform (see "Fast Fourier Transforms on Your Home Computer" by W D Stanley and S J Peterson, on page 14 of the December 1978 BYTE).

In dealing with complex, time-dependent waveforms and their spectrums, it is desirable to display the data as a function of either time or frequency. Plotting is possible with a data terminal such as the DECwriter II, but such methods are lacking when high-resolution plotting is required. The Hiplot digital plotter, manufactured by Houston Instrument, gives the small-system user a cost-effective means of obtaining high-quality digital plots. The plotter uses an 8½- by 11-inch sheet of paper and allows plotting within a 7- by 10-inch boundary. Reversible stepper motors are used to give bidirectional steps of either 200 or 100 steps per inch, amounting to a resolution of 0.005 or 0.01 inches per step. An RS-232C serial interface is a standard feature, which makes connecting the plotter to a computer an easy task.

The Hiplot accepts data in an RS-232C format consisting of 1 start bit, 8 data bits, and 2 stop bits. Since the computer manipulates 8 bits of

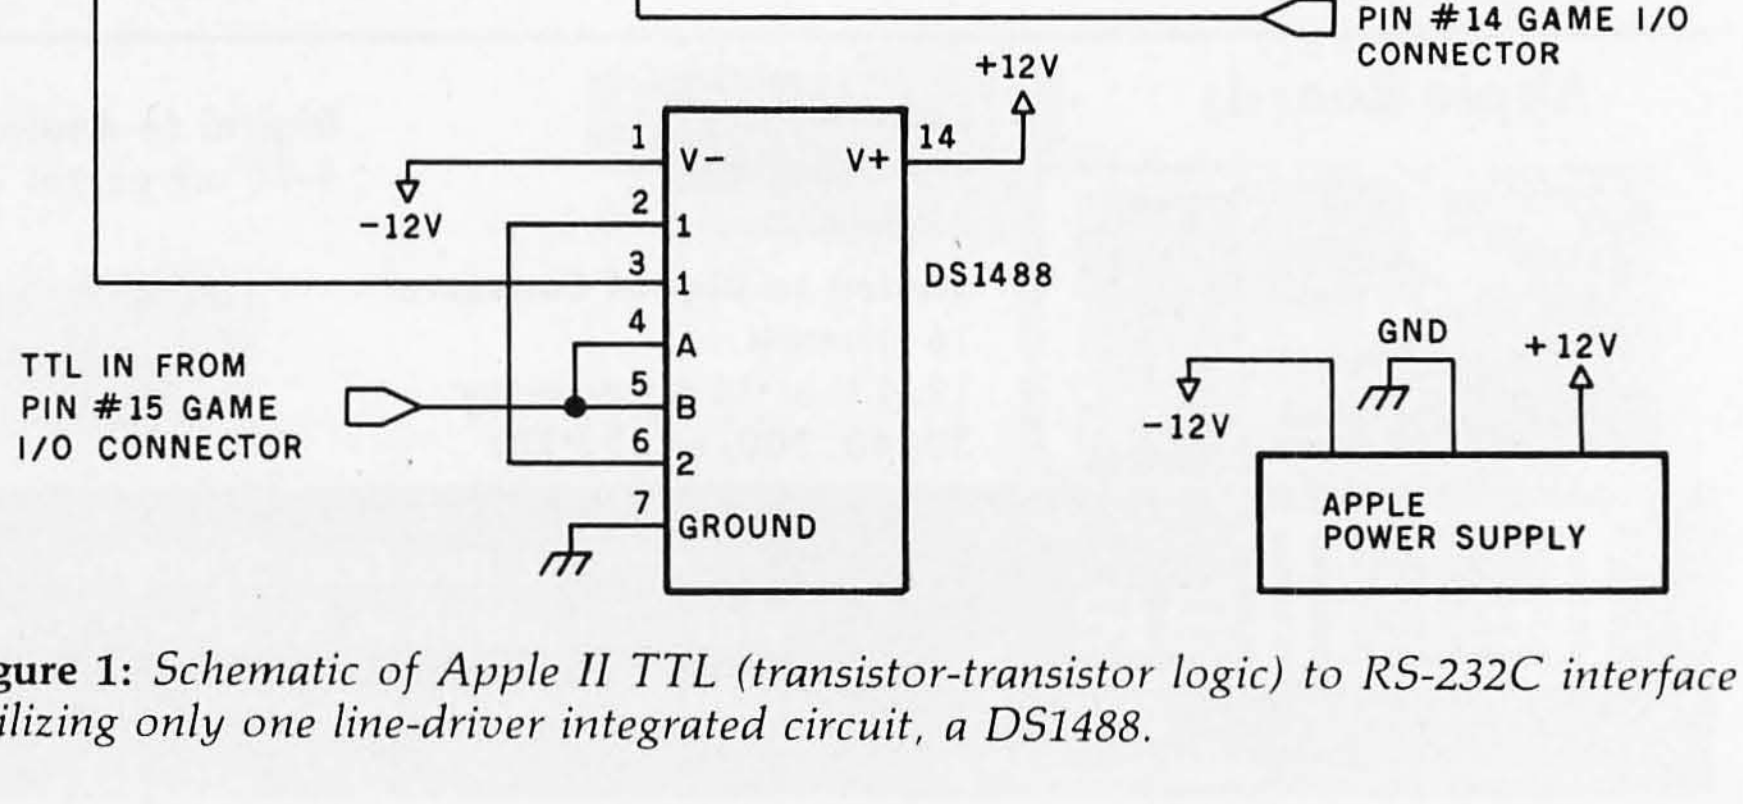

Figure 1: *Schematic of Apple II TTL (transistor-transistor logic) to RS-232C interface utilizing only one line-driver integrated circuit, a DS1488.*

THE ULTIMATE REFINEMENT.
PL/I FOR YOUR MICRO.

It's standard, it's structured, and it's perfect for commercial applications.

PL/I Subset G. Designed expressly for minicomputers by an ANSI committee of PL/I experts. All the best application programming features, refined to match contemporary programming practices. Supported by the major minicomputer manufacturers, there's no better way to protect your software investment.

PL/I-80™ for Microcomputers. Based on Subset G, PL/I-80 runs under our CP/M© and MP/M™ operating systems on Z-80, 8080 and 8085 based microcomputers.

PL/I-80 Features. Save design time, minimize debugging and maintenance problems, and design high-quality output with picture specifications, structures, arrays, based and pointer variables, and exception processing.

BT-80™. A Record Retrieval System for PL/I-80 applications is available separately to help you manage your large files.

PL/I-80 from Digital Research. Fast. Economical. Refined. With the programming power of minicomputer PL/I. The package includes compiler, run-time library, linkage editor and relocating macro-assembler, plus three comprehensive manuals. All for only $500.

(Domestic USA price only)

Interested in Refinement?
Call or write Digital Research.
Experts in refinement.

DIGITAL RESEARCH®

U.S.A.
DIGITAL RESEARCH
P.O. Box 579
801 Lighthouse Avenue
Pacific Grove, CA 93950
TWX 910 360 5001

EUROPE
VECTOR INTERNATIONAL
Research Park
B-3030 Leuven
Belgium
32 (16) 20-24-96
Telex 26202 VECTOR

FAR EAST
MICROSOFTWARE ASSOCIATES
102 Plasada
3-16-14 Minami Aoyama
Minato-ku
Tokyo 107, Japan
03-403-2120 Telex 2426875 MSA

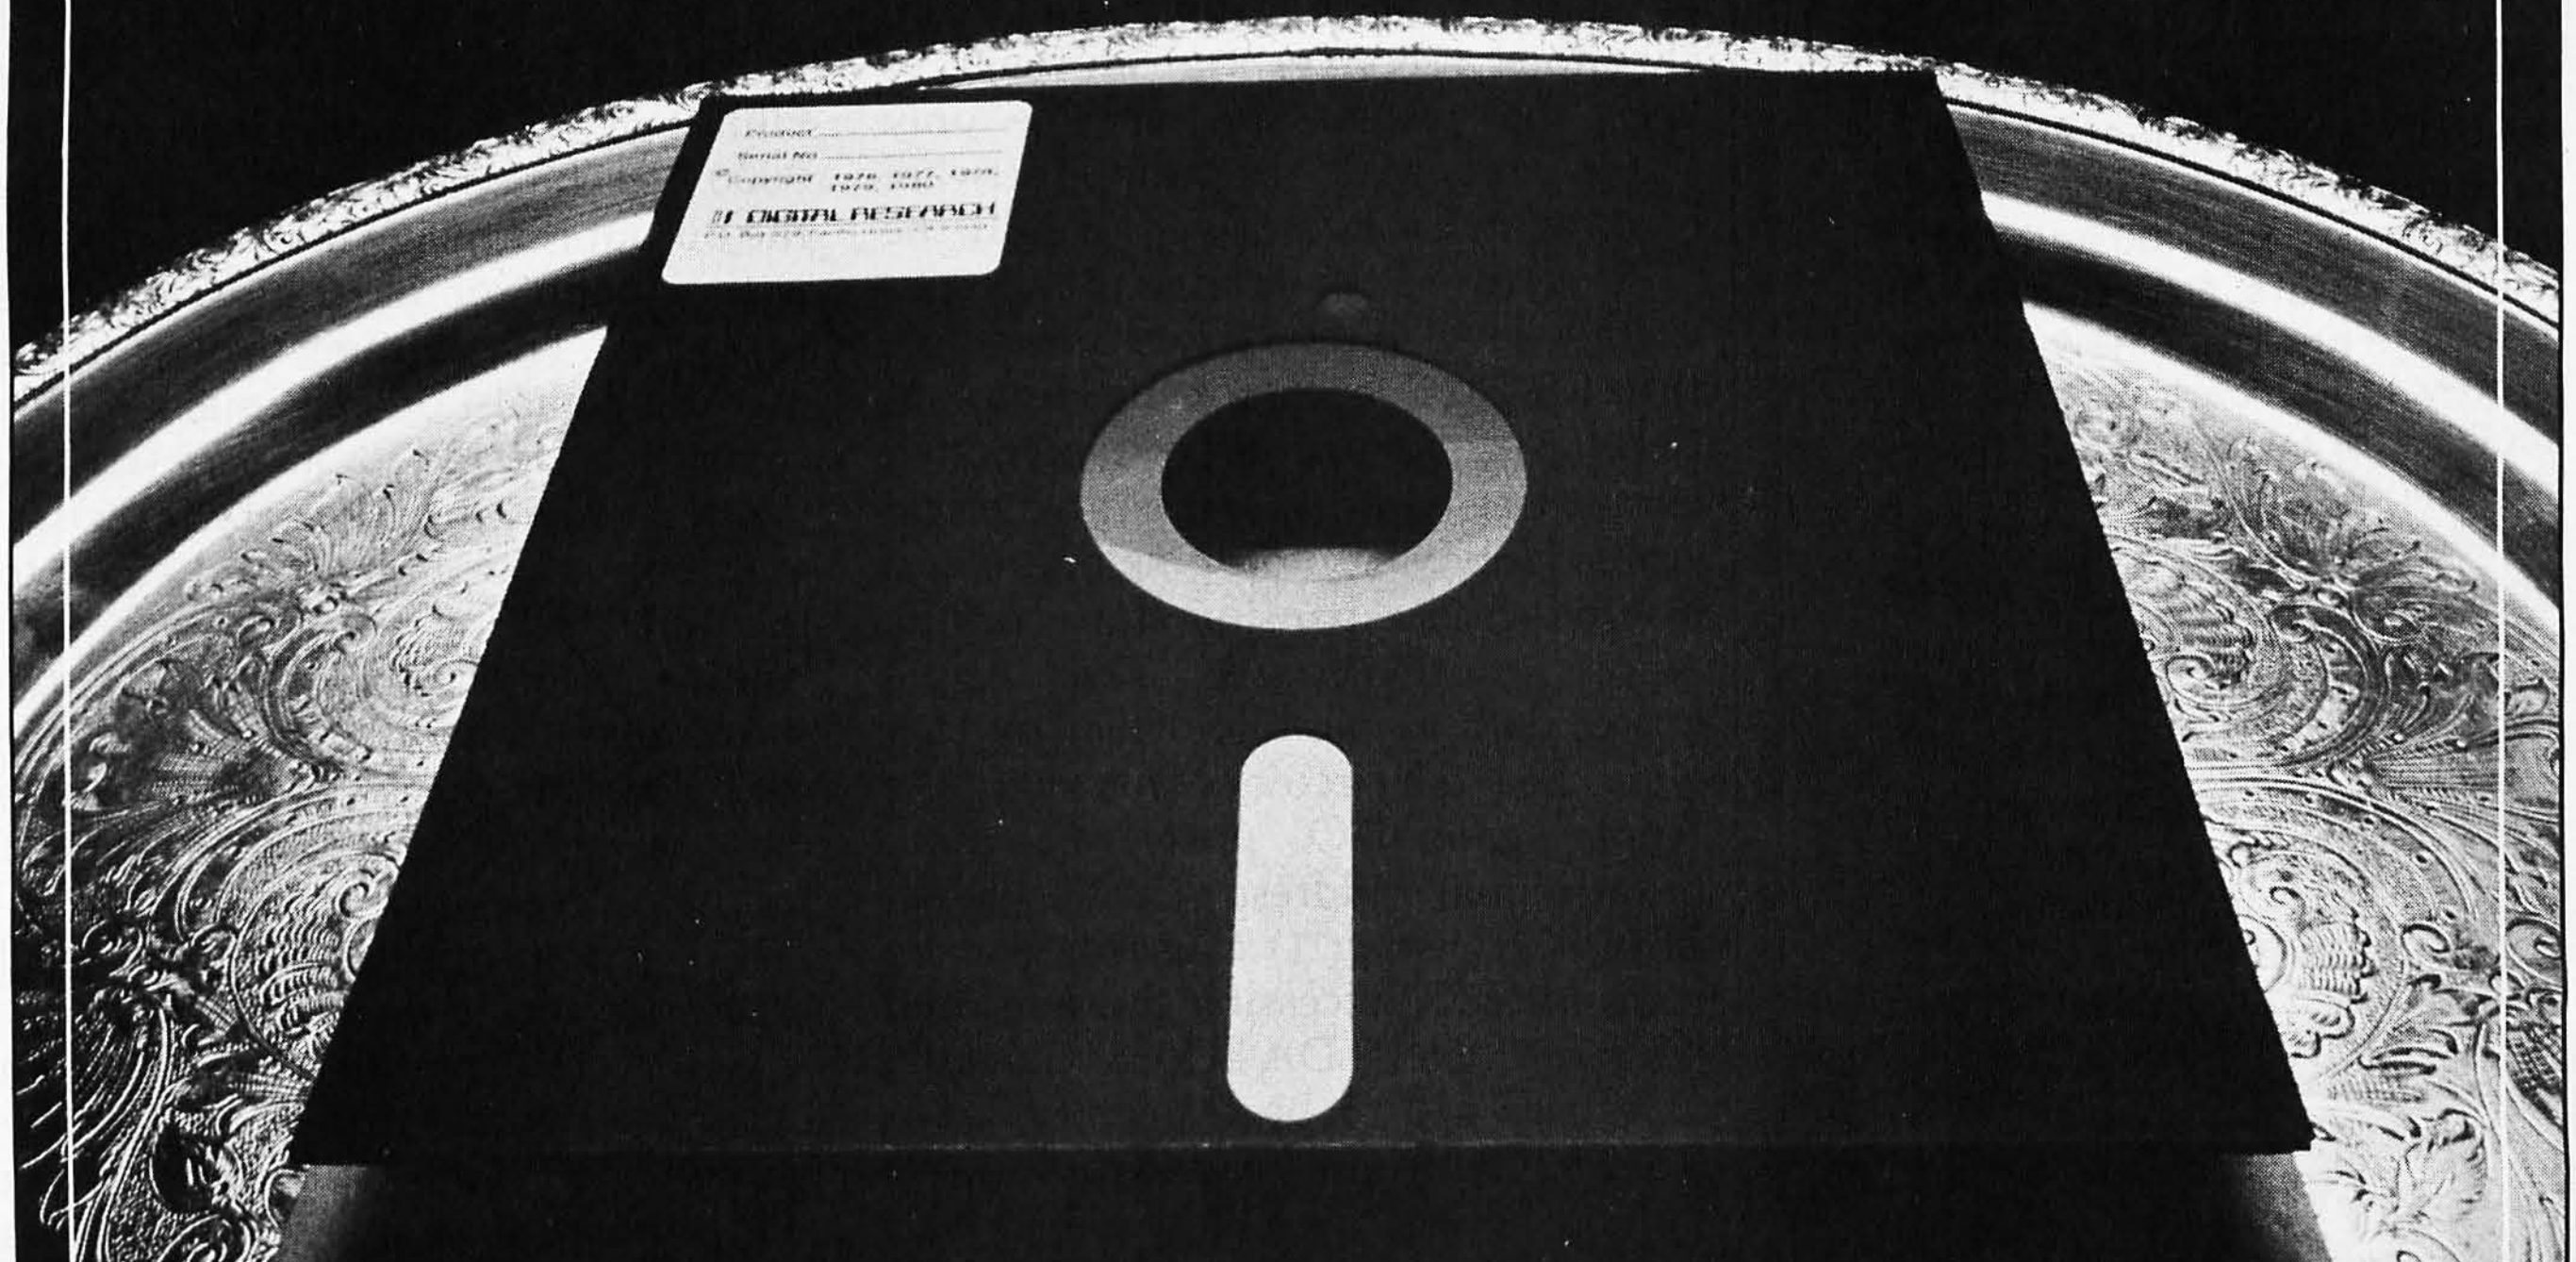

Circle 129 on inquiry card.

Visit us at NCC.

Listing 1: *6502 machine-language routine to perform functions of a UART (universal asynchronous receiver/transmitter) for transmitting RS-232C serial data through the hardware modification.*

```
8000-    A0 09       LDY     #$09       9 bits (1 start, 8 data)
8002-    18          CLC
8003-    48          PHA                Save data byte
8004-    B0 05       BCS     $800B
8006-    AD 59 C0    LDA     $C059      Output a space
8009-    90 03       BCC     $800E
800B-    AD 58 C0    LDA     $C058      Output a mark
800E-    A9 03       LDA     #$03
8010-    48          PHA
8011-    A9 04       LDA     #$04
8013-    4A          LSR
                                                            Delay 1 bit time
8014-    90 FD       BCC     $8013
8016-    68          PLA
8017-    E9 01       SBC     #$01
8019-    D0 F5       BNE     $8010
801B-    68          PLA                Get data byte
801C-    6A          ROR                Rotate into carry bit
801D-    88          DEY                Decrement bit count
801E-    D0 E3       BNE     $8003      Jump if more data
8020-    A0 02       LDY     #$02       2 stop bits
8022-    AD 38 C0    LDA     $C058      Output a mark
8025-    A9 03       LDA     #$03
8027-    48          PHA
8028-    A9 04       LDA     #$04
802A-    4A          LSR
                                                            Delay 1 bit time
802B-    90 FD       BCC     $802A
802D-    68          PLA
802E-    E9 01       SBC     #$01
8030-    D0 F5       BNE     $8027
8032-    88          DEY                Decrement bit count
8033-    D0 ED       BNE     $8022      Jump if more stop bits
8035-    60          RTS
```

parallel data at a time, we need a method to convert the parallel data to serial data. I decided to implement this conversion in software, instead of using a UART (universal asynchronous receiver/transmitter) to keep the system simple. The only things required are the software routine and a line driver to shift the TTL (transistor-transistor logic) voltage-level output from the Apple II to RS-232C levels for the Hiplot. A DS1488 quad line driver integrated circuit (see figure 1) is mounted on an Apple Hobby/Prototyping board and inserted into expansion slot 6 on the Apple motherboard. The Apple writes data to the line driver by toggling the latch circuit connected to the Apple game-I/O port. Accessing hexadecimal address C059 ("LDA $C059" in listing 1) causes a 1 to be transmitted. Accessing hexadecimal address C058 ("LDA $C058" in listing 1) causes a 0 to be transmitted. (In RS-232C communications, any voltage between +5 V and +15 V is called a *space* and represents a "high" signal or a digital 0; any voltage between −5 V and −15 V is called a *mark* and represents a "low" signal or a digital 1.)

Figure 2 on page 300 shows the flowchart for the software routine that replaces the UART; listing 1 (above) shows the program with comments. To reduce the plotting time to a minimum, I decided to operate the Hiplot at its maximum data rate of 9600 bps (bits per second). Executing the output routine loads the Y register with a count of nine and clears the carry bit. The routine then writes a mark (a digital 1 or a *low* signal) if the carry bit is cleared, or a space (the opposite of mark) if the carry bit is set, and loops for a time period equal to the time spacing between bits. The routine then shifts the data so the most significant bit goes into the carry bit and checks to see if all the data bits have been sent. If not, it loops to process the next bit. Otherwise, it transmits 2 stop bits and returns to the calling program.

Getting to the point where data can be transferred from the Apple to the Hiplot is only the first part of using the plotter. Since the plotter comes with no software, it is necessary to write routines which will generate axis systems and, if desired, alphanumeric characters.

Text continued on page 314

2716 (5V) $8.95 | **4116 200NS $3.50** | **2114L 300NS $3.75**

NEW! IT TALKS

"FAST TALKERS S-100"

LOW DATA RATE S100 SPEECH BOARD

- ★ UNLIMITED SPEECH POSSIBILITIES
- ★ S100 INTERFACE
- ★ USES TEXAS INSTRUMENT TMS 5200 V.S.P.
- ★ SOFTWARE VOICE DATA ASSEMBLER
- ★ 32 WORD VOCABULARY INCLUDED
- ★ AUDIO AMP W/SPEAKER
- ★ ASSEMBLED AND TESTED



NEW TECHNOLOGY SPEECH PROCESSOR
ALLOWING UNLIMITED SPEECH POSSIBILITIES
DELIVERY FROM STOCK

TMS-5200 VOICE SYNTHESIS PROCESSOR
Chip with Data Sheet **$69.00**

$329.

"CONTROL TALKER II"

- ★ 110V 50/60 HZ
- ★ 32 INPUT LINES (TTL)
- ★ 32 10 AMP (50V) OUTPUT LINES
- ★ Z80 BASED SYSTEM
- ★ 8K PROM (SOCKET)
- ★ 1K RAM
- ★ VOICE OUTPUT
- ★ SINGLE BOARD
- ★ STEPPING MOTOR CONTROL (UP TO 8)



Control Talker II can be used to control stepping motors, relays, counters, etc., and support a variety of uses including robotics, telephone dialer, digital access, security, auto drilling, measuring, counting and virtually unlimited applications with added speech output to advise of status etc. Put one to work for you today!

$550.

Double Sided QUME DRIVES DATATRAK 8

OUR PRICE $540.00

(Regularly) $808.00)

CALIFORNIA COMPUTER SYSTEMS

Order Number	Our Price
2032A 32K Static MEM-450NS	$560.00
2032B 32K Static MEM-300NS	640.00
2032C 32K Static MEM-200NS	649.00
2065C 64K Dynamic MEM-200NS	569.00
2116A 16K Static MEM-450NS	257.00
2116B 16K Static MEM-300NS	261.00
2116C 16K Static MEM-200NS	290.00
2116X 16K BD only	67.00
2200A Mainframe 110/60	386.00
2422A Floppy Controller	320.00
2710A 4-Port Serial I/O	279.00
2718A Serial/Parallel I/O	290.00
2720A 4-Port Parallel I/O	200.00
2810A Z-80 CPU BD	235.00

APPLE BDS:

Order Number	Our Price
7114A 12K Rom/Prom Bd.	$ 63.00
7424A Calendar Clock Bd.	103.00
7440A Programmable Timer	90.00
7470A A/D Converter	97.00
7490A GPIB IEEE 488	230.00
7710A Serial Asynch Bd.	127.00
7712A Serial Synch Bd.	152.00
7720A Parallel Interface Bd.	99.00
7720B Centronic Parallel Interface	99.00
7811B Arithmetic Processor with Diskette	329.00
7811C Arithmetic Processor with Rom	329.00

VOLTAGE REGULATORS

Part#	Case	Price
78L05	TO92	.45
78L12	TO92	.45
78L15	TO92	.45
79L05	TO92	.65
79L12	TO92	.65
79L15	TO92	.65
7805P	TO220	1.20
7812P	TO220	1.20
7815P	TO220	1.20
7905P	TO220	1.25
7912P	TO220	1.25
7915P	TO220	1.25
7805K	TO3	1.50
7812K	TO3	1.50
7815K	TO3	1.50
7905K	TO3	1.60
7912K	TO3	1.60
7915K	TO3	1.60
309H	TO39	.95
309K	TO3	1.25
317P	TO220	1.95
317K	TO3	2.95
323K	TO3	5.50
337P	TO220	2.40
337K	TO3	3.80
350K	TO3	5.75

CRYSTALS

(Part# includes frequency in MHZ)

Part#	Price
SY1	5.75
SY1.8432	5.75
SY2	5.75
SY2.4576	5.75
SY3.579	5.75
SY4	4.50
SY5.068	4.50
SY6	4.50
SY6.144	4.50
SY8	4.50
SY10	4.50
SY12	4.50
SY14.31818	4.50
SY15	4.50
SY18	4.50
SY18.432	4.50

CERAMIC DISC CAPACITORS 50V

Value	1 +	25 +	100 +
4.7pf	.07	.06	.04
10pf	.07	.06	.04
22pf	.07	.06	.04
33pf	.07	.06	.04
39pf	.07	.06	.04
47pf	.07	.06	.04
68pf	.07	.06	.04
100pf	.07	.06	.04
150pf	.07	.06	.04
220pf	.07	.06	.04
270pf	.07	.06	.04
330pf	.07	.06	.04
470pf	.07	.06	.04
.001mf	.07	.06	.04
.0022mf	.07	.06	.04
.0033mf	.07	.06	.04
.0047mf	.07	.06	.04
.01mf	.07	.06	.04
.022mf	.10	.08	.06
.033mf	.10	.08	.0C
.047mf	.11	.09	.07
.1mf	.14	.12	.10

DIODES

Switching

1N914	12/$1.00
1N4148	12/$1.00

SOCKETS

LOW-PROFILE SOLDER TIN

Part#	1 +	25 +	100 +
S8LT	.15	.11	.08
S14LT	.18	.16	.14
S16LT	.21	.18	.16
S18LT	.26	.22	.18
S20LT	.31	.26	.20
S22LT	.33	.28	.22
S24LT	.35	.29	.24
S28LT	.41	.34	.28
S40LT	.53	.47	.40

WIRE-WRAP SOLDER TIN

Part#	1 +	25 +	100 +
S8WT	.37	.33	.30
S14WT	.48	.43	.39
S16WT	.53	.48	.43
S18WT	.61	.55	.50
S20WT	.85	.77	.69
S22WT	.89	.80	.72
S24WT	.96	.86	.77
S28WT	1.22	1.11	.99
S40WT	1.75	1.57	1.40

WIRE-WRAP GOLD

Part#	1 +	25 +	100 +
S8WG	.54	.49	.44
S14WG	.77	.69	.62
S16WG	.83	.75	.68
S18WG	1.00	.90	.81
S20WG	1.24	1.11	.99
S22WG	1.35	1.22	1.10
S24WG	1.40	1.26	1.13
S28WG	1.78	1.60	1.44
S40WG	2.25	2.03	1.83

SOLID DIPPED TANTALUM CAPACITORS 20%

Value	Volts	1 +	25 +	100 +
.1mf	35v	.35	.30	.26
.15mf	35v	.35	.30	.26
.22mf	25v	.35	.30	.26
.33mf	35v	.35	.30	.26
.47mf	35v	.35	.30	.26
.68mf	35v	.35	.30	.26
1mf	35v	.35	.30	.26
1.5mf	35v	.45	.39	.33
2.2mf	35v	.45	.39	.33
3.3mf	35v	.50	.42	.36
4.7mf	25v	.50	.42	.36
4.7mf	35v	.65	.56	.44
6.8mf	35v	.65	.56	.44
10mf	25v	.85	.72	.61
10mf	35v	1.19	1.00	.84
15mf	25v	1.30	1.09	.92
22mf	25v	1.30	1.09	.92
33mf	25v	1.35	1.12	.95
47mf	25v	1.55	1.29	1.05
100mf	6v	2.95	2.48	2.08

¼ WT & ½ WT CARBON FILM 5% RESISTORS

10	100	1K	10K	100K	1M
11	110	1.1K	11K	110K	1.1M
12	120	1.2K	12K	120K	1.2M
13	130	1.3K	13K	130K	1.3M
15	150	1.5K	15K	150K	1.5M
16	160	1.6K	16K	160K	1.6M
18	180	1.8K	18K	180K	1.8M
20	200	2K	20K	200K	2M
22	220	2.2K	22K	220K	2.2M
24	240	2.4K	24K	240K	2.4M
27	270	2.7K	27K	270K	2.7M
30	300	3K	30K	300K	3M
33	330	3.3K	33K	330K	3.3M
36	360	3.6K	36K	360K	3.6M
39	390	3.9K	39K	390K	3.9M
43	430	4.3K	43K	430K	4.3M
47	470	4.7K	47K	470K	4.7M
51	510	5.1K	51K	510K	5.1M
56	560	5.6K	56K	560K	5.6M
62	620	6.2K	62K	620K	
68	680	6.8K	68K	680K	
75	750	7.5K	75K	750K	
82	820	8.2K	82K	820K	
91	910	9.1K	91K	910K	

**MINIMUM ORDER PER TYPE:
5 pcs—any qty 5 pack @ $.25**

**MINIMUM ORDER PER TYPE:
100 pcs
Price Per 100 Pk:**

QTY	¼ WT	½ WT
100 up	$1.70	$1.80
1,000 up	1.50	1.60
5,000 up	1.30	1.40
10,000 up	1.10	1.20

ZENER DIODES

½ WT

Part#	Price
1N5231B	.20
1N5239B	.20
1N5242B	.20
1N5245B	.20
1N5248B	.20
1N5250B	.20
1N5252B	.20
1N5255B	.20

1 WT

1N4733A	.30
1N4739A	.30
1N4742A	.30
1N4744A	.30
1N4746A	.30
1N4747A	.30
1N4749A	.30

POLYESTER CAPACITORS + & − 10% TOLERANCE 50V

Value	1 +	25 +	100 +
.001mf	.13	.11	.08
.0012mf	.13	.11	.08
.0015mf	.13	.11	.08
.0018mf	.13	.11	.08
.0022mf	.13	.11	.08
.0027mf	.13	.11	.08
.0033mf	.13	.11	.08
.0039mf	.13	.11	.08
.0047mf	.13	.11	.08
.0056mf	.13	.11	.08
.0068mf	.13	.11	.08
.0082mf	.13	.11	.08
.01mf	.13	.11	.08
.012mf	.13	.11	.08
.015mf	.13	.11	.08
.018mf	.14	.12	.09
.022mf	.14	.12	.09
.027mf	.14	.12	.09
.033mf	.14	.12	.09
.039mf	.15	.13	.10
.047mf	.15	.13	.10
.056mf	.16	.13	.10
.068mf	.17	.14	.11
.082mf	.17	.14	.11
.1mf	.18	.15	.12
.12mf	.20	.17	.14
.15mf	.22	.18	.15
.18mf	.24	.20	.16
.22mf	.26	.22	.17
.27mf	.30	.25	.20
.33mf	.33	.28	.23
.39mf	.37	.31	.25
.47mf	.40	.34	.30

TRANSISTORS

2N2219A	$ .35
2N2222A	.25
2N2905A	.30
2N2907A	.25
2N2369A	.25
2N3904	.20
2N3906	.20
PN2222A	.19
PN2907A	.19

RECTIFIERS (1A)

		100 +
1N4001	12/1.00	.07
1N4002	12/1.00	.07
1N4003	12/1.00	.07
1N4004	12/1.00	.07
1N4005	10/1.00	.08
1N4006	10/1.00	.08
1N4007	10/1.00	.08

74 LS

Part #	Price
74LS00	.32
74LS01	.32
74LS02	.32
74LS03	.32
74LS04	.32
74LS05	.32
74LS08	.32
74LS09	.35
74LS10	.38
74LS11	.38
74LS12	.39
74LS13	.32
74LS14	.65
74LS15	.35
74LS20	.32
74LS21	.36
74LS22	.36
74LS26	.35
74LS27	.39
74LS28	.37
74LS30	.36
74LS32	.40
74LS37	.38
74LS38	.39
74LS40	.36
74LS42	.95
74LS47	1.15
74LS48	1.15
74LS51	.32
74LS54	.38
74LS55	.34
74LS73	.49
74LS74	.49
74LS75	.63
74LS76	.55
74LS83	.95
74LS85	1.25
74LS86	.55
74LS90	.79
74LS92	.75
74LS93	.75
74LS95	.99
74LS107	.50
74LS109	.50
74LS112	.52
74LS113	.52
74LS114	.52
74LS123	1.05
74LS125	.70
74LS126	.70
74LS132	.95
74LS136	.53
74LS138	.85
74LS139	.85
74LS148	1.75
74LS151	.79
74LS152	.79
74LS153	.79
74LS154	2.05
74LS157	1.15
74LS158	1.15
74LS160	.85
74LS161	.85
74LS162	.85
74LS163	.95
74LS164	1.10
74LS165	1.10
74LS166	2.55
74LS170	1.90
74LS173	1.35
74LS174	1.25
74LS175	.95
74LS181	2.35
74LS190	1.15
74LS191	1.15
74LS192	1.15
74LS193	1.15
74LS194	1.15
74LS195	1.15
74LS196	.99
74LS197	.99
74LS221	.95
74LS240	1.05
74LS241	1.05
74LS242	1.45
74LS243	1.45
74LS244	1.05
74LS245	2.15
74LS251	1.29
74LS253	.99
74LS255	.99
74LS257	1.15
74LS258	1.15
74LS260	.95
74LS261	2.49
74LS266	.65
74LS273	1.65
74LS283	1.05
74LS365	.85
74LS366	.85
74LS367	.85
74LS368	.85
74LS373	1.65
74LS374	1.45
74LS375	.99
74LS377	1.15
74LS386	.59
74LS390	1.75
74LS393	1.75
81LS95	1.35
81LS96	1.35
81LS97	1.35
81LS98	1.35

4000 CMOS B SERIES ONLY

Part #	Price
4000	.35
4001	.35
4002	.35
4006	1.05
4007	.35
4008	1.15
4009	.45
4010	.45
4011	.35
4012	.35
4013	.50
4014	.85
4015	.75
4016	.55
4017	1.05
4018	.95
4019	.55
4020	1.10
4021	1.10
4022	.75
4023	.35
4024	.85
4025	.35
4026	1.45
4027	.50
4028	.75
4029	1.15
4030	.50
4034	2.55
4035	.99
4040	1.15
4041	1.15
4042	1.05
4043	.95
4044	.95
4046	1.15
4047	1.35
4048	.99
4049	.50
4050	.50
4051	1.10
4052	1.10
4053	.85
4060	1.39
4066	.39
4068	.35
4069	.35
4070	.39
4071	.39
4072	.39
4073	.39
4075	.39
4076	1.15
4077	.39
4078	.35
4081	.35
4082	.35
4093	.95
4503	.85
4508	2.95
4510	.89
4511	.89
4512	1.10
4514	2.55
4515	2.55
4516	1.25
4518	1.25
4519	.55
4520	1.25
4526	1.65
4527	1.65
4528	1.45

SERIAL PORT CARD
WITH 4 PORTS $289
WITH 2 PORTS $260

MIN ORDER: $10.00 SHIPPING: ADD $2.00
GA RESIDENTS ADD 3% SALES TAX

MASTERCARD AND
VISA WELCOME

MAIL ORDERS: **SOUTHERN SEMICONDUCTORS INC.**
BOX 986
LAWRENCEVILLE, GA. 30246

OEM AND INSTITUTIONAL INQUIRIES INVITED

PHONE ORDERS:
(404) 963-3699

Circle 381 on inquiry card.

Circle 266 on inquiry card.

MORE FOR YOUR RADIO SHACK TRS-80 MODEL I !

- ★ **MORE SPEED**
  10-20 times faster than Level II BASIC.
- ★ **MORE ROOM**
  Compiled code plus VIRTUAL MEMORY makes your RAM act larger.
- ★ **MORE INSTRUCTIONS**
  Add YOUR commands to its large instruction set!
  Far more complete than most Forths: single & double precision, arrays, string-handling, more.
- ★ **MORE EASE**
  Excellent full-screen Editor, structured & modular programming
  Optimized for your TRS-80 with keyboard repeats, upper/lower case display driver, single- & double-width graphics, etc.
- ★ **MORE POWER**
  Forth operating system
  Interpreter AND compiler
  Internal 8080 Assembler
  (Z80 Assembler also available)
  VIRTUAL I/O for video and printer, disk and tape
  (10-Megabyte hard disk available)

MMSFORTH

THE PROFESSIONAL FORTH FOR TRS-80 MODEL I
(Over 1,000 systems in use)

MMSFORTH Disk System V1.9 (requires 1 disk drive & 16K RAM) . . . . just **$79.95***
MMSFORTH Cassette System V1.8 (requires Level II BASIC & 16K RAM) **$59.95***

AND MMS GIVES IT PROFESSIONAL SUPPORT

Source code provided
MMSFORTH Newsletter
Many demo programs aboard
MMSFORTH User Groups
Programming staff can provide advise, modifications and custom programs, to fit YOUR needs.

THE DATAHANDLER V1.1, a very sophisticated database management system operable by non-programmers (requires Disk MMSFORTH, 1 drive & 32K RAM); with manuals. **$59.95***

MMSFORTH UTILITIES DISKETTE: includes FLOATING POINT MATH (L.2 BASIC ROM routines plus Complex numbers, Rectangular-Polar coordinate conversions, Degrees mode, more), plus a full Forth-style Z80 ASSEMBLER; plus a powerful CROSS-REFERENCER to list Forth words by block and line. All on one diskette (requires MMSFORTH, 1 drive & 16K RAM). **$39.95***

MMSFORTH GAMES DISKETTE: Real-time graphics and board games w/source code. Includes BREAKFORTH, CRASHFORTH, FREEWAY, OTHELLO, and TICTACFORTH (requires MMSFORTH, 1 drive & 32K RAM). **$39.95***

FORTH BOOKS AVAILABLE

MICROFORTH PRIMER (comes with MMSFORTH) separately **$15.00***
USING FORTH — more detailed and advanced than above **$25.00***
THREADED INTERPRETIVE LANGUAGES— advanced, excellent analysis of MMSFORTH-like language. **$18.95***
CALTECH FORTH MANUAL — good on Forth internal structure, etc **$10.00***
PROGRAM DESIGN and CONSTRUCTION — *intro to structured* program, good for Forth **$8.95***

* — Software prices include manuals and require signing of a single-system user license. Add $2.00 S/H plus $1.00 per additional book; Mass. orders add 5% tax. Foreign orders add 20%. UPS COD, VISA & M/C accepted; no unpaid purchase orders, please.

Send SASE for free MMSFORTH information. Good dealers sought.

Get MMSFORTH products from your computer dealer or
MILLER MICROCOMPUTER SERVICES (B5)
61 Lake Shore Road, Natick, MA 01760
(617) 653-6136

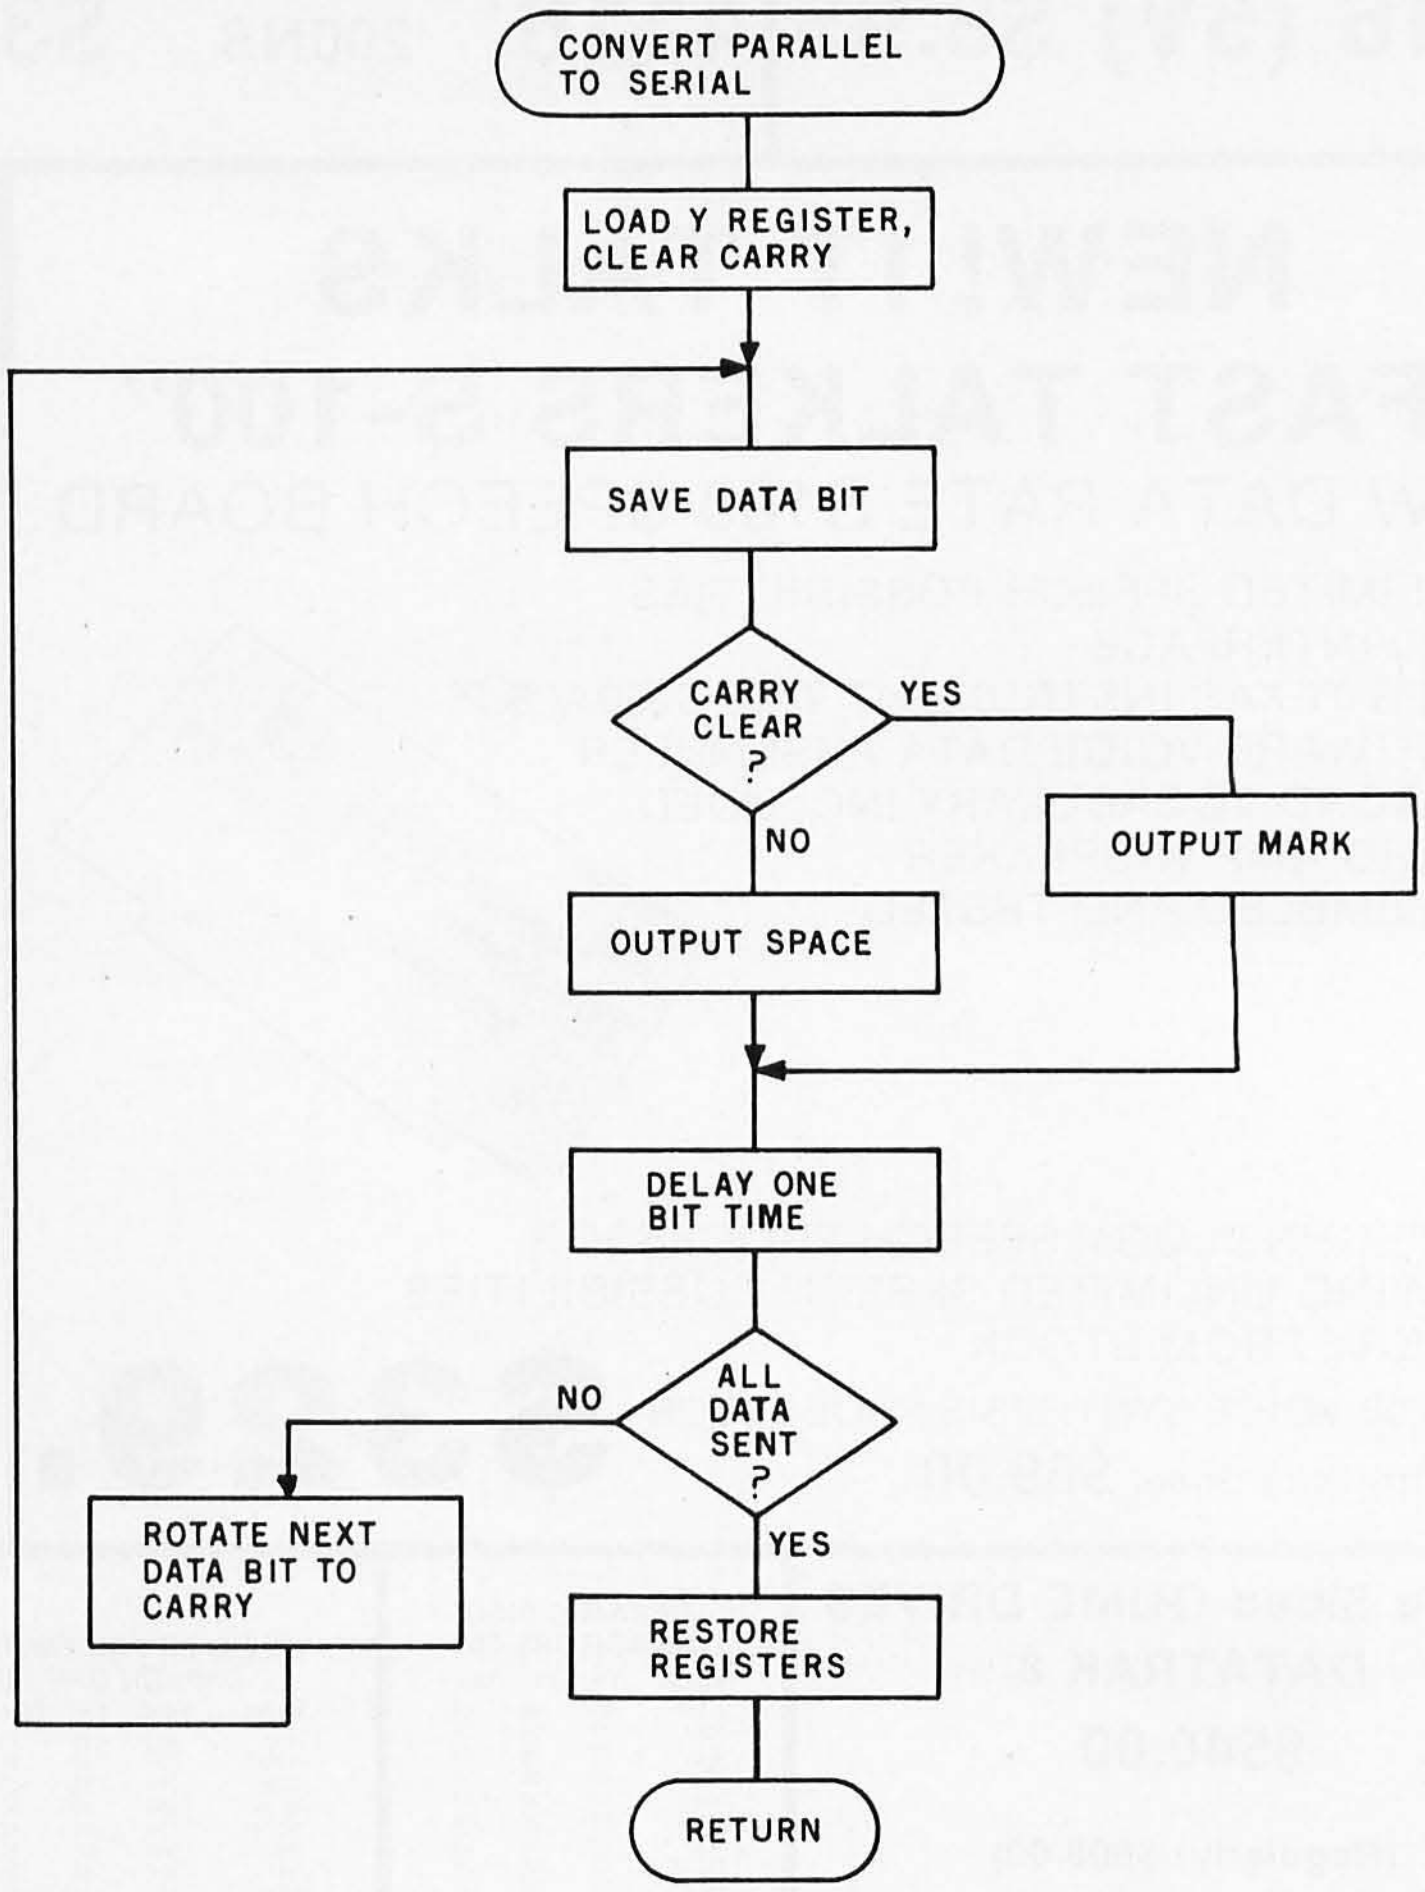

Figure 2: *Flowchart for machine-language software UART in listing 1.*

Listing 2: *Machine-code command generator to select a specified plotter command before calling the UART subroutine.*

```
8038-    48          PHA              Save accumulator
8039-    08          PHP              Save processor status
803A-    A9 70       LDA    #$70      Output 'p'
803C-    20 00 80    JSR    $8000     Jump to parallel to serial conversion
803F-    28          PLP              Restore processor status
8040-    68          PLA              Restore accumulator
8041-    60          RTS              Return
8042-    48          PHA
8043-    08          PHP
8044-    A9 71       LDA    #$71      Output 'q'
8046-    4C 3C 80    JMP    $803C
8049-    48          PHA
804A-    08          PHP
804B-    A9 72       LDA    #$72      Output 'r'
804D-    4C 3C 80    JMP    #803C
8050-    48          PHA
8051-    08          PHP
8052-    A9 73       LDA    #$73      Output 's'
8054-    4C 3C 80    JMP    $803C
8057-    48          PHA
8058-    08          PHP
8059-    A9 74       LDA    #$74      Output 't'
805B-    4C 3C 80    JMP    $803C
805E-    48          PHA
805F-    08          PHP
8060-    A9 75       LDA    #$75      Output 'u'
8062-    4C 3C 80    JMP    $803C
8065-    48          PHA
8066-    08          PHP
```

Listing 2 continued on page 302

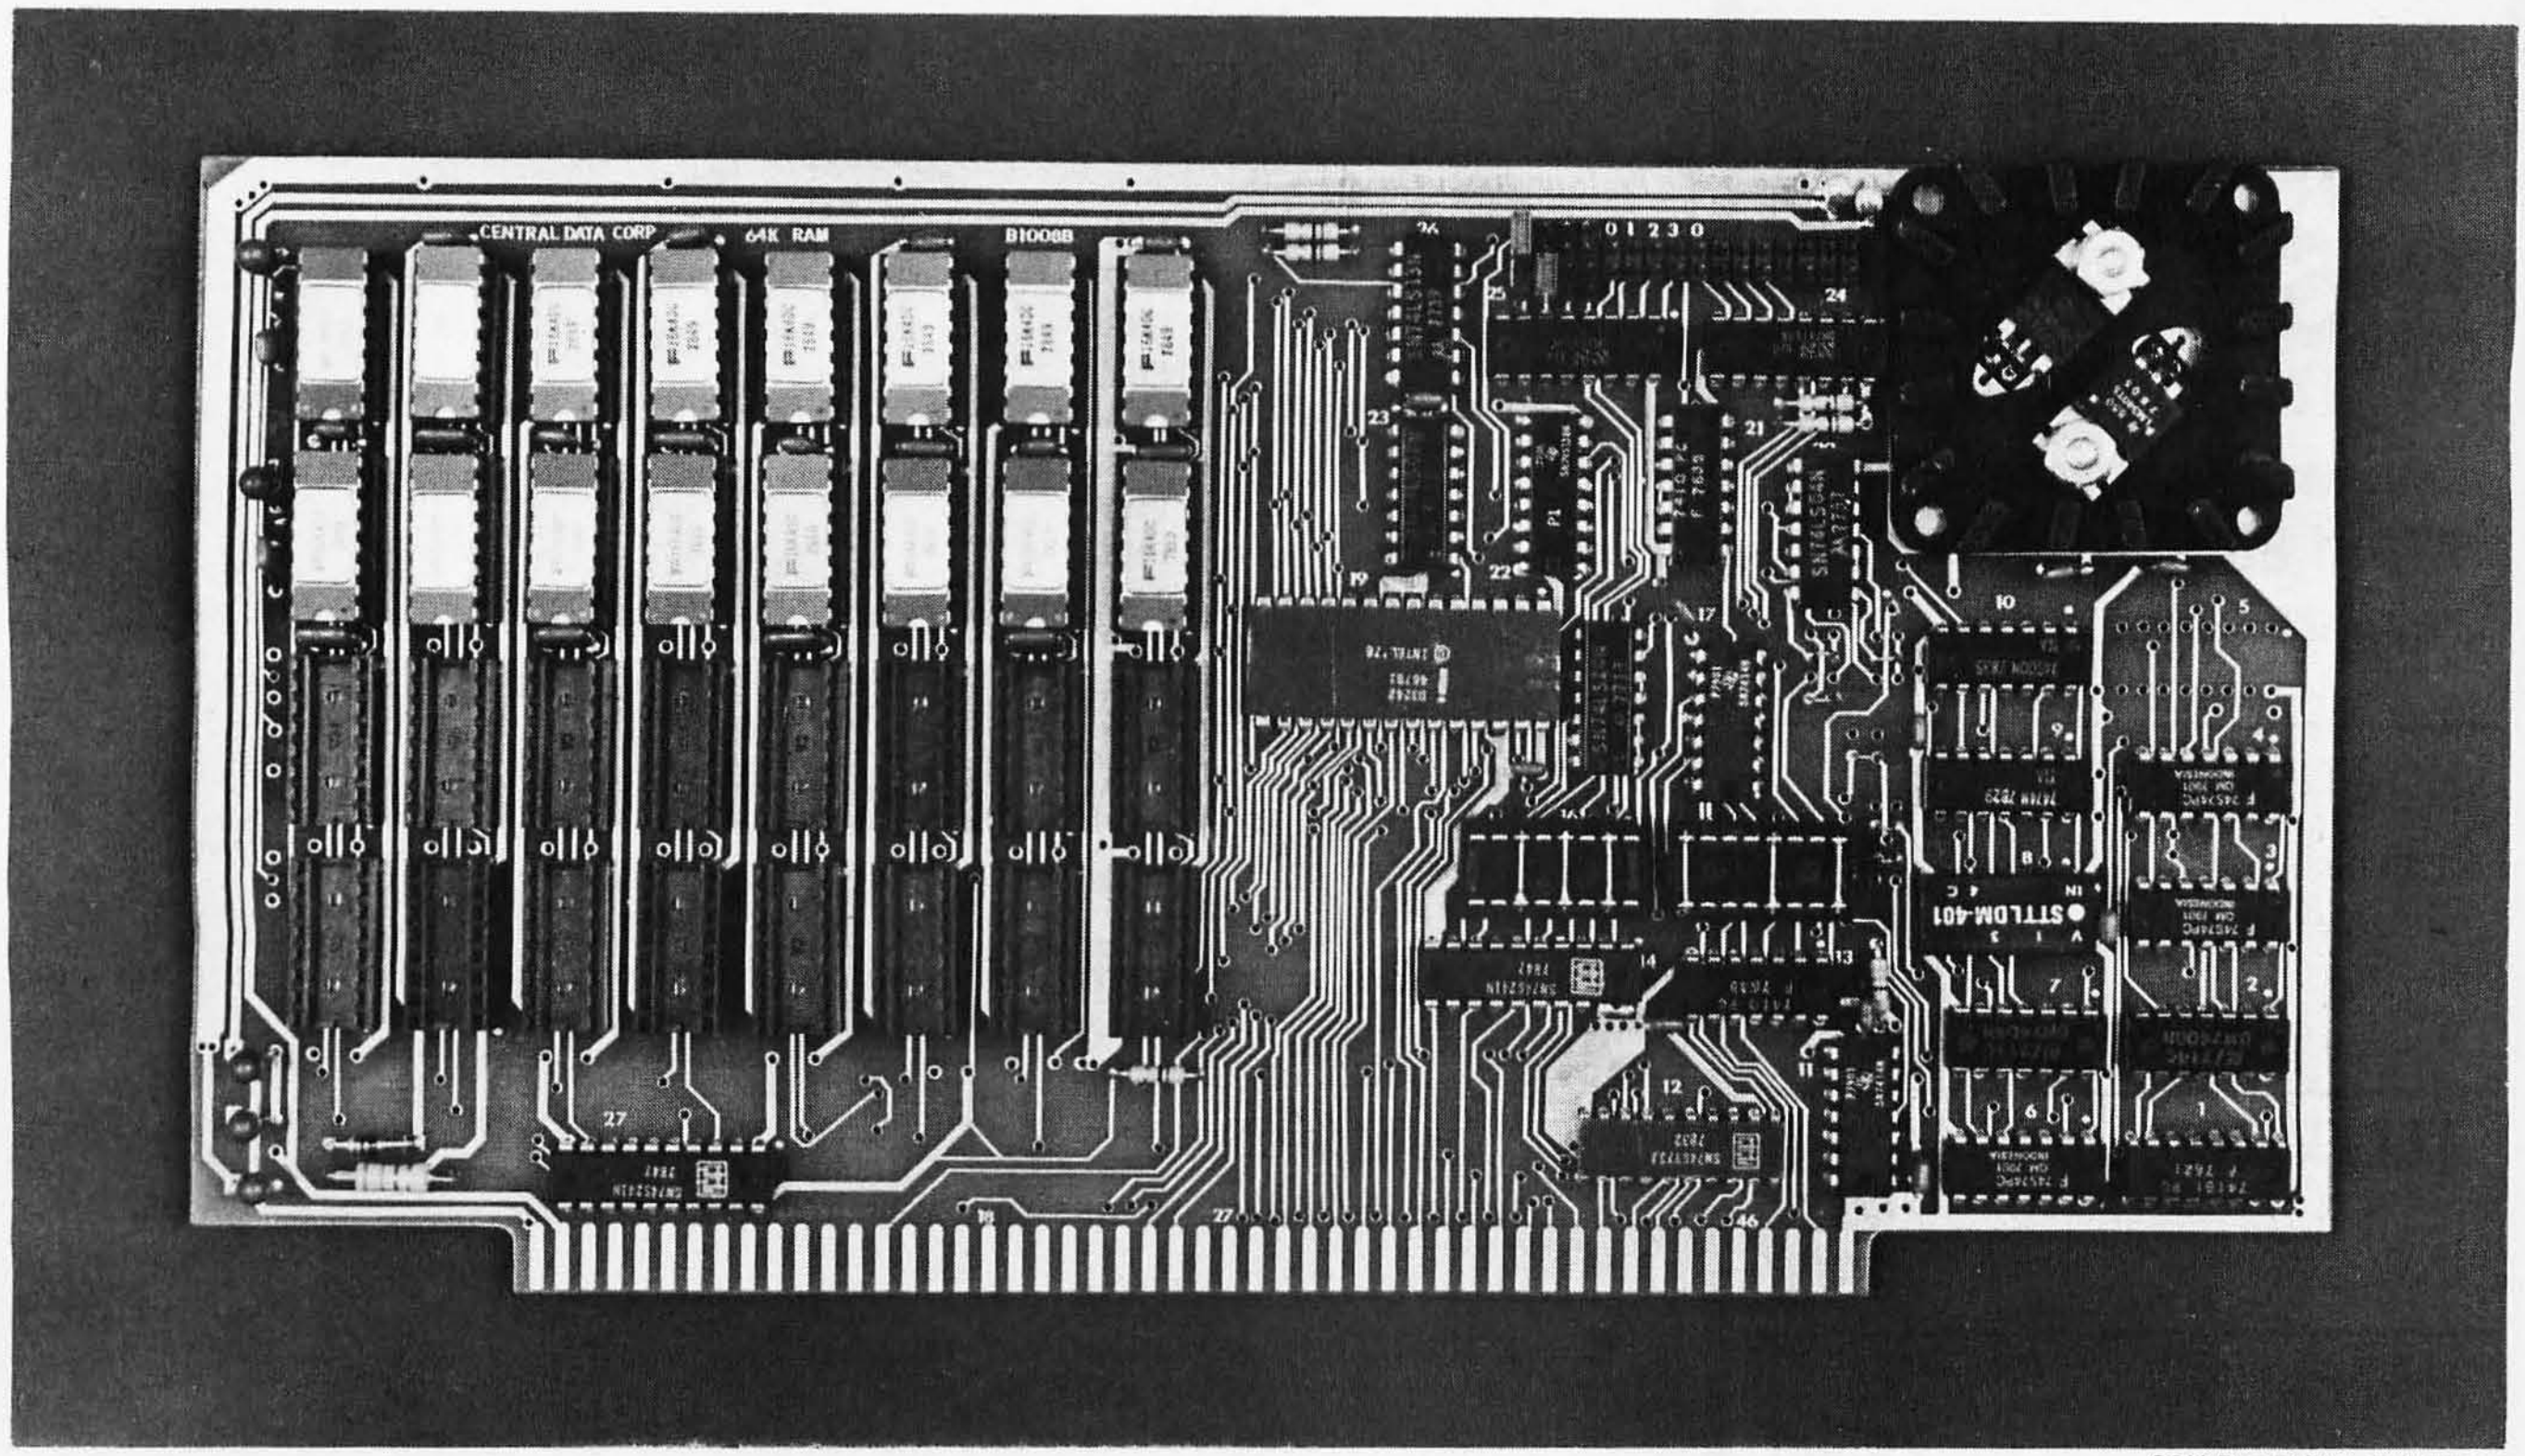

32K Board Pictured Above

Why Not the Best?

From The Dynamic RAM Company.

2MHz	4MHz
16K—$249	$259
32K—$375	$395
48K—$500	$530
64K—$625	$665

We have now been shipping our 2MHz dynamic RAM boards for over two years. Hundreds of 4MHz boards have been going out every month since early 1979. Our reliability is proven in the thousands of systems which contain our board. Many quality-minded systems houses across the country and overseas are using our boards for their equipment.

Our prices still beat all. Despite rising 16K memory chip prices (at least from reputable suppliers), Central Data continues to give you the best buy in memory today. Nobody offers a board with a capacity of 64K, assembled, tested, and guaranteed for a full year at the price we do.

Deselect around PROMs. Our boards have the important deselect feature which lets you overlap any fixed memory in your system with no interference.

Our features make the board easily used and expanded. You address our boards on 16K boundaries with mini-jumps (small shorting plugs that slide over wire-wrap pins) near the top of the board for easy access. If you want to expand your board after you have purchased it, all that you need to do is add memory. We can supply you with expansion packages ($150-2MHz, $160-4MHz) which include eight RAMs that you can depend on as well as two mini-jumps for addressing. And of course, our board **never** generates wait states.

Low power consumption keeps your computer running cool and reliable. The total power consumption of our 16K board is typically less than 4 watts (+8V @ 300ma, +16V @ 150ma and −16V @ 20ma). Boards with additional memory typically increase power consumption only 1 watt per 16K!

Standard S-100 Interface. Our board is designed to interface with any standard S-100 CPU. All of the timing of the board is independent of the processor chip, and the board is set up for different processors by changing two plugs on the board.

Call or write us today. That will guarantee a fast response with more information on the board. Or make an order — you'll probably have the board in two weeks! **If you're interested, also ask for a catalog on our Z8000 16-bit processor board designed for the MULTIBUS.** All of these products are available to your local dealer, also.

Central Data Corporation, 713 Edgebrook Drive, PO Box 2530, Station A, Champaign, IL 61820. (217) 359-8010

Central Data

Circle 65 on inquiry card.

Listing 2 continued:

```
8067-     A9 76      LDA     #$76      Output 'v'
8069-     4C 3C 80   JMP     $803C
806C-     48         PHA
806D-     08         PHP
806E-     A9 77      LDA     #$77      Output 'w'
8070-     4C 3C 80   JMP     $803C
8073-     48         PHA
8074-     08         PHP
8075-     A9 79      LDA     #$79      Output 'y'
8077-     4C 3C 80   JMP     #803C
807A-     48         PHA
807B-     08         PHP
807C-     A9 7A      LDA     #$7A      Output 'z'
807E-     4C 3C 80   JMP     $803C
```

Listing 3: *BASIC program to produce a plot of the voltage across a charging capacitor.*

```
 10  REM  MAIN PROGRAM
 12  HOME : VTAB 12
 14  PRINT "POSITION PEN IN LOWER LEFT HAND"
 16  PRINT "CORNER.  PRESS ANY KEY TO CONTINUE."
 18  GET A$
 19  HOME
 20  GOSUB 1000  REM DRAW X,Y AXIS
 30  REM  EXPONENTIAL RISE
 32  POKE  -  16293,0  REM SET RESOLUTION TO 200 POINTS PER INCH
 34 Z = 0
 36  CALL  -  32646:  FOR I = 0 TO 10:  NEXT I  REM PEN DOWN
 38  FOR I =  0 TO 8.99 STEP  .005
 40 V = 5 *  (1 -  EXP ( - I))  REM FIND CAPACITOR VOLTAGE
 42 K =  INT  (200 * V)
 44  IF K - Z = 0 THEN GOTO 90  REM NO CHANGE IN PREVIOUS POTENTIAL
 46  IF K - Z < 0 THEN GOTO 60  REM POTENTIAL IS DECREASING
 48  FOR J = 1 TO (K - Z) REM POTENTIAL IS INCREASING
 50  CALL  - 82712  REM MOVE IN +Y DIRECTION
 52  NEXT J
 54  GOTO 70
 60  FOR J = 1 TO (Z - K)
 62  CALL  - 32681  REM MOVE IN -Y DIRECTION
 64  NEXT J
 70 Z = K
 90  CALL  - 32695  REM MOVE IN +X DIRECTION
 92  NEXT I
 94  CALL  - 32653  REM PEN UP
 99  END
300  REM  "1"
301  CALL  - 32653:  FOR I = 1 TO 8:  CALL  - 32674:  Next I
302  CALL  - 32646
304  FOR I = 1 TO 8:  CALL  - 32702:  NEXT I
306  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
308  CALL  - 32653
310  FOR I = 1 TO 8:  CALL  - 32667:  NEXT I
312  CALL  - 32646
314  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
316  CALL  - 32653
317  FOR I = 1 TO 8:
318  FOR I = 1 TO 26:  CALL  - 32712:  NEXT I
319  RETURN
320  REM  "2"
321  CALL  - 32653:  FOR I = 1 TO 8:  CALL  - 32667:  NEXT I
322  CALL  - 32646
324  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
326  FOR I = 1 TO 13:  CALL  - 32681:  NEXT I
328  FOR I = 1 TO 16:  CALL  - 32667:  NEXT I
330  FOR I = 1 TO 13:  CALL  - 32681:  NEXT I
332  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
334  CALL  - 32653
336  FOR I = 1 TO 8:  CALL  - 32667:  NEXT I
337  FOR I = 1 TO 26:  CALL  - 32712:  NEXT I
339  RETURN
```

Listing 3 continued on page 304

OUR TIMING CONTROL UNIT HELPS YOUR COMPUTER KEEP SCORE OF TIME AND DATE.

Power-up or power-down, your computer always knows the time, *exactly*, with Digital Pathway's Timing Control Unit (TCU). Even during extended power interruptions. Rechargeable battery support makes our TCU immune from power failure of any kind. For as long as three months. And an on-board crystal-controlled oscillator ensures supreme accuracy.

No matter what model computer you have, you'll find our TCUs offer many features that make living with computer timeouts less complicated. And some models can even be set to initiate an interrupt at a chosen date and time. Or at specified intervals.

Find out how we can help make your time more productive. Call or write Digital Pathways today for more information at 1260 L'Avenida, Mountain View, CA 94043. Telephone (415) 969-7600. TWX: 910-379-5034.



*PDP-11 and LSI-11/2 are registered trademarks of Digital Equipment Corp. Others listed are trademarks, respectively, of Intel Corp., Motorola Inc., Hewlett-Packard, Lockheed Corp. and Computer Automation Inc.

*PDP-11	TCU-100	$495
	TCU-150	$460
*LSI-11/2	TCU-50D	$325
*Multi-Bus	TCU-410	$325
*EXORcisor	TCU-68	$325
*HP 2100	TCU-2100	$395
*Lockheed SUE	TCU-200	$550
*Naked Mini	TCU-310	$385
Any Model Computer (RS-232/20mA)	SLC-1	$640

DIGITAL PATHWAYS

NOW YOU'RE SAFE FROM COMPUTER TIMEOUTS EVEN AFTER THE POWER GOES.

Circle 128 on inquiry card.

Canada: (403) 286-2744 • England: 403 813 813
Germany: (089) 60 60 71-72 Telex: 5216290 isio d • Switzerland: 022/310587 Telex: 289191

Circle 36 on inquiry card.

$99* For The GENERAL



The Micro Computer General 85

FOR USE IN:

• OEM Industry • Laboratory
• University • Home

The General is a 4.5"x 6.5" single board micro computer, ideal for industrial control applications as well as for dedicated test monitoring systems, communication subsystems, small scale data processing and front end processing. Through its advanced design, it is adaptable for data logging, data acquisition, prototyping and experimenting. Its compact size allows for easy integration into already existing equipment, and provides an excellent nucleus when designing new products.

User communication is accomplished through the General's **"Expeditor"** system monitor. The Expeditor resides in a 2K EPROM, and features 15 commands and 18 utility routines to facilitate program development. An instructional user's manual is provided with every unit.

HARDWARE FEATURES
- 8085 CPU (100% software compatible with 8080)
- 2K bytes of EPROM (containing the EXPEDITOR system monitor) expandable on board to 4K bytes.
- EIA serial port (50-19.2K baud)
- 22 programmable I/O lines
- Software controlled 14 bit counter and timer
- 3 priority interrupts
- 2 non-maskable interrupts
- 256 bytes of programmable memory expandable on board to 2K bytes of either **STATIC** Ram or **CMOS** Ram
- On board data bus buffers for system expansion
- Parallel I/O ports available at on-board sockets
- Address, data and control bus available at edge connector in addition to 6 spare pins.
- Ample on-board prototyping space
- Small size (4.5" x 6.5")

SOFTWARE FEATURES
EXPEDITOR—2K SYSTEM MONITOR
- 15 System commands (Substitute, Move, Display, Fill, Kill echo, Examine registers, Insert, String search, Assemble code, Disassemble code, Read, Write, Binary load, ASCII load)
- 18 Utility routines including Terminal I/O routines, Test and compare routines, Code check or convert
- Download commands. Read, Binary load, ASCII load will give the user three different data formats of downloading data directly into the Ram of the computer. This will allow the user to develop his software on a larger computer, then use the MCG-85 as the "execution vehicle" of software.
- Automatic baud rate selection

HARDWARE & POWER REQUIREMENTS
The General requires +5 ±12 volts power supply (±12 volts required only for RS232 Transmitter Interface) and a Terminal for complete system operation (Hex Keypad version will be available shortly). The power requirements are +5 Volts at 500 MA and +12 −12 at 50 MA.

PRICING INFORMATION

The General MCG-85 (kit)	$ 99.00
The General MCG-85 (assembled and tested)	135.00
2K Expansion ROM	15.00
2K CMOS RAM	50.00
2K Expansion RAM	20.00
3 Voltage Power Supply	59.00
Edge Connector	6.00
Data Bus Buffer Expansion	10.00
Line Assembler (on 2716 EPROM)	35.00
Disassembler (on 2716 EPROM)	35.00
Expeditor Monitor Listings (Monitor Form)	29.00

Send check or money order, or charge to VISA/MASTER CHARGE card number. Add $4.00 for shipping and handling. COD fee extra. New York residents add 8% sales tax.

*** In kit form, single quantity, introductory offer good till June 30, 1981. Dealer inquiries invited.**

ATLANTIS COMPUTERS
Division of Atlantis Computerized Services
34-13 30th Avenue, Astoria, NY 11103
(212) 728-6700

Listing 3 continued:

```
340  REM  "3"
341  CALL  - 32653:  FOR I = 1 TO 8:  CALL  - 32667:  NEXT I
342  CALL  - 32646
344  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
346  FOR I = 1 TO 13:  CALL  - 32681:  NEXT I
348  FOR I = 1 TO 16:  CALL  - 32667:  NEXT I
350  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
352  FOR I = 1 TO 13:  CALL  - 32681:  NEXT I
354  FOR I = 1 TO 16:  CALL  - 32667:  NEXT I
356  CALL  - 32653
357  FOR I = 1 TO 8:  CALL  - 32695:  NEXT I
358  FOR I = 1 TO 26:  CALL  - 32712:  NEXT I
359  RETURN
360  REM  "4"
361  CALL  - 32653:  FOR I = 1 TO 8:  CALL  - 32667:  NEXT I
362  CALL  - 32646
364  FOR I = 1 TO 13:  CALL  - 32681:  NEXT I
366  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
368  CALL  - 32653
372  FOR I = 1 TO 13:  CALL  - 32712:  NEXT I
374  CALL  - 32646
376  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
377  CALL  - 32653
378  FOR I = 1 TO 26:  CALL  - 32712:  NEXT I
379  FOR I = 1 TO 8:  CALL  - 32667:  NEXT I:  RETURN
380  REM  "5"
381  CALL  - 32653:  FOR I = 1 TO 8:  CALL  - 32695:  NEXT I
382  CALL  - 32646
384  FOR I = 1 TO 16:  CALL  - 32667:  NEXT I
386  FOR I = 1 TO 13:  CALL  - 32681:  NEXT I
388  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
390  FOR I = 1 TO 14:  CALL  - 32681:  NEXT I
392  FOR I = 1 TO 16:  CALL  - 32667:  NEXT I
394  CALL  - 32653
396  FOR I = 1 TO 26:  CALL  - 32712:  NEXT I
397  FOR I = 1 TO 8:  CALL  - 32695:  NEXT I
399  RETURN
400  REM  "6"
401  CALL  - 32653:  FOR I = 1 TO 8:  CALL  - 32667:  NEXT I
402  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
404  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
406  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
408  FOR I = 1 TO 13:  CALL  - 32712:  NEXT I
410  ROR I = 1 TO 16:  CALL  - 32667:  NEXT I
412  CALL  - 32653
414  FOR I = 1 TO 13:  CALL  - 32712:  NEXT I
415  FOR I = 1 TO 8:  CALL  - 32695:  NEXT I
416  RETURN
420  REM  "7"
422  CALL  - 32653
424  FOR I = 1 TO 8:  CALL  - 32667:  NEXT I
426  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
428  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
430  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
432  CALL  - 32653
434  FOR I = 1 TO 26:  CALL  - 32712:  NEXT I
436  FOR I = 1 TO 8:  CALL  - 32667:  NEXT I
439  RETURN
440  REM  "8"
442  CALL  - 32653
444  FOR I = 1 TO 8:  CALL  - 32695:  NEXT I
445  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
446  FOR I = 1 TO 16:  CALL  - 32667:  NEXT I
448  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
450  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
452  FOR I = 1 TO 26:  CALL  - 32712:  NEXT I
454  CALL  - 32653
456  FOR I = 1 TO 13:  CALL  - 32681:  NEXT I
457  CALL  - 32646
458  FOR I = 1 TO 16:  CALL  - 32667:  NEXT I
460  CALL  - 32653
462  FOR I = 1 TO 8:  CALL  - 32695:  NEXT I
464  FOR I = 1 TO 13:  CALL  - 32712:  NEXT I
469  RETURN
```

Listing 3 continued on page 306

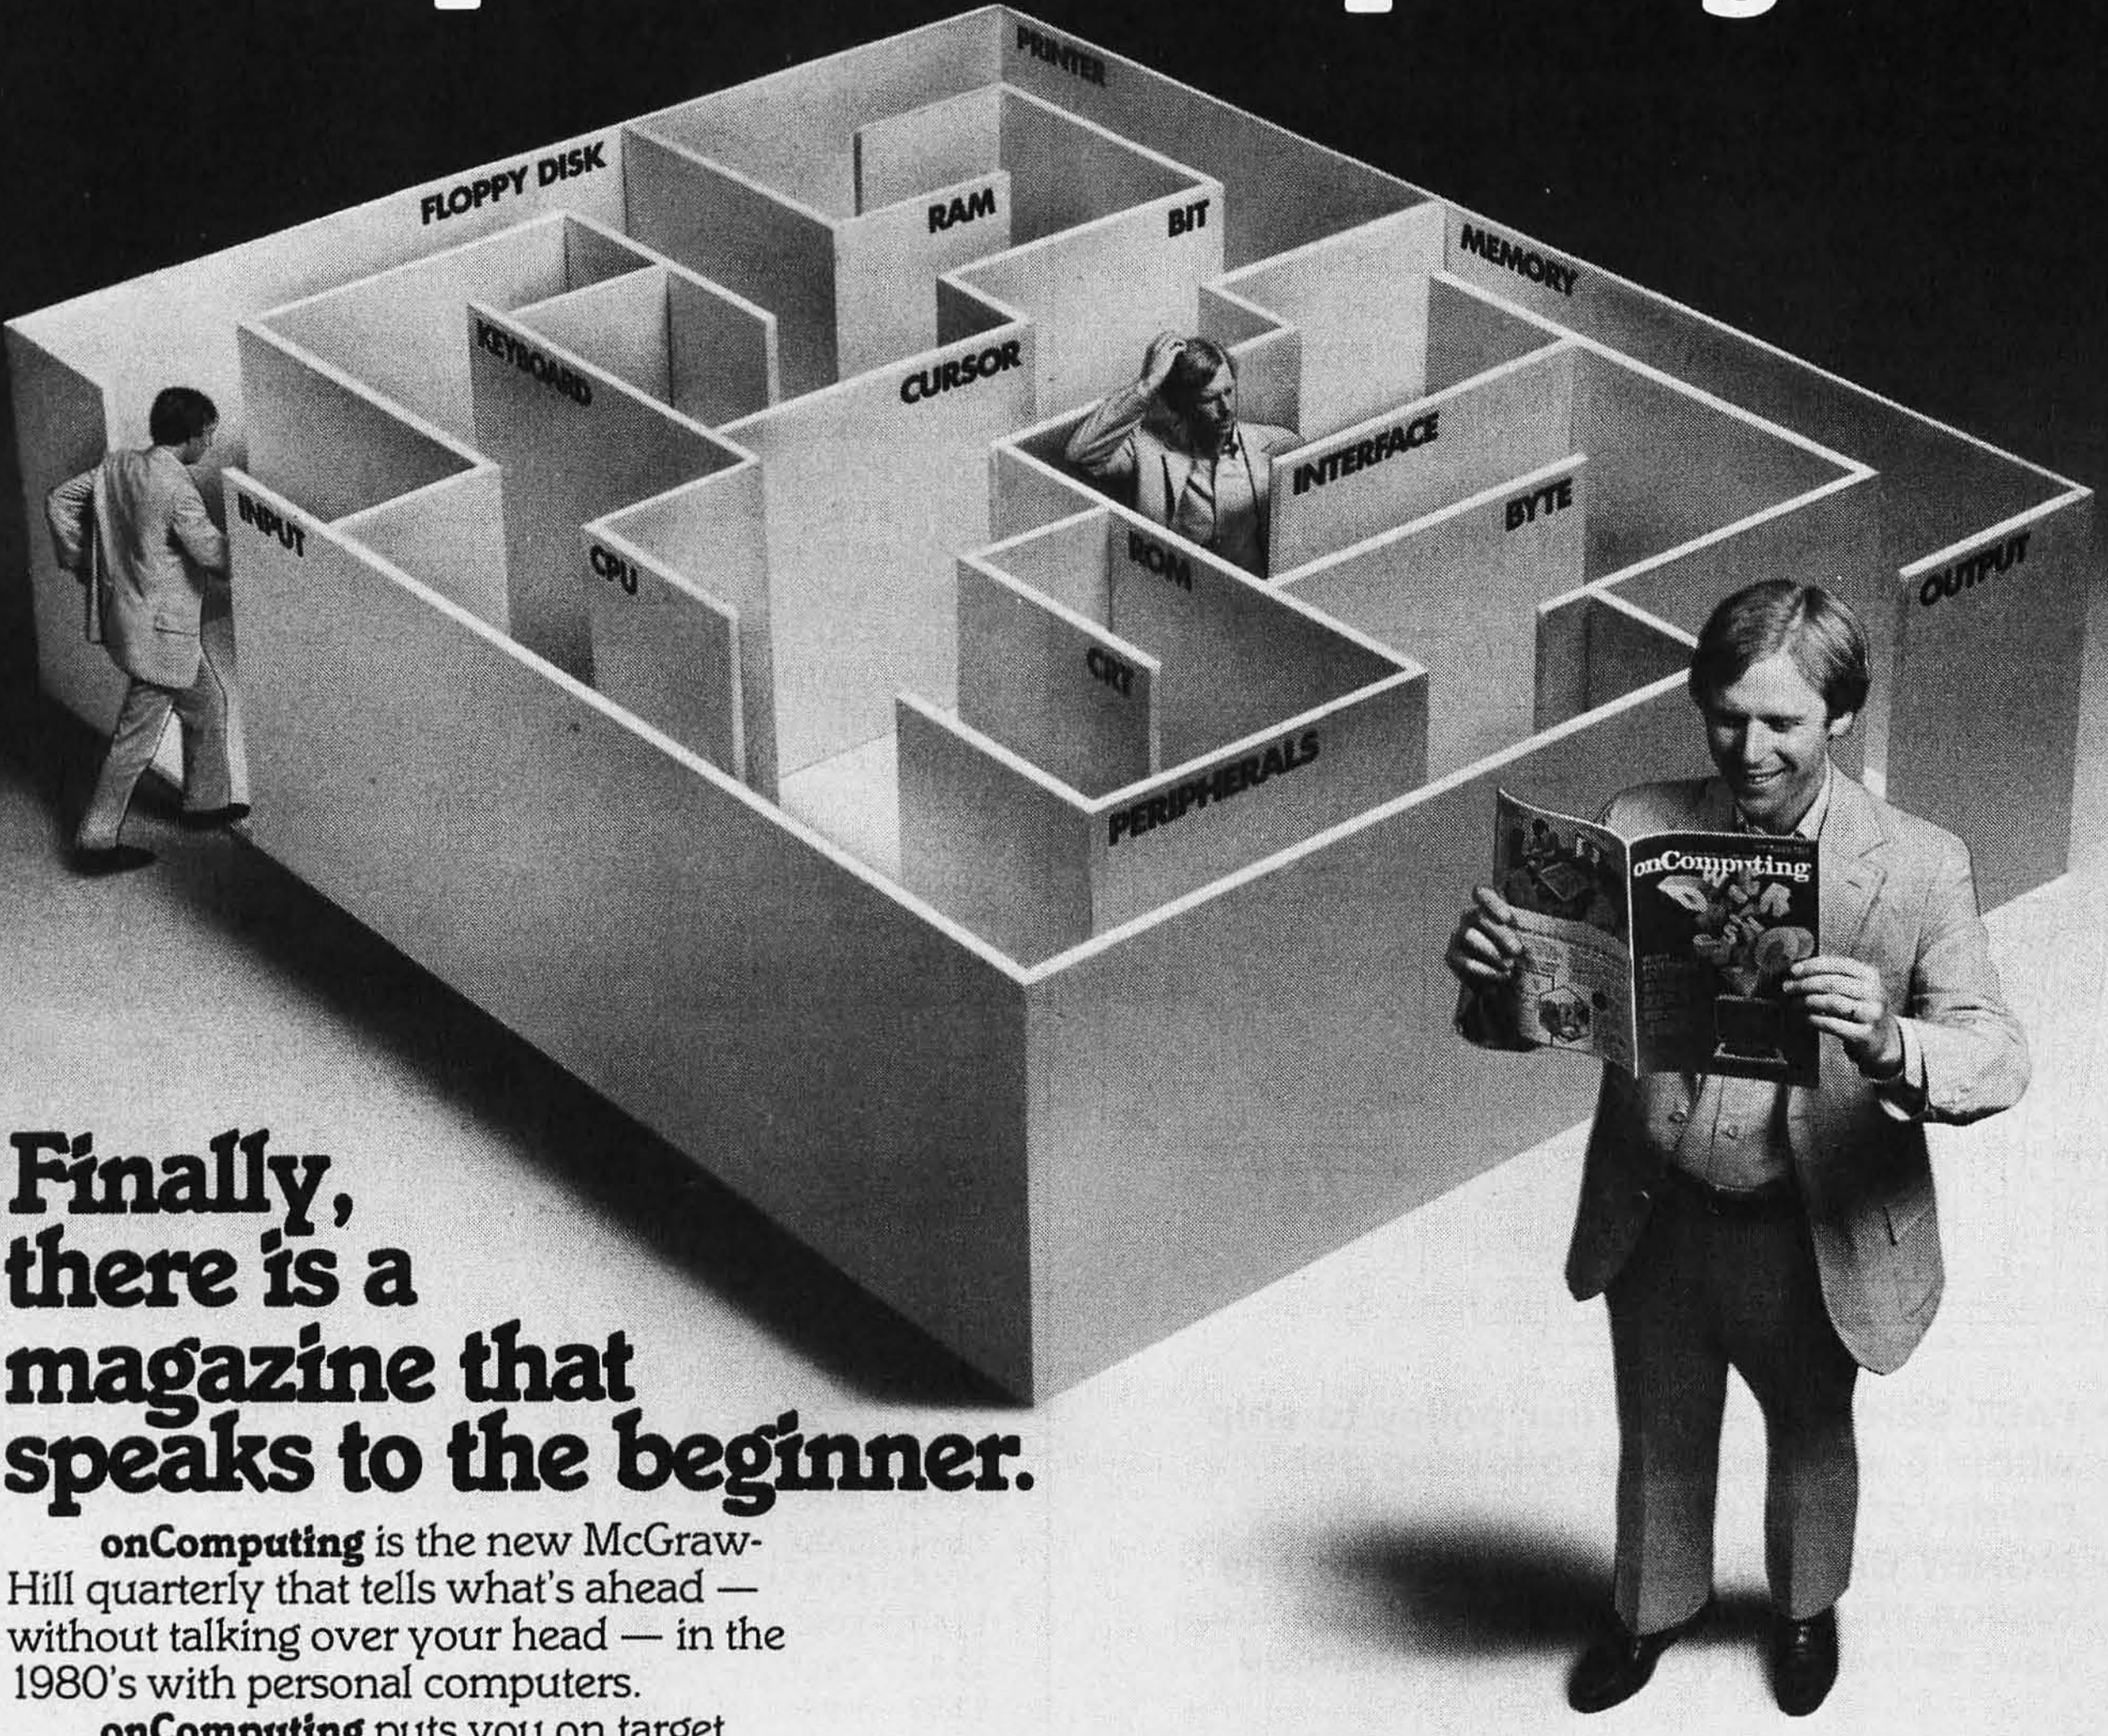
PRINTER
FLOPPY DISK
RAM
BIT
MEMORY
KEYBOARD
CURSOR
INTERFACE
INPUT
CPU
ROM
BYTE
OUTPUT
CRT
PERIPHERALS
onComputing

Listing 3 continued:

```
480  REM  "9"
482  CALL  - 32653
483  FOR I = 1 TO 8:   CALL  - 32667:  NEXT I
484  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
485  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
486  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
487  CALL  - 32653
488  FOR I = 1 TO 13:  CALL  - 32712:  NEXT I
489  CALL  - 32646
490  FOR I = 1 TO 16:  CALL  - 32667:  NEXT I
492  FOR I = 1 TO 13:  CALL  - 32712:  NEXT I
493  CALL  - 32653
494  FOR I = 1 TO 8:   CALL  - 32695:  NEXT I
499  RETURN
500  REM  "0"
502  CALL  - 32653
504  FOR I = 1 TO 8:   CALL  - 32695:  NEXT I
506  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
508  FOR I = 1 TO 16:  CALL  - 32667:  NEXT I
510  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
512  FOR I = 1 TO 16:  CALL  - 32695:  NEXT I
514  FOR I = 1 TO 26:  CALL  - 32712:  NEXT I
516  CALL  - 32653
518  FOR I = 1 TO 8:   CALL  - 32667:  NEXT I
519  RETURN
999  END
1000  REM  X AXIS
1010  POKE  - 16294,0:  CALL  - 32653
1012  FOR I = 1 TO 50:  CALL  - 32712:  NEXT I
1014  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1016  FOR I = 1 TO 1000:  CALL  - 34695:  NEXT I
1018  CALL  - 32653
1100  REM  X AXIS SCALE
1110  FOR I = 1 TO 20:  CALL  - 32712:  NEXT I
1112  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1114  FOR I = 1 TO 40:  CALL  - 32681:  NEXT I
1116  CALL  - 32653
1118  FOR I = 1 TO 5:  CALL  - 32681:  NEXT I
1120  POKE  - 16293,0
1122  GOSUB 480
1124  POKE  - 16294,0
1126  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1128  FOR I = 1 TO 38:  CALL  - 32712:  NEXT I
1130  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1132  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
1134  CALL  - 32653
1146  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1148  FOR I = 1 TO 33:  CALL  - 32712:  NEXT I
1150  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1152  FOR I = 1 TO 40:  CALL  - 32681:  NEXT I
1154  CALL  - 32653
1156  FOR I = 1 TO 5:  CALL  - 32681:  NEXT I
1158  POKE  - 16293,0
1160  GOSUB 440
1162  POKE  - 16294,0
1164  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1166  FOR I = 1 TO 38:  CALL  - 32712:  NEXT I
1168  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1170  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
1172  CALL  - 32653
1174  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1176  FOR I = 1 TO 33:  CALL  - 32712:  NEXT I
1178  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1180  FOR I = 1 TO 40:  CALL  - 32681:  NEXT I
1182  CALL  - 32643
1184  FOR I = 1 TO 5:  CALL  - 32681:  NEXT I
1186  POKE  - 16293,0
1188  GOSUB 420
1190  POKE  - 16294,0
1192  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1194  FOR I = 1 TO 38:  CALL  - 32712:  NEXT I
1196  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1198  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
1199  CALL  - 32653
```

Listing 3 continued on page 308

"By the time we get out of this traffic, my 6-month auto policy will be up for renewal. And they may raise my rate, too!"

"6 months? Next time, call GEICO and get a 12-month policy."

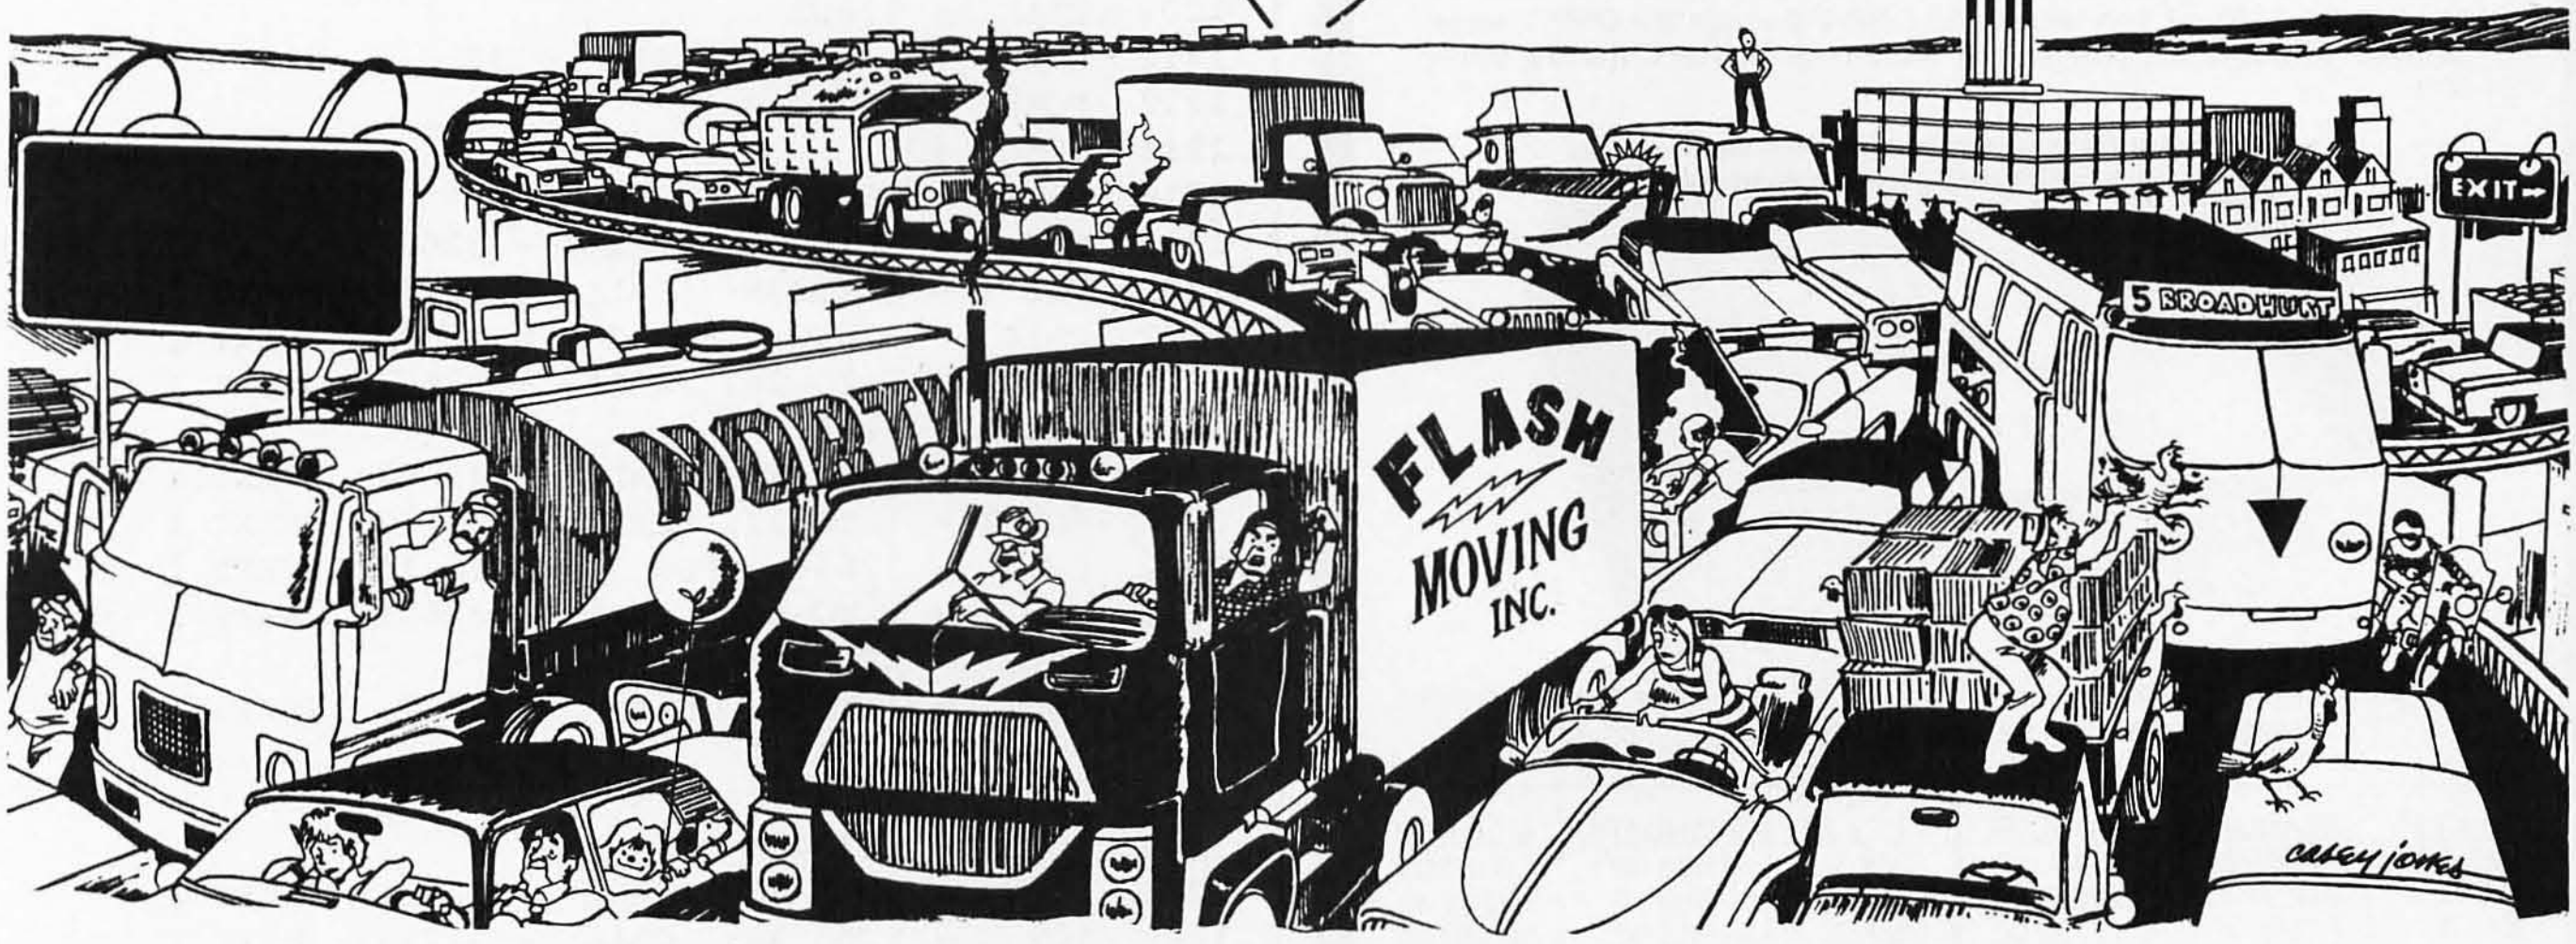

Unlike most companies, GEICO still offers the 12-month auto policy... a full year's coverage at a low rate. With a choice of convenient payment plans to fit your budget. Up to 9 payments if you wish.

And this is possible because GEICO tries to insure only good drivers. Good drivers are the best inflation-fighters around. You have fewer accidents. You cost us less. So you are one reason we can afford to charge you less.

"Good" doesn't mean "perfect." Even good drivers may occasionally have an accident. That doesn't necessarily bar you from GEICO... or from being renewed once you're a GEICO policyholder.

If you call, you'll talk directly to a GEICO sales insurance counselor, not a salesman. So there's no pressure. And no extra sales expense to inflate the cost.

GEICO has been saving money for good drivers since 1936. Today, nearly 1,500,000 people are satisfied GEICO policyholders. And that makes GEICO the 5th largest of the more than 1,000 stock companies insuring autos in the U.S.

GEICO has fast and efficient claim service with toll-free and collect-call telephone numbers throughout the U.S. So if you have to report an accident or loss, you can call our claim adjusters immediately. We also have over 3,500 claim representatives countrywide to assist in handling your claim if necessary.

NOTE: While you're checking GEICO, why not find out about our rates for homeowner/renter and boatowner coverage. And—even if you do not meet GEICO's auto policy standards—you may still obtain the same quality auto coverage and service from our affiliate, Criterion Insurance Company, at somewhat higher rates. Criterion operates in the District of Columbia and every state except Massachusetts, New Jersey and South Carolina.

GEICO

Where good drivers get the low rates they deserve.

Call toll-free **800-841-3000** (8 a.m.-9 a.m. East Coast Time)
In Georgia call toll-free 800-342-2800 or mail coupon. No obligation. No salesman will call.

Send to: GEICO & Affiliates, Consumer Information Services, GEICO Center, Macon, GA 31295

Name__________

Address__________ Apt. #______

City__________ State______ Zip______

Employer__________ # Yrs.______

Govt. or Military Grade______ Have you previously been insured with GEICO? ☐ Yes ☐ No

Location of car if different from address above:

Car #1: City__________ State______

Car #2: City__________ State______

Car #3: City__________ State______

Name of current insurance co.__________ Month/Year Current Policy Expires______

List all drivers	M or F	Relation	Age	Marital Status	Occupation	Yrs. lic.	Driver Training		% of Use of Cars			Accidents in Past 5 Years*		Violations in Past 3 Years*		License Suspension*	
							Yes	No	#1	#2	#3	Yes	No	Yes	No	Yes	No
		SELF															

If student away at school, how many miles to school?
______ miles.

	CAR 1	CAR 2	CAR 3
Year & Make ▶			
Model (Nova, Granada, etc.) ▶			
Body type: 2/4 dr. sdn, hardtop, sta. wag ▶			
No. of cylinders ▶			
Est. Annual Mileage ▶			
Days per week driven to work or parking area ▶			
One way driving distance ▶			
Is car used in business (except to/from job)? ▶			

If "yes" explain__________

*For accidents, violations, or license suspension, give dates and complete details, including cost of damages, on a separate sheet.
Check for Information on ☐ Homeowners/Renter's Insurance ☐ Boatowner's Insurance

684

GEICO and Affiliates. Corporate Headquarters: Washington, D.C. 20076

Not available in New Jersey or Massachusetts.

Circle 166 on inquiry card.

houston instrument

FROM COMPUTERS TO GO

A six pen plotter option is now available for shipment with the Houston Instrument DMP series of plotters. Now you can produce graphs or charts in black, red, blue, green, violet, orange and optional brown. With the addition of the $395 six pen option, the DMP-2 through the DMP-7 series of plotters, becomes the only line of multi-color plotters starting under $1,500.

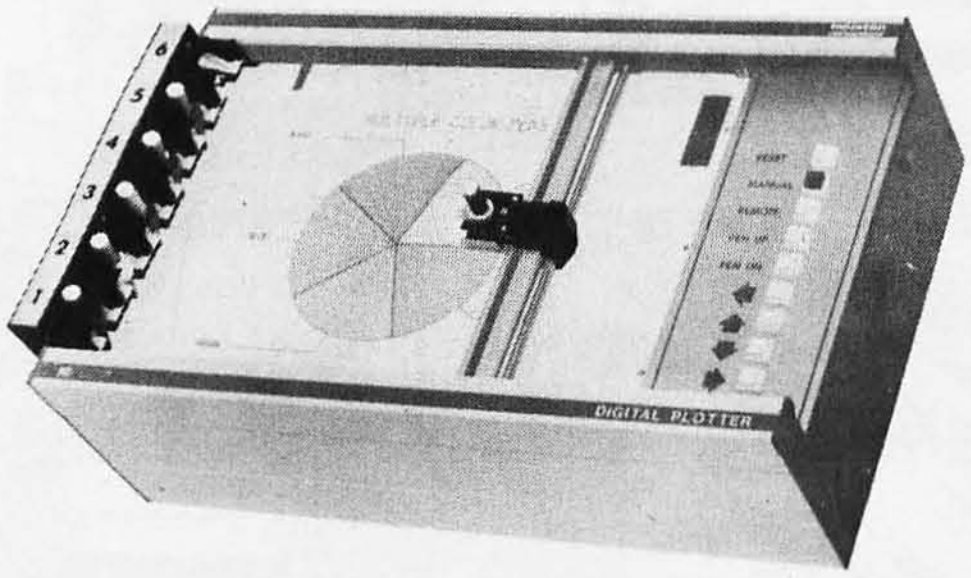

Digital plotters for the Apple, Atari, PET, PMC-80, TRS-80 or other systems with RS-232C or Centronics data source.

8½ x 11"	STANDARD	6 COLOR	11" x 17"	STANDARD	6 COLOR
DMP-2	$1085.00	$1480.00	DMP-5	$1685.00	$2080.00
DMP-3	$1250.00	$1645.00	DMP-6	$1850.00	$2245.00
DMP-4	$1385.00	$1780.00	DMP-7	$1985.00	$2380.00

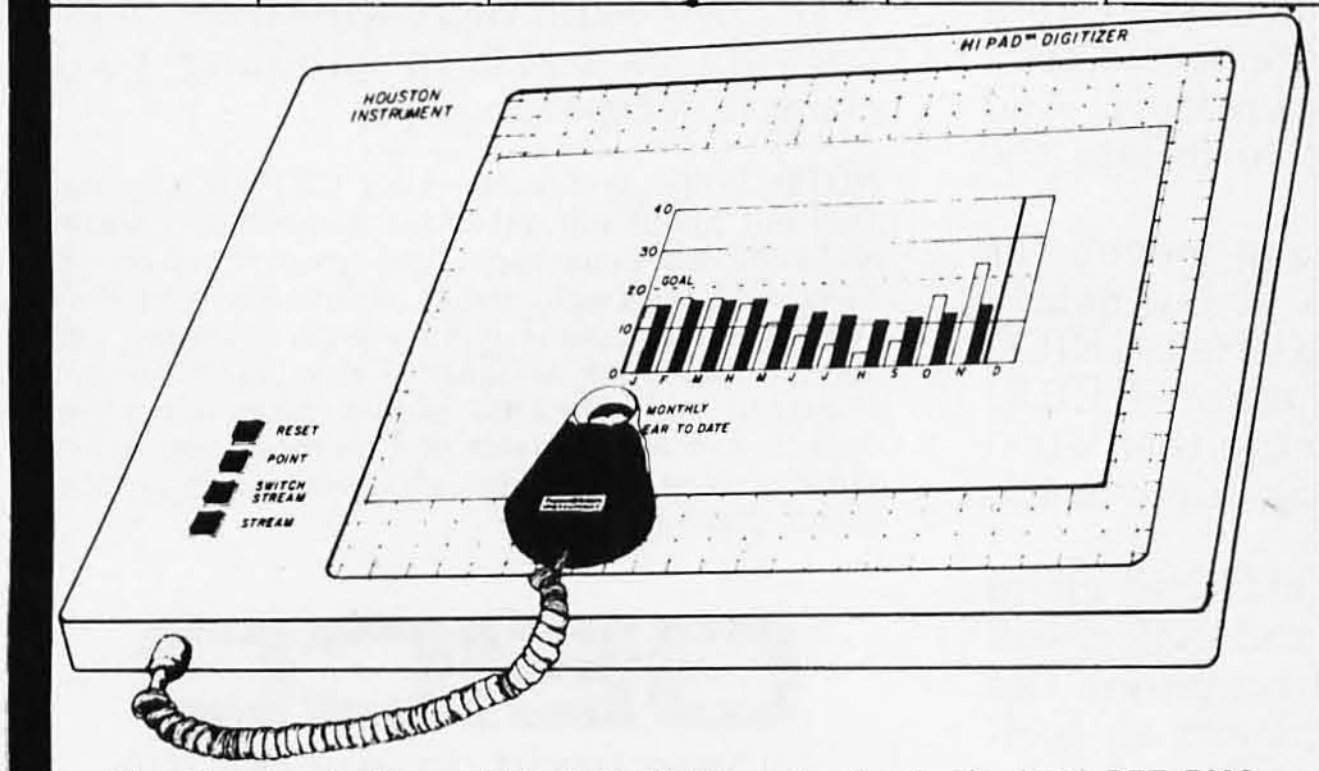

The Houston Instrument HI PAD Digitizers for the Apple, Atari, PET, PMC-80, TRS-80 or other systems with RS-232C or Centronics data source. The HI PAD Digitizer is an input device that converts graphic information into digital values. The HI PAD comes completely assembled and ready to use, with an RS-232C and parallel interface integrated for convenient interfacing to your minicomputer or microcomputer based system. It is priced at only $795.00.

SOFTWARE TO GO

presents

THE EVANS BUSINESS SYSTEM; a user-definable data-management system emphasizing rapid access to individual records for the APPLE II. Requires 48K, 1 disk drive, ROM or RAM Applesoft. (written by Al Evans)

USE THE BUSINESS SYSTEM FOR:

Rolodex Emulation
Financial Records
Real Estate Locator
Grade Books
Catalogs
Lab Test Results
Bibliographies
Names and Addresses
Fantasy Game Characters
Any Application Requiring Fast, Cross-referenced Random Access to Formatted Information

RETRIEVAL TIME: Average less than 5 seconds for any of 1000 records. NUMBER OF FIELDS: defined by user. RECORD LENGTH: Defined by user. FILE SIZE: Determined by record length and disk capacity. Keyfield(s): Specified by user.

INTRODUCTORY OFFER

You can get the EVANS BUSINESS SYSTEM software package for $99.95, or $15.00 for a demo copy (creditable towards the package purchase.)

COMPUTERS TO GO
(a division of C.T.G Corp.)
2000 Guadalupe Austin, TX 78705
(512) 472 8926 9A.M.-10 P.M., M.-Sat.
DEALER INQUIRIES INVITED

Listing 3 continued:

```
1200  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1202  FOR I = 1 TO 33:  CALL  - 32712:  NEXT I
1204  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1206  FOR I = 1 TO 40:  CALL  - 32681:  NEXT I
1208  CALL  - 32653
1210  FOR I = 1 TO 5:  CALL  - 32681:  NEXT I
1212  POKE  - 16293,0
1214  GOSUB 400
1216  POKE  - 16294,0
1218  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1220  FOR I = 1 TO 38:  CALL  - 32712:  NEXT I
1222  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1224  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
1226  CALL  - 32653
1228  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1230  FOR I = 1 TO 33:  CALL  - 32712:  NEXT I
1232  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1234  FOR I = 1 TO 40:  CALL  - 32681:  NEXT I
1236  CALL  - 32653
1238  FOR I = 1 TO 5:  CALL  - 32681:  NEXT I
1240  POKE  - 16293,0
1242  GOSUB 380
1244  POKE  - 16294,0
1246  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1248  FOR I = 1 TO 38:  CALL  - 32712:  NEXT I
1250  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1252  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
1254  CALL  - 32653
1256  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1258  FOR I = 1 TO 33:  CALL  - 32712:  NEXT I
1260  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1262  FOR I = 1 TO 40:  CALL  - 32681:  NEXT I
1264  CALL  - 32653
1266  FOR I = 1 TO 5:  CALL  - 32681:  NEXT I
1268  POKE  - 16293,0
1270  GOSUB 360
1272  POKE  - 16294,0
1274  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1276  FOR I = 1 TO 38:  CALL  - 32667:  NEXT I
1278  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1280  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
1282  CALL  - 32653
1284  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1286  FOR I = 1 TO 33:  CALL  - 32712:  NEXT I
1288  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1290  FOR I = 1 TO 40:  CALL  - 32681:  NEXT I
1292  CALL  - 32653
1294  FOR I = 1 TO 5:  CALL  - 32681:  NEXT I
1296  POKE  - 12394,0
1298  GOSUB 340
1300  POKE  - 16294,0
1302  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1304  FOR I = 1 TO 38:  CALL  - 32712:  NEXT I
1306  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1308  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
1312  FOR I - 1 TO 50:  CALL  - 32667:  NEXT I
1314  FOR I = 1 TO 33:  CALL  - 32712:  NEXT I
1316  CALL  - 32546:  FOR I = 0 TO 10:  NEXT I
1318  FOR I = 1 TO 40:  CALL  - 32681:  NEXT I
1320  CALL  - 32653
1322  For I = 1 TO 5:  CALL  - 32681:  NEXT I
1324  POKE  - 16293,0
1326  GOSUB 320
1328  POKE  - 16294,0
1330  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1332  FOR I = 1 TO 38:  CALL  - 32712:  NEXT I
1334  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1336  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
1338  CALL  - 32653
1340  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1342  FOR I = 1 TO 33:  CALL  - 32712:  NEXT I
1344  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1346  FOR I = 1 TO 40:  CALL  - 32681:  NEXT I
1348  CALL  - 32653
```

Listing 3 continued on page 310

Circle 376 on inquiry card.

Circle 419 on inquiry card. →

COMPUTERS–TERMINALS–MODEMS!

MODEMS AND COUPLERS

Connect your Apple, TRS–80 or any other computer or terminal to the phone lines!

Penril

Penril 300/1200—Bell 212A style $799
Bell 212A style. 1200 baud and 300 baud. Manual originate, auto-answer. Full duplex. RS232. Direct connect to phone lines via RJ11C standard extension phone voice jack. 1 year warranty.

U.S. Robotics
USR-330A
Bell 103/113 style
USR-330D
Bell 103/113 style

USR-330D $339
Bell 103/113 style. 330 baud. Manual originate, auto-answer. Half/full duplex. RS232. 1 year warranty. Direct connect to phone lines via RJ11C standard extension phone voice jack.

USR-330A $399
Same as USR-330D but includes auto-dial capability.



U.S. Robotics
The Phone Link Acoustic Modem

Bell 103/113 style $179
300 baud. Sleek, low profile. Originate and answer capability. Half/full duplex. Self-test. RS232. Light displays for On, Carrier, Test, Send Data, Receive Data. 15 oz.

CRT's

Digital Equipment Corporation



DEC VT100

DEC VT100 ... $1668
Detachable keyboard. Separate numeric keypad with function keys. Business forms character set. Reverse video. Selectable double-size characters. Bidirectional smooth-scrolling. 80 cols or 132 cols. Split screen. Settable tabs. Line drawing graphic characters. Status line. Key-Click.

Perkin-Elmer Corporation

Superowl 1251

Perkin-Elmer Superowl 1251 .... $1564
Intelligent, editing CRT. Detachable keyboard. 32 fully programmable function keys. Intelligent printer part. Business forms character set. Block mode. Protected fields. Blinking fields. Numeric fields. Reverse video. Half intensity. Polling. Down line loading of options. Remote control of all options by host computer. Settable tabs. Status line. Separate numeric keypad. Transparent mode.

Perkin-Elmer Corporation

Bantam 550B $694
Compact. Silent. Upper/lower case. 80th col. wrap-around. Bell. Integrated numeric pad. Printer port. Transparent mode. Editing features. Tabbing.

Bantam 550E ... $755
Same as 550B plus separate numeric keypad and cursor direction keys.

Bantam 550S $879
Same as 550E plus block mode. 8 function keys, and protected fields, reverse video fields, half intensity fields, blinking fields.

550 Options

20mA Current Loop Interface $70
Non-Glare Screen $25
2nd page of memory (550S only).. $100

HARDCOPY TERMINALS & PRINTERS



Teletype Model 43

Teletype Corporation

Teletype Model 43 KSR with RS232 and Connector Cable $999
30 CPS. Dot matrix. 132 cols. True descenders on lower case. Excellent print quality for dot matrix printer. Pin feed.



DEC LA120

Digital Equipment Corporation

DEC LA120 ... $2388
180 CPS. Dot matrix. Upper/lower case. 1K buffer. Designed for 1200 baud communications. 30 character answerback message. Adjustable line spacing. Adjustable character sizes including double sized characters. Settable horizontal and vertical tabs. Top-of-form capability. RS232.

Digital Equipment Corp.

DEC LA34DA ... $939
30 CPS. Dot matrix. Upper/lower case. 4 character sizes. Up to 217 cols per line. 6 lines per inch settings. Friction feed. Settable tabs. RS232.

DEC LA34AA $1095
30 CPS. Dot matrix. Upper/lower case. 8 character sizes including double size characters. 6 lines per inch settings. Up to 217 cols per line. Friction feed. Settable horizontal and vertical tabs. Top-of-form capability.

Options for LA34AA and LA34DA

Tractor Feed Mechanism $114
Numeric Keypad w/ *Function Keys* .. $69
Pedestal $100
Paper Out Sensor $25
APL Capability with APL Keycaps .. $499
2K Buffer with Text Editor and 1200 Baud Communications Capability $499

NEC Corporation
NEC Spinwriter 5510 & 5520

5520 KSR Spinwriter $3088
55 CPS. Impact printer. Selectric print quality. Changeable print fonts. 110, 300 and 1200 baud data rate. Numeric keypad. Friction and tractor feed.

5510 Spinwriter $2754
55 CPS. Impact printer. Selectric print quality. Changeable print fonts. 110, 300 and 1200 baud data rate. Friction and tractor feed.



Perkin-Elmer Corporation

Pussycat 650/655 CRT Screen Printer

650/655 Pussycat CRT Screen Printer. $899
100 CPS. Extremely compact and quiet. 110 to 9600 baud rate. 2K buffer. Ideal for producing rapid, reliable hardcopy of your CRT screen display. Can be added to any CRT with our interface option.

Leasing rates and lease/purchase plan information is available on request.
All equipment is shipped with a 10 day money back guarantee.
We offer full service, on site maintenance plans on all equipment.
All equipment in stock.

U.S. ROBOTICS INC.
203 N. WABASH SUITE 1718 CHICAGO, ILL 60601

SALES (312) 346-5650
GENERAL OFFICES (312) 346-5651
SERVICE (312) 733-0497

Listing 3 continued:

```
1350  FOR I = 1 TO 5:  CALL  - 32681:  NEXT I
1352  POKE  - 16293,0
1354  GOSUB 300
1356  POKE  - 16294,0
1358  FOR I = 1 TO 50:  CALL  - 32667:  NEXT I
1360  FOR I = 1 TO 38:  CALL  - 32712:  NEXT I
1362  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1364  FOR I = 1 TO 26:  CALL  - 32681:  NEXT I
1366  CALL  - 32653
1368  FOR I = 1 TO 50:  CALL  - 32681:  NEXT I
1370  FOR I = 1 TO 37:  CALL  - 32681:  NEXT I
1372  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1373  REM  Y AXIS
1374  FOR I = 1 to 700:  CALL  - 32712:  NEXT I
1376  FOR I = 1 to 13:  CALL  - 32667:  NEXT I
1378  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1380  FOR I = 1 TO 26:  CALL  - 32695:  NEXT I
1381  CALL  - 32653
1382  FOR I = 1 TO 44:  CALL  - 32681:  NEXT I
1384  FOR I = 1 TO 43:  CALL  - 32667:  NEXT I
1386  POKE  - 16293,0
1388  GOSUB 400
1390  POKE  - 16294,0
1392  FOR I = 1 TO 6:  CALL  - 32681:  NEXT I
1394  FOR I = 1 TO 10:  CALL  - 32695:  NEXT I
1396  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1398  FOR I = 1 TO 40:  CALL  - 32695:  NEXT I
1400  CALL  - 32653
1402  FOR I = 1 TO 50:  CALL  - 32681:  NEXT I
1404  FOR I = 1 TO 33:  CALL  - 32667:  NEXT I
1406  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1408  FOR I = 1 TO 26:  CALL  - 32695:  NEXT I
1410  CALL  - 32653
1412  FOR I = 1 TO 44:  CALL  - 32681:  NEXT I
1414  FOR I = 1 TO 43:  CALL  - 32667:  NEXT I
1416  POKE  - 16293,0
1418  GOSUB 380
1420  POKE  - 16294,0
1422  FOR I = 1 TO 6:  CALL  - 32681:  NEXT I
1424  FOR I = 1 TO 10:  CALL  - 32695:  NEXT I
1426  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1428  FOR I = 1 TO 40:  CALL  - 32695:  NEXT I
1430  CALL  - 32653
1432  FOR I = 1 TO 50:  CALL  - 32681:  NEXT I
1434  FOR I = 1 TO 33;  CALL  - 32667:  NEXT I
1436  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1438  FOR I = 0 TO 26:  CALL  - 32695:  NEXT I
1440  CALL  - 32653
1442  FOR I = 1 TO 44:  CALL  - 32681:  NEXT I
1444  FOR I = 1 TO 33:  CALL  - 32667:  NEXT I
1446  POKE  - 15293,0
1448  GOSUB
1450  POKE  - 16294,0
1452  FOR I = 1 TO 6:  CALL  - 32681:  NEXT I
1454  FOR I = 1 TO 10:  CALL  - 32695:  NEXT I
1456  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1458  FOR I = 1 TO 40:  CALL  - 32695:  NEXT I
1460  CALL  - 32653
1462  FOR I = 1 TO 50:  CALL  - 32681:  NEXT I
1464  FOR I = 1 to 33:  CALL  - 32667:  NEXT I
1466  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1468  FOR I = 1 TO 26:  CALL  - 32695:  NEXT I
1470  CALL  - 32653
1472  FOR I = 1 TO 44:  CALL  - 32681:  NEXT I
1474  FOR I = 1 TO 43:  CALL  - 32667:  NEXT I
1476  POKE  - 16293,0
1478  GOSUB 340
1480  POKE  - 16294,0
1482  FOR I = 1 TO 6:  CALL  - 32681:  NEXT I
1484  FOR I = 1 TO 10:  CALL  - 32695:  NEXT I
1486  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1488  FOR I = 1 TO 40:  CALL  - 32695:  NEXT I
1490  CALL  - 32653
1492  FOR I = 1 TO 50:  CALL  - 32681:  NEXT I
```

Listing 3 continued on page 312

ALL THESE FEATURES... IN THIS SMALL SPACE... AT THIS LOW PRICE!

4,695

Greater computer power . . . fewer separate components . . . larger capability . . . simpler to operate . . .. modular maintenance . . .

These are the unique benefits of the Quasar Data QPD-100 Floppy Disk Computer . . . plus unsurpassed reliability...plus 12-month warranty on all PC boards.

Its highly reliable, industry-standard MFE drive is compact. Accepts both single AND double-sided disks.

Upgradeable from the Z-80™ microprocessor-based system to our 16 BIT microprocessor-based system by simply plugging in extra PC cards. Hard disk and multi-user systems available.

As your requirements grow, your QDP-100 can grow to fit them.

The Quasar Data QDP-100H is a larger version with 6-megabyte capacity; includes one double-sided floppy and one 5¼ microwinchester hard disk.

Both the Quasar Data QDP-100 and QDP-100H are fully compatible with all standard terminals.

Phone or write for descriptive bulletin and specifications. And ask for a demonstration. Dealer inquiries invited.

FEATURES

Z-80, 4-MhZ CPU
64K memory, bank selectable
Two (2) double-sided, double-density 8" floppies, 2 megabytes
Four (4) ports...2 serial, 2 parallel
Double-sided, double-density disk controller, to 4 MB
CP/M 2.2 DOS. MP/M multi-user operating system. (Optional)
S-100 (IEEE) motherboard
BASIC LANGUAGE . . . C-BASIC compiler
Real-time clock
Monitor in PROM
Manuals supplied: All documentation and schematics, including "CP/M Handbook" by Sybex.
Accounting systems: G/L, A/R, A/P, P/R, included.

QUASAR DATA'S QDP-100 COMPUTER SYSTEM.

18" wide
16⅞" deep
11" high

Complete systems available

Z-80 is a trademark of Zilog Corp.

CP/M and MP/M
are trademarks of Digital Research Corp.

Quasar Data Products

10330 Brecksville Road, Brecksville (Cleveland), Ohio 44141
Phone: 216/526-0838 / 526-0839
Telex: 241596

Circle 341 on inquiry card.

SAVE!
WITH DSC'S
10% CLUB

YOU CAN BUY HARDWARE, AT 10% ABOVE WHOLESALE
JOIN NOW: $15.00 ANNUAL MEMBERSHIP FEE INCLUDES $10.00 CREDIT TOWARD FIRST PURCHASE AND PRICE LIST OF PRODUCTS

TERMS — PREPAYMENT, CASH, CERTIFIED CHECK, M.O.; M.C. AND VISA ADD 4%; F.O.B. ORIGIN
MANUFACTURER'S WARRANY $100.00 MIN. PURCHASE

COMPUTERS
INTERTEC SB 64K $2640.
QD 64K 2990.
ZENITH Z89/48K 2204.
TRS-80 MOD II 64K 3350.
TRS-80 MOD III 16K $854.
32K 2 DR. 2100.
HP85 2782.
Apple II & II + 16K 1141.

DRIVES — INC. P.S. & ENC.
2 DR. CABLE 25.
8" CDC FOR MOD II 749.
MPI 40TK 1 SIDE 285.
80TK 1 SIDE 379.
40TK 2 SIDE 379.
80TK 2 SIDE 499.
LOBO/APPLE/CONT3. 3495.
ADDITIONAL DRIVE 434.
TANDON 40K 1 SIDE 270.
80 TK 1 SIDE 365.
40 TK 2 SIDE 365.
80 TK 2 SIDE 455.

PRINTERS — **INC. TRACTORS
**NEC — 5510 2530.
** 5530 2530.
**C. ITOH — 25CPS 1477.
**DIABLO 630 2184.
1640 RO 2509.
1650 RO 2656.
1650 KSR 2932.
CABLES fm. 35.
EPSON MX70 409.
MX80 485.
CENTRONICS 737-1 696.
TI 810 BASIC/SER 1480.
810 W/VCC & ASCII/SER 1943.
810 VFC & CP/ PARALLEL 1716.
820 KSR BASIC 1722.
825 RO LOADED/ 75 CPS 1341.
PAPER TIGER 460G 1111.
ANADEX 9500 1287.
9501 1287.
2K BUFFER/INST. 70.
OKIDATA MICROLINE
80 418.
82 617.
83 920.
TRACTORS 99.

TERMINALS — HAZELTINE
1410 715.
1420 787.
1500 837.
1510 1024.
1520 1202.
1552 1028.

ACCESSORIES
D-CAT MODEM 150.
LEXICON MODEM 129.
16K RAM-4116 29.
TRS-80 EXP. INT. 246.

CALL FOR PRICES ON ITEMS NOT LISTED
PRICES SUBJECT TO CHANGE WITHOUT NOTICE

I WANT TO JOIN NOW.
NAME
STREET
CITY STATE ZIP
CHARGE ☐ MASTER CHG. ☐ VISA
CARD NUMBER
EXPIRATION DATE

DISK SUPPLY CO.
SUITE 439, 111 S. OLIVE ST., MEDIA, PA 19063
(215) 461-5437

Listing 3 continued:

```
1494  FOR I = 1 TO 33:  CALL  - 32667:  NEXT I
1496  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1498  FOR I = 1 TO 26:  CALL  - 32695:  NEXT I
1500  CALL  - 32653
1502  FOR I = 1 TO 44:  CALL  - 32681:  NEXT I
1504  FOR I = 1 TO 43:  CALL  - 32667:  NEXT I
1506  POKE  - 16293,0
1508  GOSUB 320
1510  POKE  - 16294,0
1512  FOR I = 1 TO 6:  CALL  - 32681:  NEXT I
1514  FOR I = 1 TO 10:  CALL  - 32695:  NEXT I
1516  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1518  FOR I = 1 TO 40:  CALL  - 32695:  NEXT I
1520  CALL  - 32653
1522  FOR I = 1 TO 50:  CALL  - 32681:  NEXT I
1524  FOR I = 1 TO 33:  CALL  - 32667:  NEXT I
1526  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1528  FOR I = 1 TO 26:  CALL  - 32695:  NEXT I
1530  CALL  - 32653
1532  FOR I = 1 TO 44:  CALL  - 32681:  NEXT I
1534  FOR I = 1 TO 43:  CALL  - 32667:  NEXT I
1536  POKE  - 16293,0
1538  GOSUB 300
1540  POKE  - 16294,0
1542  FOR I = 1 TO 6:  CALL  - 32681:  NEXT I
1544  FOR I = 1 TO 10:  CALL  - 32695:  NEXT I
1546  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1548  FOR I = 1 TO 40:  CALL  - 32695:  NEXT I
1550  CALL  - 32653
1552  FOR I = 1 TO 50:  CALL  - 32681:  NEXT I
1554  FOR I = 1 TO 33:  CALL  - 32667:  NEXT I
1556  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1558  FOR I = 1 TO 26:  CALL  - 32695:  NEXT I
1560  CALL  - 32653
1562  FOR I = 1 TO 26:  CALL  - 32667:  NEXT I
1564  FOR I = 1 TO 100:  CALL  - 32681:  NEXT I
1566  CALL  - 32646:  FOR I = 0 TO 10:  NEXT I
1568  FOR I = 1 TO 26:  CALL  - 32695:  NEXT I
1570  CALL  - 32653
1572  FOR I = 1 TO 13:  CALL  - 32667:  NEXT I
1574  FOR I = 1 TO 50:  CALL  - 32712:  NEXT I
1999  RETURN
```

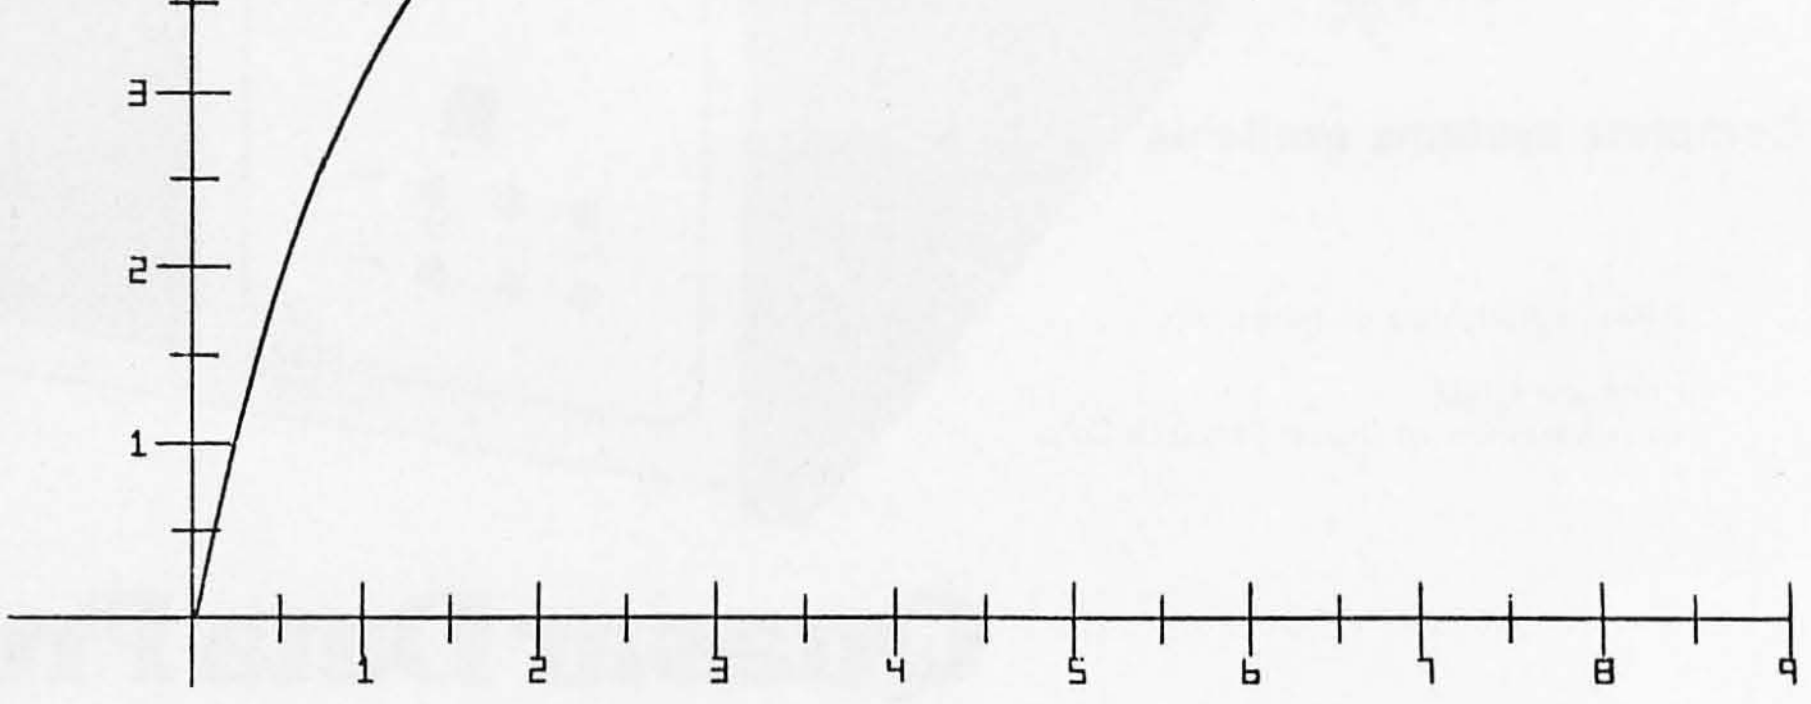

Figure 3: *Sample plot of results obtainable with the information included in this article.*

MULTI-USER OASIS HAS THE FEATURES PROS DEMAND. READ WHY.

(THEN COMPARE.)

Computer experts (the pros) usually have big computer experience. That's why when they shop system software for Z80 micros, they look for the big system features they're used to. And that's why they like Multi-User OASIS. You will too.

DATA INTEGRITY: FILE & AUTOMATIC RECORD LOCKING

The biggest challenge for any multi-user system is co-ordinating requests from several users to change the same record at the same time.

Without proper co-ordination, the confusion and problems of inaccurate or even destroyed data can be staggering.

Our File and Automatic Record Locking features solve these problems.

For example: normally all users can view a particular record at the same time. But, if that record is being updated by one user, automatic record locking will deny all other users access to the record until the up-date is completed. So records are always accurate, up-to-date and integrity is assured.

Pros demand file & automatic record locking. OASIS has it.

SYSTEM SECURITY: LOGON, PASSWORD & USER ACCOUNTING

Controlling who gets on your system and what they do once they're on it is the essence of system security. Without this control, unauthorized users could access your programs and data and do what they like. A frightening prospect isn't it?

And multi-users can multiply the problem.

But with the Logon, Password and Privilege Level features of Multi-User OASIS, a system manager can specify for each user which programs and files may be accessed—and for what purpose.

Security is further enhanced by User Accounting—a feature that lets you keep a history of which user has been logged on, when and for how long.

Pros insist on these security features. OASIS has them.

EFFICIENCY: RE-ENTRANT BASIC

A multi-user system is often not even practical on computers limited to 64K memory.

OASIS Re-entrant BASIC makes it practical. How?

Because all users use a single run-time BASIC module, to execute their compiled programs, less memory is needed. Even if you have more than 64K, your pay-off is cost saving and more efficient use of all the memory you have available—because it services more users.

Sound like a pro feature? It is. And OASIS has it.

AND LOTS MORE...

Multi-User OASIS supports as many as 16 terminals and can run in as little as 56K memory. Or, with bank switching, as much as 784K.

Multi-Tasking lets each user run more than one job at the same time.

And there's our BASIC—a compiler, interpreter and debugger all in one. An OASIS exclusive.

Still more: Editor; Hard & Floppy Disk Support; Keyed (ISAM), Direct & Sequential Files; Mail-Box; Scheduler; Spooler; all from OASIS.

Our documentation is recognized as some of the best, most extensive, in the industry. And, of course, there's plenty of application software.

Put it all together and it's easy to see why the real pros like OASIS. Join them. Send your order today.

OASIS

MAKES MICROS RUN LIKE MINIS

OASIS IS AVAILABLE FOR

SYSTEMS: Altos; Compucorp; Cromemco; Delta Products; Digital Group; Digital Microsystems; Dynabyte; Godbout; IBC; Index; Intersystems; North Star; Onyx; SD Systems; TRS 80 Mod II; Vector Graphic; Vorimex.

CONTROLLERS: Bell Controls; Cameo; Corvus; Konan; Micromation; Micropolis; Tarbell; Teletek; Thinkertoys; X Comp.

Write for complete, free Application Software Directory.

PLEASE SEND ME:

Product	Price with Manual	Manual Only
OPERATING SYSTEM (Includes: EXEC Language; File Management; User Accounting; Device Drivers; Print Spooler; General Text Editor; etc.) SINGLE-USER MULTI-USER	 $150 350	 $17.50 17.50
BASIC COMPILER/ INTERPRETER/DEBUGGER	100	15.00
RE-ENTRANT BASIC COMPILER/INTERPRETER/ DEBUGGER	150	15.00
DEVELOPMENT PACKAGE (Macro Assembler; Linkage Editor; Debugger)	150	25.00
TEXT EDITOR & SCRIPT PROCESSOR	150	15.00
DIAGNOSTIC & CONVERSION UTILITIES (Memory Test; Assembly Language; Converters; File Recovery; Disk Test; File Copy from other OS; etc.)	100	15.00
COMMUNICATIONS PACKAGE (Terminal Emulator; File Send & Receive)	100	15.00
PACKAGE PRICE (All of Above) SINGLE-USER MULTI-USER	 500 850	 60.00 60.00
FILE SORT	100	15.00
COBOL-ANSI '74	750	35.00

Order OASIS from:

Phase One Systems, Inc.
7700 Edgewater Drive, Suite 830
Oakland, CA 94621
Telephone (415) 562-8085
TWX 910-366-7139

NAME________________
STREET (NO BOX #)________
CITY________________
STATE________ ZIP________
AMOUNT $________
(Attach system description; add $3 for shipping; California residents add sales tax)
☐ Check enclosed ☐ VISA
☐ UPS C.O.D. ☐ Mastercharge
Card Number____________
Expiration Date__________
Signature____________

Circle 326 on inquiry card.

Circle 276 on inquiry card.

MTI stocks 'em all for faster delivery.

No hidden charges. Prices include delivery.
Ask about our "QED" discounts.
VISA and MasterCard orders accepted.

VIDEO TERMINALS
VT100 DECscope .... $ 1595
VT132 DECscope 1995
ADM-3A (dumb terminal) 795
ADM-3A+ (dumb terminal) 875
ADM-5 (dumb terminal) 945
ADM-31 (2 page buffer) 1185
ADM-42 (8 page buffer avail.) 2035
1410 (Hazeltine dumb terminal) 825
1420 (dumb terminal) 895
1421 (Consul 580 & ADM-3A comp.) 850
1500 (dumb terminal) 1045
1510 (buffered) 1145
1520 (buffered printer port) 1395
1552 (VT52 compatible) 1250

GRAPHICS TERMINALS
VT100 with graphics pkg. 3160
ADM-3A with graphics pkg. 1995
ADM-3A+ with graphics pkg. 2075

300 BAUD TELEPRINTERS
LA34-DA DECwriter IV 995
LA34-AA DECwriter IV 1095
LA36 DECwriter II 1295
Teletype 4310 1095
Teletype 4320 1195
Diablo 630 RO 2295
Diablo 1640 KSR 2775
Diablo 1650 KSR 2835
TI 743 (portable) 1190
TI 745 (port/built-in coupler) 1485
TI 763 (port/bubble memory) 2545
TI 765 (port/bubble/b.i. coupler) 2595

600 BAUD TELEPRINTERS
TI 825 RO impact 1450
TI 825 KSR impact 1570
TI 825 RO Pkg. 1625
TI 825 KSR Pkg. 1795

1200 BAUD TELEPRINTERS
LA 120 RO (forms pkg.) 2295
LA 120-AA DECwriter III (forms pkg.) 2095
LA 180 DECprinter I 2295
TI 783 (portable) 1645
TI 785 (port/built-in coupler) 2270
TI 787 (port/internal modem) 2595
TI 810 RO impact 1760
TI 810 RO Pkg. 1950
TI 820 KSR impact 2025
TI 820 RO 1850
TI 820 KSR Pkg. 2195
TI 820 RO Pkg. 2025

2400 BAUD
Dataproducts M200 (2400 baud) 2595

DATAPRODUCTS LINE PRINTERS
B300 (300 LPM band) 5535
B600 (600 LPM band) 6861
2230 (300 LPM drum) 7723
2260 (600 LPM drum) 9614
2290 (900 LPM drum) 12655

ACOUSTIC COUPLERS
A/J A242-A (300 baud orig.) 242
A/J 247 (300 baud orig.) 315
A/J AD342 (300 baud orig./ans.) 395
A/J 1234 (Vadic compatible) 895
A/J 1245 (300/1200 Bell comp.) 695

MODEMS
GDC 103A3 (300 baud Bell) 395
GDC 202S/T (1200 baud Bell) 565
GDC 212-A (300/1200 baud Bell) 850
A/J 1256 (Vadic compatible) 825
A/J 1257 (triple modem w/phone) 975

CASSETTE STORAGE SYSTEMS
Techtran 816 (store/forward) 1050
Techtran 817 (store/for/speed up) 1295
Techtran 818 (editing) 1795
Techtran 822 (dual) 2295
MFE 5000 (editing) 1495

FLOPPY DISK SYSTEMS
Techtran 950 (store/forward) 1395
Techtran 951 (editing) 1995

mti
Applications Specialists & Distributors
Great Neck, New York/Cleveland, Ohio.
N.Y.: 516/482-3500 & 212/895-7177
800/645-8016. Ohio: 216/464-6688



VECTOR NOTATION

COMMAND	CHARACTER	HEXADECIMAL ADDRESS
+Y	p	8038
+X, +Y	q	8042
+X	r	8049
+X, −Y	s	8050
−Y	t	8057
−X, −Y	u	805E
−X	v	8065
−X, +Y	w	806C
PEN UP	y	8073
PEN DOWN	z	807A

Table 1: *Chart of plotter pen-movement commands and the vector notation associated with each command.*

Text continued from page 298:

Table 1 shows plotter commands and the vector notation associated with each. Listing 2 on page 300 is a machine-language routine that generates the specified command characters. To execute a given command, a jump is made to the appropriate hexadecimal address, where the proper character is loaded into the accumulator. A call is then made to the parallel-to-serial subroutine, where the command character is transferred from the computer to the plotter.

Results with the digital plotter have been encouraging. Figure 3 on page 312 shows an actual plot made on the plotter. A #0 Rapidograph pen was used to produce a high-quality plot. The plot is a simulation of the voltage drop across a capacitor that is placed in series with a resistor and a fixed voltage source. Figure 4 shows the flowchart of the program, and listing 3 beginning on page 302 shows the program with comments.

At present, the Apple II and Hiplot digital plotter are being used for several projects that include the spectral analysis of breath sounds, muscle voltages, and neural characteristics. The two units working together provide a low-cost, high-quality record of the analysis of scientific data.■

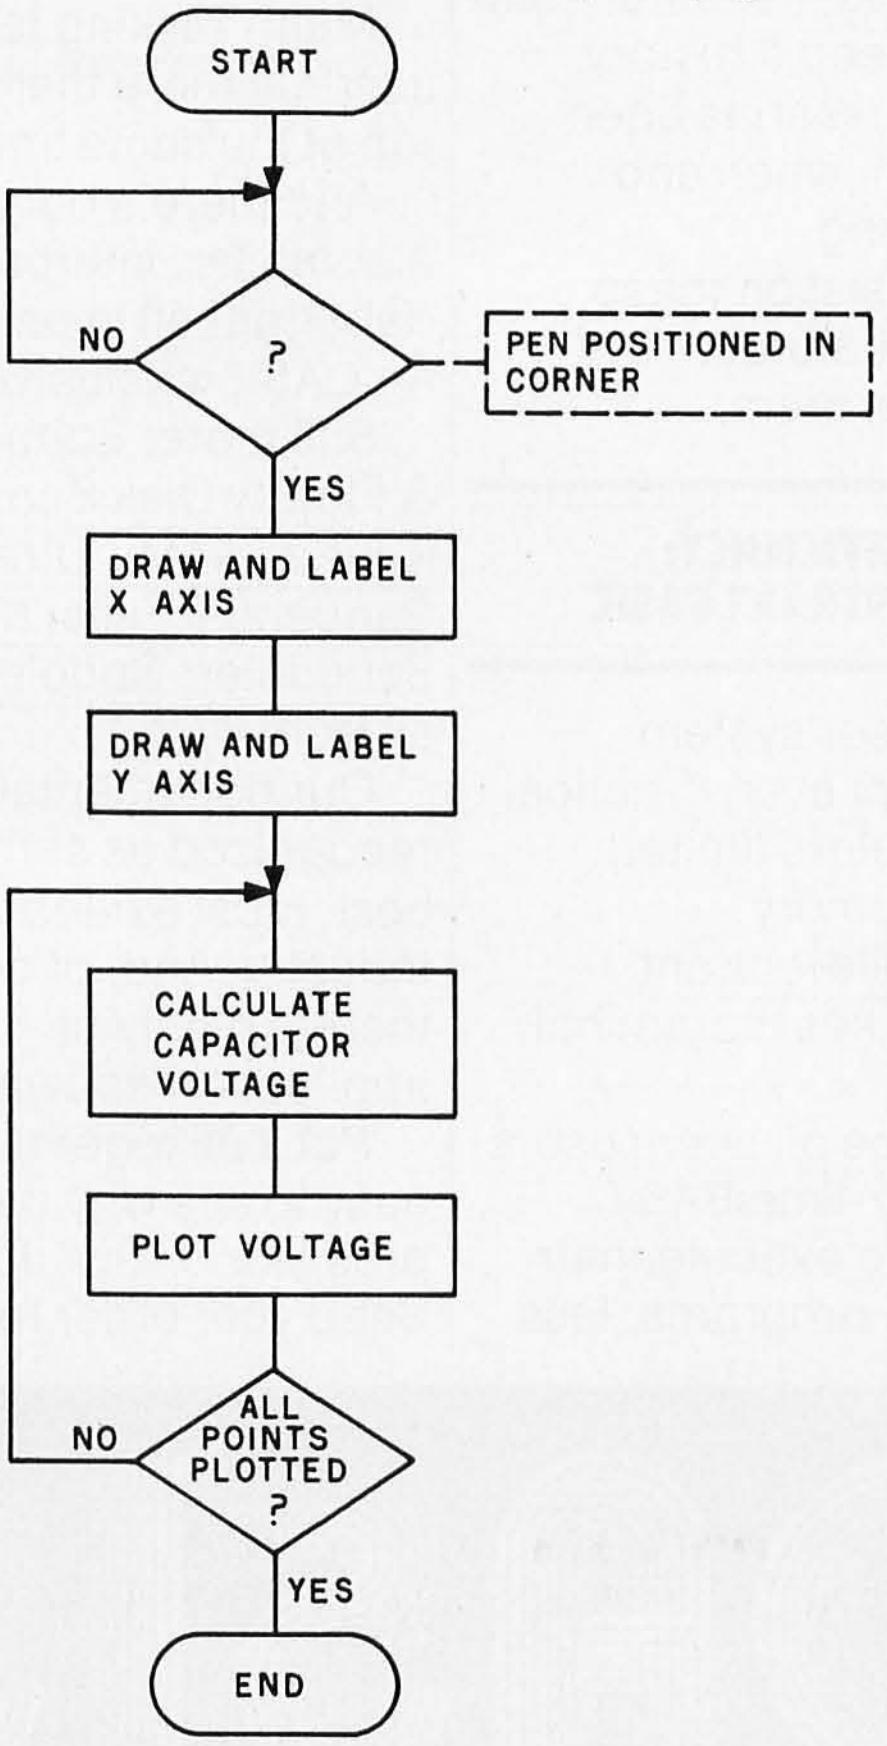

Figure 4: *Flowchart for the BASIC program used to produce figure 3.*

MAIN FRAME POWER— MICRO PRICE

OSM's ZEµS multiprocessor computer system delivers main frame performance for one to 64 users—**performance impossible in a single processor micro!** We start with the S100 bus and mount a Z80A as master processor to control the shared resources of disk and printer. Then we add a separate single board Z80A processor for each user (no bank switching!) so ZEµS can **grow any time from a single user to many** with no changes in programs or files. And each user is independent of reset or program crash in other users.

OSM's MUSE operating system—the Multi User System Executive—is **many times faster than other leading operating systems.** Each user owns a resident copy of MUSE so you don't wait for the bus or interrupt the master processor to do console I/O and applications code. MUSE finds files fast with a random directory access similar to random file access. And MUSE protects shared files from simultaneous update to the same record by different users. We designed MUSE from the start for multi-user data base environments—yet MUSE is **CP/M* compatible!**

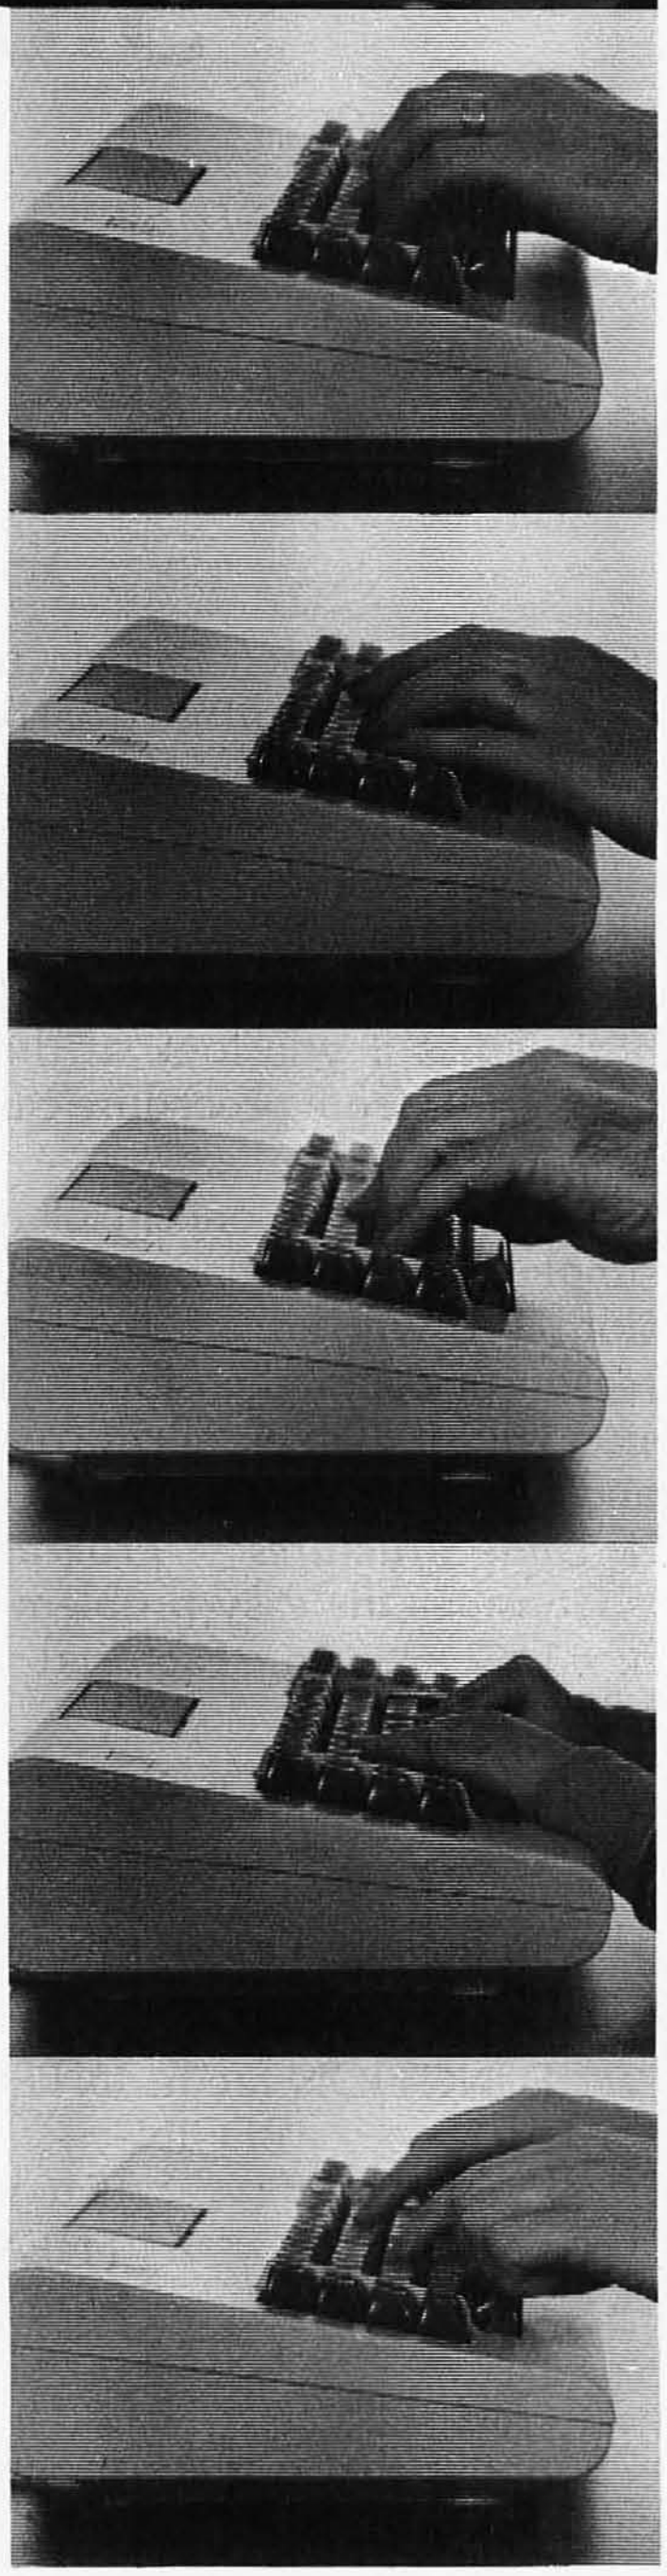

Check the other multi-processors!

Check the hardware!

- S100 compatible master processor (4MHz Z80A, 32K dynamic RAM) for disk and shared printer control
- single board processor (4MHz Z80A, 64K dynamic RAM), with I/O on board, for each user
- serial and parallel ports on each user board support optional slave printer or other user devices
- rack mountable enclosure built to highest industrial standards for reliable continuous operation
- readily field expandable to any configuration from 1 user, 64K RAM, to 64 users, 4 Megabyte RAM
- 2.4 Megabyte double sided dual density 8″ floppy disk
- 26 to 96 Megabyte hard disk option
- independent user processor reset directly from each keyboard

Check the operating system!

- all MUSE code written in Z80 native code (not 8080 code) for fast response
- MUSE user operating system in 7K RAM on board each user processor reduces calls to the master processor
- transfer of data between master and users via single Z80 block move command for highest speed
- random directory search provides immediate file access
- common file area for shared programs and files eliminates redundant files while individual user file areas protect each user's private files
- shared file update with record level lockout
- spool file can be displayed, updated, reprinted
- password security protects multiple user data bases
- MUSE supports standard CP/M* word processors, utilities, and languages: MBASIC, CBASIC, PASCAL, FORTRAN, COBOL, FORTH, C, PL/1, etc.

Check the price!

- Single user mainframe with dual 8″ floppy drives expandable to 12 users. Begins at $5715.00.

See us at MicroPro International
Booth 4431, at NCC in Chicago, May 3-7.

WE'RE SHIPPING ZEµS MICRO MAIN FRAMES!
CALL US TODAY 408-496-6910 ex 40

2364 Walsh Avenue #4
Santa Clara, CA 95051

OSM

*CP/M is a registered trade mark of Digital Research

Circle 30 on inquiry card.

Recursion and Side Effects in Pascal

Robert Morris and James Perchik
University of Massachusetts
Boston Harbor Campus
Boston MA 02125

Two features of Pascal, *recursion* and *side effects*, often cause difficulties for beginners to the language. Although these features appear to address separate issues, they are not unrelated, and for this reason confusion over one often accompanies confusion over the other. Conversely, contemplation of one can assist in an understanding of the other. It is easier to comprehend both issues if you look at the management of variables that results from procedure calls. That will be the focus of this article.

Typically, the concept of recursion is illustrated with simple functions that are better written without recursion. We will adhere to that custom for the standard reason of comprehensibility. Readers who master recursion will find an excellent treatment of the subject (when and when not to use it) in Nikolaus Wirth's *Algorithms + Data Structures = Programs*, listed in the references.

Consider the easy problem of computing the factorial $n! = 1 \times 2 \times \ldots \times n$. Factorial is defined recursively as follows:

$$\begin{aligned} n! &= n(n-1)! \text{ if } n > 1 \\ n! &= 1 \qquad\quad \text{ if } n = 1 \end{aligned}$$

The following Pascal function computes the factorial function recursively:

```
FUNCTION fac(n: INTEGER): INTEGER;
        BEGIN
                IF n = 1
                THEN fac := 1
                ELSE fac := fac(n - 1)*n
        END
```

Suppose that a main program contains the following calling sequence:

```
m := 3; y := fac(m)
```

The function "fac" is recursive. That is, "fac(3)" will call "fac(2)", which will call "fac(1)". We say that there are three activations of this function, with parameter values of 3, 2, and, finally, 1.

Each activation of a recursive function (or procedure) must have a separate location (called the *stack frame*) for its local variables, parameters, etc. In this way, one activation (say, "fac(2)") does not disturb the contents of another activation (say, "fac(3)"). As each activation begins, a new stack frame is created (or *pushed*) for its local variables. As that activation is completed, its stack frame is destroyed (or *popped*), and control returns to the previous activation. The "current" values of the local variables are then taken from the stack frame of the previous activation, which is now at the bottom of the (downward-growing) stack. [*In a stack, only the item most recently placed there can be accessed. We call this the* top *of the stack if the stack is growing "up." Since the stack in this context is growing "down," we will refer to the item that can be removed as the* bottom *of the stack....*GW]

Snapshots of the stack are shown in figure 1. The global variables "m" and "y" (ie: those declared in the main program) are allocated storage in the stack frame of the main program, which is shown at the top frame of the stack. These variables are not duplicated with each activation of the function. A function or procedure may be able to directly access and modify a global variable. That, as you will see, can lead to surprising results.

Above and between the snapshots of the stack in figure 1 is the fragment of code (plus comments, in braces) which caused the changes to the stack. This information helps specify the time when each snapshot was taken.

At any point in time, there are two currently active frames that are of immediate interest. These two frames contain the values that are currently accessible; they are the top and bottom frames in figure 1. The top frame contains the (global) variables of the main program. The local frames are shown below it, growing downward. The bottom frame is the only local frame that is currently accessible (ie: belongs to the current activation). In addition to local variables, the stack frame contains the value of the function (marked "P" if it is pending further calculations) and the return address (so that control will be transferred back to the correct calling sequence). The

APPLE ACCESSORIES

Sanyo Monitor 9" B/W	$169.
NEC Monitor 12" GN.	229.
LOBO Disk II/Contoller DOS 3.3	499.
LOBO Disk II	399.
SUPERTERM 80 Col. Card	$329.
Z80 Soft Card	295.
H.S. Serial Card	179.
COMM. Card	179.
CLOCK Calendar Card	225.
ROM Plus Card/KB Filter	175.
HAYES Micromodem	319.
SUPERTalker	249.
PARALLEL Printer Card	149.

SOFTWARE

VISICALC	119.00
DESKTOP Plan II	169.00
PERS Filing Syst	80.00
ADDRESS Book	40.00
SUPER Text II	125.00
CCA Data Mgmt	85.00

MODEMS

UDS 103 LP, *direct*	$169.00
NOVATION CAT, *acoustic*	159.00
D-CAT, *direct*	169.00
LEXICON LX-11, *acoustic*	147.00
HAYES Micromodem, S100	349.00

S100 CORNER

Boards	Xitan ZPU (Z80)	$129.
	SMB-2 I/O	199.
	D-16K Dynamic	129.
	D-32K Dynamic	199.
Mainframes	Xitan 8 Slot	$199.
	CCS 12 Slot	349.
	NNC 19 Slot	590.
Computers	NNC System 80-IMB	$3,995.
	NNC System 80W-8.4MB	6,995.

Z-80 SOFTWARE

	Cassette	Disk
8K Basic	$50.	
Super Basic	$95.	$99.
Disk Basic		$159.
ZAPPLE Text Ed.	$35.	$69.
Z-Tel Text Ed.	$50.	
Text Output Proc	$50.	
Macro Assembler	$50.	$69.
Z-Bug		$89.
Micro Z-BUG		$69.
LINKER		$69.
Fortran IV		$249.

SUPER SALE

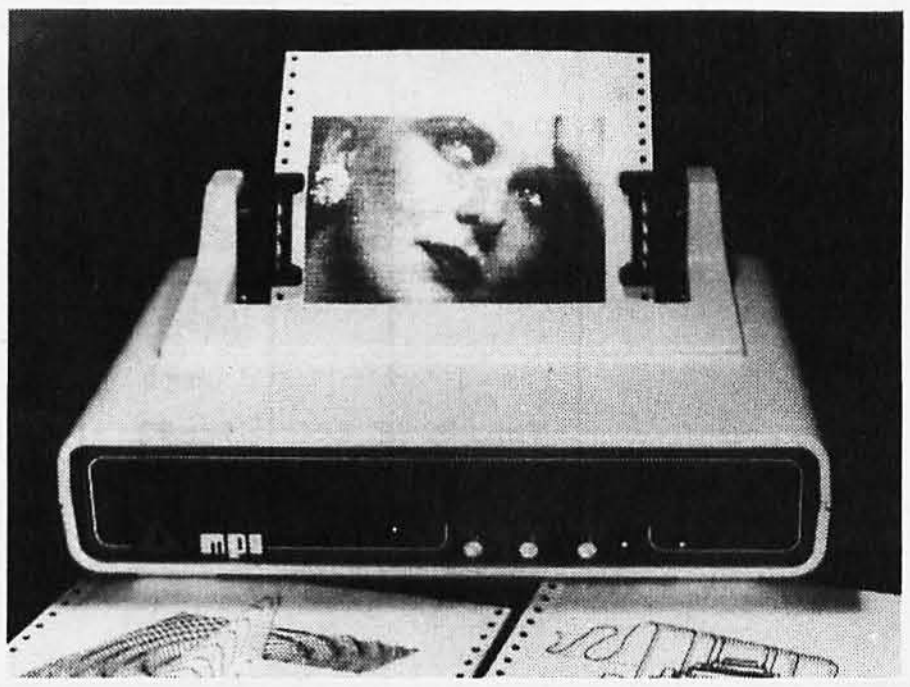

MPI 88 G Matrix

High resolution dot-addressable graphics for Apple. Enhanced "correspondence quality" printing. Tractor and Friction feed. Serial and Parallel Input. 100 cps Bidirectional printing, 80, 96, and 132 column widths!

List $799.00 .... $599.00

ANADEX DP 9500/9501

200 cps Matrix, high density dot addressable graphics serial and parallel input, up to 2K buffer!

List $1,650.00 .... $1,395.00

TI 820, RO Full ASCII

150 cps Matrix, wide carriage, data processing workhorse.

List $1,995 .... $1,695.00

ANACOM 150

Heavy duty 150 cps Matrix 15" carriage, low cost replacement for TI 820.

List $1,350.00 .... $1,095.00

QUANTEX 6000 MATRIX

Heavy duty 150 cps 15" carriage.

List $1,495.00 .... $1,195.00

NEC — SPINWRITER

55 cps Bidirectional, letter quality

5510 RO List $3,055.00 .... $2,595.00

C. ITOH — STARWRITER RO

25 cps Low cost Daisy Wheel

List $1,895 .... $1,695.00

QUME SPRINT 5/45 RO

45 cps Daisy Wheel, High Quality

List $3,137.00 .... $2,595.00

DIABLO 630 RO

30 cps letter quality, plastic or metal Daisy wheel

List $2,711.00 .... $2,395.00

TYPRINTER 221 Word Processing W/KEYBOARD

20 cps computer printer and typewriter in one. Non valatile memory up to 16K. Auto error correction. 10, 12 and 15 pitch letter quality characters. Proportional spacing works with most word processing software.

List $2,850.00 .... $2,450.00

ESCON CONVERSION FOR IBM SELECTRIC

Complete with micro processor controller and power supply. Standard serial, parallel and IEEE versions available.

List $599.00 .... $539.00

PRINT ELEMENTS

NEC Thimbles	$16.00
Plastic Daisy Wheels *for Qume, Diablo, Starwriter*	6.00
Metal Daisy Wheels	56.00
IBM Selectric Elements	17.00

RIBBONS

NEC	$71.00/Doz.
QUME	54.00/Doz.
DIABLO	54.00/Doz.
ANADEX	144.00/6 ea.
ANACOM/QUANTEX	192.00/Doz
TI/DEC/TTY	50.00/Doz.

MAGNETIC MEDIA

Premium Quality At Bargain Prices

5¼" Diskettes, all Formats, 100% Certified with hub rings, box of 10

Single sided, single density	$22.50
Single sided, double density	24.50
Double sided, double density	32.50

8" DISKETTES, ALL FORMATS 100% CERTIFIED

Single sided, single density	$26.00
SSSD Error Free	27.00
Single sided, double density	34.50
Double sided, double density	40.00

3M DATA CARTRIDGES, 1/4"

Regular	$18.15/ea.
Regular Error Free	20.65
Mini	15.25

DIGITAL PHILLIPS CASSETTES, 1/4"

For Most Systems	$3.60

FREE & EASY

. . . . that's our new catalog, filled with super buys on computers, peripherals, accessories and supplies. It's **free** and it makes buying **easy** for you. Just ask for it!

Circle 315 on inquiry card.

TO PLACE YOUR ORDER CALL:

TELEPHONE	*TELEX*
(714) 744-7314	697120

or write to:

PALOMAR
Computer Products
910-105 W. San Marcos Blvd., San Marcos, CA 92069

TERMS OF SALE: Cash, check, money order, bank wire transfer, credit card or purchase orders from qualified firms and institutions. Please include telephone number with order and expiration date on credit card orders. California residents add 6% sales tax. Advertised prices are for prepaid orders F.O.B. shipping point. Add 3% for shipping in U.S. Pricing and availability subject to change without notice.

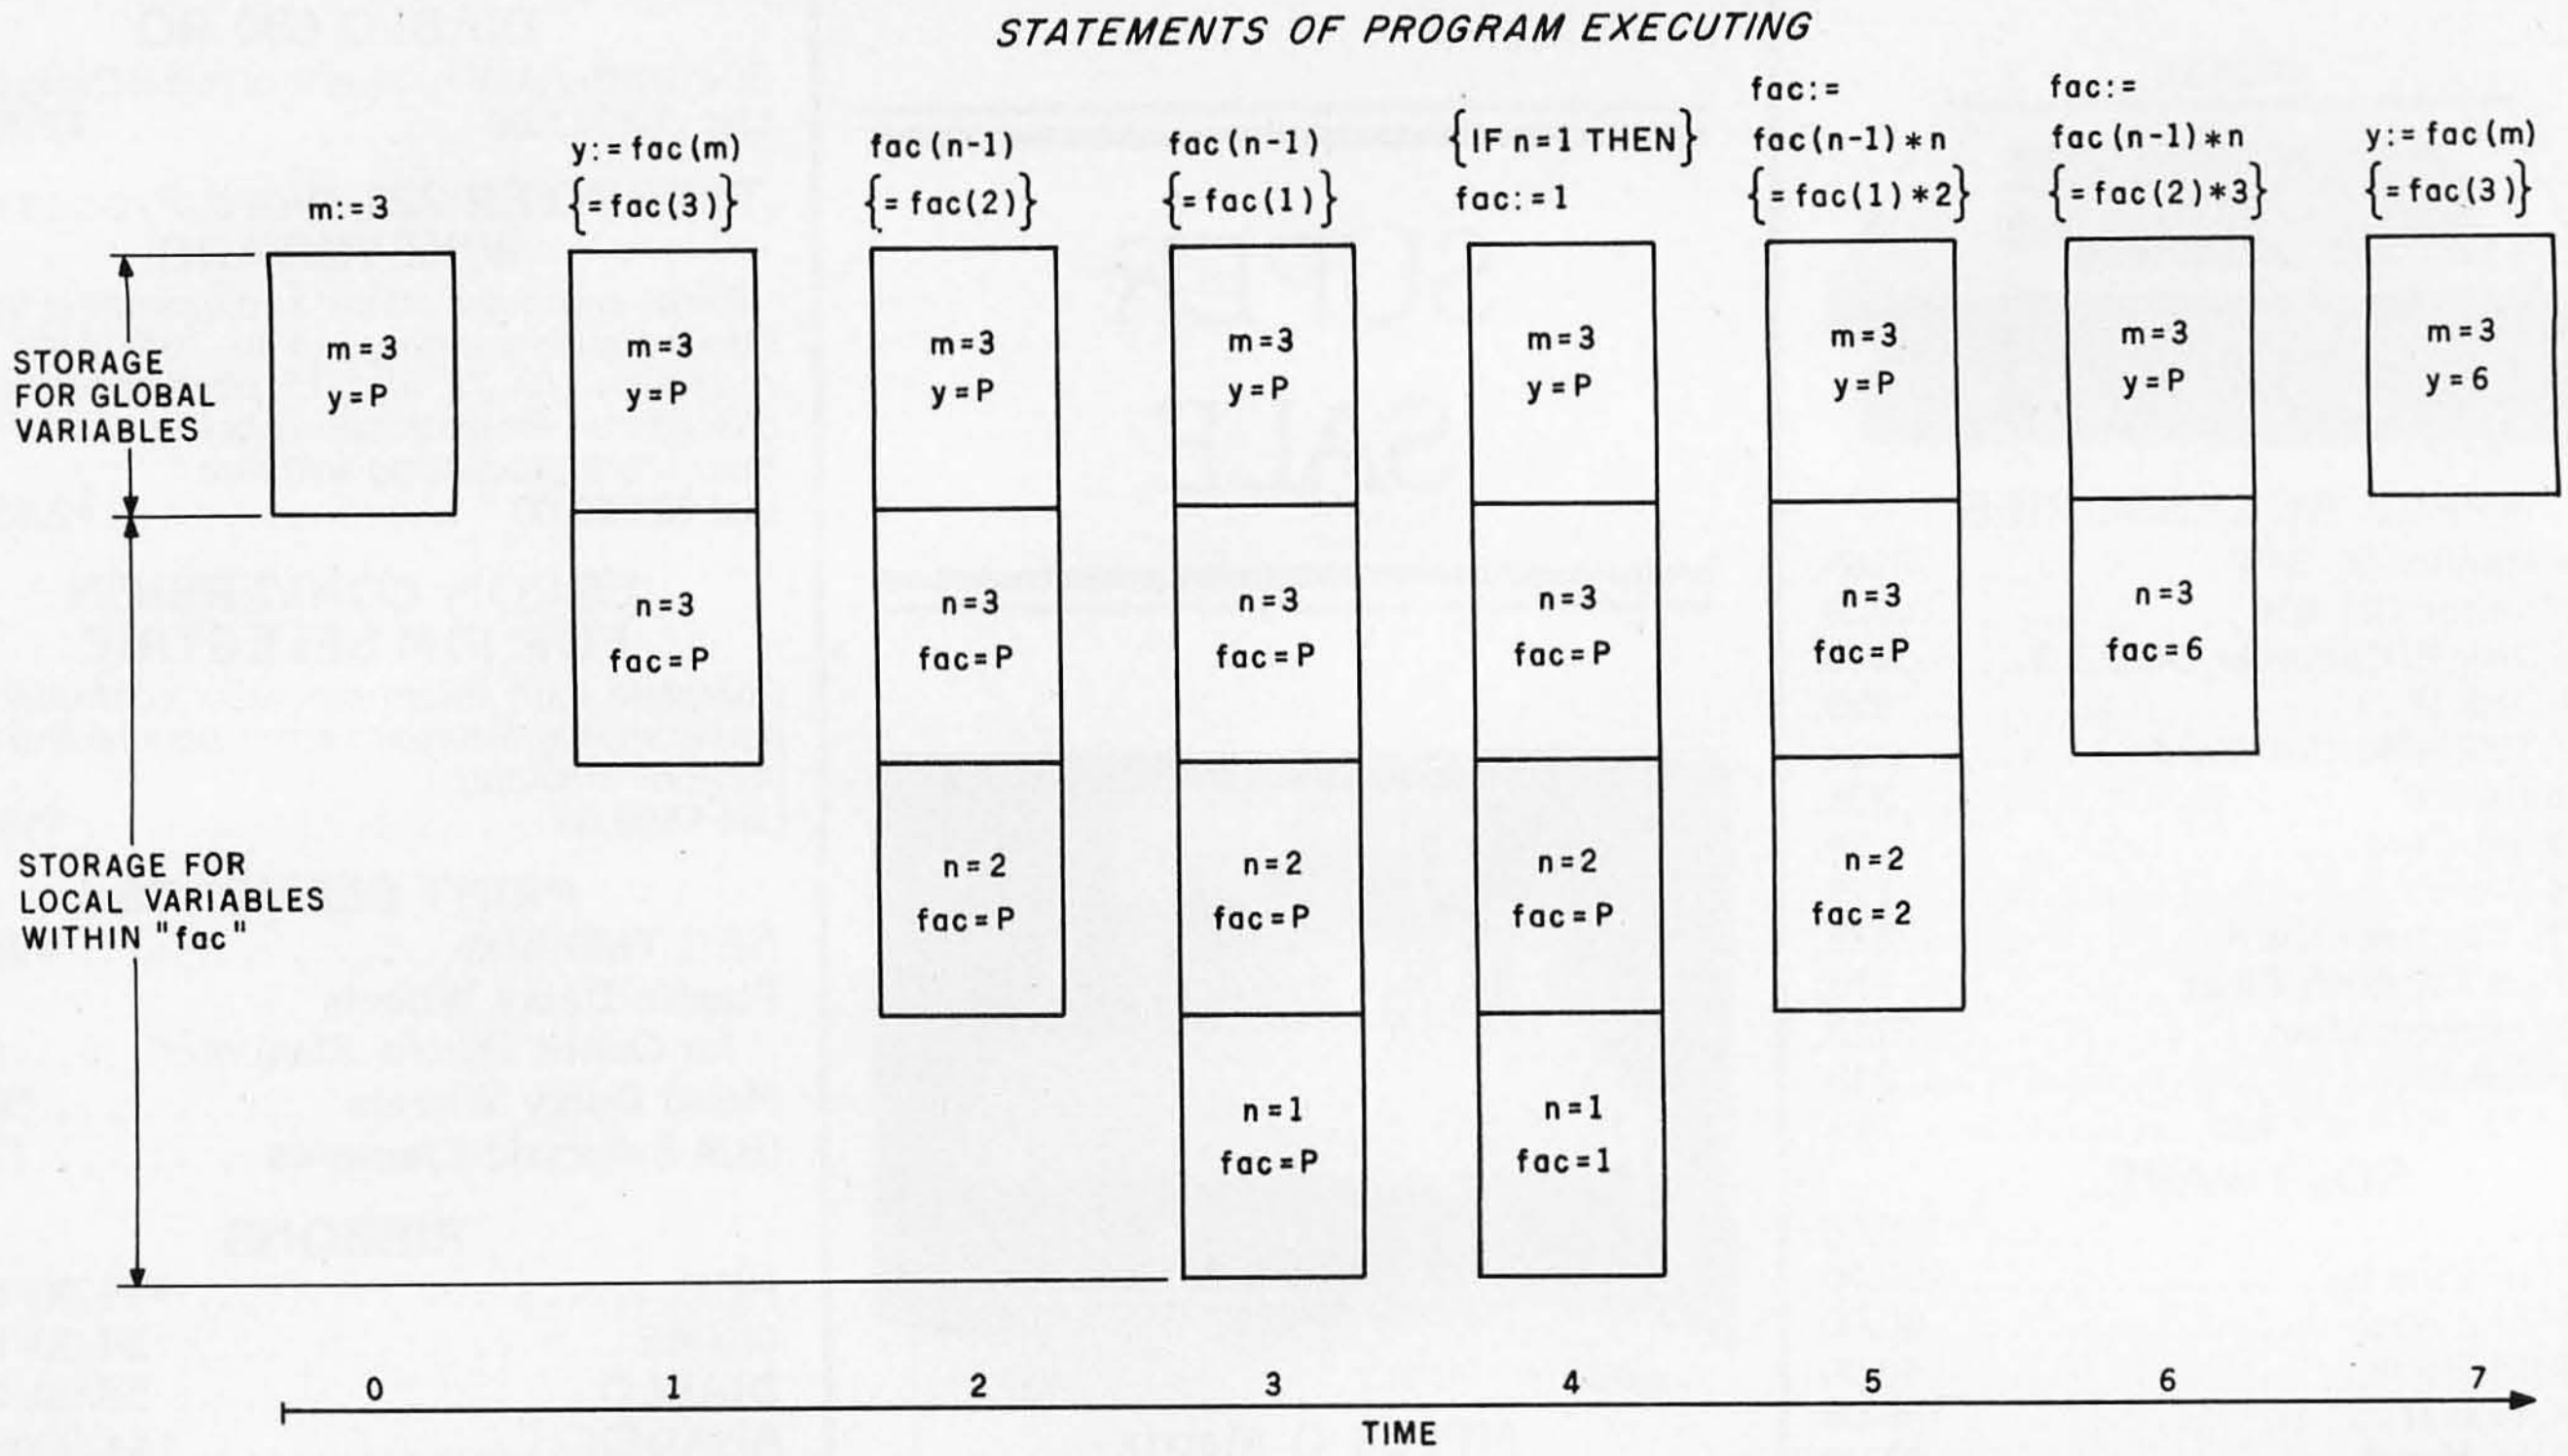

Figure 1: *Execution of the Pascal statements "m := 3; y := fac(m)". The columns of boxes represent the stack at time t=0, 1, 2,...7. The statements above each column indicate the part of the function that is executed to give the stack illustrated below, and the comments in braces are used to clarify the statements being executed. The letter P indicates a pending calculation.*

addresses have not been shown in figure 1.

Had the variables "m" or "y" occurred inside "fac" without a new declaration, these variables would be said to be *global* to the function, and then "fac" could access or change their values. When global variables are changed within a function, the function is said to cause *side effects*. Sometimes this is useful, but often it is dangerous, and should be used with caution.

When the program execution begins, the global frame is set up, and soon the variable "m" is assigned the value of 3 (see column 0 in figure 1). When the function call "fac(m)" is reached, a stack frame for "fac" is set up (column 1) below the global frame, and the value, 3, of the argument "m" is assigned the parameter "n" and stored in the local stack frame. (This *call by value* is the default behavior in Pascal. The alternative method of passing values, *variable parameters*, will be discussed shortly.)

Now the value of "fac(n−1)=fac(2)" is required. In order to compute this, the function "fac" is called (recursively), this time with a parameter value of 2. A second local stack frame is set up with n=2 (column 2).

This activation will call "fac(1)", and its frame is set up

ABRACADABRA . . .
DataMagic® and 3450 Computer System

Try it and you'll see why it's named DataMagic.® Abracadabra, you're transformed from a programmer, back into doing what's printed on your business card. You're concentrating on the content

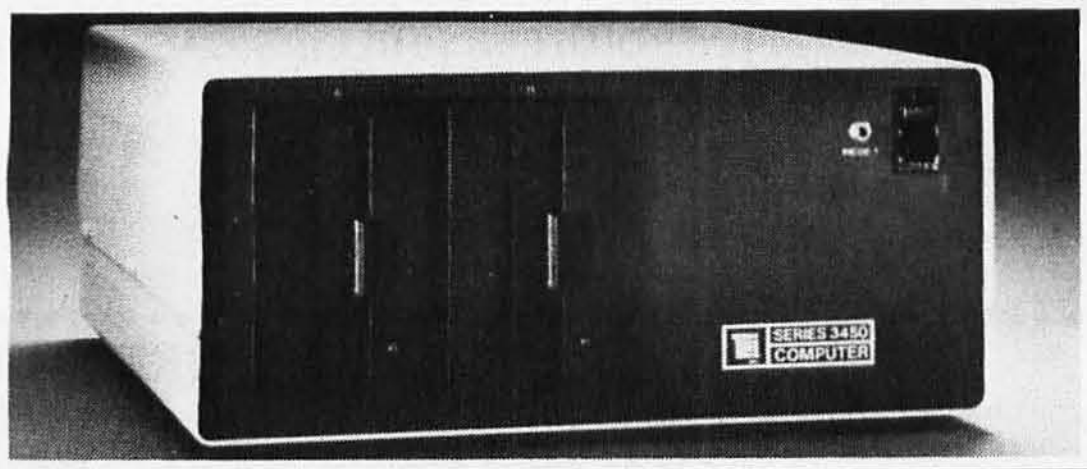

TEI INC. DataMagic®

of a report, not how many lines to skip after the title. You're concentrating on a sale, not how to get prices out of the computer.

You are using DataMagic,® TEI, Inc.'s DataBase Management System that allows you to quickly define databases and fill them with a minimum of effort. You work with a CRT screen display in a "fill-in-the-blanks" mode of operation. Report generation, database browsing, database update — do it by "magic", DataMagic,® that is.

And the perfect companion for DataMagic® is the TEI Model 3450 Computer System. With the fastest 8-bit CPU on the market, over half a megabyte of mass storage, two serial and one parallel printer ports, and one RS-232 port for the available Model 3411 Terminal. With the built-in voltage protection that is keeping up TEI's reputation for reliability all over the world. And, with TEI's proven Operating System, T/DOS, that lets you run not only DataMagic,® but BASIC and most of the other microcomputer programming languages and application programs commercially available.

When you outgrow your Model 3450, no problem. Let us show you System/48, our multi-user System with it's own kind of MAGIC® (details in a separate ad in this issue). Your programs will transfer easily.

You simply can't buy a better small computer! And, to make it even better, we include BASIC, DataMagic® and T/DOS with every system.

See your Distributor today! Or see us at NCC booth 1561-63 or call TEI to see the System and attend one of the regularly-offered training classes.

5075 S. LOOP EAST, HOUSTON, TX. 77033 (713) 738-2300 TWX. 910-881-3639

Circle 406 on inquiry card.

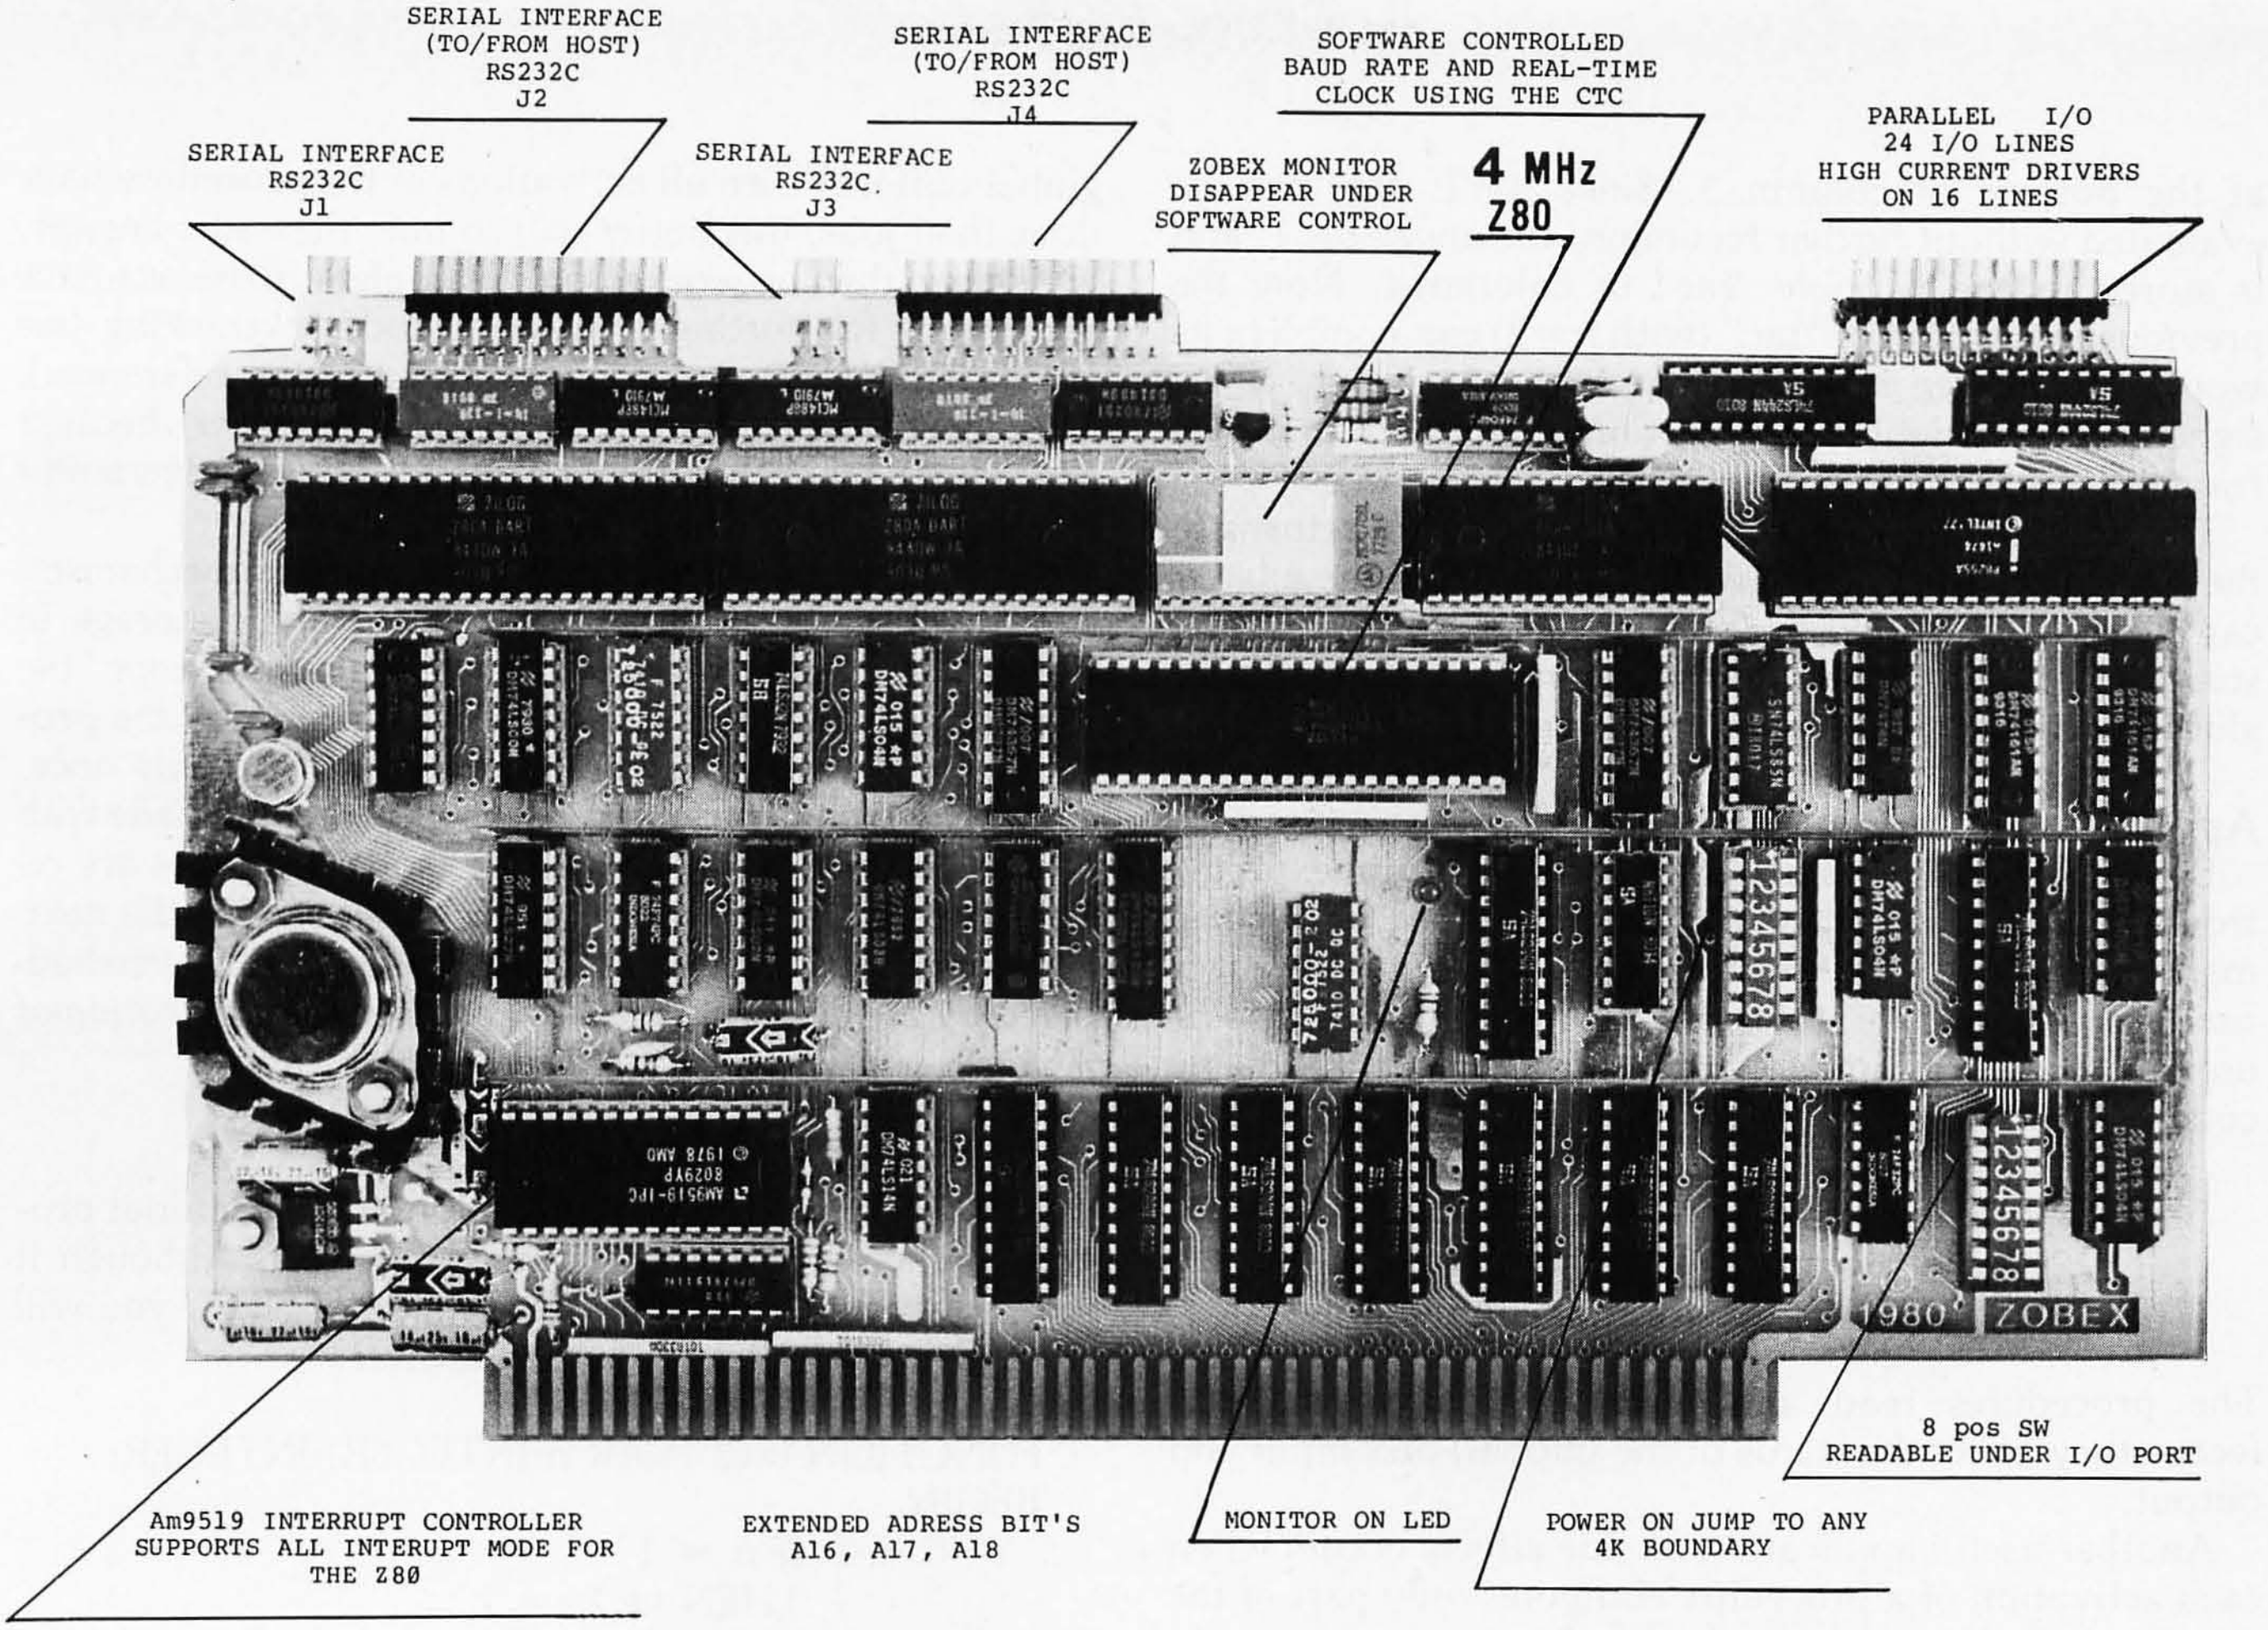

ZOBEX CPU

$490

THE ZOBEX CPU IS A IEEE STANDARD S-100 MODULE THAT INCORPORATES PROCESSOR, 4 SERIAL AND 3 PARALLEL I/O, REAL-TIME CLOCK, AND PROM FEATURES, ALL ON ONE BOARD. IT IS ADAPTABLE TO WIDE VARIETY OF HOME AND OEM APPLICATIONS. THIS BOARD WILL RUN MODERN INTERRUPT DRIVEN OPERATING SYSTEMS SUCH AS **MP/M, WITH NO EXTERNAL CIRCUITRY.

64K RAM BOARD

$795

THE ZOBEX ZMS-100 64K RAM BOARD IS HIGH-SPEED BANK SELECTABLE DYNAMIC MEMORY FOR S-100 COMPUTERS.

- 4MHz OPERATION (no wait states)
- INVISIBLE REFRESHING
- FULL DMA OPERATION
- COMPATIBLE WITH *CROMEMCO, etc.
- RUNS *CROMIX AND **MP/M
  WITH NO MODIFICATION

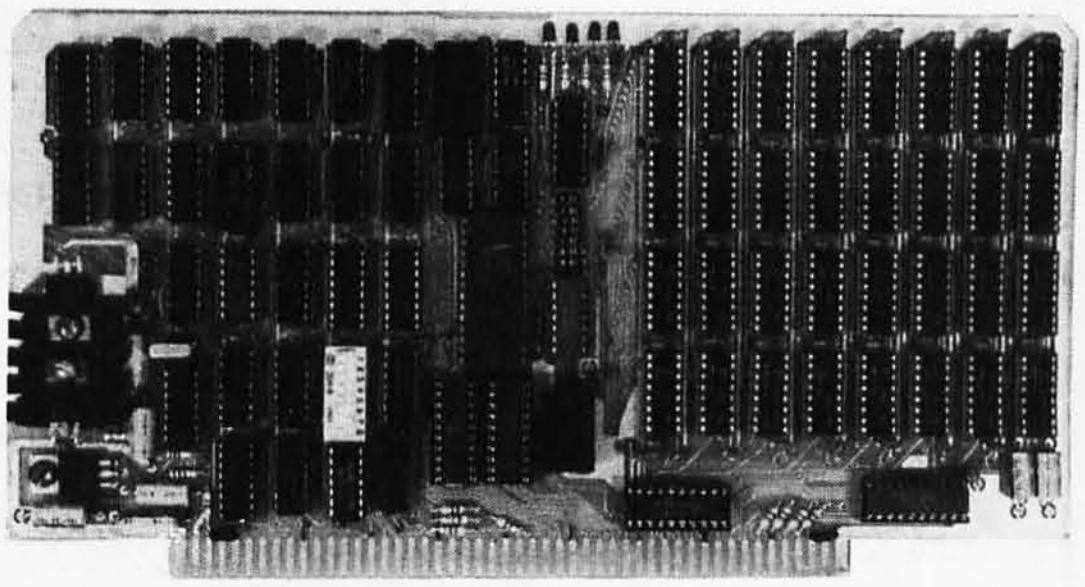

FLOPPY DISK CONTROLLER
FOR IBM 3740 FORMAT

$245

ZOBEX®

P.O. BOX 1847 SAN DIEGO, CA 92112
7343-J RONSON RD. SAN DIEGO, CA 92111
(714) 571-6971

*Cromemco, Cromix are trade marks of Cromemco Inc.
**MP/M is trade mark of Digital Research

Circle 440 on inquiry card.

at the bottom of column 3. Since n=1, this can be evaluated without further recursion: the answer is 1, and is stored in the variable "fac" in column 4. Now the previous invocation of "fac" (with n=2) can complete its work. Its answer is 2×fac(1)=2×1=2, which is assigned to the variable "fac" in column 5 (where the stack frame of "fac(1)" has been popped).

The unwinding process continues as control returns to the previous call of "fac" (with n=3), where the answer can now be computed as fac=3×fac(2)=3×2=6, and stored in column 6. Finally, the answer is assigned to the global variable "y" in column 7.

Applications of Side Effects

Before we see how side effects can lead to unexpected trouble, we should point out that they can be used in many legitimate ways. For example, no useful language can exist without the statement READ(x). It may also be useful to have a function that includes the following code:

```
IF denominator = 0
THEN write('attempt to divide by zero')
ELSE quotient := numerator/denominator
```

The procedures read and write both have side effects—they affect the status of the (global) files input and output.

Another useful application of side effects occurs when each activation of a procedure computes only part of the answer and places it into the appropriate section of a global buffer. When all activations of the procedure have done their jobs, this buffer will contain the entire answer, which can then be worked on. Examples are the recursive algorithms for sorting arrays and for backtracking (see Wirth, Chapter 3 and page 79, listed in the references). This mechanism is not without risk, however, because procedures other than the one intended can inadvertently modify the global variable.

Some languages provide the appropriate mechanism, eg: "own" variables in ALGOL-60 or static storage in PL/I and C. These variables have "local name scope" (ie: they can not be directly accessed from outside the procedure). However, they are allocated storage only once. Thus, like global variables, new copies are not made with each activation of the procedure, so their values are retained from one activation of the procedure to the next. The loss of this feature in Pascal is generally overshadowed by the pleasant fact that Pascal is a simplification of ALGOL-60, whereas PL/I is a "complification."

A Faulty "fac" Function

Now we'll look at a modification of the factorial program, where a variable parameter is used. Although it looks very much like the first version of "fac", you will see that it computes the wrong answer:

```
FUNCTION fac2 (VAR n:INTEGER):INTEGER;
BEGIN
          IF n = 1
          THEN fac2 := 1
          ELSE
          BEGIN
                    n := n - 1;
                    fac2 := fac2(n) * (n + 1)
          END
END
```

Assume that it is called, as before, by the following sequence:

```
m := 3; y := fac2(m);
```

Note the keyword "VAR" in the function header. A variable parameter in Pascal does not copy the value of its argument onto the stack frame. Instead, a reference (ie: a pointer) to the argument (in this case, the variable "m") is placed on the stack frame. This method is known as "call by reference." There are times when you want to use this method—for example, when a large item like an array or file is a parameter, or when you want to change the value of a global variable. But disaster lurks, as we will indicate shortly.

The argument in a call by reference must also be a variable (see Wirth, page 71). This prohibits a call like "fac2(n−1)", since (n−1) is an expression, not a variable. Therefore, the variable "n" must be decremented in the ELSE clause. This appears to make the same mathematical calculation as in the previous version of the function "fac" because the multiplication is now by (n+1), the original value of n. In fact, it does not.

By having a variable parameter, "fac2" is able to get into the global variable "m" and (if you are not careful) change its value.

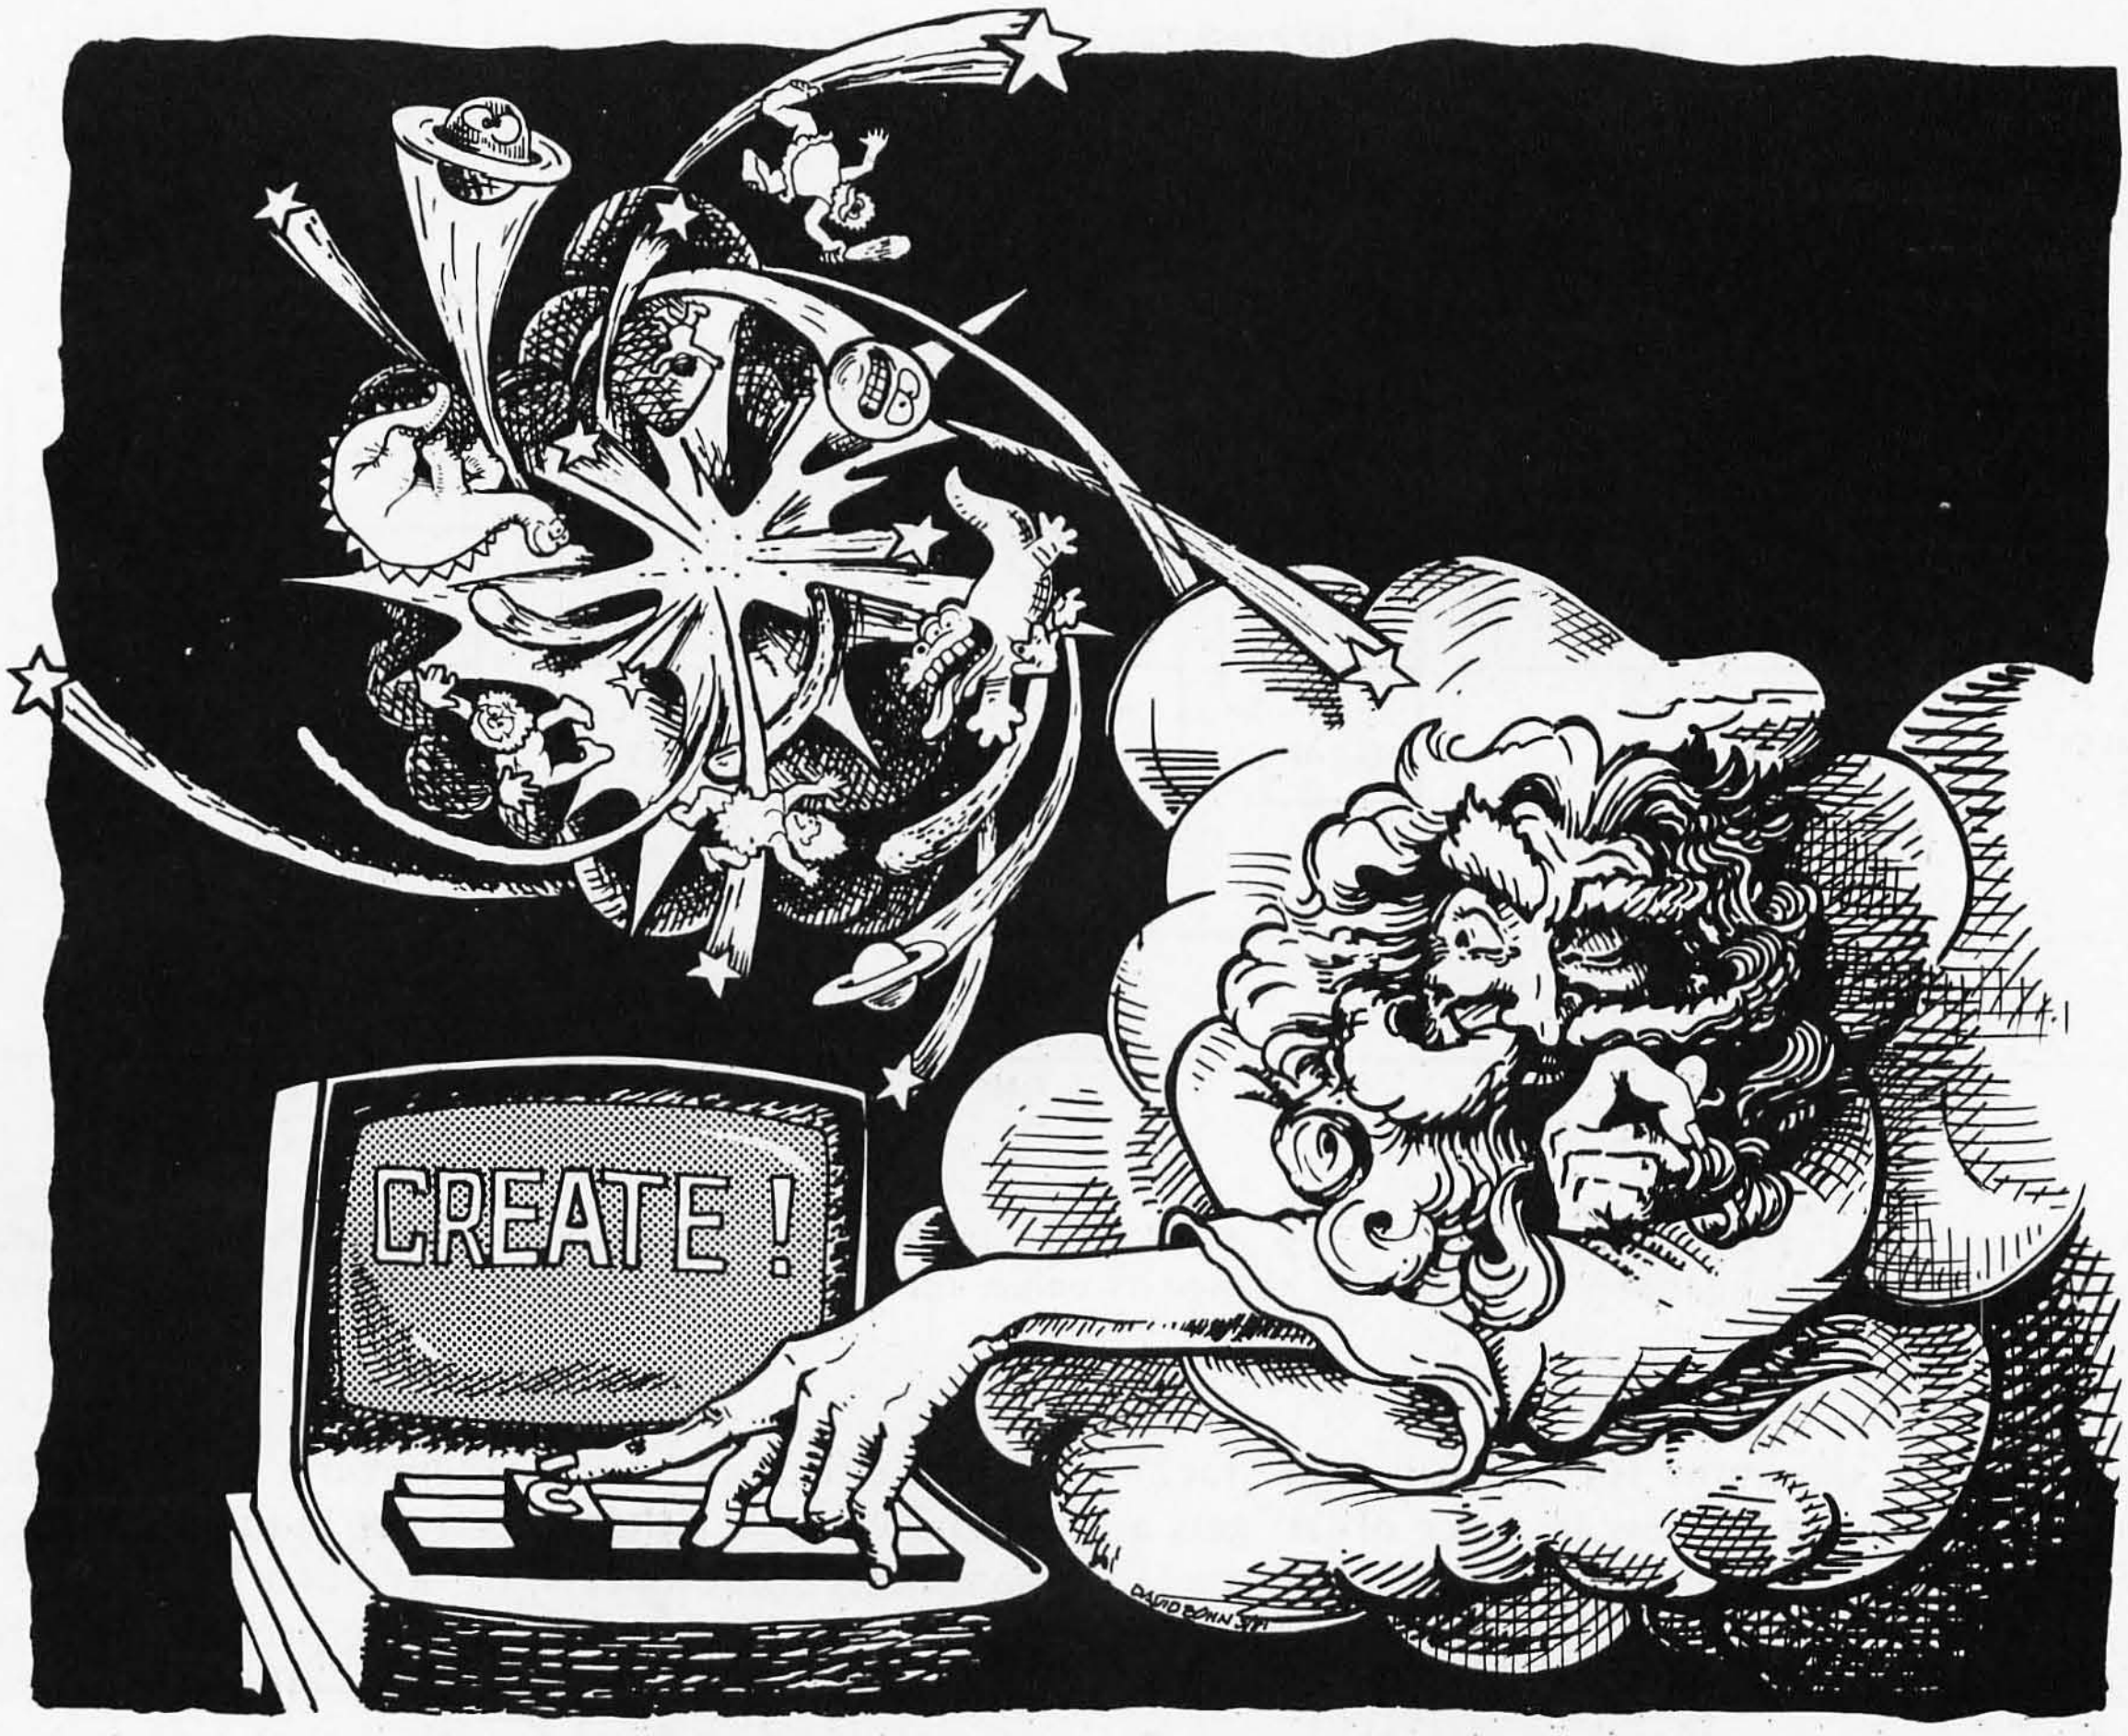
CREATE !
DAVID BOHN '81

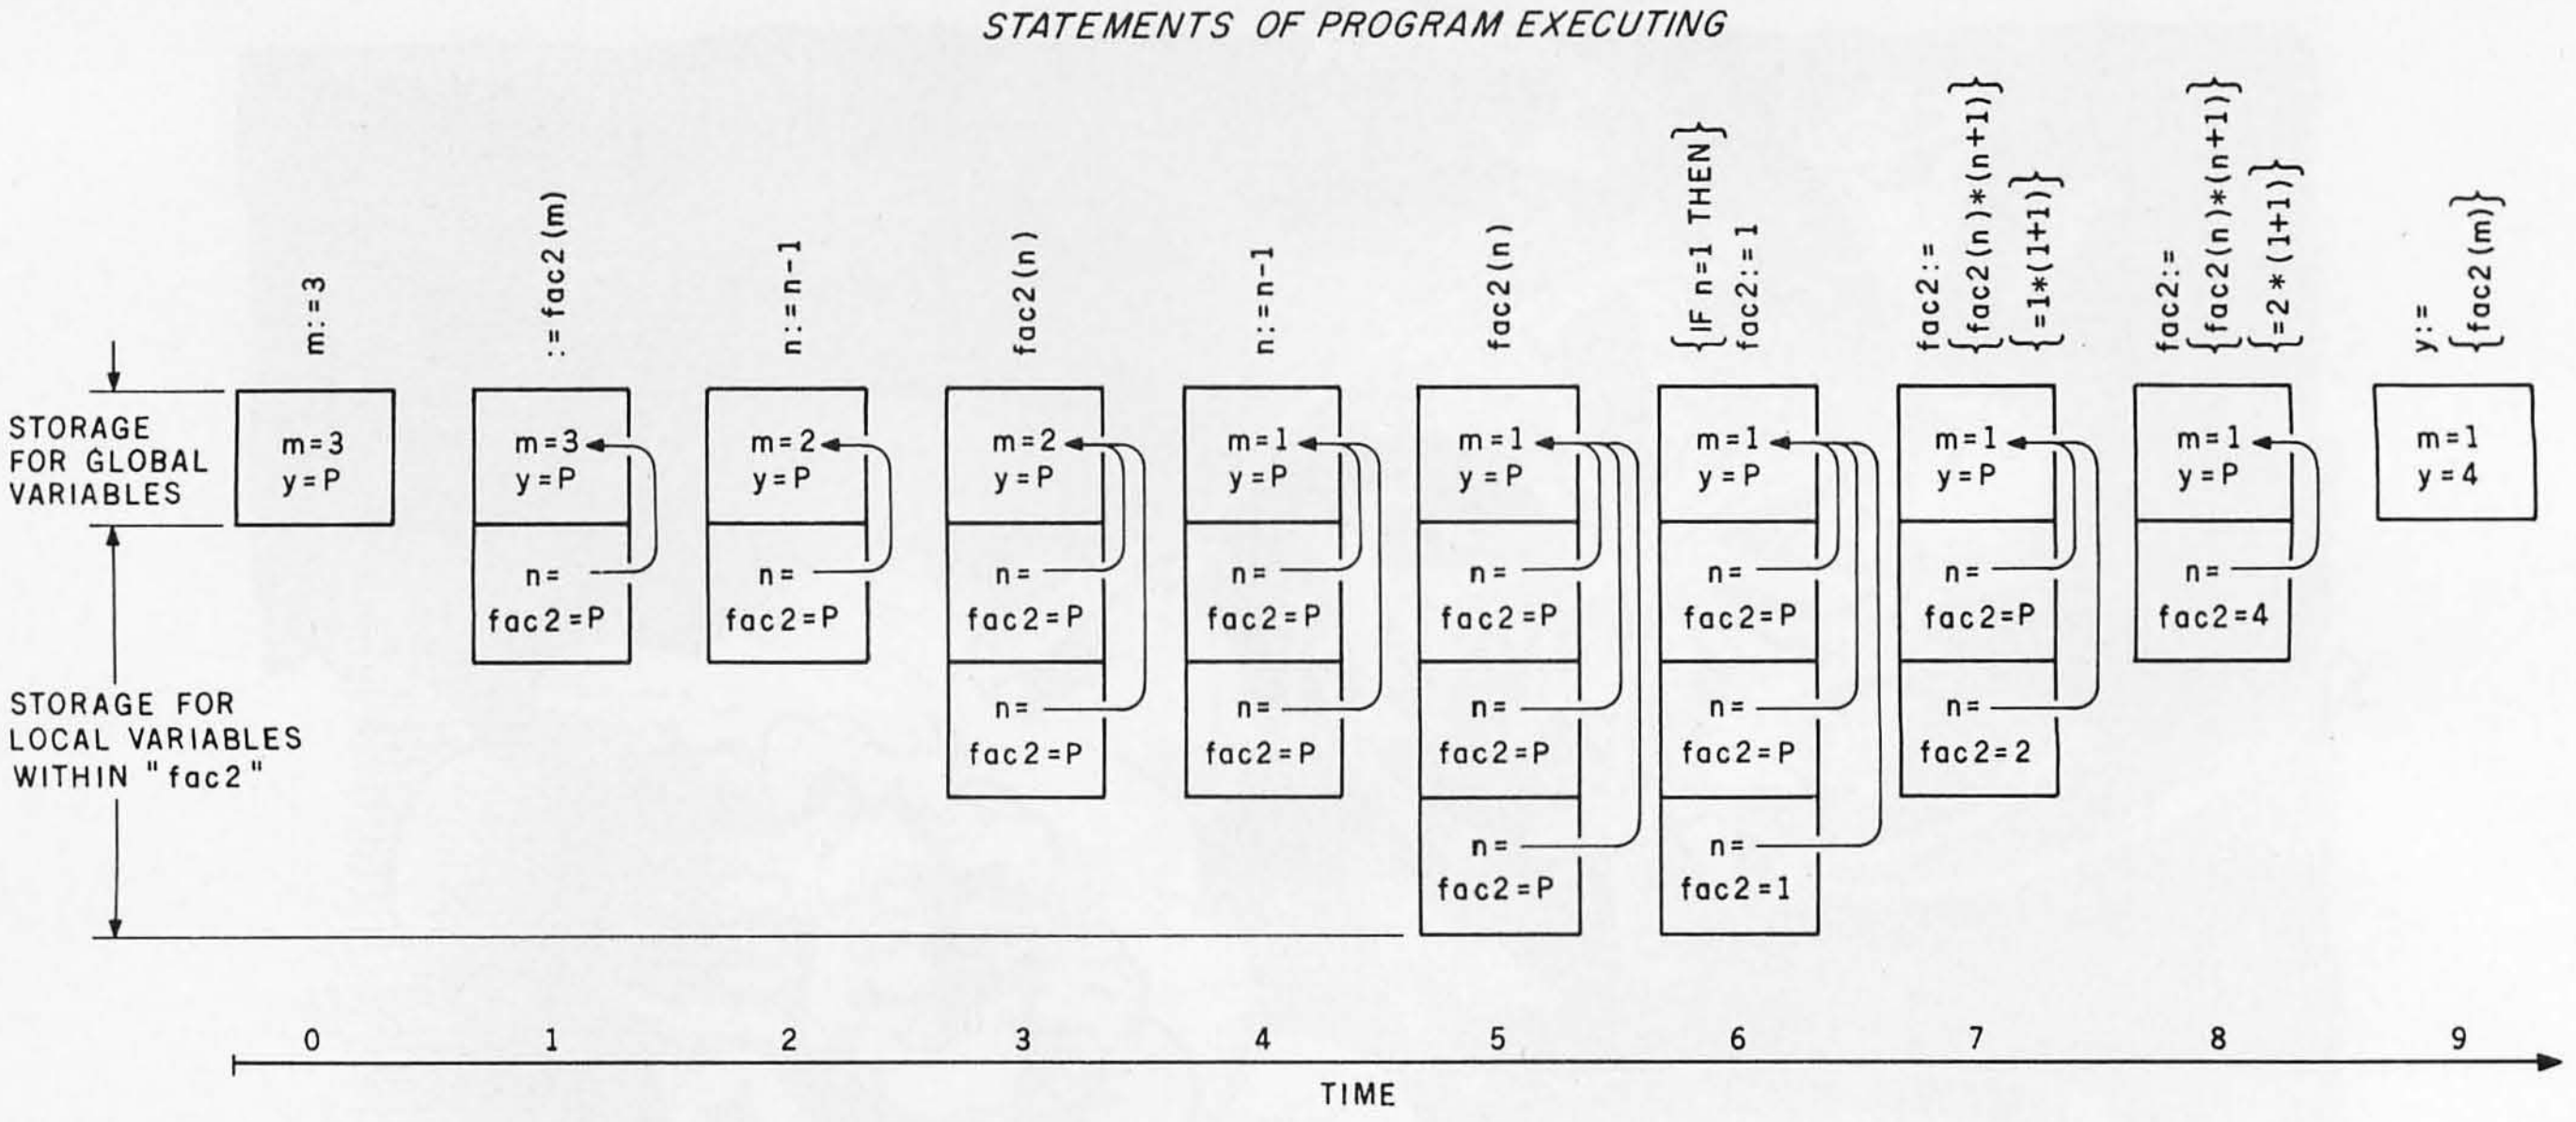

Figure 7: *Execution of the Pascal statements "m := 3; y := fac2(m)". In this case, the variable "n" within the function "fac2" (listed in the text) points to the global variable "m" and can change its value; the arrows from "n" to "m" indicate this relationship.*

Consider the stack diagrams for the function "fac2" (see figure 2). This time, each new instance of "n" gets a pointer to the variable "m" and the code "n := n−1" causes the global variable, "m", to be decremented by 1. Still, no values can be assigned to "fac2" until the stack starts to unwind, and when that happens, the value of "m" has been decreased to 1. Thus the multiplication is always by 2.

As you see, this function is not computing factorials at all, but 2^{m-1}. The problem arises because "fac2" is altering the value of its parameter, a situation to be avoided when not absolutely necessary. After the entire function terminates, the variable "m" will be left at 1, regardless of its initial value. The function "fac2" is exerting a side effect on "m".

Side effects can occur whenever a procedure accesses a global variable either directly or indirectly via a variable parameter. Side effects are avoided by the use of local parameters (declared within the procedure or function) and value parameters. Many side-effect errors are so easy to make and so hard to debug that language designers will prohibit certain dangerous constructs (or encourage the implementors to do so). (See *Pascal User Manual and Report*, page 79, listed in the references.) For example, the use of global variables (or parameters) for the control of "for" loops is prohibited by the CDC implementation of Pascal described in *The Pascal User Manual and Report* (pages 120 and 121, and error messages 155 and 180).

One of the most discomforting difficulties in debugging

If your accounting system is in the Dark Ages, you should talk to Systems Plus

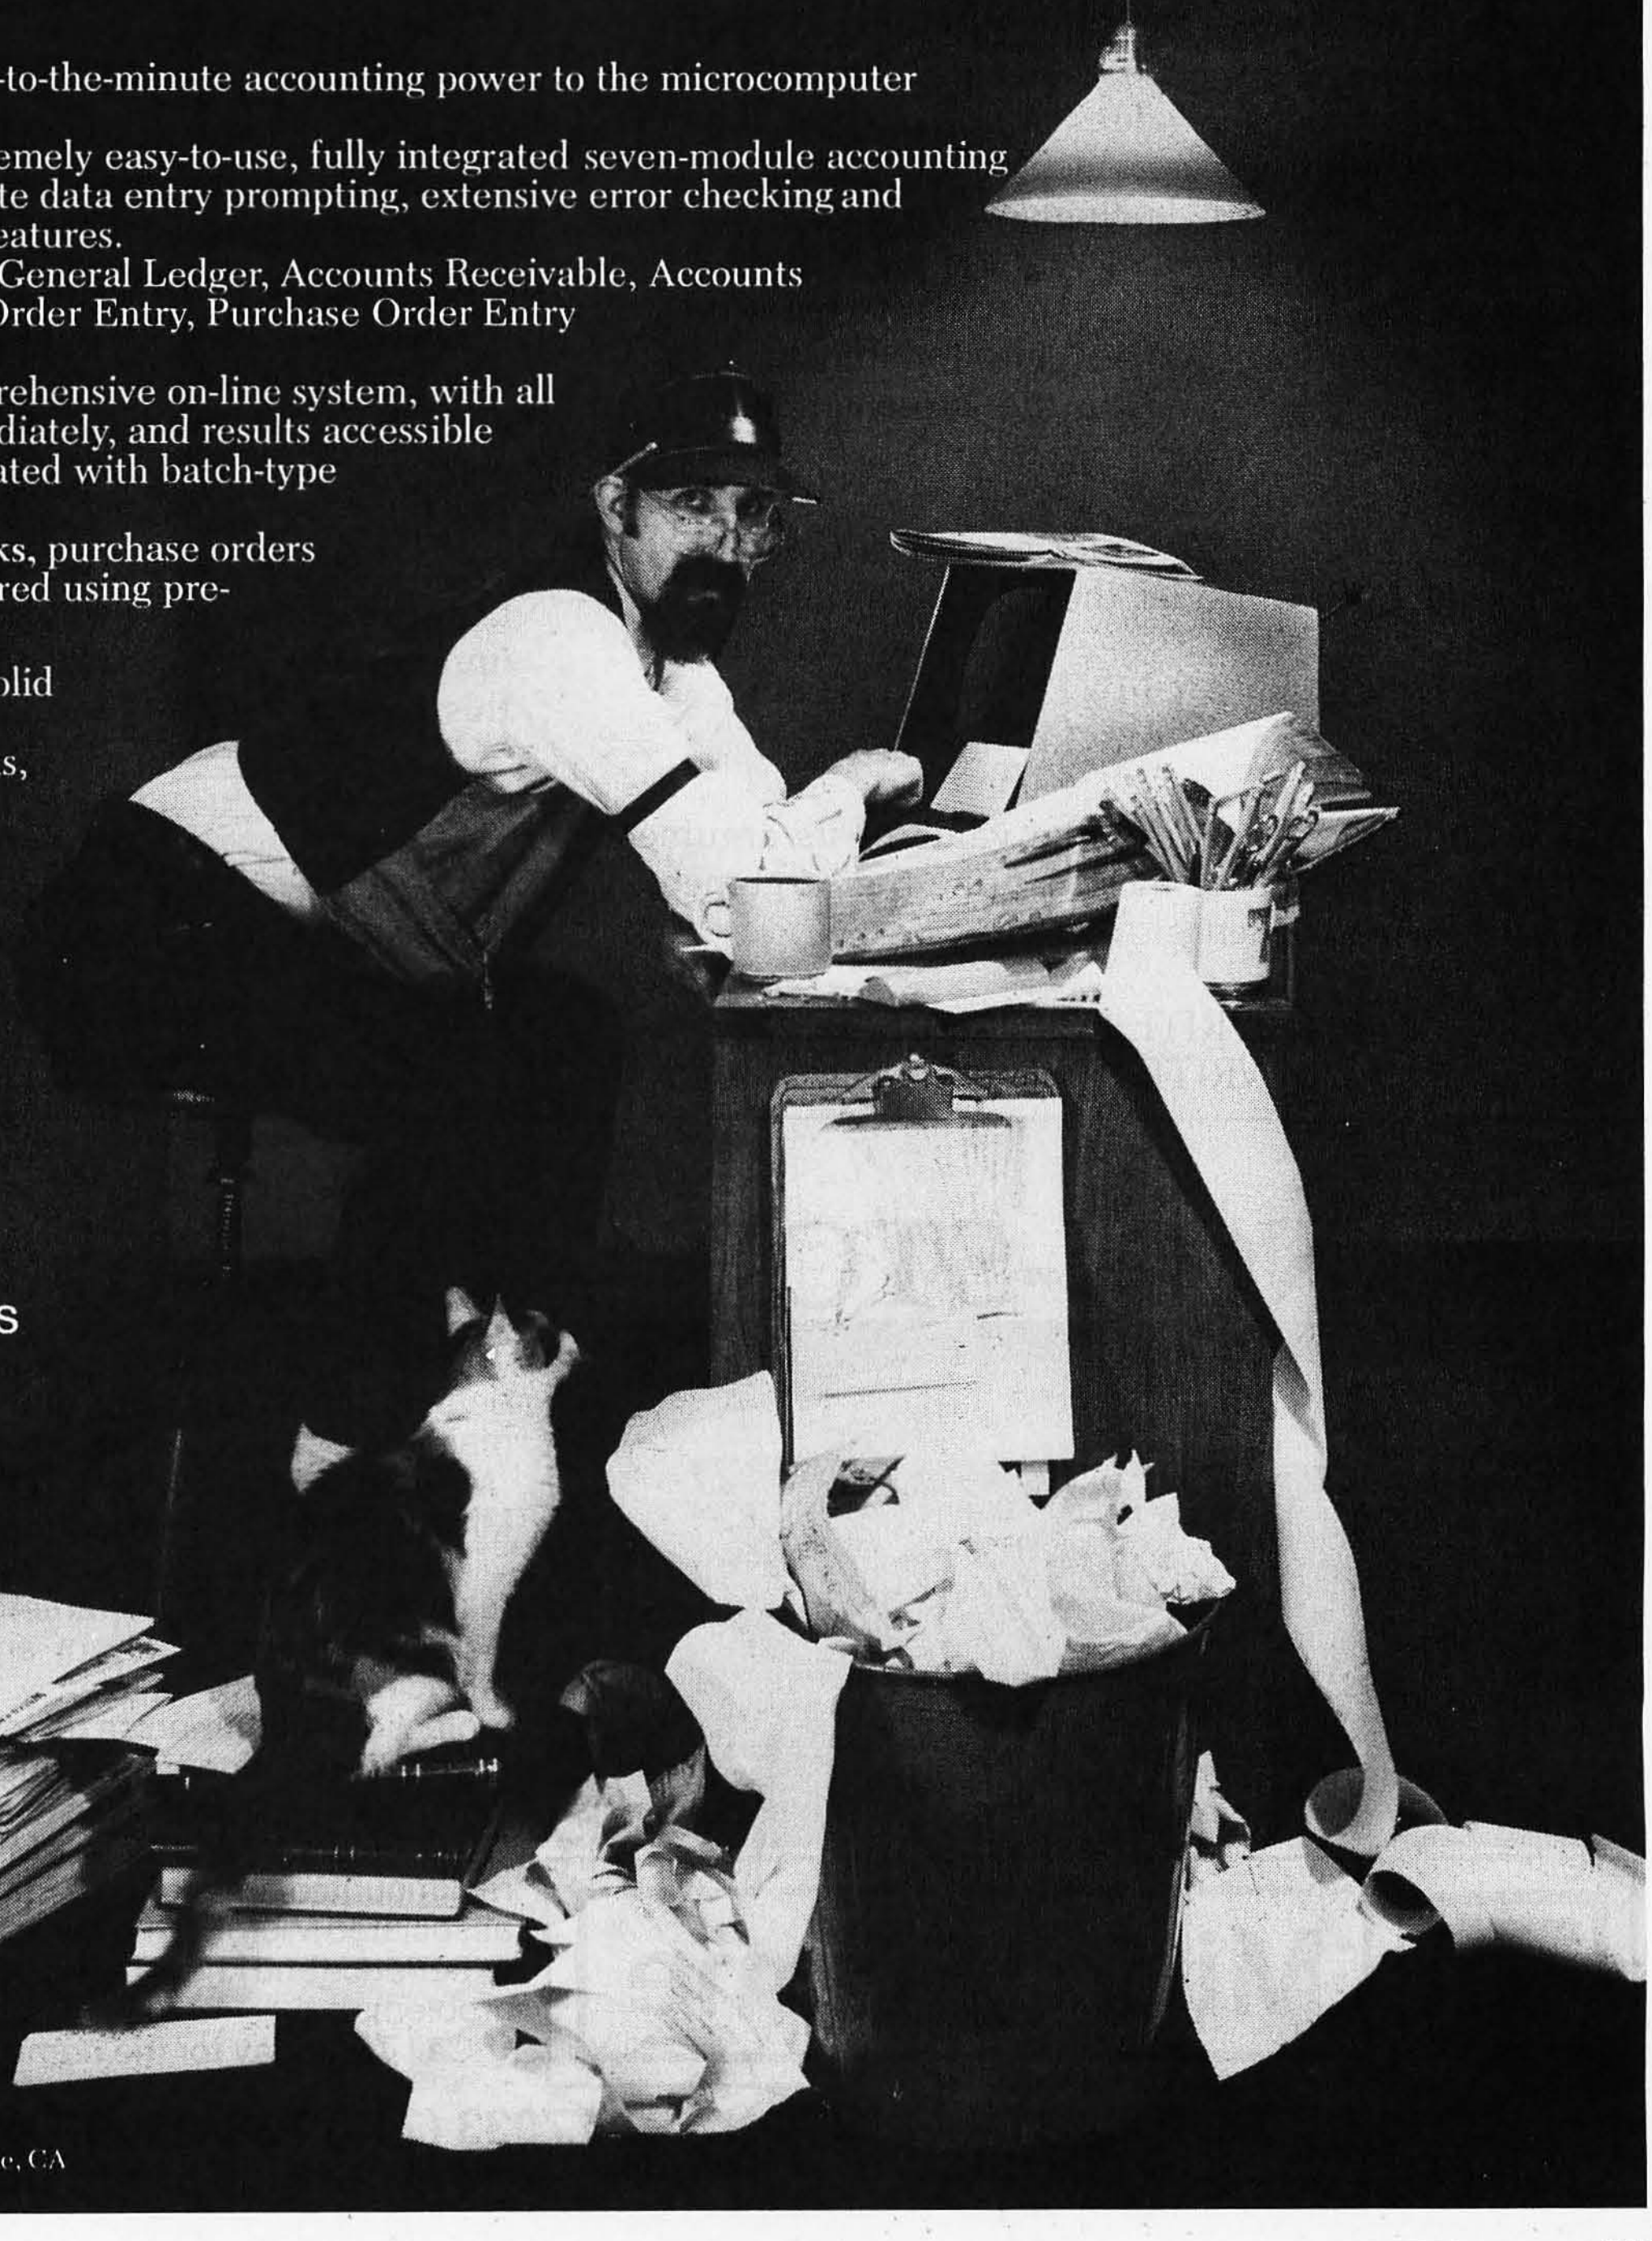

Accounting Plus brings up-to-the-minute accounting power to the microcomputer industry.

Accounting Plus is an extremely easy-to-use, fully integrated seven-module accounting system. It includes complete data entry prompting, extensive error checking and one-time-only data entry features.

Accounting Plus features: General Ledger, Accounts Receivable, Accounts Payable, Inventory, Sales Order Entry, Purchase Order Entry and payroll.

Accounting Plus is a comprehensive on-line system, with all transactions applied immediately, and results accessible without long delays associated with batch-type transactions.

Invoices, statements, checks, purchase orders and sales orders are prepared using pre-printed standard forms.

If you are ready to enjoy solid software that create functional and easy installations, call Systems Plus
Our software operates under CP/M*, MP/M* or CDOS** operating systems. Yesterday's dreams are available today, off the shelf.

1921 Rock St. Suite 2
Mt. View, CA 94043
415-969-7047

Systems Plus

°TM of Digital Research, Pacific Grove, CA
°°TM of Cromemco, Sunnyvale, CA

Circle 396 on inquiry card.

Programmers should strive to write code that is clear, correct, verifiable, and easily transported to other implementations.

functions with side effects may occur if f×g is not equal to g×f, at least if "f" or "g" is a function. Consider, for example, the apparently simple modification of the "fac2" function that is made by changing the key line to:

```
fac2 := (n + 1)*fac2(n)
```

The reader is invited to make a stack history as above. Assume that multiplications are performed left to right, and that the stack frame for "fac2" also allocates a location to hold the value of the expression (n+1) until after "fac2(n)" is computed, with the two values then being multiplied. (In practice, values of such expressions may be stored as temporary variables in registers.)

As a result of this single change, "fac2" will compute the correct value of factorial. What is the moral? Whenever the spectre of unplanned side effects rears its ugly head, discovery of the "correct" solution may be a matter of luck (and might depend on the implementation!). In any case, programs are certainly hard to debug whenever f×g and g×f are not equal.

There are, of course, simpler examples that illustrate this phenomenon. Consider the following function:

```
FUNCTION f(VAR i:INTEGER):INTEGER;
BEGIN f := i; i := i + 1 END;
```

This function simply returns the value of its argument, but has the side effect of incrementing that argument.

The following sequence:

```
x := 1; WRITE ( (x + 1)*f(x) );
x := 1; WRITE ( f(x) * (x + 1) );
```

produces a printout of:

```
2     3
```

In this case, the printout (which would have been "2 2" if the order of multiplication had not mattered) vindicates our assumption that multiplication was performed left to right.

The order in which multiplications are performed is (deliberately) left unspecified by the semantics of most programming languages. For example:

```
x := 1; WRITE(x*f(x));
x := 1; WRITE(f(x)*x);
```

produces a printout of:

```
2     2
```

and we must conclude that the value of the expression f(x) is evaluated before the value of the variable "x". This may be done for optimization reasons, in order to minimize register use. Furthermore, an optimizing compiler may choose not to evaluate f(x) at all in an expression like 0*f(x), since the answer is always zero. In that case, any side effects of the function "f" on "x" would not appear.

In short, the results of these examples can very well depend on the implementation! It is bad practice to write this kind of code, and programmers should strive to write code that is clear, correct, verifiable, and easily transported to other implementations. If you can avoid unnecessary side effects, you will be one step closer to this goal. ■

References

1. Jensen, K and N Wirth. *Pascal User Manual and Report*. Springer-Verlag, 1974.
2. Wirth, N. *Algorithms + Data Structures = Programs*. Englewood Cliffs NJ: Prentice -Hall, 1976.

Let your customers know that you mean business - show with

Comp-U-Con

The schedule of shows will be **1981**

1 Cleveland, Ohio — August 14-16
2 Milwaukee, Wisconsin — August 20-23
3 St. Paul, Minnesota — September 9-11
4 Detroit, Michigan — September 24-26
5 Pittsburgh, Pennsylvania — October 1-3
6 St. Louis, Missouri — October 15-17
7 Dallas, Texas — October 22-24
8 Los Angeles, California — November 8-10
9 San Francisco, California — November 19-21
10 Denver, Colorado — December 3-5

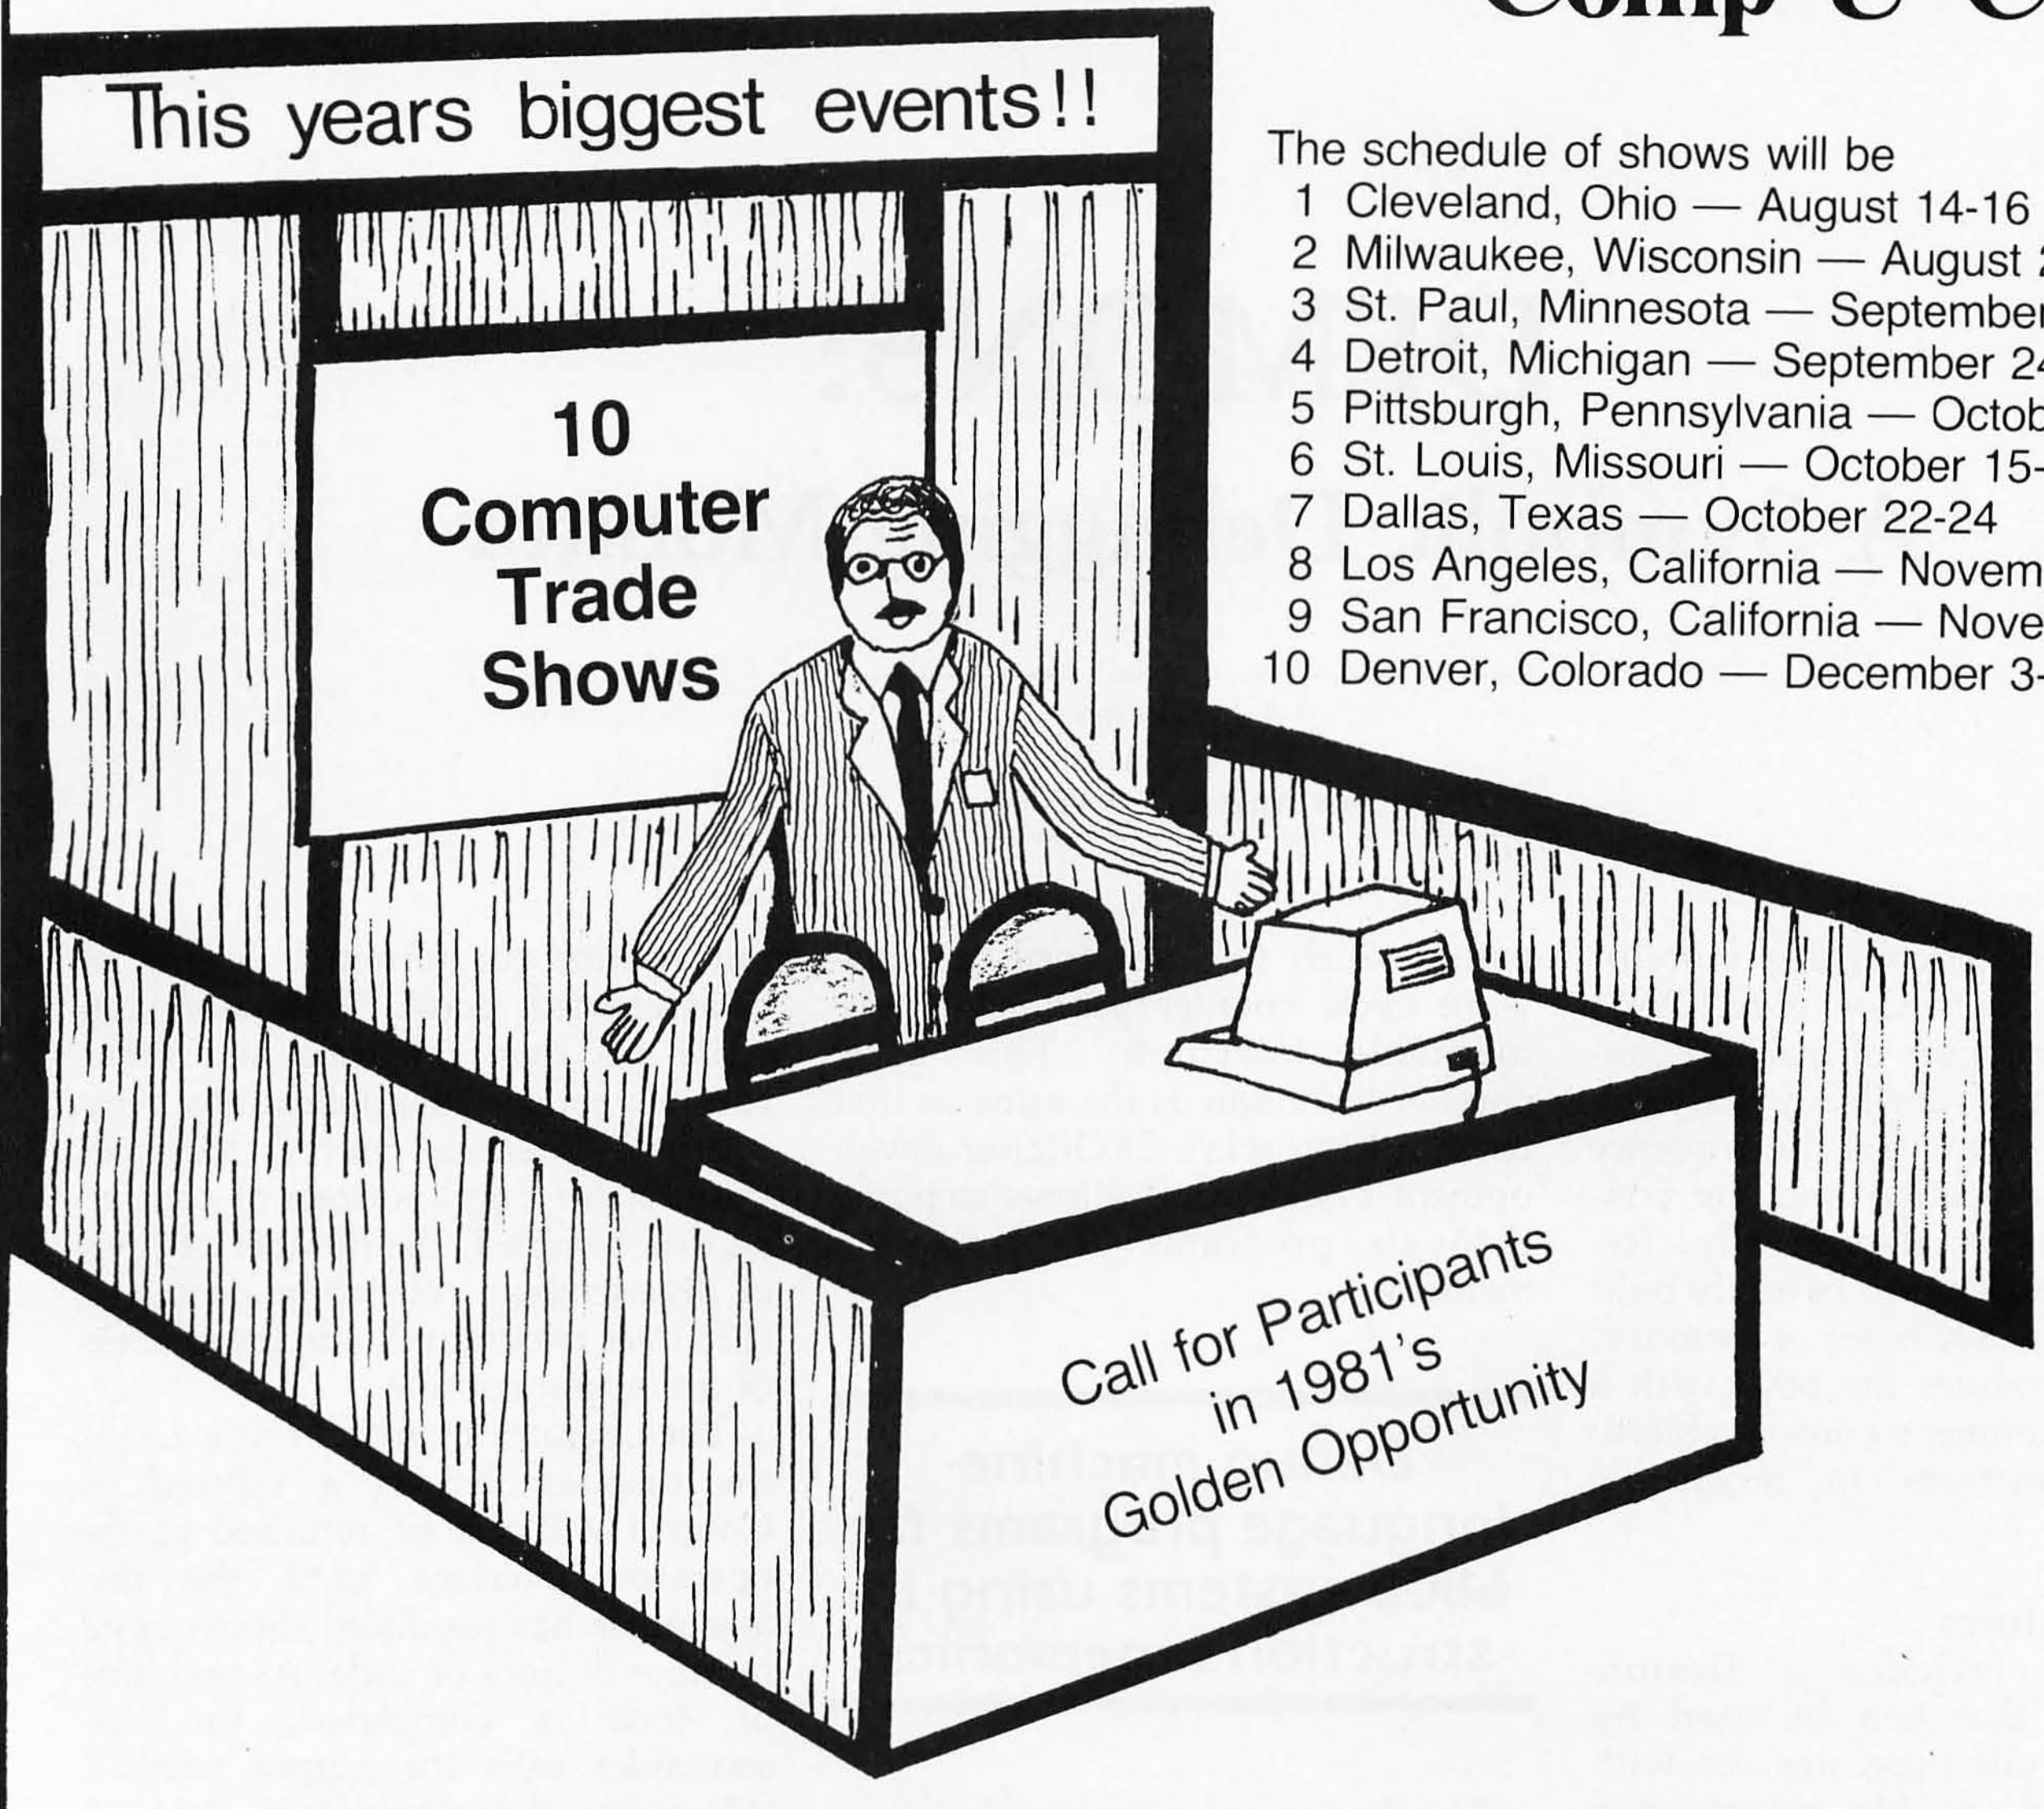

Comp-U-Con Company presents — 10 Home and Business Computer Festivals — From Coast to Coast.

These shows will be directed toward the home user/hobbiest and small businessman and will be promoted by a full scale publicly appealing package of inducements — such as speakers on subjects of particular interest to the targeted groups and a drawing for a $3000.00 computer system.

If your company has an interest in greatly increasing its sales this fall and does business within a 300 mile radius of any or all of the targeted cities. These shows are exactly what your looking for.

You may participate on two levels. You may either purchase Booth space, in which you can present and demonstrate your goods directly to the public, or you can purchase advertising space in each shows handout brochure that will be given to all that attend.

The average attendance is expected to range from 20,000 up to 35,000 people with additional information going out by mail to those who can't attend.

Please Call or Write today for complete details and costs. Write to — The Weston Research Institute, P.O. Box 175, Waverly, IA 50677 or **Call Jeff Weston, Collect at (319) 268-1953.**

Note - Because of limited space availability, an early reservation is recommended to assure you of space.

DEMONS:
A Symbolic Debugging Monitor

A I Halsema
4921 Patrae St
Los Angeles CA 90066

This symbolic debugging monitor for the 6800 processor, DEMONS, can make debugging of machine-language programs devilishly easy by allowing you to control the sequence of program execution and the contents of registers dynamically. Requiring only $40 worth of easily built hardware and 1500 bytes of memory, DEMONS provides the 6800 with a virtual programmer's console able to display instructions in mnemonic form.

Monitor Features

DEMONS includes a flexible disassembler that can be used by itself, with your programs, or with DEMONS. All variables are stored in the MIKBUG scratchpad memory (hexadecimal locations A000 thru A07F), making DEMONS a candidate for being stored in read-only memory. Single-step and trace functions are implemented with a peripheral interface adapter (PIA) and two readily available integrated circuits, which together form a hardware cycle counter producing non-maskable interrupts. This cycle counter technique is the same as that used in Motorola's EXORciser development system, and allows stepping through programs in read-only memory.

Debug machine-language programs for 6800 systems using instruction mnemonics.

The disassembler requires less than 1 K bytes of read-only memory, produces symbolic program listings similar to those produced by an assembler, and can be used to produce source code for input to an assembler (for instance, if you need to reassemble a program to incorporate modifications). As an added feature, the disassembler calculates and displays the effective address referenced by relative address mode instructions.

Disassembler Routines

The disassembler subsystem consists of three main routines: operator interface, disassembler, and an output routine for terminal display of disassembled code. The user can write his own interface and other routines for special applications. Any operator interface routine must set the first (or only) address of code to be disassembled, the number of lines of disassembled code to be produced (128 lines maximum), and the address of an output routine.

The operator interface routine calls the disassembler as a subroutine. Control will not be returned to the operator interface until the disassembler has produced the required number of lines of code. As each line of code is completed, the disassembler calls the output routine. When the disassembler is done, it returns control to the operator interface routine with the line count set to 0 and the address of the input code incremented to point to the next instruction.

The built-in operator interface is designed for use with video terminals having displays in a format of sixteen lines of thirty-two characters each, although it will work with other types of terminals. Since each line of output is thirty-two characters in length, the interface routine will cause a single page of fifteen lines to be displayed, with the cursor at the bottom of the display (as illustrated in figure 1). A new address can then be entered. If

About the Author

Aillil Ian Halsema has worked as a programmer since 1971. He is now a senior member of the programming staff at Xerox Corporation. He owns a Southwest Technical Products Corporation 6800 system equipped with 16 K bytes of memory, a CT-1024 video terminal, an AC-30 cassette tape interface, and an Okidata CP-110 printer.

ALL THE PROGRAMS YOU'LL EVER NEED. FOR $600.

Say goodbye to the costs and frustrations associated with writing software: The Last One® will be available very soon.

More comprehensive and advanced than anything else in existence, The Last One® is a computer program that writes computer programs. Programs that work first time, every time.

By asking you questions in *genuinely* plain English about what you want your program to do, The Last One® uses those answers to generate a totally bug-free program in BASIC, ready to put to immediate use.

What's more, with The Last One,® you can change or modify your programs as often as you wish. Without effort, fuss or any additional cost. So as your requirements change, your programs can too.

In fact, it's the end of programming as you know it.

And if, because of the difficulties and costs of buying, writing and customising software, you've put off purchasing a computer system up to now, you need delay no longer.

The Last One® will be available very soon from better computer outlets. To place your order, take this ad into your local dealer and ask him for further details. Or in case of difficulty, please write to us direct.

THE LAST ONE®

YOU'LL NEVER NEED BUY ANOTHER PROGRAM.

D. J. 'AI' Systems Ltd., Ilminster, Somerset, England TA19 9BQ. Telephone: 011-44-4605-4117. Telex: 46338. ANYTYR G.

Circle 133 on inquiry card.

you wish to view the next sequential set of fifteen lines, type a nonhexadecimal character followed by a G. The disassembler executes quickly; it will be input/output (I/O) bound (having to wait for I/O operations to finish) up to terminal data rates of about 3000 bps.

Disassembler Tables

Almost half of the memory space taken up by the disassembler is used for two tables. The larger of the two is the *packed-mnemonic* table. Each entry in this table is 2 bytes long, with entries arranged in ascending operation code order. Those operation codes which are undefined (such as hexadecimal 00) are represented in the table by the FCB pseudo-operation mnemonic. Each entry is formed by dropping the fourth character of the mnemonic (either an A or a B as in LDAA), masking out the 3 high-order bits of each of the remaining characters, and packing them into 16 bits. The high-order bit of the 16 is used as a flag to specify an alternate entry in the smaller table. Note that this method of packing characters is valid only for character codes with the same high-order 3 bits. Numeric and alphabetic ASCII characters cannot be packed together. Figure 2 gives an example of mnemonic packing.

The smaller table is the *format* table. It defines the address mode, the fourth character of the mnemonic symbol, and the number of bytes in the input object code. The format table consists of thirty-two 1-byte entries with two entries for each possible value of the high-order nybble (ie: half-byte) of the input op code. The second entry of a pair is selected when bit 16 is set to the value 1 in the corresponding packed-mnemonic-table entry.

This method of defining formats and mnemonics works for all but three mnemonic symbols. The PSHB, PULB, and BSR op codes are exceptions that must be handled differently in the program. A fourth exception is the FCB pseudo-operation which has its own *format-flags byte* outside of the table.

During execution of the disassembler, the op code is used as an index into the packed-mnemonic table, while the high-order nybble of the op code is multiplied by 2 and is used as an index into the format table. The packed mnemonic is unpacked, and the 3 high-order bits of each character are restored by adding hexadecimal 40 to each 5-bit value. The unpacked ASCII characters are stored in a line buffer along with the fourth character, if any, of the mnemonic.

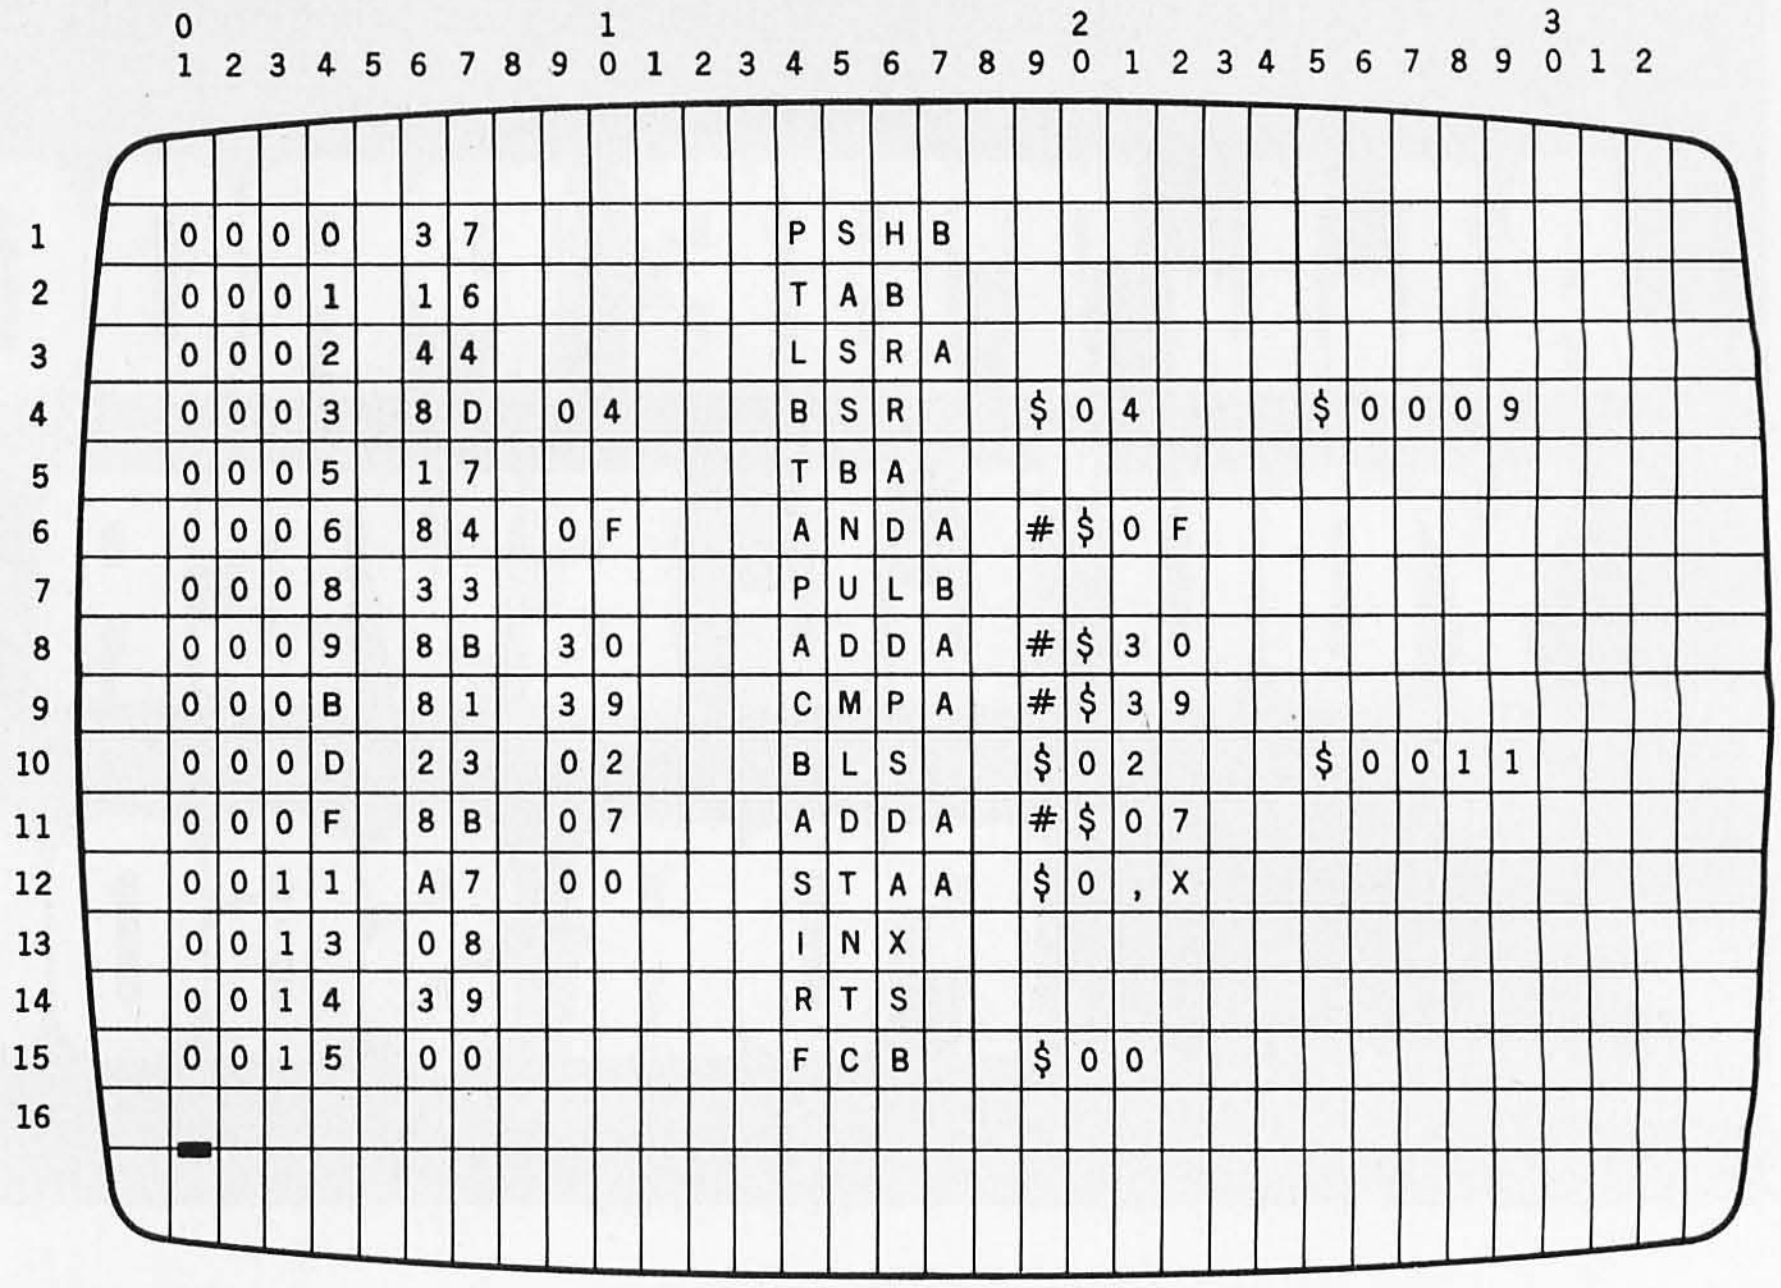

```
0000 37       PSHB
0001 16       TAB
0002 44       LSRA
0003 8D 04    BSR  $04    $0009
0005 17       TBA
0006 84 0F    ANDA #$0F
0008 33       PULB
0009 8B 30    ADDA #$30
000B 81 39    CMPA #$39
000D 23 02    BLS  $02    $0011
000F 8B 07    ADDA #$07
0011 A7 00    STAA $0,X
0013 08       INX
0014 39       RTS
0015 00       FCB  $00
```

Figure 1: *Example of disassembled code as it appears when output to a video terminal screen.*

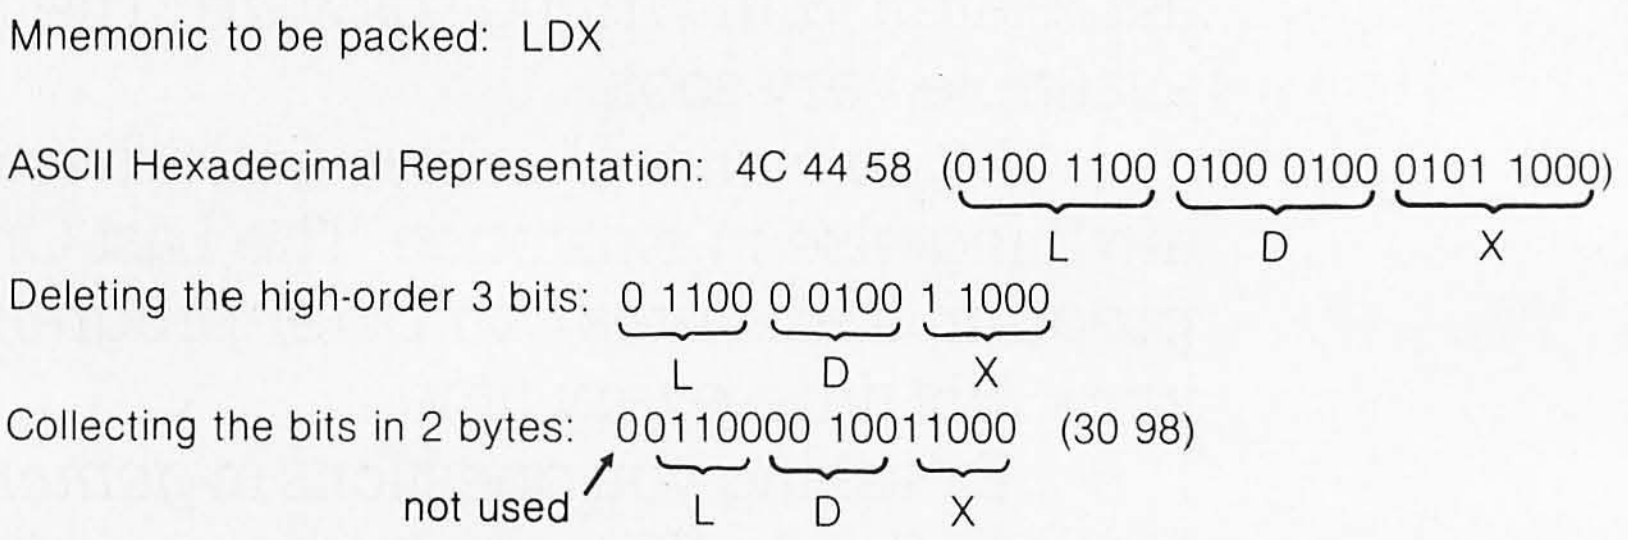

Mnemonic to be packed: LDX

ASCII Hexadecimal Representation: 4C 44 58 (0100 1100 0100 0100 0101 1000)

Deleting the high-order 3 bits: 0 1100 0 0100 1 1000

Collecting the bits in 2 bytes: 00110000 10011000 (30 98)

Figure 2: *Forming an entry in the packed-mnemonic table. The three high-order bits are stripped from the ASCII representation of each character of the three-letter mnemonic. The 5-bit characters are packed into two 8-bit bytes, with one bit not used. The characters are restored to 8-bit form by adding hexadecimal 40 to the 5-bit value.*

The operand field is built using format table data indicating the length and address mode of the instruction. If an immediate-mode instruction is being processed, the operand is preceded by a "#" character. If the instruction uses relative addressing, the absolute effective address is calculated and is placed in the comments field of the output buffer. If the instruction uses indexing, the operand is followed by a ",X" sequence. All operands are in hexadecimal. All fields in the line start at fixed locations, making for easier user processing.

Hardware Additions

The hardware cycle counter is connected to side A of the peripheral interface adapter. Figure 3 shows a schematic diagram of this. In my system, a Southwest Technical Products Corp (SwTPC) 6800, the peripheral interface adapter is on an MP-L parallel interface board which is connected to the system reset line. On power-up or reset conditions, data direction register A (DDRA) and I/O register A (IORA) cause logic 1 levels to appear on the MP-L's output lines. If applied directly to the counter, these levels would start the counter running and producing interrupts before the system could properly process them.

To avoid this condition, a 7404 hex inverter is used to complement the load, clear, and enable signals, and to keep the counter halted and cleared following power-up and system reset.

MORE BANG

Qantex Impact Printers
150 Characters Per Second
136 Columns Per Line

The microprocessor controlled **Series 6000** is packed with standard features. True lower case descenders and underlining. Bidirectional logic seeking. Built-in test capability. Rugged 400 million character print head. Beautiful 96 character set in a 9 x 9 matrix. Parallel, or up to 19,200 baud serial interfaces supporting RS-232, X-ON, X-OFF or Current Loop. Full operator controls. Quietized, sleek enclosure to enhance your system. Delivery from stock.

Qantex Division of
North Atlantic Industries
60 Plant Avenue, Hauppauge, N.Y. 11787
(516) 582-6060 TWX 510-227-9660
(800) 645-5292

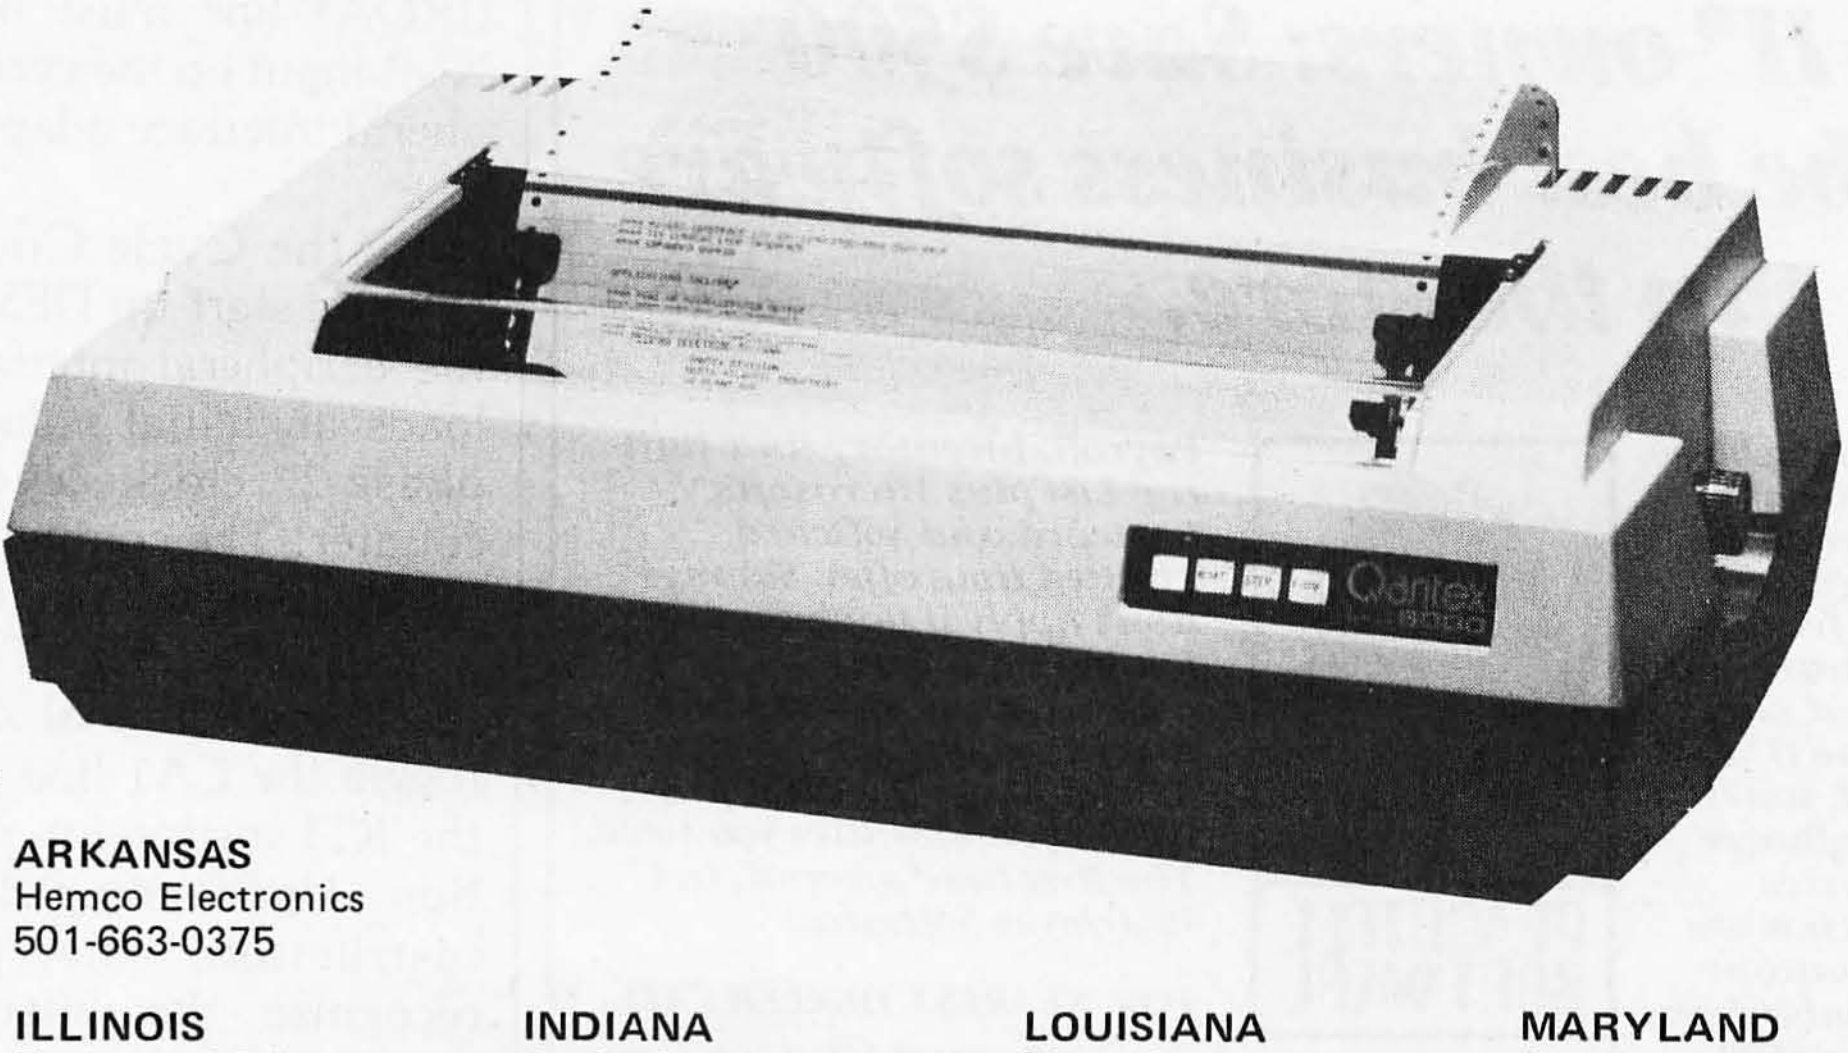

For more information
call your local distributor:

ARIZONA
PGI Wholesale
1-800-528-1415

ARKANSAS
Hemco Electronics
501-663-0375

CALIFORNIA
Basic Systems
213-673-4300
714-268-8000
408-727-1800

ILLINOIS
Engineered Sales
312-832-8425

INDIANA
Audio Specialists
219-234-5001

LOUISIANA
Micro Computer
Of New Orleans
504-885-5883

MARYLAND
Source Associates
301-431-0587

MINNESOTA
Integrated Peripherals
612-831-0349

MINNESOTA
Vikeland Sales
612-645-4647

MISSOURI
Computer Dataco
816-254-3600

MISSOURI
ESC Sales & Leasing
314-997-1515

NEW YORK
Washington
Electric Co., Inc.
212-226-2121

NEW YORK
Daily Business
Products, Inc.
800-645-5556
516-543-6100

TEXAS
Data Trend, Inc.
512-496-1111

AUSTRALIA
Mitsui
Computer
Systems
02-9299921

BELGIUM
Compudata
Belgium
7205066

CANADA
Computer
Markets
416-445-1978

DENMARK
TMS Dataudstyr
45-2-911122

FAR EAST
Hong Kong
Equipment
5-453870

FRANCE
Gepsi
1-554-9742

GERMANY
Technitron
49(89)692-4141

NETHERLANDS
Compudata
Benelux B.V.
73-215700

Distributor inquiries welcome!

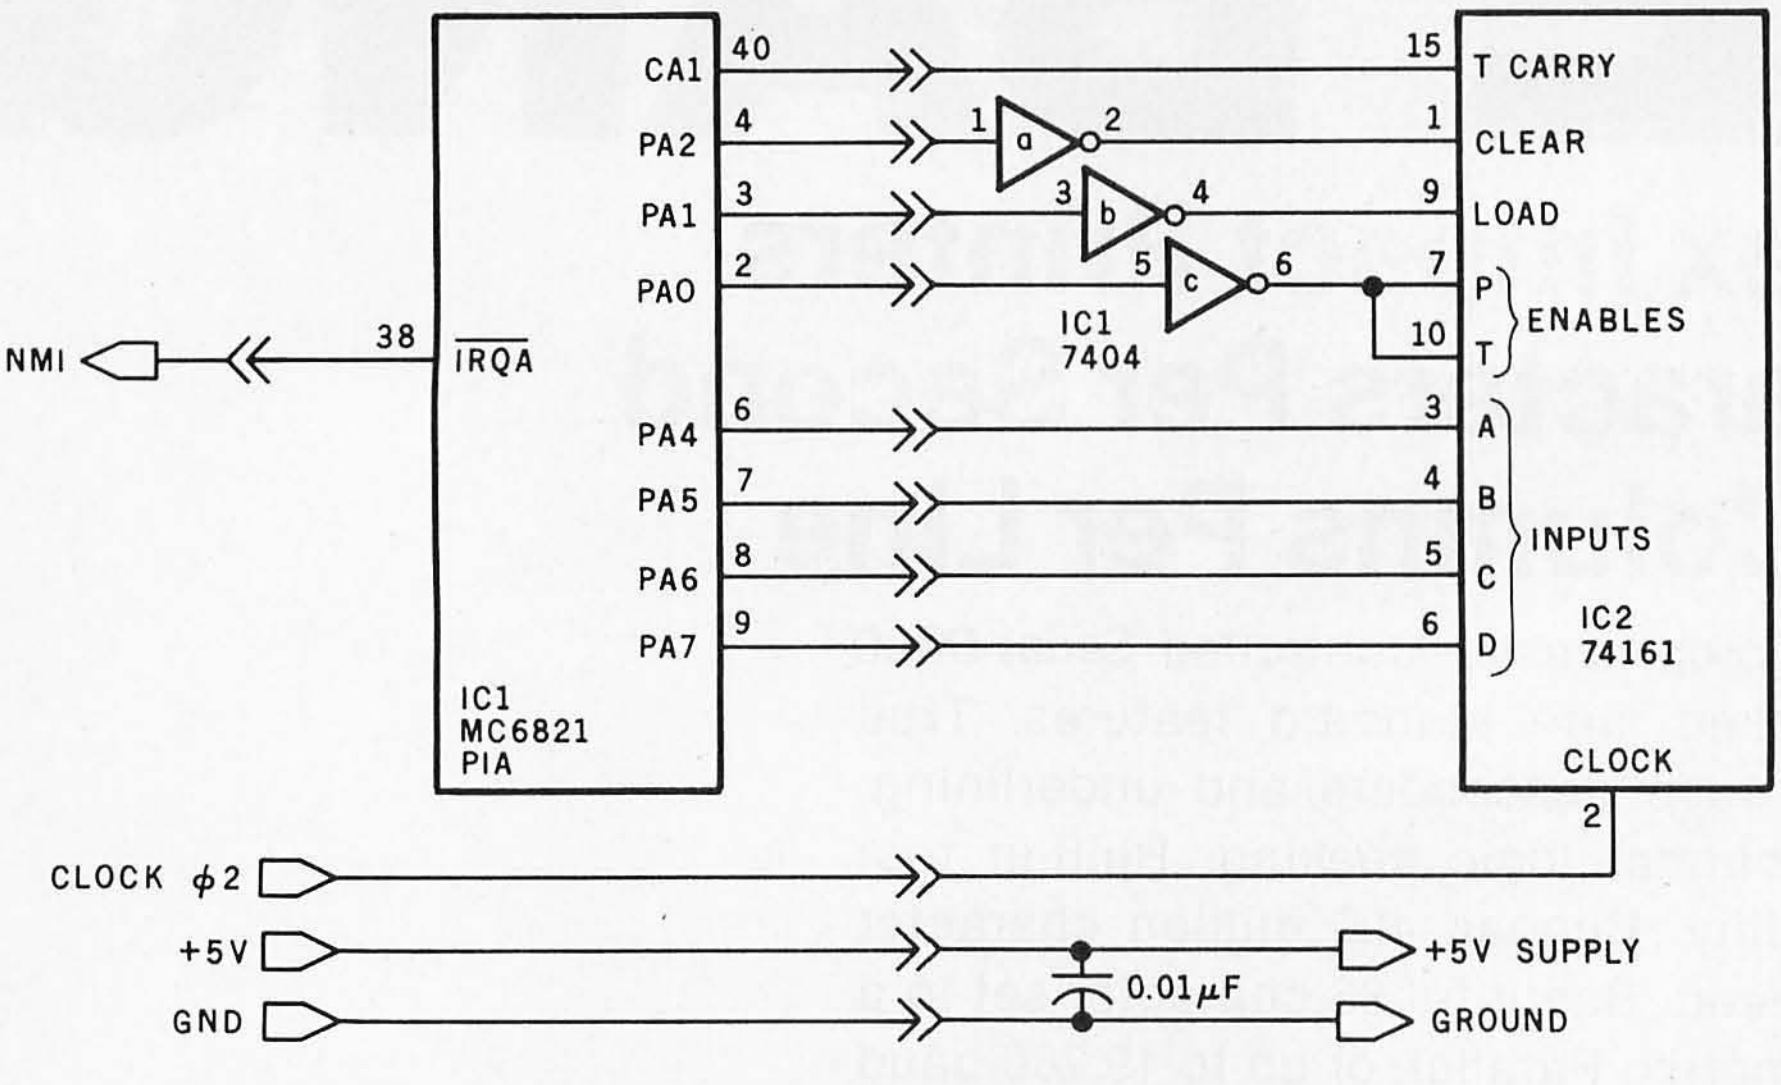

PIA I/O REGISTER A							
7	6	5	4	3	2	1	0
COUNT BIT 3	COUNT BIT 2	COUNT BIT 1	COUNT BIT 0	☒	$\overline{\text{CLEAR}}$	$\overline{\text{LOAD}}$	ENABLE

Figure 3: *Schematic diagram of the hardware cycle counter. The DEMONS system uses the nonmaskable interrupt (NMI) in the 6800.*

Number	Type	+5 V	GND
IC1	7404	14	7
IC2	74161	16	8

From the program's viewpoint, the counter clear is off when IORA bit 2 is a 1, counter load is off when IORA bit 1 is a 1, and counter enable is on when IORA bit 0 is 0. IORA bits 4, 5, 6, and 7 are used to output the value to be loaded into the counter, leaving IORA bit 3 unused.

The 74161 device in figure 3 is a 32 MHz synchronous 4-bit counter whose carry output will go high for a period equal to one full machine cycle when a count of 15 is reached. By presetting the counter, the carry output can be made to go high after 1 to 15 clock cycles.

I built the prototype version of the cycle counter on a perforated circuit board and attached it to the MP-L board, which supplies power and clock signals. You can see this mounting technique in photos 1 and 2. This assembly plugs into the motherboard and I/O board slot 3, giving it the hexadecimal address range 800C through 800F. If the cycle counter is to be plugged into some other slot, DEMONS will have to have the new address of IORA patched in at hexadecimal locations 03E9, 03EA, 040B, and 040C. DEMONS uses the nonmaskable interrupt (NMI), so the interrupt-request acknowledge (IRQA) line must be wired to the NMI input on the cycle counter's peripheral interface adapter board.

How the Cycle Counter Works

Upon start-up DEMONS initializes the peripheral interface adapter and loads an initial value of 6 (count 9 phase-2 clock cycles) into the counter. The counter is started and a return from interrupt (RTI) instruction is executed. The counter will reach the terminal count value and toggle the CA1 line one cycle before the RTI instruction completes execution. Upon completion of the RTI instruction, the processor will recognize the interrupt, save the registers in the stack, and transfer control to the DEMONS interrupt routine via the previously set NMI vector address.

DEMONS' interrupt processor will test the cycle counter's peripheral interface adapter control register A to verify that it was entered as a result of a valid interrupt. If the cycle counter did not cause the interrupt, the instruction at hexadecimal location

Apple* en CASTELLANO

Tercer Medio presenta su sistema administrativo (T.M.A.) para Apple

Diseñado de acuerdo con los principios contables aceptados en todos los países de habla hispana.

APLICACIONES COMERCIALES Y CIENTIFICAS

- **CONTABILIDAD GENERAL**
  - Diario General
  - Resumen del Diario
  - Consulta parcial al Diario
  - Mayor General
  - Balance de Comprobación
  - Balance General
  - Ganancias y Pérdidas
  - Catálogos de Cuentas
  - Consultas por pantalla
- **CUENTAS POR COBRAR**
  - Catálogo de Cuentas
  - Listado de Transacciones
  - Antigüedad de Saldos
  - Saldos por Vencer
  - Relación de Cobranzas
  - Relación de Pagos
  - Estado de Cuentas
  - Consultas varias por pantalla
- **INVENTARIO Y FACTURACION**
- **CONTROL DE BANCOS**
- **PERT/CPM**
- **CUENTAS A PAGAR**
- **CONTROL DE COSTO DE OBRAS**

VENTAJAS DEL SISTEMA T.M.A.

- Son completamentes conversacionales.
- El chequeo de la información es instantáneo.
- Los reportes impresos o por pantalla guardan los formatos generalmente aceptados.
- Están pensados para adaptarse a cualquier empresa.
- Toda la información está instantáneamente disponible
- Precisión Expandida.
- Números de hasta ± 999.999.999.99



Tercer Medio
Sistema de Información C.A.

APARTADO DE CORREOS 62533
CARACAS 1060 - A - VENEZUELA
TELEX: 27.876 - CPB TH - VE.
TELEFONOS: 283.60.88 - 284.74.68

*Apple es marca registrada por APPLE COMPUTER INC.

Publicidad Gráficas León, S.R.L.

Circle 402 on inquiry card.

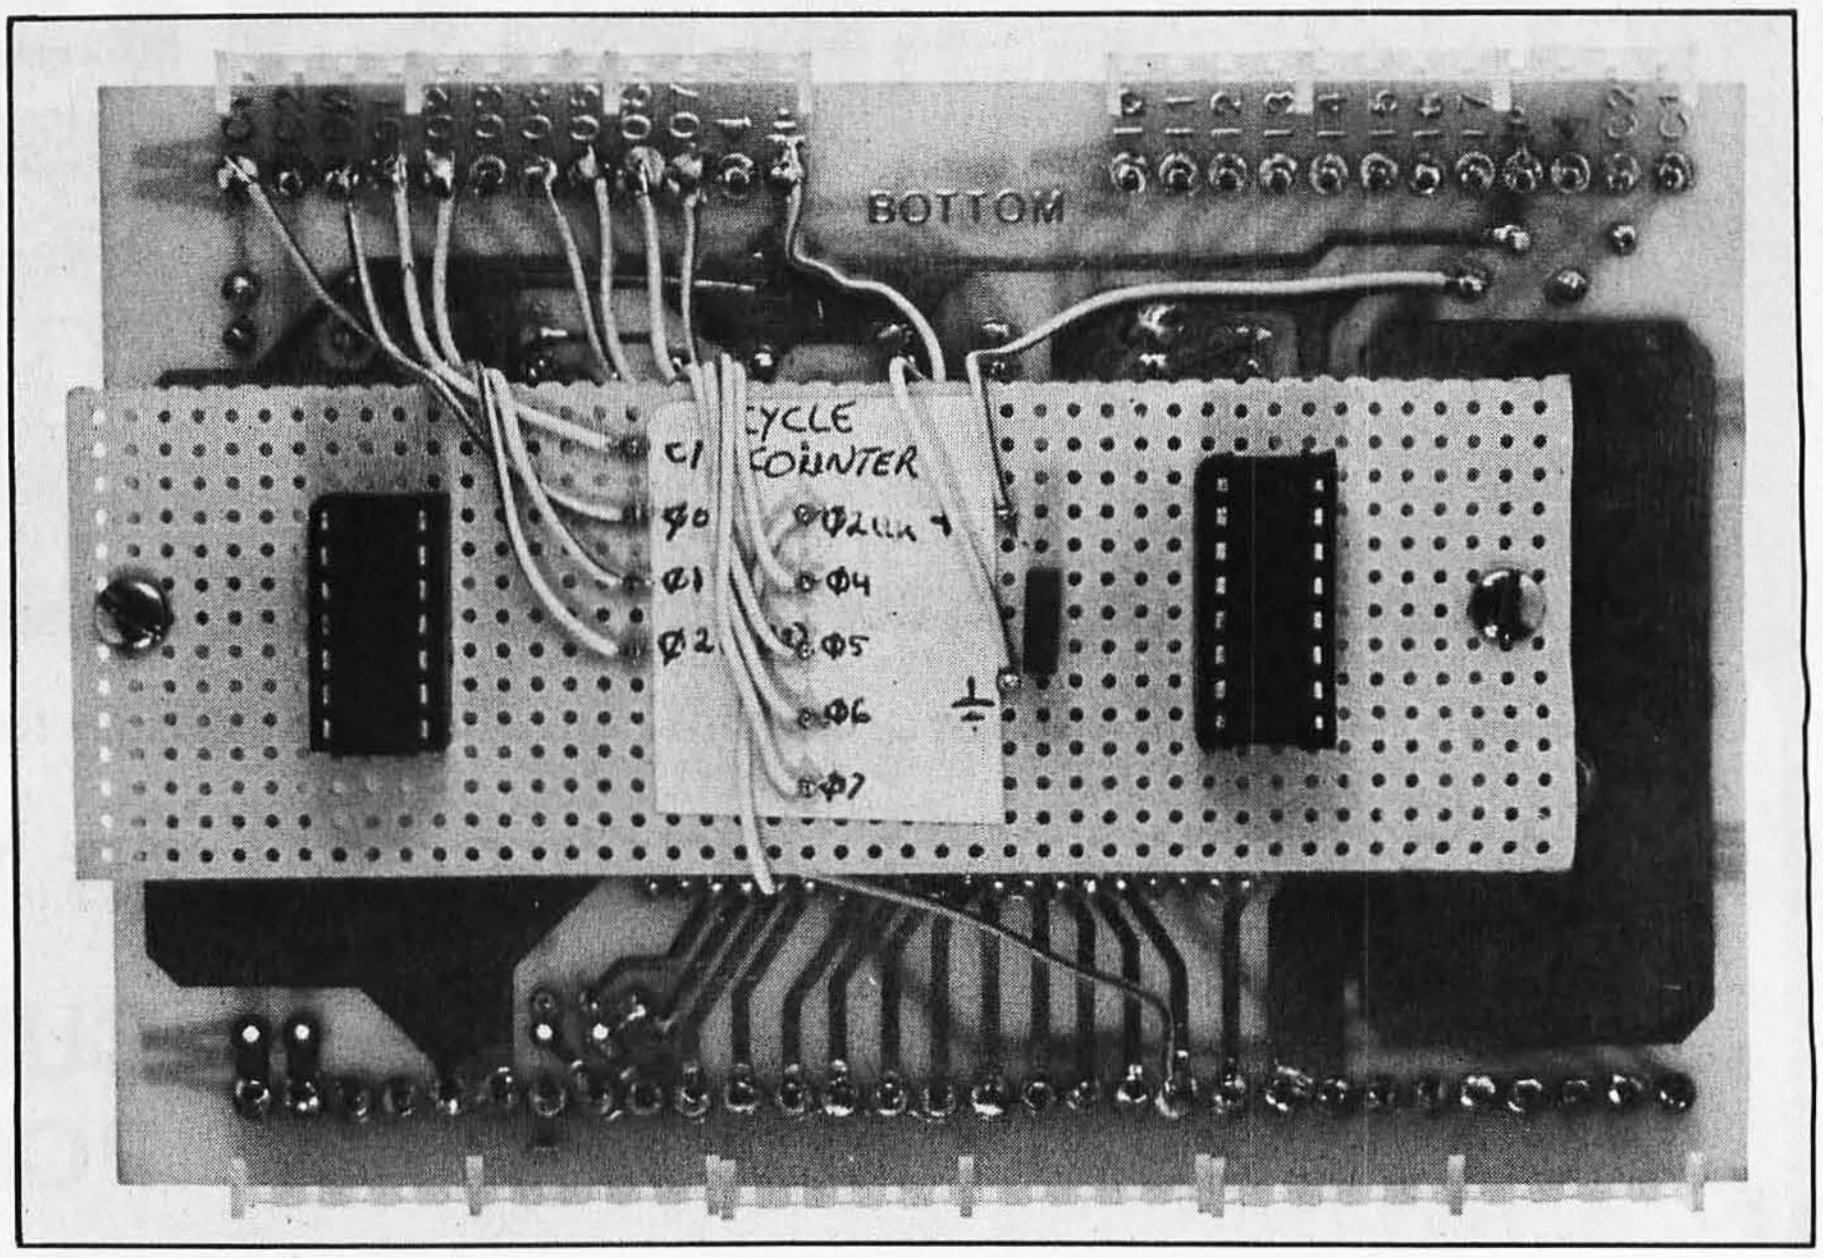

Photo 1: *The cycle-counter circuit was constructed on a small piece of perforated board and mounted on the MP-L parallel interface board inside the SwTPC 6800.*

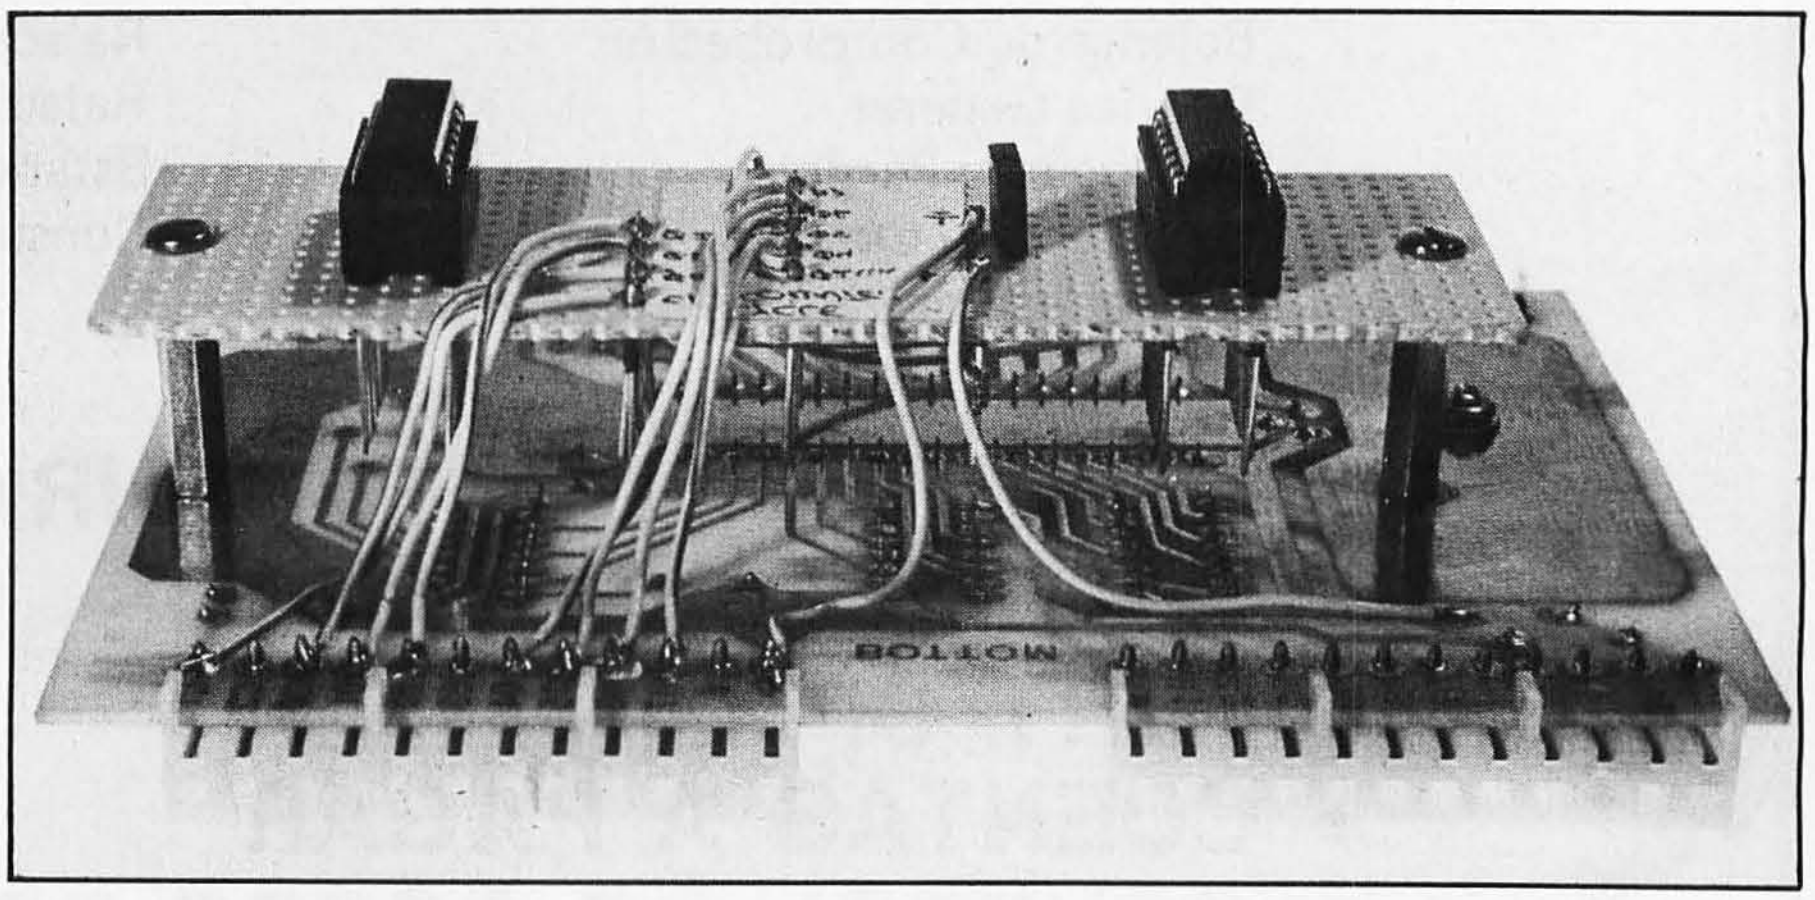

Photo 2: *Shown here is the method of mounting the cycle-counter circuit board.*

0411 will be executed. DEMONS is supplied with three no-operation instructions (NOPs) starting at this address. You should patch DEMONS to jump to another nonmaskable interrupt processing routine if the cycle counter is not the only source of nonmaskable interrupts.

If the interrupt is valid, the counter is halted, cleared, and reloaded with a value of 3. The registers are fetched from the stack and displayed on the terminal along with the next instruction to be executed, in this case the first instruction of the problem program. DEMONS then waits for the user to enter a command. If the *step* command is entered, the counter is started and a return from interrupt (RTI) instruction is executed. Twelve phase-2 ($\phi 2$) clock cycles later, the CA1 line is toggled, producing another nonmaskable interrupt. Since the RTI instruction takes 10 cycles to execute, the interrupt occurs during execution of the first instruction of the program that is being debugged. From this point on, interrupts will occur after the execution of the RTI instruction as *each* instruction of the program being debugged is executed.

Operational Modes

In *step* mode, DEMONS causes a single instruction of the program being debugged to be executed, and then seizes control of operations to

TO ORDER CALL (212) 687-5000

The COMPUTER FACTORY®

SUPERBRAIN™

INTERTEC DATA SYSTEMS

64K ONLY $3395

32K $2795

More than an intelligent terminal, the SuperBrain outperforms many other systems costing three to five times as much. Endowed with a hefty amount of available software (BASIC, FORTRAN, COBOL), the SuperBrain is ready to take on your toughest assignment. You name it! General Ledger, Accounts Receivable, Payroll, Inventory or Word Processing. . .the SuperBrain handles all of them with ease.

FEATURES INCLUDE:

• 2 dual-density minifloppies with **360K** bytes of disk storage • A CP/M Disk Operating System with a high-powered text editor, assembler and debugger.

Model QD

720K Bytes disk storage and **64K** RAM

$3895

SUPER BRAIN HARD DISKS

10 Megabyte List $4995	16 Fixed-16 Removable
$4495	**$9995**

NEW 96K 80 Column Commodore CBM

Basic 4.0 Operating System

- 80 column by 25 line display
- 12" CRT
- New screen editor
- Split screen processing
- Super fast string handling
- 15 additional basic commands
- Supports relative record processing

Model 8032
32K memory
$1795

NEW!
Model 8096
96K memory
Call for price

NEW 8050 DUAL DISK $1795
1 million bytes on-line storage and DOS 2.0 operating system
NEW 2031 SINGLE DISK $595

Commodore Computer

These low cost Commodore PET **Business Computers** have virtually unlimited business capabilities. Accounts Receivable, Inventory Records, Payroll, and other accounting functions.

PET 16N & 32N COMPUTERS
- Full size keyboard
- 16 or 32,000 Bytes Memory
- Level III Operating System
- Full Screen Editor
- Upper lower case & 64 graphic characters

$995

$1295

PET DUAL FLOPPY DISK
- Stores 360,000 Bytes on-line
- Microprocessor controlled
- Uses single or dual sided floppies

$795

HI-SPEED PRINTER
- 150 characters per second • Up to 4 copies 8" wide
- Microprocessor Controlled • Prints All Graphics • Full Formatting Capability

apple



NEW CORVUS 5 MEG ONLY $3750

APPLE II PLUS *Call for price*

A complete self-contained computer system with APPLESOFT floating point BASIC in ROM, full ASCII keyboard in a light weight molded carrying case.

Features Include:

• auto-start ROM • Hi-Res graphics and 15 color video output.
• Expandable to 48K.

Supertalker	$279	Micromodem	$379
Disk	645	Superterm (24 x 80)	395
Add-on Disk	525	Speechlab	229
Pascal Card	495	Communication Card	225
Business Software	625	Modem	200
Monitor	159	Graphics Printer	595
Printer Card	180	Graphics Tablet	795

apple ///
IS FINALLY HERE
128K RAM!!

FOR BEST DELIVERY AND SUPPORT SEE IT AT THE COMPUTER FACTORY

PRINTERS



EPSON



MX-70
MX-80
MX-80FT
MX-100FT
Call for Prices

VR-300 (25cps Letter Quality)	$1795
EPSON MX-80	$ 645
Paper Tiger 445	795
Paper Tiger 460	1295

CENTRONICS 700-9
$1795



• 180 cps Bi-Directional • Up to 15" Paper Width • 9 x 9 Matrix
• Upper/Lower Case
• Tractor Feed
• RS-232 Serial Interface

MONITORS

SANYO 12" GREEN	$325
BMC 12" GREEN	295
LEEDEX 13" COLOR	449
ZENITH 13" COLOR	395
LEEDEX 12" B&W	159

704
$1295 List $1895
• 60 cps • Up to 15" paper width • Tractor Feed • Parallel Interface for Apple & TRS-80 • 2 channel vertical forms! • Top of Form!
737 Parallel $895

ANDERSON JACOBSON

841 I/O Terminal Ideal for word processing and small businesses.

Serial $995

- ASCII Code
- 15 CPS Printout
- High Quality Selectric Printing
- Reliable heavy duty mechanism
- Completely Refurbished by A.J.
- Delivered FREE to nearest service center

CLOSE OUT SPECIALS!

	List	Special
Chatsworth Card Reader for TRS-80	750	**450**
Axiom 801	495	**195**
Protoline PET to Centronics Interface	199	**49**
Microtronics PET/Ham Interface	125	**49**

TEXAS Instruments 99/4 $695 (with 13" color Monitor)

Leedex-80 12" $89

Over 1000 software tapes, books, disks, on display. Come in and browse.

NEW NEC PC-8000

Call for Price

- 32K RAM
- 24K ROM
- Z80-A Micro
- Centronics and RS-232 interfaces standard
- Built-in color video interface creates vivid 8-color graphic displays
- MICROSOFT™ BASIC, plus many unique features combine to produce a high-performance DISK BASIC System.
- Five dual-level user-programmable function keys
- A built-in numeric key pad

DEALER INQUIRIES INVITED ON DIABLO, CENTRONICS, SUPERBRAIN DYNABYTE

DIABLO
630 Special $2495
On Site Warranty List $2755

VISA

WE HONOR master charge

Min. Credit Card Order $75

N Y residents add 8% sales tax
• Same day shipment on prepaid and credit card orders

TO ORDER CALL (212) 687-5000

Open
Mon-Fri. 10-6 Sat. 11-5

The COMPUTER FACTORY®
485 Lexington Ave., New York, NY 10017 (46th St. Lobby)
Foreign order desk — Telex 640055

Command	Description
S.	Step and execute from current address.
S*nnnn*	Set hexadecimal address *nnnn* as the new current address.
T*nnnn*.	Set trace mode and break address *nnnn*. Break count set to 1.
T*nnnn*,11	Set trace mode and break address *nnnn*. Set break count to 11.
C*nn*	Set condition codes to hexadecimal value *nn*.
B*nn*	Set B register to hexadecimal value *nn*.
A*nn*	Set A register to hexadecimal value *nn*.
X*nnnn*	Set X register to hexadecimal value *nnnn*.
R	Display registers.
D.	Display 14 instructions in disassembled form starting at the current address.
D*nnnn*	Display 14 instructions in disassembled form starting at hexadecimal address *nnnn*.
G	Exit from DEMONS and resume problem program execution at the current address.
P*nnnn*,*oo oo* ...	Patch memory starting at address *nnnn* with the hexadecimal values *oo*. Terminate entry with a carriage return.

Table 1: *Summary and description of the DEMONS command set.*

Dialogue at Terminal		Comments
*L		Command MIKBUG to load DEMONS from tape.
*G		Start DEMONS execution.
P *1E00*		Tell DEMONS where to start problem program being debugged.
CC B A X		DEMONS displays registers.
E1 00 00 3745		
1E00 BD 1E45	JSR $1E45	DEMONS displays the next instruction.
: *S.*		Operator commands an instruction step.
CC B A X		DEMONS displays registers.
E1 00 00 3745		
1E45 37	PSHB	DEMONS displays the next instruction.
:*T1E5F,03*		Enter trace mode.
: *S.*		Start tracing.

Table 2: *Example of a typical user work session with DEMONS, with commentary. Characters in italics have been typed by the user.*

	Simultaneous Interrupts	Processor Action
Early (PK) Mask	NMI and SWI	*treats as IRQ*
	NMI and IRQ	handles NMI first
	IRQ and SWI	handles SWI first
Later Masks	NMI and SWI	handles NMI first
	NMI and IRQ	handles NMI first
	IRQ and SWI	handles IRQ first

Table 3: *Sequence of interrupt handling in the Motorola 6800 microprocessor. Parts produced during early production runs used the PK chip mask, and demonstrate unexpected behavior under certain interrupt conditions, most notably the simultaneous occurrence of a nonmaskable hardware interrupt (NMI) and a software interrupt (SWI). The PK series of 6800 branches to the* IRQ *(maskable hardware interrupt) vector location whenever this happens. (Parts of the PK series have the letters PK inscribed somewhere on the surface of the package; therefore they may be identified.) Later production runs of the 6800 processor used an improved chip mask, and devices from these later runs handle interrupts in a more logical manner.*

The following rule holds true for all 6800 processors: in the case where the IRQ signal is overruled by one of the other two interrupts, the IRQ may be ignored and lost unless its interrupt signal has been latched. Fortunately, the IRQ signal from the peripheral interface adapter (PIA) is *latched.*

allow user input. At this point, the user can modify the program; *alter* the path taken through the program; change the contents of the condition code registers, index register, or either accumulator; display memory content in disassembled form; or enter the trace mode.

In *trace* mode, DEMONS continues to receive control following execution of problem program instructions, but the user is not given control (that is, a chance to input commands) until the *break* address (or breakpoint) is encountered and the break counter is decremented to 0. The user sets the break address and the break count. Once set, these cannot be cleared without going through DEMONS initialization or executing the program being debugged until the break address is encountered N times. The break address entered must always be the address of the op code (ie: first byte) of an instruction byte sequence. Once trace mode is selected, tracing will be started by entry of the step command. Using the trace feature, the user can avoid stepping through long loops and previously debugged code one instruction at a time. Table 1 shows the complete command set of DEMONS; table 2 shows an example of user interaction.

DEMONS may be exited by use of the GO function, which bypasses the counter start-up code, or by activating the system reset line (by hitting the reset switch).

Possible Problems

All debugging monitors have drawbacks; DEMONS is no exception. Since DEMONS relies on having the stack-pointer (SP) register properly set, code which uses the stack pointer as an index register must be bypassed using the step function. Any code that is synchronized with some external process or has critical timing requirements will be delayed by at least 130 machine cycles per instruction, causing possible errors. If a software interrupt (SWI) or regular maskable hardware interrupt (IRQ) occurs simultaneously with the cycle counter's nonmaskable interrupt (NMI), possible vectoring problems may occur. (Table 3 summarizes these effects.) Thus care must be

Circle 230 on inquiry card. →


For those special people who've
stepped ahead with a mini-computer
maxell
Mini-Floppy Disk
MH1
Single Sided
16 Sector Holes
CERTIFIED and TESTED
Double Density
maxell
Mini-Floppy Disk
MD2
Double Sided
CERTIFIED and TESTED

I stated that the disassembler executes quickly, and will have to wait for input/output (I/O) operations when using terminals having data rates of up to about 3000 bits per second (bps). I calculated this figure by disassembling 128 instructions and noting the time required to complete this task (T1). The time required for I/O operations (T2) was determined from the following formula:

$$T2 = (C \times L) \times D$$

where:

C *is the number of characters per line (32)*
L *is the number of lines in the test (128)*
D *is the time required to transmit one character (0.033 seconds at 300 bps)*

The processor time required to disassemble the 128 instructions is then:

$$T_p = T1 - T2.$$

The disassembler is no longer I/O bound in speed of execution when $T_p = T2$ *for the 128-line test. The system is I/O bound when* $T_p < T2$*, and is compute bound when* $T_p > T2$*.*

taken when using DEMONS to avoid stepping through software interrupt (SWI) instructions. Likewise, I/O operations involving a regular maskable interrupt (IRQ) may not work correctly every time.

Other Considerations

Several extensions to DEMONS are possible. The *patch* function is not symbolic, but may be made so by using the disassembler tables in reverse and using a subset of the 6800 assembly language restricted to hexadecimal operands. This feature was not included in this version of DEMONS because of the need to avoid using excessive amounts of programmable memory. Another extension could be to allow the entry of multiple addresses for the trace function to compare against. This feature would be useful if a situation arose in which the program under test could take several possible and unpredictable paths.

To use the disassembler in standalone mode, control should be passed to hexadecimal location 0000. The disassembler will reply by outputting a blank character to the terminal. Enter the four-digit hexadecimal address of the area of memory whose contents are to be displayed. The disassembler will issue home-up and erase-to-end-of-frame cursor commands to the terminal and will begin displaying lines of disassembled code. When 15 instructions have been displayed, the disassembler will pause awaiting entry of the address of the next area of memory to be displayed. If a nonhexadecimal character is entered, MIKBUG will resume control.

DEMONS is started by transferring control to hexadecimal address 03CC. DEMONS will output the character P to the terminal and await entry of the four-digit hexadecimal address of the program to be debugged. Following entry of this address, the contents of the registers and the next instruction to be executed from the program being debugged will be displayed. DEMONS then issues a colon (:) as a prompt character and awaits entry of a command at the control terminal. If a format error is made while entering a command, DEMONS will output a question mark and again prompt for input.

The most efficient way to use DEMONS is to step through undebugged code a single instruction at a time, patching errors as they are encountered and correcting the contents of the registers when necessary, in an attempt to find as many bugs as possible in a single run. When the number of patches becomes unwieldy, or an unpatchable bug is found, or the last bug is found, only then should you reload the assembler and reassemble the problem program. This technique will reduce the number of times you have to load memory from your mass-storage device and so will increase productivity. ■

Listing 1: *The main debugging routine of DEMONS, assembled in code for the 6800 microprocessor. This program uses the cycle counter, shown in figure 3, to generate interrupts that allow it to take command from the user program.*

```
00100                              NAM     DEMON
00200                  *
00300                  * AUTHOR: A.I. HALSEMA
00400                  * DATE: 11/08/77
00500                  * OBJECT MACHINE: SWTPC 6800
00600                  * PROGRAM NAME: DEMON(S) VERSION 1.0
00700                  * DEBUG MONITOR (SYMBOLIC) INITIALIZATION
00800                  *
00900                  *           THIS ROUTINE READIES THE PIA AND STARTS THE HARDWARE CYCLE
01000                  *           COUNTER. IT WILL REQUEST THE STARTING ADDRESS OF THE CODE
01100                  *           TO BE DEBUGGED WITH A 'P' PROMPT. IT ALSO REMOVES TRACE
01200                  *           SETTINGS.
01300                              OPT     0
01400   03CC                       ORG     $03CC
01500                  *
01600          A075    XSAV        EQU     $A075                 X-REGISTER SAVE AREA
01700          A02F    STAK        EQU     $A02F                 DEMON(S) STACK ADDRESS
01800          A006    NMIV        EQU     $A006                 NMI INTERRUPT VECTOR ADDRESS
01900          E1D1    OUTEEE      EQU     $E1D1                 OUTPUT CHARACTER ROUTINE
02000          A078    TFLAG       EQU     $A078                 TRACE ACTIVE FLAG. 1= ACTIVE
02100          A00C    ADDR        EQU     $A00C                 ADDRESS STORAGE USED BY BADDR
02200          800C    HCCPIA      EQU     $800C                 CYCLE COUNTER PIA ADDRESS
02300          A07C    APPND       EQU     $A07C                 APPENDAGE ADDRESS FOR DISASM
02400          A077    LINES       EQU     $A077                 LINES FOR DISASM TO DISPLAY
02500          01A4    APP         EQU     $01A4                  APPENDAGE ADDRESS IN DISASM
02600          E0CA    OUT2HS      EQU     $E0CA                 OUTPUT 2 HEX DIGITS AND SPACE
```

Listing 1 continued on page 338

MAPS®

Multi-Application Processing System

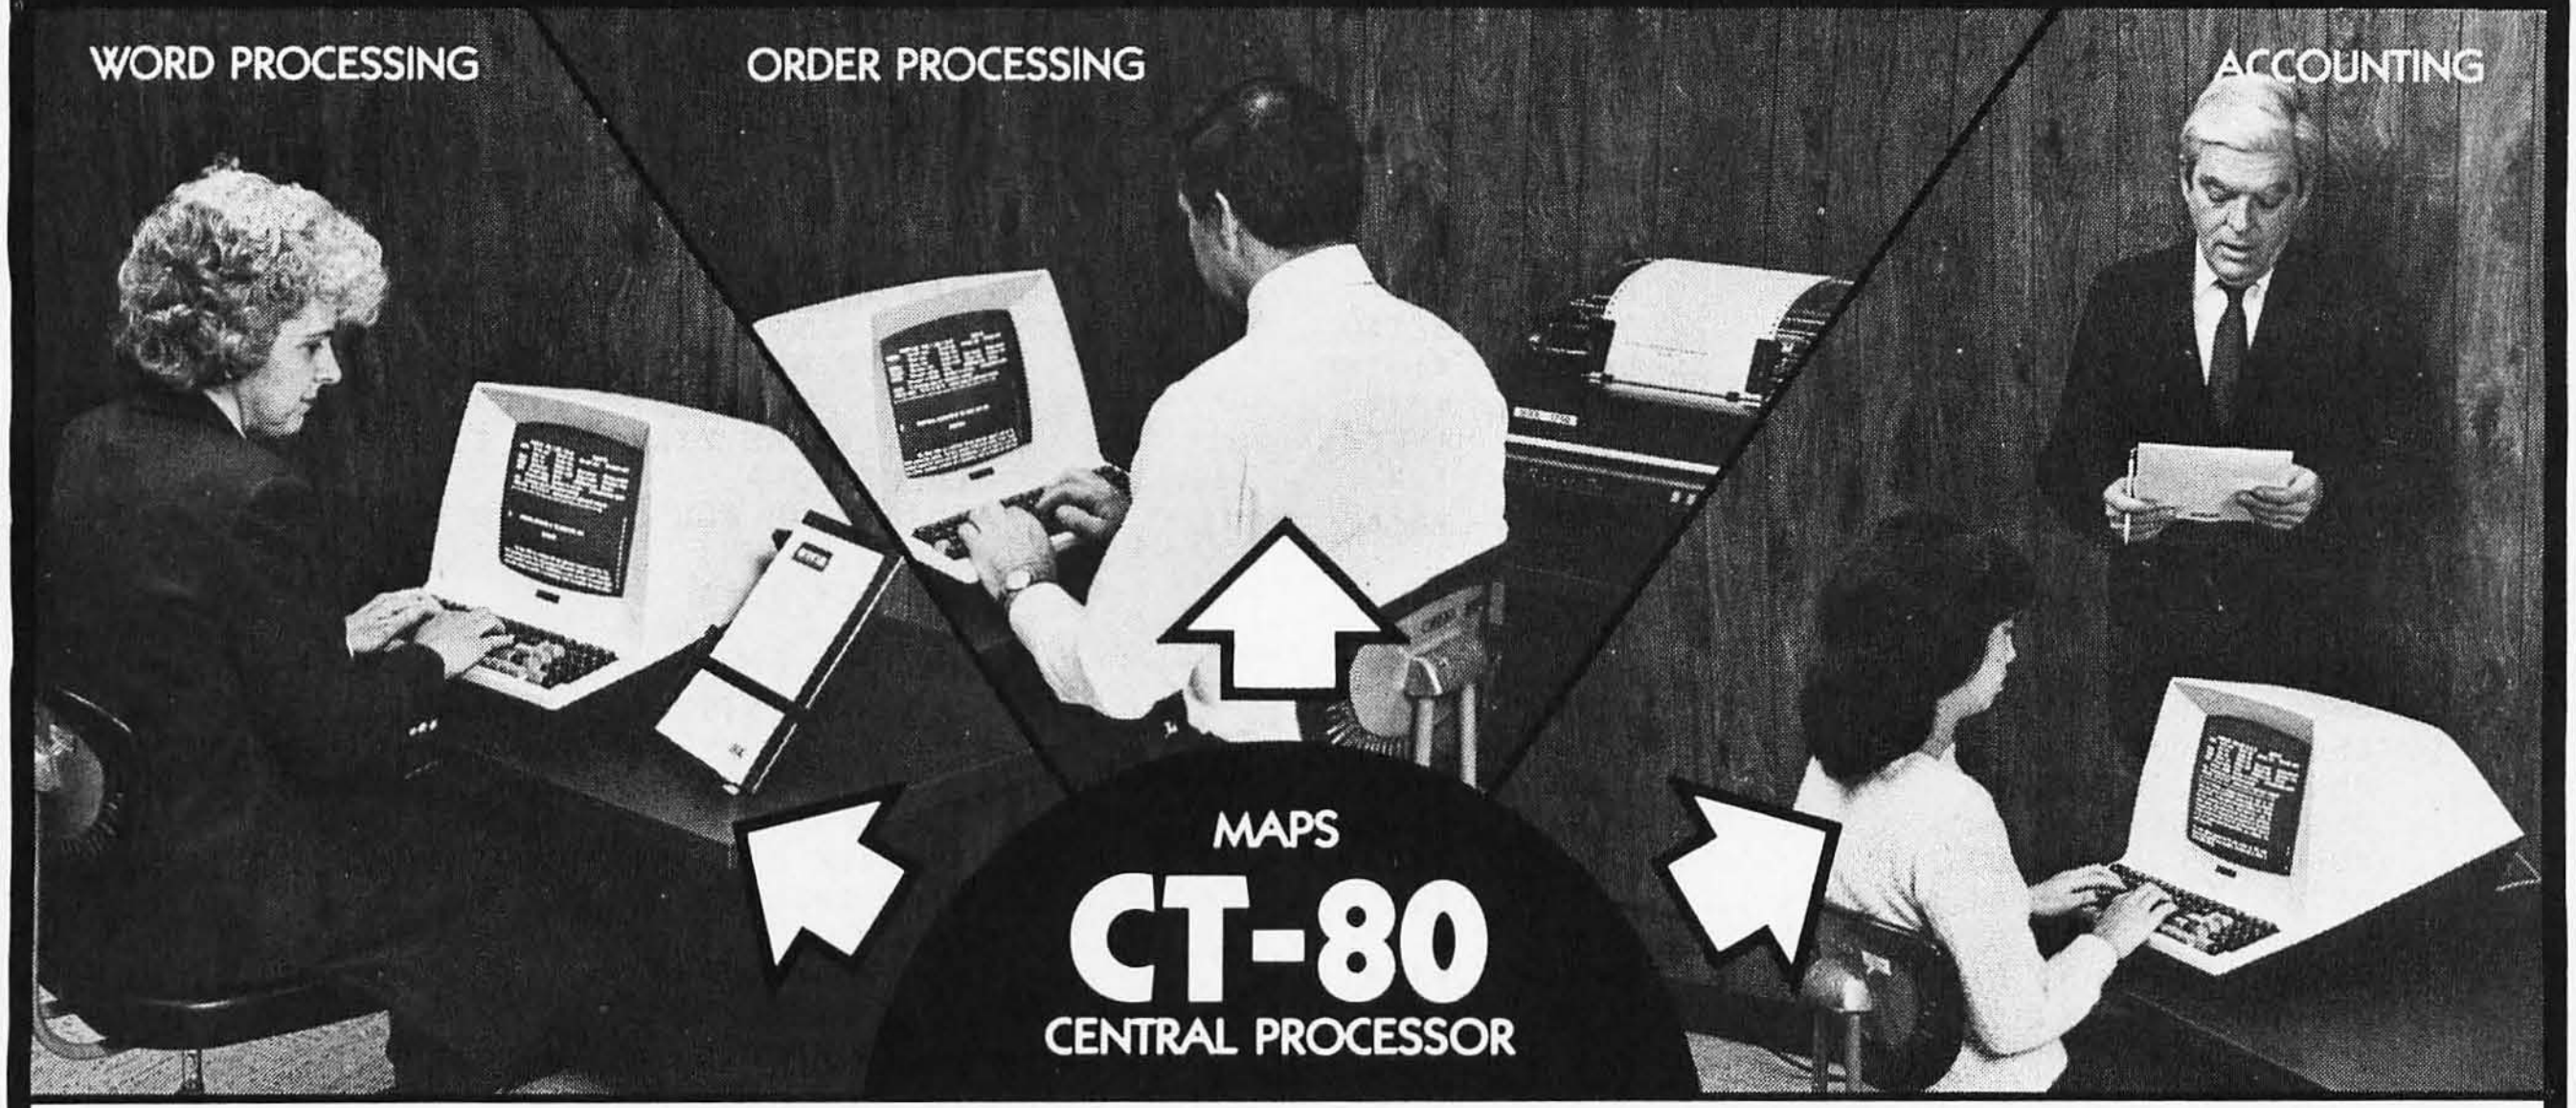

WHY BUY 3 COMPUTER SYSTEMS

When You Can Share Time On 1?

- Three business systems can run concurrently - that's three times the overall system productivity!
- Time share word processing, accounting, order processing, inventory, forms processing, billing and more!
- Three workstations can share data base - preparations can be done by several operators concurrently!
- All workstations can share common peripherals.
- Uses DIGIAC MAPS-80 operating system. (Digital Research MP/M)
- High level language processors including Fortran - Basic - Pascal - Cobol.
- Complete turn-key system for ease of operation and learning.

DIGIAC MAPS® 1000

S-100 COMPATIBLE MP/M SUPPORT MODULE MAKES IT ALL POSSIBLE!



The Digiac MAPS-1000 MP/M Universal Support Module has been designed to meet the total demands required by Digital Research's MP/M multi-user, multi-tasking operating system. All input/output, interrupt generation for task switching and disk bootstrapping are resident functions on the MAPS-1000.

The MAPS-1000 has been designed with all the following powerful features:

- Four (4) independent RS-232C Serial Communication channels
- One 8 bit TTL parallel port
- On-board phantom controlled disk boot prom/monitor
- Power on jump capability
- Crystal controlled MP/M interrupt generation Logic
- On-board extended memory bank switching Logic.

MAPS-1000 Board - Available separately, fully assembled & tested
Price: $425.00

BE SURE TO INQUIRE ABOUT OUR **MAPS®**

MP/M Users Group

MAPS is the only information network providing timely applications support for MP/M users. Members receive the **MAPS Digest**, a quarterly newsletter highlighting practical information exchange between MP/M users. No matter what your application, business or home hobbyist, the **MAPS Digest** provides information at your fingertips. Ask for your subscription!

DIGIAC®
CORPORATION

For Additional Information Contact:
MAPS
Commercial Products
Division Of:
DIGIAC CORPORATION
175 Engineers Road
Smithtown, New York
11787
Phone (516) 273-8600

MP/M is a trademark of
Digital Research Corporation

Listing 1 continued:

```
02700           E0C8  OUT4HS    EQU      $E0C8         OUTPUT 4 HEX DIGITS AND SPACE
02800           A079  TADDR     EQU      $A079         TRACE RECOGNITION ADDRESS
02900           E1AC  INEEE     EQU      $E1AC         CHARACTER INPUT ROUTINE
03000           E07E  PDATA1    EQU      $E07E         PRINT BLOCK ROUTINE
03100           0018  NEXTL     EQU      $0018           DISASSEMBLER ENTRY POINT
03200                 *
03300                 * DEMON(S) START-UP ENTRY POINT
03400                 *
03500    03CC 8E A02F START     LDS      #STAK         SET STACK ADDRESS
03600    03CF 7F A078           CLR      TFLAG         RESET TRACE FLAG
03700    03D2 BD 047D UG        JSR      CURL          ISSUE CR/LF
03800    03D5 86 50             LDAA     #'P
03900    03D7 BD E1D1           JSR      OUTEEE        ISSUE PROMPT
04000    03DA BD 04B2           JSR      BADDR         GET START OF PROBLEM PROGRAM
04100    03DD 25 F3             BCS      UG            BAD INPUT- TRY AGAIN
04200    03DF BD 0561           JSR      SETAD
04300    03E2 CE 040A           LDX      #INTRP        SET UP NMI VECTOR
04400    03E5 FF A006           STX      NMIV
04500    03E8 CE 800C           LDX      #HCCPIA       INITIALIZE PIA/CYCLE COUNTER
04600    03EB 6F 01             CLR      1,X          SELECT DDRA
04700    03ED 86 FF             LDAA     #$FF         AND SET UP ALL LINES TO OUTPUTS
04800    03EF A7 00             STAA     X
04900    03F1 86 04             LDAA     #$04            SELECT IORA
05000    03F3 A7 01             STAA     1,X
05100    03F5 86 6B             LDAA     #$6B         TURN OFF COUNTER RESET
05200    03F7 A7 00             STAA     X             AND SET INITIAL COUNTER VALUE
05300    03F9 A6 00   SETUP     LDAA     X
05400    03FB 84 F9             ANDA     #$F9         TURN OFF COUNTER LOAD
05500    03FD A7 00             STAA     X
05600    03FF 86 07             LDAA     #$07            ENABLE CA1 INTERRUPT ON LOW TO
05700    0401 A7 01             STAA     1,X          .HIGH TRANSITIONS
05800    0403 A6 00             LDAA     X
05900    0405 84 F8             ANDA     #$F8         START COUNTER
06000    0407 A7 00             STAA     X
06100    0409 3B                RTI                     GO TO PROBLEM PROGRAM
06200                 *
06300                 * DEMON(S) INTERRUPT PROCESSOR AND OPERATOR COMMAND DECODING.
06400                 *         ENTERED ONLY UPON OCCURENCE OF NMI INTERRUPT.
06500                 *         LOCATION LABELLED 'USER' ALLOWS FOR PATCHING IN JUMPS
06600                 *         TO FURTHER INTERRUPT PROCESSING IF MORE THAN ONE SOURCE
06700                 *         OF NMI INTERRUPTS IS AVAILABLE.
06800                 *
06900    040A CE 800C INTRP     LDX      #HCCPIA       GET PIA ADDRESS
07000    040D 6D 01             TST      1,X          .AND CHECK FOR CYCLE COUNTER
07100    040F 2B 03             BMI      MINE          .INTERRUPT
07200    0411 01      USER      NOP                    PATCH A JUMP TO SOME OTHER NMI
07300    0412 01                NOP                    .PROCESS HERE, BECAUSE THIS
07400    0413 01                NOP                    .INTERRUPT IS NOT FROM CYCLES.
07500    0414 86 04   MINE      LDAA     #$04           DISABLE COUNTER INTERRUPTS
07600    0416 A7 01             STAA     1,X
07700    0418 86 3F             LDAA     #$3F         STOP COUNTER
07800    041A A7 00             STAA     X
07900    041C 86 3B             LDAA     #$3B         RESET COUNTER- SET LOAD VALUE
08000    041E A7 00             STAA     X            . TO 3
08100    0420 A6 00             LDAA     X             DUMMY READ TO INSURE NMI OFF
08200    0422 30                TSX
08300    0423 EE 05             LDX      5,X          GET ADDRESS OF NEXT INSTRUCTION
08400    0425 FF A00C           STX      ADDR         SET ADDRESS FOR DISASSEMBLER
08500    0428 7D A078           TST      TFLAG         TRACE MODE RUNNING?
08600    042B 27 0A             BEQ      NOT           IF NOT- BRANCH
08700    042D BC A079           CPX      TADDR         TRACE FLAG SET- TEST ADDRESS
08800    0430 26 52             BNE      NOPE          BRANCH IF WRONG ADDRESS
08900    0432 7A A078           DEC      TFLAG         ADDRESSES ARE EQUAL- COUNT HIT
09000    0435 26 4D             BNE      NOPE          IF NOT ZERO- GO TRACE SOME MORE
09100    0437 86 01   NOT       LDAA     #$01           SET NUMBER OF LINES FOR DISASM
09200    0439 B7 A077           STAA     LINES
09300    043C 8D 28             BSR      REGS          DO A CR LF AND DISPLAY REGISTERS
09400    043E BD 056E           JSR      SHOLIN        DISPLAY INSTRUCTION
09500    0441 86 3A   COMON     LDAA     #':           GET COMMAND- ISSUE PROMPT
09600    0443 BD E1D1           JSR      OUTEEE
09700    0446 BD E1AC           JSR      INEEE          GET INPUT
09800    0449 CE 0578           LDX      #COMTAB       GET COMMAND TABLE ADDRESS
09900    044C E6 00   TEST      LDAB     X             GET RECOGNITION CHARACTER
10000    044E 11                CBA                    SAME AS INPUT?
10100    044F 26 04             BNE      MORE          IF NOT- GO LOOK AGAIN
10200    0451 EE 01             LDX      1,X          EQUAL- GET CURRENT ADDRESS
10300    0453 6E 00             JMP      X             GO DO IT TO IT
10400                 *
10500    0455 5D      MORE      TSTB                   FOUND END OF TABLE?
10600    0456 27 05             BEQ      BAD           YES- TELL OPERATOR
10700    0458 08                INX                    NO- POINT TO NEXT ENTRY IN TABLE
10800    0459 08                INX
10900    045A 08                INX
11000    045B 20 EF             BRA      TEST          AND GO TEST IT
11100                 * INPUT IS BAD- TELL OPERATOR AND GIVE HIM ANOTHER CHANCE TO DO IT RIGHT
11200    045D 86 3F   BAD       LDAA     #'?           DISPLAY QUESTION MARK
11300    045F BD E1D1           JSR      OUTEEE
11400    0462 8D 19   NEXT1     BSR      CURL          DO CARRIAGE RETURN/LINE FEED
11500    0464 20 DB             BRA      COMON         AND GO TRY AGAIN
```

Listing 1 continued on page 340

Computers for people.™

"Atari graphics and sound stand in a class by themselves."

David D. Thornburg
Compute Magazine, November/December 1980

"Its superiority lies in three areas: drawing fancy pictures (in color), playing music, and printing English characters onto the screen. Though the Apple can do all these things, Atari does them better."

Russell Walter
"Underground Guide to Buying a Computer"
Published 1980,
SCELBI Publications

"The Atari machine is the most extraordinary computer graphics box ever made..."

Ted Nelson
Creative Computing Magazine, June 1980

"...so well packaged that it is the first personal computer I've used that I'm willing to set up in the living room."

Ken Skier, OnComputing, Inc. Summer 1980

"...well constructed, sleekly designed and user-friendly—expect reliable equipment, and strong maintenance and software support."

Videoplay
December, 1980

What computer people are saying about Computers for people.™

To find out about the ATARI® 800™ Computer first hand, ask your local computer dealer for a hands-on demonstration.
Or call, 800-538-8547 (In California 800-672-1404)

ATARI®
Computers for people.™

©1981, ATARI, Inc.
A Warner Communications Company

For further information write: Atari Inc., Computer Division, 1196 Borregas Avenue, Sunnyvale, CA 94086 Dept. C-11

Circle 35 on inquiry card.

Listing 1 continued:

```
                *
                *
                * REGS- DISPLAY REGISTERS
                *
0466 8D 15      REGS        BSR     CURL                    DO CR/LF
0468 CE 059A                LDX     #CCL                    DISPLAY 'CC B A X' CRLF
046B BD E07E                JSR     PDATA1
046E 30                     TSX                             GET STACK ADDRESS
046F 08                     INX                             CORRECT FOR REGS RETURN ADDRESS
0470 08                     INX
0471 BD E0CA                JSR     OUT2HS                  DISPLAY CC
0474 BD E0CA                JSR     OUT2HS                  DISPLAY B
0477 BD E0CA                JSR     OUT2HS                  DISPLAY A
047A BD E0C8                JSR     OUT4HS                  DISPLAY X
047D CE 05A4    CURL        LDX     #CRLF                   DO CARRIAGE RETURN/LINE FEED
0480 BD E07E                JSR     PDATA1
0483 39                     RTS                             EXIT
                *
0484 CE 800C    NOPE        LDX     #HCCPIA                 GET PIA ADDRESS
0487 7E 03F9                JMP     SETUP                   GO START COUNTER AND EXECUTE
                *
                * GET HEX INPUT
                *
048A BD E1AC    INHEX       JSR     INEEE                    GO GET CHARACTER
048D 80 30                  SUBA    #$30                  HEX?
048F 2B 10                  BMI     BADHEX                   NO- JUMP
0491 81 09                  CMPA    #$09                      BETWEEN 0 AND $09?
0493 2F 0A                  BLE     OKHEX                    YES- OK
0495 81 11                  CMPA    #$11                  A OR GREATER?
0497 2B 08                  BMI     BADHEX                   NO- ERROR
0499 81 16                  CMPA    #$16                  F OR LESS?
049B 2E 04                  BGT     BADHEX                   NO- ERROR
049D 80 07                  SUBA    #$07                      ADJUST FOR A THROUGH F VALUES
049F 0C         OKHEX       CLC                             CLEAR ERROR FLAG
04A0 39                     RTS                             EXIT
04A1 0D         BADHEX      SEC
04A2 39                     RTS
                *
                *GET ONE BYTE OF HEX INPUT- EXIT WITH DIGIT IN A AND CARRY CLEAR IF OK.
                *
04A3 8D E5      BYTE        BSR     INHEX                   GET A DIGIT
04A5 25 0A                  BCS     BADB                    BAD- NOT HEX- JUMP
04A7 48                     ASLA                            MOST SIGNIFICANT DIGIT, SO LEFT
04A8 48                     ASLA                            . JUSTIFY IT
04A9 48                     ASLA                            .
04AA 48                     ASLA                            .
04AB 16                     TAB                             . AND SAVE IN B-REGISTER
04AC 8D DC                  BSR     INHEX                   GET LEAST SIGNIFICANT DIGIT
04AE 25 01                  BCS     BADB                    IF INPUT IS BAD- JUMP
04B0 1B                     ABA                             COMBINE BOTH IN A
04B1 39         BADB        RTS                             EXIT
                *
                * BADDR- BUILD ADDRESS, RESULT IN $A00C AND X IF GOOD, ELSE CARRY SET.
                *
04B2 8D EF      BADDR       BSR     BYTE                    GET HEX BYTE
04B4 25 0D                  BCS     ADBAD                   JUMP IF BAD
04B6 B7 A00C                STAA    ADDR                    SAVE BYTE
04B9 8D E8                  BSR     BYTE                    GET SECOND BYTE
04BB 25 06                  BCS     ADBAD                   JUMP IF BAD
04BD B7 A00D                STAA    ADDR+1                  SAVE IT
04C0 FE A00C                LDX     ADDR                    GET IN X
04C3 39         ADBAD       RTS                             EXIT
                *
                * TRACE PROCESSING, COMMAND FORMAT: TXXXX, OR TXXXX,NN
                *                                  WHERE T IS THE COMMAND CHARACTER
                *                                        XXXX IS A FOUR-DIGIT HEX ADDRESS
                *                                        NN IS A TWO  DIGIT TRAP COUNT=$7F MAX.
                *           TRACE MODE IS SET WITH THIS COMMAND, STEP COMMAND STARTS RUN.
                *           THE PROBLEM PROGRAM WILL RUN UNTIL DEMON(S) HAS ENCOUNTERED
                *           ADDRESS XXXX NN TIMES, WHEN IT WILL RETURN OPERATOR CONTROL.
                *           ADDRESS XXXX MUST BE THE ADDRESS OF THE FIRST BYTE OF AN INSTRUCTION.
                *           NOTE THAT ZERO IS A DISALLOWED VALUE FOR NN IN INPUT.
                *           TXXXX, FORM SETS NN TO 01 AUTOMATICALLY.
04C4 8D EC      TRACE       BSR     BADDR                   GO GET TRACE ADDRESS
04C6 25 95                  BCS     BAD                     BAD INPUT
04C8 FF A079                STX     TADDR
04CB BD E1AC                JSR     INEEE                    GET PERIOD OR COMMA
04CE 81 2E                  CMPA    #'.                     PERIOD?
04D0 27 0F                  BEQ     SETONE                  YES- SET TFLAG TO ONE
04D2 81 2C                  CMPA    #',                     COMMA?
04D4 26 87                  BNE     BAD                     NO- BAD INPUT
04D6 8D CB                  BSR     BYTE                    IT IS COMMA- GET LOOP COUNT
04D8 25 83                  BCS     BAD
04DA 27 81                  BEQ     BAD
04DC B7 A078    SETT        STAA    TFLAG                   SET IN TRACE FLAG
04DF 20 81      NEXT2       BRA     NEXT1                   GO GET A COMMAND
04E1 86 01      SETONE      LDAA    #$01
04E3 20 F7                  BRA     SETT
```

Listing 1 continued on page 342

TRS-80 owners
Explore new worlds with CHATTERBOX.™

The MICROMINT INC. introduces its latest data communications product, the "CHATTERBOX." The CHATTERBOX is a unique packaging combination of the presently available COMM-80 I/O interface for the TRS-80* and an acoustic modem. This one box is all that is required to turn even a barebones 4K TRS-80 into a full timesharing terminal.

The CHATTERBOX includes a built-in programmable 50-19200 baud serial port, a Centronics compatible parallel printer port, a 300 baud acoustic originate modem, and a spare TRS-BUS expansion connector. It comes complete with power supply, ribbon cable and connector, user's manual, and smart terminal software for immediate operation. When the modem is in use, the complete data conversation is automatically routed to the serial output port and parallel port where it can be logged on a printer.

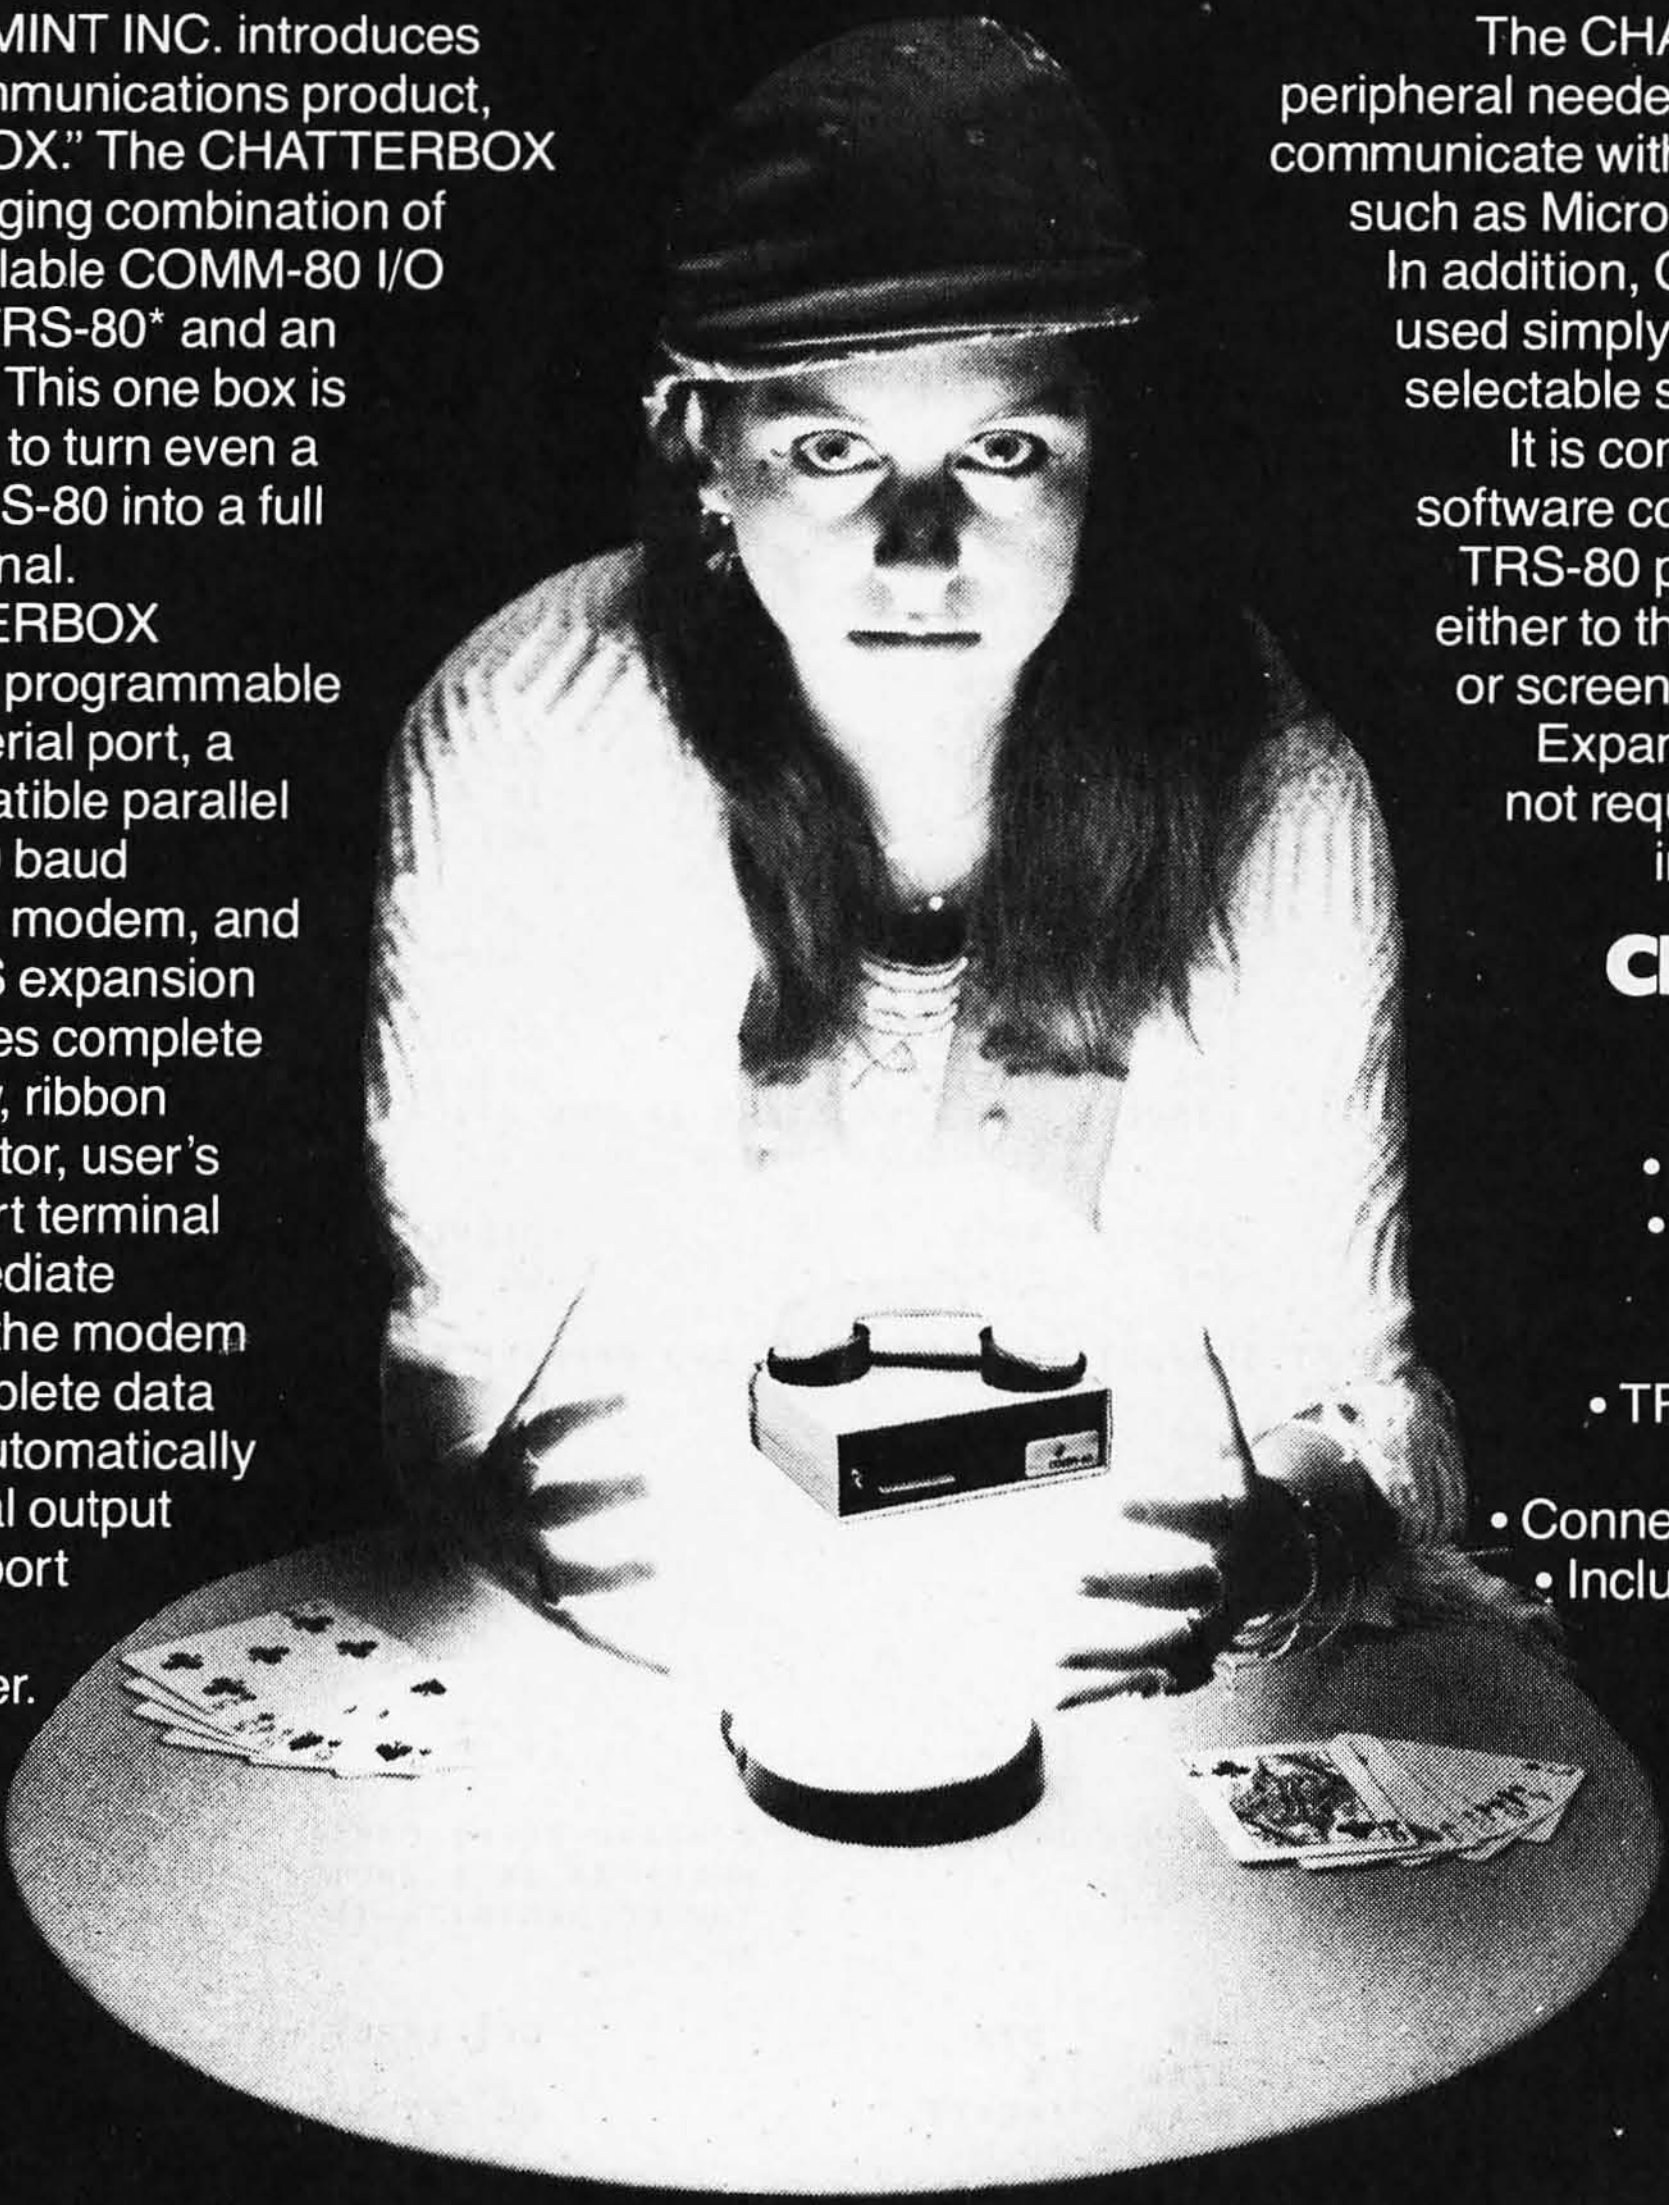

The CHATTERBOX is the only peripheral needed to allow a TRS-80 to communicate with timesharing systems such as Micronet and the SOURCE. In addition, CHATTERBOX can be used simply to provide an address selectable serial and parallel port. It is completely hardware and software compatible with existing TRS-80 products and connects either to the keyboard connector or screen printer port on the RS Expansion interface. It does not require the RS Expansion interface for operation.

CHATTERBOX.™

$279.95

- Full 8-bit parallel port.
- RS-232-C serial port (up to 19,200 baud).
- Acoustic modem.
- TRS-BUS connector for future expansion.
- Connects to Keyboard or E.I.
- Includes terminal software.
- Users manual.
- Power supply.

MAIL ORDER OR INFORMATION WRITE OR CALL:

The MicroMint Inc.
917 Midway
Woodmere, NY 11598
Dealer inquiries invited.

VISA

master charge

MICRO MINT

THE INTERFACE CONNECTION

CALL:
516·374·6793

TRS-80 is a trademark of Tandy Corporation

Listing 1 continued:

```
             * STEP COMMAND PROCESSING, CAUSES TRANSFER OF CONTROL TO ADDRESS.
             *                   COMMAND FORMAT: SXXXX OR S.
             *                           WHERE XXXX IS A FOUR DIGIT HEX ADDRESS.
             *                   SXXXX FORM SETS NEW CURRENT ADDRESS
             *                   S. FORM STARTS RUN AT CURRENT ADDRESS.
             *
04E5 8D CB   STEP       BSR      BADDR            GO GET ADDRESS
04E7 25 9B              BCS      NOPE             IF NOT HEX- ASSUME PERIOD
04E9 8D 76              BSR      SETAD            ELSE PUT ADDRESS IN STACK
04EB 7E 0437            JMP      NOT              DISPLAY AND GET NEXT COMMAND
04EE 01                 NOP
04EF 01                 NOP
04F0 01                 NOP
04F1 01                 NOP
             * GO COMMAND PROCESSING, CAUSES EXIT FROM DEMON(S) WITH CYCLE COUNTER
             *                        HALTED. USE WHEN FINISHED WITH DEBUGGING.
             *                        CONTROL IS PASSED TO THE CURRENT ADDRESS REACHED
             *                        WHILE STEPPING OR TRACING.
04F2 3B      GO         RTI                       EXIT FROM DEMON(S)
             * DISPLAY COMMAND PROCESSING, DISPLAYS 15 INSTRUCTIONS FROM MEMORY IN
             *                             DISASSEMBLED FORM.
             *                             COMMAND FORMS; DXXXX OR D.
             *                                     WHERE XXXX IS A 4 DIGIT HEX ADDRESS
             *                             D. CAUSES DISPLAY TO START WITH THE CURRENT
             *                             INSTRUCTION
04F3 7E 045D DAB        JMP      BAD
04F6 86 0E   DISPLA     LDAA     #$0E             SET UP LINES FOR DISASM
04F8 B7 A077            STAA     LINES
04FB 8D B5              BSR      BADDR            GET ADDRESS
04FD 24 06              BCC      SHOW             IF NO ERROR ON ENTRY- BRANCH
04FF 30                 TSX                       GET ADDRESS FROM STACK
0500 EE 05              LDX      5,X              .
0502 FF A00C            STX      ADDR             .AND SET FOR DISASSEMBLER
0505 86 10   SHOW       LDAA     #$10              HOME UP
0507 BD E1D1            JSR      OUTEEE
050A 8D 62              BSR      SHOLIN           GO DISPLAY INSTRUCTION
050C 20 D1              BRA      NEXT2            GET ANOTHER COMMAND
             * REGISTER DISPLAY. THE REGISTERS IN THE STACK ARE DISPLAYED.
             *                   COMMAND FORM: R
             *
050E BD 0466 SHOREG     JSR      REGS             DISPLAY REGISTERS
0511 7E 0441 BACKUP     JMP      COMON            GO GET ANOTHE COMMAND
             *
             * SUPPORT SUBROUTINE- GET INPUT AND PREPARE X REGISTER
             *
0514 8D 8D   BYN        BSR      BYTE             GET INPUT BYTE
0516 25 04              BCS      GAG              BAD VALUE?
0518 30                 TSX                       SET VALUE IN STACK
0519 08                 INX                       ADJUST ADDRESS FOR BEING IN A SUBROUTINE
051A 08                 INX
051B 39                 RTS
051C 31      GAG        INS
051D 31                 INS
051E 20 D3              BRA      DAB
             *
             * SET CONDITION CODE REGISTER, COMMAND FORM: CXX
             *                              WHERE XX IS A 2-DIGIT HEX VALUE THAT
             *                              THE CC REGISTER IN THE STACK WILL BE SET
             *                              TO.
             *
0520 8D F2   RSETC      BSR      BYN              GET INPUT BYTE
0522 A7 00   SETREG     STAA     X
0524 20 B9              BRA      NEXT2            GO GET ANOTHER COMMAND
             *
             * SET B-REGISTER,   COMMAND FORM: BXX
             *
0526 8D EC   RSETB      BSR      BYN              GET INPUT BYTE
0528 08      BSETS      INX
0529 20 F7              BRA      SETREG
             *
             * SET A-REGISTER,   COMMAND FORM: AXX
             *
052B 8D E7   RSETA      BSR      BYN
052D 08                 INX
052E 20 F8              BRA      BSETS
             * SET X-REGISTER,   COMMAND FORMAT: XNNNN
             *                           WHERE NNNN IS A 4-DIGIT HEX VALUE
             *
0530 BD 04B2 RSETX      JSR      BADDR            GET 4 DIGITS
0533 25 BE              BCS      DAB              BAD INPUT?
0535 30                 TSX                       NO- GET STACK ADDRESS
0536 09                 DEX                       SET X VALUE IN STACK
0537 09                 DEX
0538 09                 DEX
0539 8D 28              BSR      SETS
```

Listing 1 continued on page 344

DEALERS: By now you know that it takes . . . . .

SOFTWARE
TO SELL
COMPUTERS

and International Micro Systems can provide you with the largest selection of quality business applications ever developed for the microcomputer industry.

If you are just looking for a G.L., A/P, and Payroll, you can find them in a dozen ads in this magazine. But thers's a much bigger market for micros out there than that. Where can you find a fully interfaced Wholesale/Retail Distribution System? How about Manufacturing Inventory Control including Production Scheduling & Control. See that one anywhere else? Maybe your market is Medical/Dental and IMS has the full systems there too. You can't sell computers without software and IMS has the finest selection of software available for you. Each system has been developed by the IMS professional staff and we support what we sell.

But thats not all. International Micro Systems has the strongest dealer marketing plan in the industry. With our . . . . .

$245 Dealer Demo System.

we put all the software shown below in your office or store ready to demo to your prospects and we include the promotional material and our unique video sales presentation to help you move systems. Give us a call or drop us a card and let us show you what selling business systems should be all about.

Financial Systems
- GL, A/P, A/R
- Payroll
- Cash Receipts/Disb.
- Job Costing
- Mailing List Mgmt.

Medical/Dental
- Office.Scheduler
- Patient Billing & A/R
- Insurance Forms

Governmental/Educational
- Student Record Keeping and Scheduling
- Fund Accounting

Wholesale Distribution System
- Purchasing & Receiving
- Inventory Control
- Invoicing & Receivables
- Salesman Comm. Reporting
- Backorder Management

Manufacturing Inventory Control
- Finished Goods Inventory Mgmt.
- Parts Inventory Mgmt.
- Parts Purchasing & Receiving
- Bill of Material
- Production Scheduling

INTERNATIONAL
MICRO
SYSTEMS

For details on our demo special, contact us at:
8425 Quivira Road, Lenexa, Kansas 66215
Phone: (913) 888-8330

Circle 201 on inquiry card.

Listing 1 continued:

```
053B 20 A2      NEXT3       BRA     NEXT2
                * PATCH COMMAND PROCESSOR, COMMAND FORMAT: PXXXX,NN NN NN ....(CR)
                *                                  WHERE XXXX IS A 4-DIGIT HEX ADDRESS
                *                                  AND NN IS A 2-DIGIT HEX VALUE
                *           ENTER AS MANY 2 DIGIT VALUES AS NEEDED, THEN TERMINATE STRING
                *           WITH A CARRIAGE RETURN. EACH NN VALUE IS PLACED IN MEMORY AS
                *           IT IS ENTERED, UNLESS AN ERROR IS MADE. THEN THE NN VALUE
                *           CONTAINING THE ERROR IS REJECTED AND IS NOT STORED.
                *
053D BD 04B2    PATCH       JSR     BADDR                GET ADDRESS
0540 25 B1                  BCS     DAB                  JUMP IF NOT HEX
0542 FF A075    GETMOR      STX     XSAV                 SAVE X FOR LATER
0545 BD 04A3    GETS        JSR     BYTE                 GET 2 DIGIT VALUE
0548 25 0D                  BCS     WHAT                 JUMP IF NOT HEX
054A FE A075                LDX     XSAV                 RESTORE X
054D A7 00                  STAA    X                    .AND STORE THE VALUE
054F 08                     INX                          POINT TO NEXT LOCATION
0550 86 20                  LDAA    #'                   SPACE BETWEEN INPUTS
0552 BD E1D1                JSR     OUTEEE
0555 20 EB                  BRA     GETMOR               GO GET MORE INPUT
0557 88 DD      WHAT        EORA    #$DD                INPUT NOT HEX- CARRIAGE CODE?
0559 27 E0                  BEQ     NEXT3                JUMP IF YES
055B 88 21                  EORA    #$21                COMMA?
055D 27 E6                  BEQ     GETS                 JUMP IF YES
055F 20 92                  BRA     DAB                  .ELSE ERROR IF NOT
                *
                * SUPPORT SUROUTINE- MOVE ADDRESS INTO STACK
                *
0561 30         SETAD       TSX                          PUT THE ADDRESS IN THE STACK
0562 08                     INX
0563 B6 A00C    SETS        LDAA    ADDR
0566 A7 06                  STAA    6,X
0568 B6 A00D                LDAA    ADDR+1
056B A7 07                  STAA    7,X
056D 39                     RTS
                *
                * SUPPORT SUBROUTINE- SET APPENDAGE ADDRESS AND CALL DISASSEMBLER
                *
056E CE 01A4    SHOLIN      LDX     #APP                 SET APPENDAGE FOR DISASSEMBLER
0571 FF A07C                STX     APPND
0574 BD 0018                JSR     NEXTL                GO TO DISASSEMBLER
0577 39                     RTS
                * COMMAND TABLE. EACH ENTRY IS 3 BYTES LONG. THE FIRST BYTE IS THE ASCII
                *                 COMMAND CHARACTER. THE NEXT 2 BYTES ARE THE PROCESS
                *                 ADDRESS. THE TABLE IS TERMINATED WITH A BYTE OF ZEROS.
                *
0578 53         COMTAB      FCC     /S/                  STEP COMMAND
0579 04E5                   FDB     STEP
057B 54                     FCC     /T/                  TRACE COMMAND
057C 04C4                   FDB     TRACE
057E 52                     FCC     /R/                  REGISTER DISPLAY
057F 050E                   FDB     SHOREG
0581 47                     FCC     /G/                  GO COMMAND
0582 04F2                   FDB     GO
0584 44                     FCC     /D/                  DISPLAY COMMAND
0585 04F6                   FDB     DISPLA
0587 43                     FCC     /C/                  SET CONDITION CODES
0588 0520                   FDB     RSETC
058A 41                     FCC     /A/                  SET A-REGISTER
058B 052B                   FDB     RSETA
058D 42                     FCC     /B/                  SET B-REGISTER
058E 0526                   FDB     RSETB
0590 58                     FCC     /X/                  SET X-REGISTER
0591 0530                   FDB     RSETX
0593 50                     FCC     /P/                  PATCH
0594 053D                   FDB     PATCH
0596 00                     FCB     0,0,0                SPACE FOR PATCHING AN ENTRY
0597 00
0598 00
0599 00                     FCB     0                    END OF TABLE
                * REGISTER IDENTIFICATION
059A 43         CCL         FCC     /CC B  A  X/         REGISTER ID LINE
059B 43
059C 20
059D 42
059E 20
059F 20
05A0 41
05A1 20
05A2 20
05A3 58
05A4 0D         CRLF        FCB     $0D,$0A,4            CARRIAGE RETURN/LINE FEED
05A5 0A
05A6 04
                            END
```

Listing 2 starts on page 346
Listing 3 is on page 358

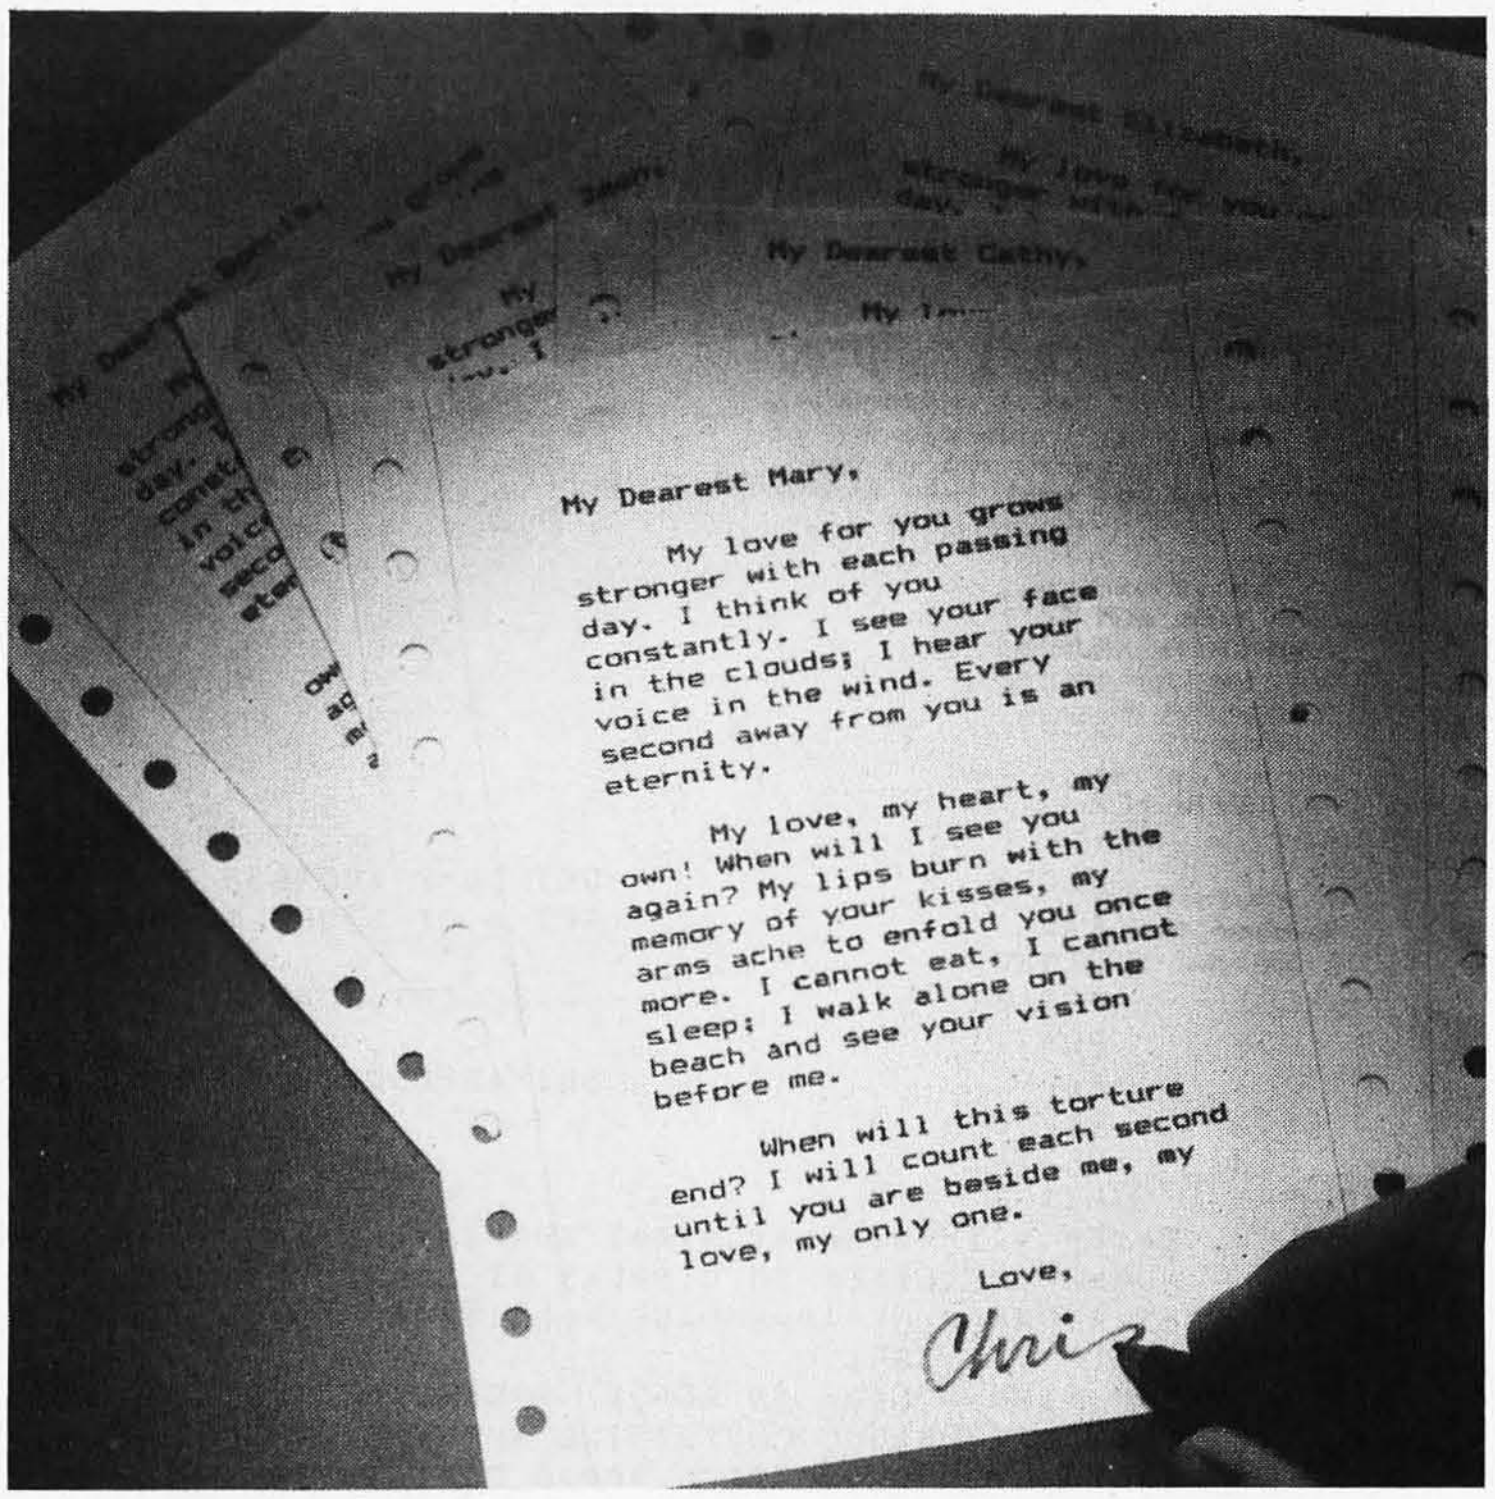

My Dearest Mary,

My love for you grows stronger with each passing day. I think of you constantly. I see your face in the clouds; I hear your voice in the wind. Every second away from you is an eternity.

My love, my heart, my own! When will I see you again? My lips burn with the memory of your kisses, my arms ache to enfold you once more. I cannot eat, I cannot sleep; I walk alone on the beach and see your vision before me.

When will this torture end? I will count each second until you are beside me, my love, my only one.

Love,

Chris

We're known for our fine print.

Epson.

The type you get out of most printers you wouldn't send to your maiden aunt, much less use for your *important* correspondence. And up to now, in order to get a dot matrix hardcopy you could really call correspondence quality, you had to spend on the high side of a thousand bucks.

Not any more.

The Epson MX-80 challenges any dot matrix printer anywhere to match our type at our price. Or even come close.

Our emphasized print mode gives you a tack-sharp, clean, easy-to-read face with true descenders—at a fraction of the price of daisy wheel printers. We give you a user-defined choice of twelve different weights and sizes of letters in 40, 80, 66 or 132 columns. We give you adjustable tractors so you can do anything from labels to memos to manuscripts. Fast and clean.

But if you think print quality is the only thing we have to sell, you're wrong. The MX-80 may be the most revolutionary printer to come out in the past ten years.

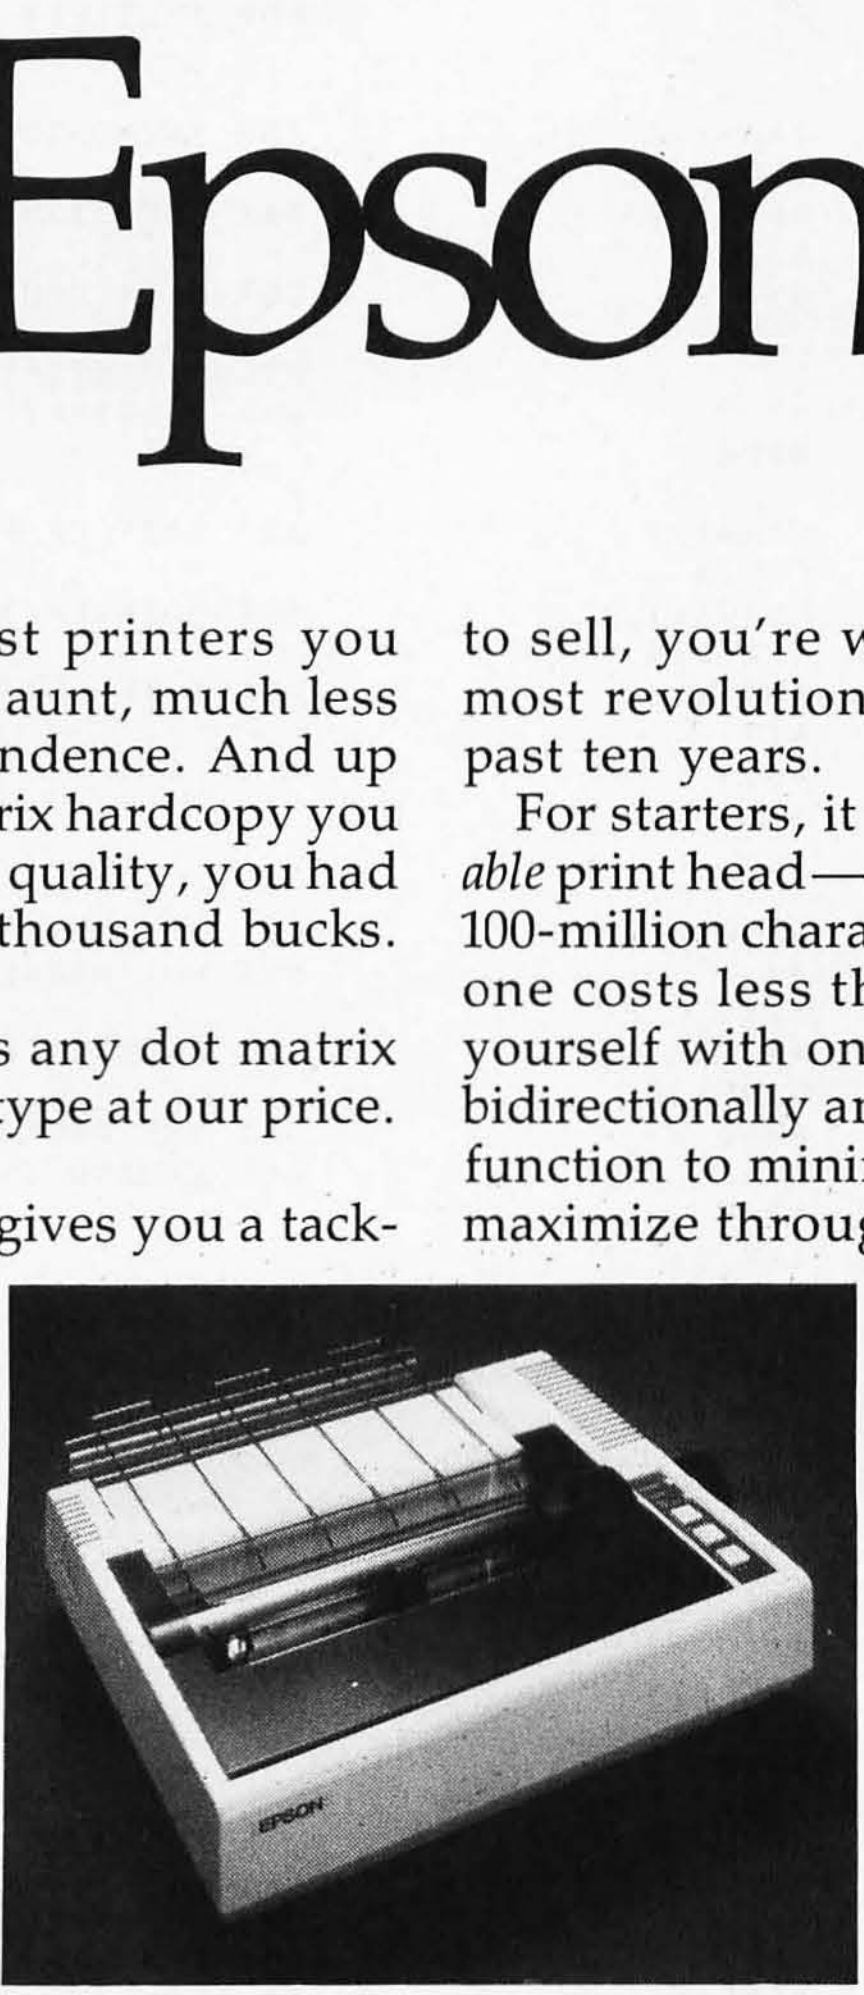

For starters, it features the world's first *disposable* print head—after it's printed between 50 and 100-million characters, just throw it away. A new one costs less than $30 and you can change it yourself with one hand. Plus, the MX-80 prints bidirectionally and 80 CPS with a logical seeking function to minimize print head travel time and maximize throughput. Finally—and this is the best part—you can buy an MX-80 right now for less than $650.

And that's what we call a lot of fine print for the money.

EPSON

EPSON AMERICA, INC.

23844 Hawthorne Boulevard • Torrance, CA 90505 • (213) 378-2220

Circle 152 on inquiry card.

Listing 2: *The disassembler routine included as part of DEMONS. The packed-mnemonic table and format table occupy much space.*

```
                        NAM     DISASM
             *
             * AUTHOR: A.I. HALSEMA
             * DATE: 10-28-1977
             * OBJECT MACHINE: SWTPC 6800
             * PROGRAM NAME: DISASSEMBLER VERSION 1.1
             *
                        OPT     0
0000                    ORG     $0000
     E047    BADDR      EQU     $E047
     A00C    ADDR       EQU     $A00C
     E07E    PDATA1     EQU     $E07E
             *
             * OPERATOR INTERFACE
             *
0000 BD E047 START      JSR     BADDR                GET DUMP ADDRESS FROM OPERATOR VIA MIKBUG
0003 86 0F              LDAA    #15                  SET # OF LINES TO DUMP
0005 B7 A077            STAA    LINES
0008 CE 0169            LDX     #ERASE               ERASE CRT SCREEN
000B BD E07E            JSR     PDATA1
000E CE 01A4            LDX     #APP                 SET APPENDAGE ROUTINE ADDRESS
0011 FF A07C            STX     APPND
0014 8D 02              BSR     NEXTL
0016 20 E8              BRA     START
             * DISASSEMBLER, ENTER WITH DISPLAY START ADDRESS AT $A00C,
             *                NUMBER OF LINES TO DISPLAY AT LABEL 'LINES',
             *               SET ADDRESS OF APPENDAGE ROUTINE AT A07C
             *                ENTER VIA JSR,
             *               EACH TIME A LINE IS READY, APPENDAGE RECIEVES CONTROL VIA JSR, RETURN VIA RTS.
             *                EXIT WITH $A00C CONTAINING ADDRESS OF NEXT
             *                INSTRUCTION, LOCATION $A04A CONTAINING 32
             *                BYTES OF ASCII TEXT TERMINATED BY CR,LF,04,
             *                LOCATION 'LINES' WILL CONTAIN ZERO,
0018 FE A00C NEXTL      LDX     ADDR                 GET ADDRESS OF DATA
001B A6 00              LDAA    X                    GET DATA BYTE
001D CE A06B            LDX     #WORKA
0020 A7 03              STAA    BYTE,X               SAVE IT
0022 5F                 CLRB                         NOW MULTIPLY BY 2
0023 48                 ASLA
0024 59                 ROLB
0025 AB 02              ADDA    TAD+1,X              ADD MNEMONIC TABLE ADDRESS
0027 E9 01              ADCB    TAD,X
0029 A7 07              STAA    BASE+1,X             SAV THE DISPLACEMENT INTO TABLE
002B E7 06              STAB    BASE,X
002D A6 03              LDAA    BYTE,X               GET HIGH ORDER NYBBLE
002F 44                 LSRA
0030 44                 LSRA                         RIGHT JUSTIFY IT
0031 44                 LSRA                         AND MULTIPLY BY 2
0032 84 FE              ANDA    #$FE
0034 5F                 CLRB
0035 AB 05              ADDA    FAD+1,X              ADD BASE OF FLAG TABLE
0037 E9 04              ADCB    FAD,X
0039 A7 09              STAA    FLAGA+1,X            SET POINTER INTO FLAG TABLE
003B E7 08              STAB    FLAGA,X
003D CE A04A            LDX     #LINE                BLANK THE DISPLAY LINE
0040 C6 1B              LDAB    #27
0042 86 20              LDAA    #$20
0044 A7 04   BLOP       STAA    4,X
0046 08                 INX
0047 5A                 DECB
0048 26 FA              BNE     BLOP
004A 86 04              LDAA    #4                   SET EOL MARKER
004C A7 05              STAA    5,X
004E CE 0D0A            LDX     #$0D0A               SET CRLF IN LINE
0051 FF A068            STX     LINE+30
0054 FE A071            LDX     WBAS                 GET THE PACKED MNEMONIC
0057 A6 00              LDAA    X                    AND EXPAND INTO DISPLAY LINE
0059 84 7F              ANDA    #$7F
005B E6 01              LDAB    1,X
005D 44                 LSRA
005E 56                 RORB
005F 44                 LSRA
0060 56                 RORB
0061 8B 40              ADDA    #$40
0063 B7 A058            STAA    OPER
0066 54                 LSRB
0067 54                 LSRB
0068 54                 LSRB
0069 CB 40              ADDB    #$40
006B F7 A059            STAB    OPER+1
006E A6 01              LDAA    1,X
0070 84 1F              ANDA    #$1F
0072 8B 40              ADDA    #$40
0074 B7 A05A            STAA    OPER+2
0077 A6 00              LDAA    X                    GET HI BYTE AGAIN
0079 81 18              CMPA    #$18                 TEST FOR FCB MNEMONIC
007B 26 05              BNE     NFC                  NOT FCB
007D CE 03CB            LDX     #FFLAG               IS FCB- SET FCB FLAG ADDRESS
0080 20 26              BRA     OFF
```

Listing 2 continued on page 348

When Eight Is Not Enough: CP/M-86™ and CBASIC/86™

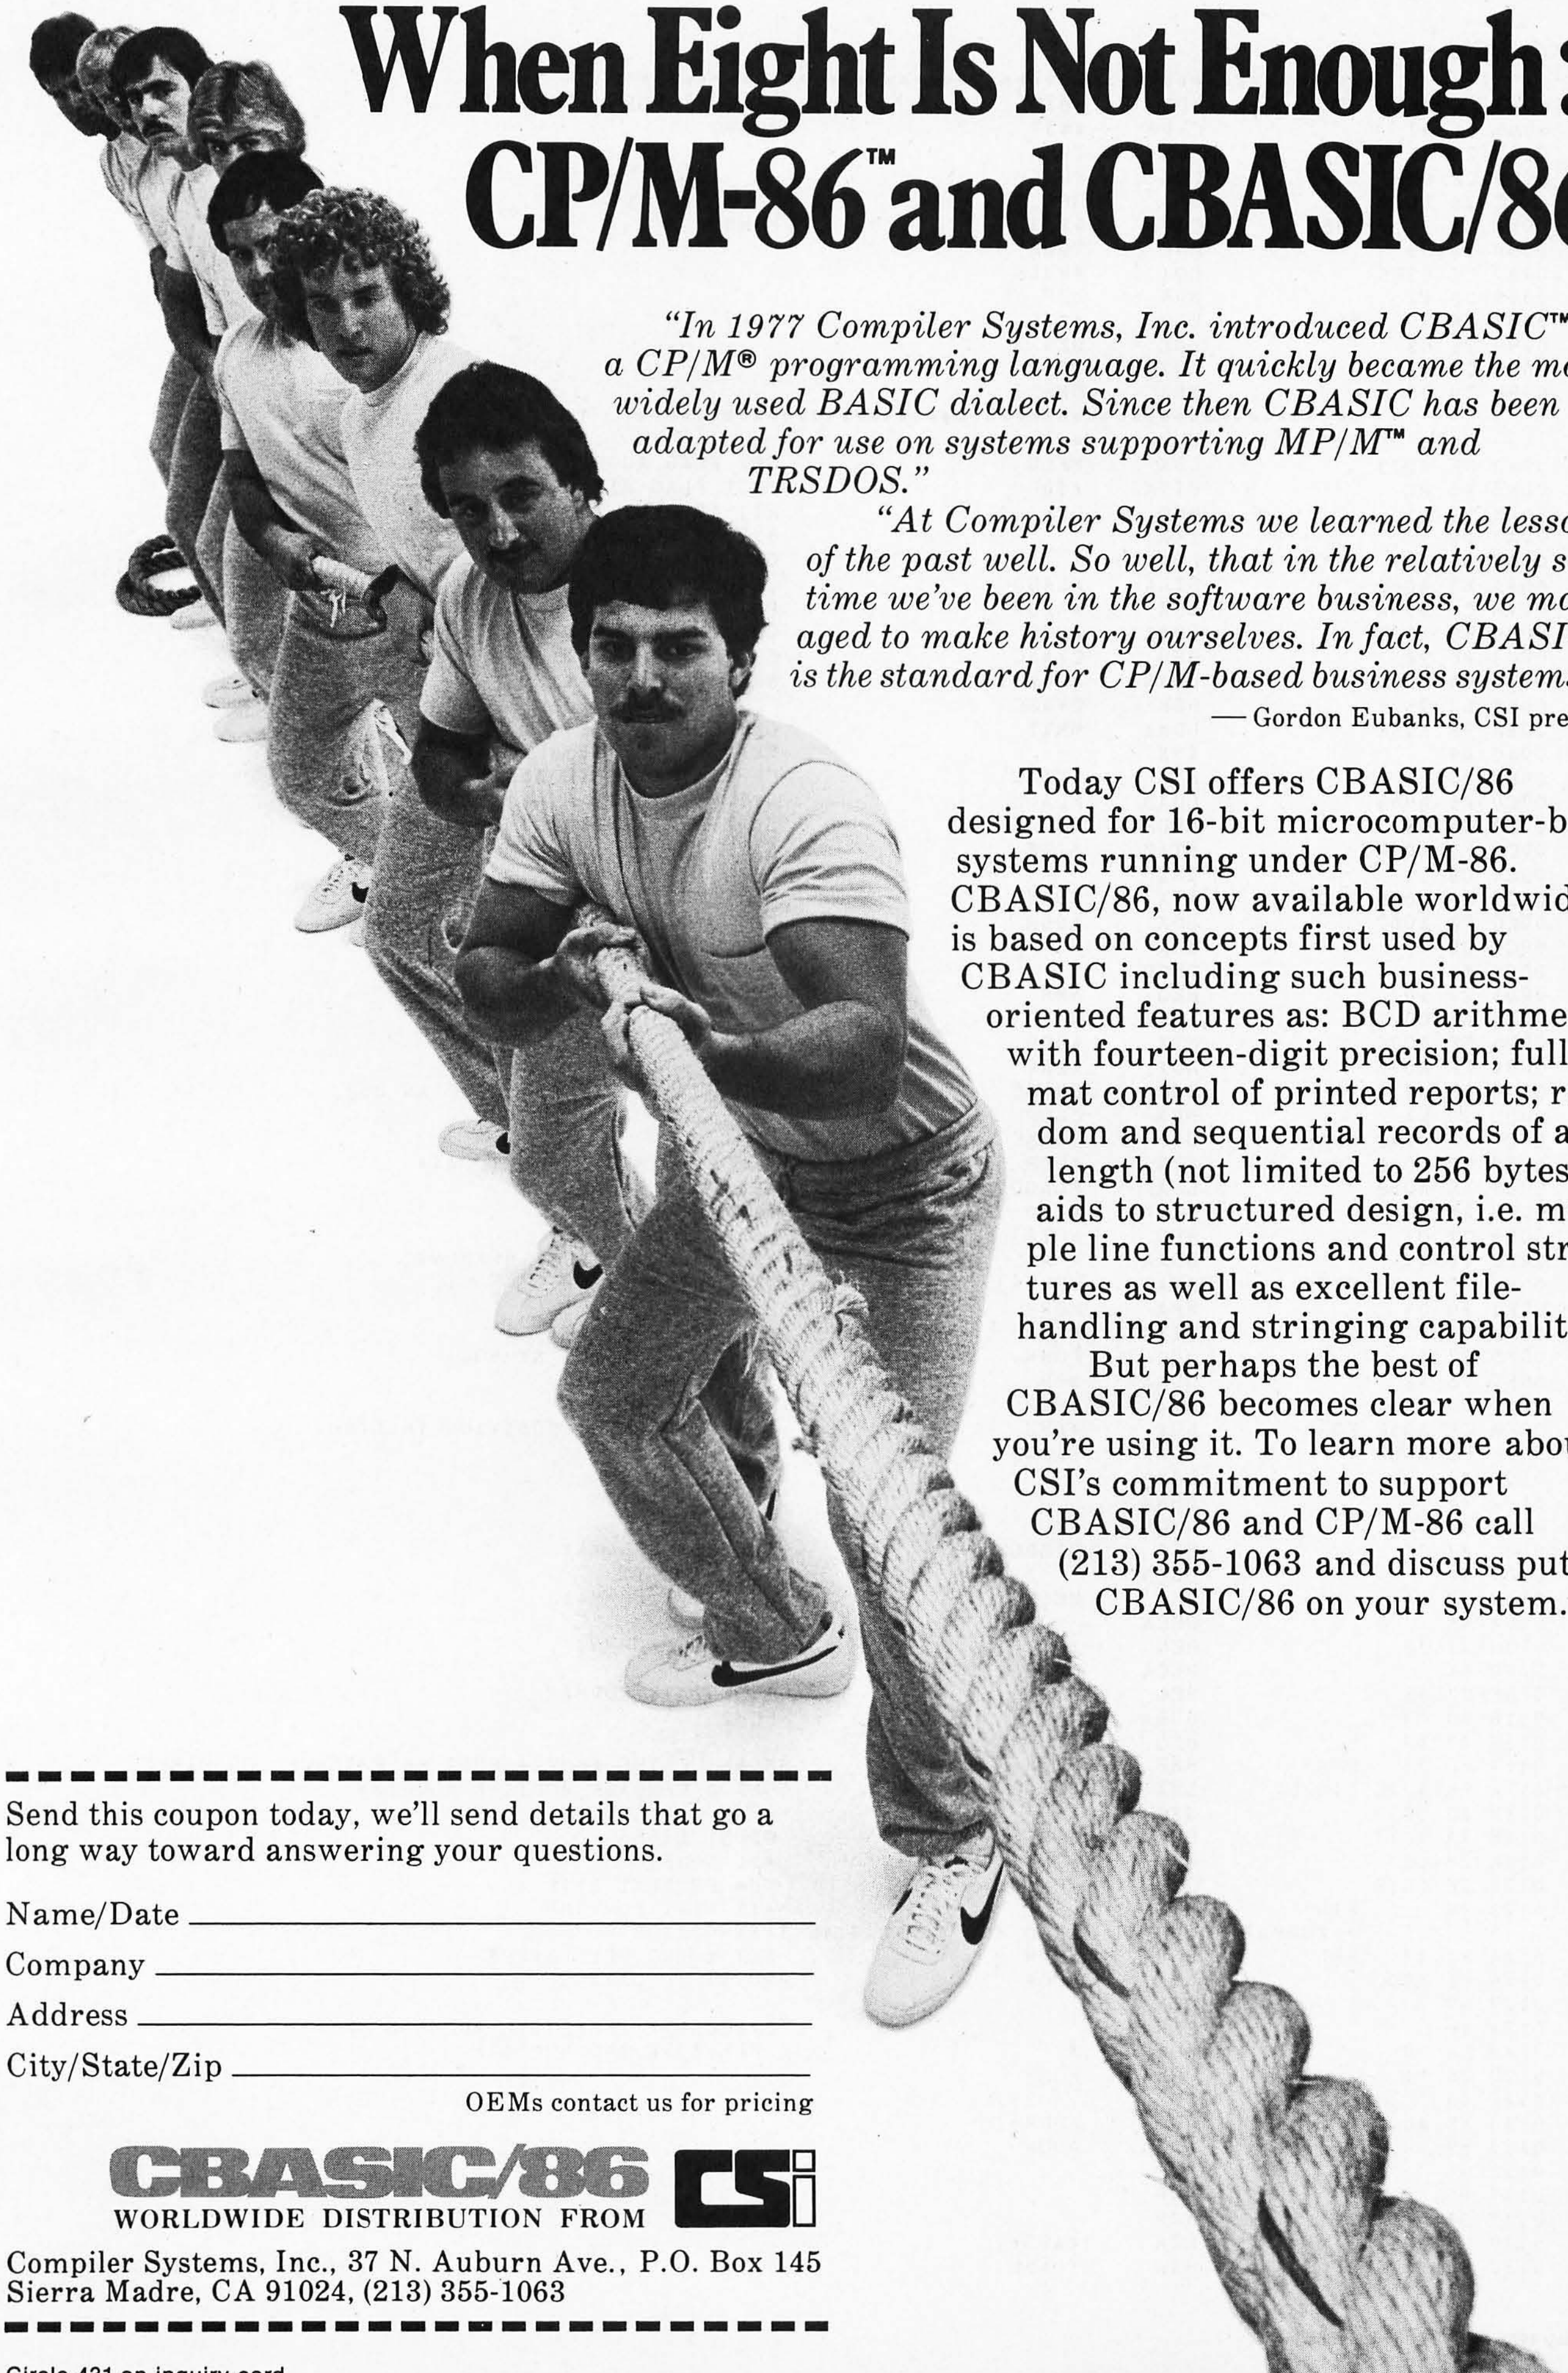

"In 1977 Compiler Systems, Inc. introduced CBASIC™ as a CP/M® programming language. It quickly became the most widely used BASIC dialect. Since then CBASIC has been adapted for use on systems supporting MP/M™ and TRSDOS."

"At Compiler Systems we learned the lessons of the past well. So well, that in the relatively short time we've been in the software business, we managed to make history ourselves. In fact, CBASIC is the standard for CP/M-based business systems."

— Gordon Eubanks, CSI president

Today CSI offers CBASIC/86 designed for 16-bit microcomputer-based systems running under CP/M-86. CBASIC/86, now available worldwide, is based on concepts first used by CBASIC including such business-oriented features as: BCD arithmetic with fourteen-digit precision; full format control of printed reports; random and sequential records of any length (not limited to 256 bytes); aids to structured design, i.e. multiple line functions and control structures as well as excellent file-handling and stringing capabilities.

But perhaps the best of CBASIC/86 becomes clear when you're using it. To learn more about CSI's commitment to support CBASIC/86 and CP/M-86 call (213) 355-1063 and discuss putting CBASIC/86 on your system.

Send this coupon today, we'll send details that go a long way toward answering your questions.

Name/Date ____________________

Company ____________________

Address ____________________

City/State/Zip ____________________

OEMs contact us for pricing

CBASIC/86 CSi

WORLDWIDE DISTRIBUTION FROM

Compiler Systems, Inc., 37 N. Auburn Ave., P.O. Box 145
Sierra Madre, CA 91024, (213) 355-1063

Circle 431 on inquiry card.

Listing 2 continued:

```
09000                ************************************************
09100   0082 F6 A06E NFC       LDAB    WBYT                   TEST FOR EXCEPTIONS
09200   0085 C1 37             CMPB    #$37                PULB?
09300   0087 26 05             BNE     TPSH
09400   0089 CE 03B5           LDX     #PULB
09500   008C 20 1A             BRA     OFF
09600   008E C1 33   TPSH      CMPB    #$33                PSHB?
09700   0090 26 05             BNE     TBSR
09800   0092 CE 03B5           LDX     #PULB
09900   0095 20 11             BRA     OFF
10000   0097 C8 8D   TBSR      EORB    #$8D                BSR?
10100   0099 26 05             BNE     SET
10200   009B CE 03AF           LDX     #BSR
10300   009E 20 08             BRA     OFF
10400                ************************************************
10500        00A0    SET       EQU     *
10600   00A0 FE A073           LDX     WFLG                GET FLAG ADDRESS
10700   00A3 85 80             BITA    #$80                TEST FLAG BIT
10800   00A5 27 01             BEQ     OFF                 BIT IS OFF
10900   00A7 08                INX                         BIT IS ON- POINT TO 2ND FLAG
11000   00A8 A6 00   OFF       LDAA    X                   GET THE FLAG
11100   00AA B7 A06B           STAA    FLAGD               ,AND SAVE IT
11200   00AD CE A04A           LDX     #AADR               POINT ASCII ADDRESS IN LINE
11300   00B0 B6 A00C           LDAA    ADDR                GET CURRENT ADDRESS
11400   00B3 8D 2A             BSR     CVASC               CONVERT TO ASCII
11500   00B5 B6 A00D           LDAA    ADDR+1              SAME FOR LOW BYTE
11600   00B8 8D 25             BSR     CVASC
11700   00BA B6 A06E           LDAA    WBYT                GET CURRENT BYTE
11800   00BD 08                INX                         LEAVE SPACE BETWEEN ADDR,+ DATA
11900   00BE 8D 1F             BSR     CVASC               CURRENT BYTE TO ASCII
12000   00C0 F6 A06B           LDAB    FLAGD               GET FLAG DATA
12100   00C3 C4 03             ANDB    #$3                 SAVE ONLY INSTRUCTION LENGTH
12200   00C5 F7 A07B           STAB    SIZE                SAVE IT
12300   00C8 08                INX
12400   00C9 FF A075 CLOP      STX     XSAV                SAVE POINTER INTO DISPLAY LINE
12500   00CC FE A00C           LDX     ADDR                GET DATA ADDRESS
12600   00CF 08                INX
12700   00D0 5A                DECB                        COUNT BYTES
12800   00D1 27 10             BEQ     NMR                 NO MORE
12900   00D3 A6 00             LDAA    X                   GET DATA
13000   00D5 FF A00C           STX     ADDR
13100   00D8 FE A075           LDX     XSAV
13200   00DB 8D 02             BSR     CVASC               AND PUT IN DISPLAY LINE AS OBJ,
13300   00DD 20 EA             BRA     CLOP
13400   00DF 7E 018C CVASC     JMP     TOASC
13500   00E2 FF A00C NMR       STX     ADDR                X NOW POINTS TO NEXT DATA
13600   00E5 B6 A06B           LDAA    FLAGD               GET FLAG DATA
13700   00E8 85 40             BITA    #$40                SET REGISTER A?
13800   00EA 27 07             BEQ     NOTA                NO
13900   00EC 86 41             LDAA    #'A                 YES- ADD TO ASCII MNEMONIC
14000   00EE B7 A05B SETR      STAA    OPER+3
14100   00F1 20 08             BRA     FORM
14200   00F3 85 80   NOTA      BITA    #$80                SET REGISTER B?
14300   00F5 27 04             BEQ     FORM                NO- NO REGISTER SYMBOL
14400   00F7 86 42             LDAA    #'B                 YES
14500   00F9 20 F3             BRA     SETR
14600   00FB CE A05E FORM      LDX     #ARG                POINT ARGUMENT POSITION IN LINE
14700   00FE B6 A06B           LDAA    FLAGD               GET FORMAT CODE
14800   0101 44                LSRA
14900   0102 44                LSRA
15000   0103 84 07             ANDA    #7
15100   0105 27 0F             BEQ     DISPLY              INHERENT FORMAT
15200   0107 4A                DECA
15300   0108 27 1A             BEQ     REL                 RELATIVE FORMAT
15400   010A 4A                DECA
15500   010B 27 3D             BEQ     IND                 INDEXED FORMAT
15600   010D 4A                DECA
15700   010E 27 46             BEQ     IMM                 IMMEDIATE FORMAT
15800   0110 80 03             SUBA    #3                  FCB?
15900   0112 27 49             BEQ     FCBFR
16000   0114 8D 57   DOMV      BSR     SETM                NONE OF THE ABOVE- MUST BE EXTENDED OR DIRECT
16100   0116 FE A07C DISPLY    LDX     APPND               GET APPENDAGE ROUTINE ADDRESS
16200   0119 AD 00             JSR     X
16300   011B 7A A077           DEC     LINES               COUNT LINES
16400   011E 27 03             BEQ     FIN                 ALL DONE?
16500   0120 7E 0018           JMP     NEXTL               NO- DO NEXT LINE
16600   0123 39      FIN       RTS                    GO AWAIT NEXT COMMAND
16700                * FORMAT ARGUMENT FIELD FOR A RELATIVE INSTRUCTION
16800   0124 8D 47   REL       BSR     SETM                SET $ AND MOVE BYTES
16900   0126 FE A00C           LDX     ADDR                POINT TO DATA
17000   0129 09                DEX
17100   012A 4F                CLRA                        CALCULATE EFFECTIVE ADDRESS OF
17200   012B E6 00             LDAB    X                    RELATIVE INSTRUCTION
17300   012D 2A 01             BPL     POS
17400   012F 43                COMA
17500   0130 FB A00D POS       ADDB    ADDR+1
17600   0133 B9 A00C           ADCA    ADDR
17700   0136 01                NOP
17800   0137 01                NOP
17900   0138 01                NOP
18000   0139 CE A064           LDX     #ABS+1
18100   013C 8D 4E             BSR     TOASC
```

Listing 2 continued on page 350

PMC-80 Expanded

Use all standard peripherals and existing software

When you buy PMC-80 you get hardware and software compatibility with the most popular microcomputer system in the world—that means thousands of disk and cassette based programs and all kinds of peripherals are instantly available!

PMC-80 has configurations that give the computer enthusiast a way to grow from a STARTER system in affordable increments. Begin at a low $675 for the basic 16K level II system and grow to the complete 48K memory system pictured above with two floppy disks for less than $3000.

FASTLOAD option inputs short programs as fast as "disk" from ordinary, standard format cassettes. Fast, reliable and economical!

PMC-80 COMMUNICATOR option provides interface to modems and parallel port printers. Take your pick of peripherals for communication with electronic bulletin boards and low cost timeshare services via phone lines from your home or business.

PMC-80 EXPANDER option provides the most powerful configuration with a total of 48K memory, provision for 4 mini-floppies, printer interface, RS-232C communications interface, plus a slot for the popular S-100 boards.

Sold through computer stores.

Personal Micro Computers, Inc.

475 Ellis Street, Mountain View, CA 94043 (415) 962-0220

Circle 324 on inquiry card.

Listing 2 continued:

```
013E 17                 TBA
013F 01                 NOP
0140 01                 NOP
0141 8D 49              BSR      TOASC
0143 86 24              LDAA     #'$
0145 B7 A063            STAA     ABS
0148 20 CC              BRA      DISPLY
              * FORMAT ARGUMENT FIELD FOR AN INDEXED INSTRUCTION
014A 8D 21    IND       BSR      SETM                     SET $ AND MOVE BYTES
014C 86 2C              LDAA     #',                      APPEND ,X TO FIELD
014E A7 01              STAA     1,X
0150 86 58              LDAA     #'X
0152 A7 02              STAA     2,X
0154 20 C0              BRA      DISPLY
              * FORMAT ARGUMENT FIELD FOR AN IMMEDIATE INSTRUCTION
0156 86 23    IMM       LDAA     #'#                      PRECEED FIELD WITH A #
0158 A7 00              STAA     X
015A 08                 INX
015B 20 B7              BRA      DOMV
              * FORMAT ARGUMENT FIELD FOR AN FCB PSEUDO
015D 86 24    FCBFR     LDAA     #'$                    MOVE DATA FOR FCB
015F A7 00              STAA     X
0161 FE A04F            LDX      LINE+5
0164 FF A05F            STX      ARG+1
0167 20 AD              BRA      DISPLY
0169 10       ERASE     FCB      $10,$16,$04
016A 16
016B 04
016C 01                 NOP
              * GENERAL ARGUMENT FIELD FORMATTING
016D 86 24    SETM      LDAA     #'$                      SET DOLLAR SIGN
016F A7 00              STAA     X
0171 BF A073            STS      WFLG                     PREPARE TO MOVE BYTES
0174 8E A051            LDS      #LINE+7
0177 F6 A07B            LDAB     SIZE                    GET OBJECT INPUT SIZE
017A C1 03              CMPB     #3                      IF SIZE= 3, MOVE 4 BYTES OF ASCII
017C 26 01              BNE      DLOOP
017E 5C                 INCB
017F 08       DLOOP     INX
0180 32                 PULA
0181 A7 00              STAA     X
0183 5A                 DECB
0184 26 F9              BNE      DLOOP
0186 BE A073            LDS      WFLG                     RESTORE SP
0189 39                 RTS
018A 01                 NOP
018B 01                 NOP
              * CONVERT CONTENTS OF A TO ASCII AND STORE AT ADDRESS POINTED TO BY X,
              * RETURN WITH X INCREMENTED AND B UNCHANGED.
018C 37       TOASC     PSHB                              SAVE B
018D 16                 TAB                              COPY A
018E 44                 LSRA                             GET LEFT NYBBL
018F 44                 LSRA
0190 44                 LSRA
0191 44                 LSRA
0192 8D 04              BSR      ASC                     CONVERT TO ASCII AND STORE
0194 17                 TBA
0195 84 0F              ANDA     #$F                     GET RIGHT NYBBL
0197 33                 PULB                           RESTORE B
0198 8B 30    ASC       ADDA     #$30                    CONVERT A DIGIT TO ASCII
019A 81 39              CMPA     #$39
019C 23 02              BLS      OU
019E 8B 07              ADDA     #$7
01A0 A7 00    OU        STAA     X
01A2 08                 INX
01A3 39                 RTS
              * APPENDAGE FOR LINE DISPLAY
01A4 CE A04A  App       LDX      #LINE                    GET ADDRESS OF TEXT.
01A7 BD E07E            JSR      PDATA1                  DISPLAY THE LINE
01AA 39                 RTS
              *
              * PACKED MNEMONIC TABLE
              *
              *  MNEMONICS (ALPHA ONLY) ARE TRUNCATED TO THE 5 LOW ORDER BITS
              *  AND STORED 3 IN 16 BITS.  THE HIGH ORDER BIT OF THE 16 IS USED
              *  AS A FLAG WHICH, IF SET, INDICATES THAT THE SECOND FORMAT FLAG
              *  BYTE OF A PAIR SHOULD BE USED.
01AB 1862     MTAB      FDB      $1862                    FCB     00
01AD 39F0               FDB      $39F0                    NOP     01
01AF 1862               FDB      $1862                    FCB     02
01B1 1862               FDB      $1862                    FCB     03
01B3 1862               FDB      $1862                    FCB     04
01B5 1862               FDB      $1862                    FCB     05
01B7 5030               FDB      $5030                    TAP     06
01B9 5201               FDB      $5201                    TPA     07
01BB 25D8               FDB      $25D8                    INX     08
01BD 10B8               FDB      $10B8                    DEX     09
01BF 0D96               FDB      $0D96                    CLV     0A
01C1 4CB6               FDB      $4CB6                    SEV     0B
01C3 0D83               FDB      $0D83                    CLC     0C
01C5 4CA3               FDB      $4CA3                    SEC     0D
```

Listing 2 continued on page 352

4MHZ, DOUBLE DENSITY,COLOR&B/W GRAPHICS . .THE LNW80 COMPUTER

When you've compared the features of an LNW80 Computer, you'll quickly understand why the LNW80 is the ultimate TRS80 software compatible system. LNW RESEARCH offers the most complete microcomputer system at an outstanding low price.
We back up our product with an unconventional 6 month warranty and a 10 days full refund policy, less shipping charges.

LNW80 Computer	$1,200.00
LNW80 Computer w/B&W Monitor & one 5" Drive	$1,664.00

All orders must be prepaid, CA residents please include 6% sales tax.
Shipping and handling charge of $15.00 must be included with every order.
* TRS80 Product of Tandy Corporation.
** PMC Product of Personal Microcomputer, Inc.

COMPARE THE FEATURES AND PERFORMANCE

FEATURES	LNW80	PMC-80**	TRS-80* MODEL III
PROCESSOR	4.0 MHZ	1,8 MHZ	2.0 MHZ
LEVEL II BASIC INTERP.	YES	YES	LEVEL III BASIC
TRS80 MODEL 1 LEVEL II COMPATIBLE	YES	YES	NO
48K BYTES RAM	YES	YES	YES
CASSETTE BAUD RATE	500/1000	500	500/1500
FLOPPY DISK CONTROLLER	SINGLE/ DOUBLE	SINGLE	SINGLE/ DOUBLE
SERIAL RS232 PORT	YES	YES	YES
PRINTER PORT	YES	YES	YES
REAL TIME CLOCK	YES	YES	YES
24 X 80 CHARACTERS	YES	NO	NO
VIDEO MONITOR	YES	YES	YES
UPPER AND LOWER CASE	YES	OPTIONAL	YES
REVERSE VIDEO	YES	NO	NO
KEYBOARD	63 KEY	53 KEY	53 KEY
NUMERIC KEY PAD	YES	NO	YES
B/W GRAPHICS, 128 X 48	YES	YES	YES
HI-RESOLUTION B/W GRAPHICS, 480 X 192	YES	NO	NO
HI-RESOLUTION COLOR GRAPHICS (NTSC), 128 X 192 IN 8 COLORS	YES	NO	NO
HI-RESOLUTION COLOR GRAPHICS (RGB), 384 X 192 IN 8 COLORS	OPTIONAL	NO	NO
WARRANTY	6 MONTHS	90 DAYS	90 DAYS
TOTAL SYSTEM PRICE	$1,664.00	$1,840.00	$2,187.00
LESS MONITOR AND DISK DRIVE	$1,200.00	$1,375.00	---

LNW80

- BARE PRINTED CIRCUIT BOARD & MANUAL $89.95

The LNW80 - A high-speed color computer totally compatible with the TRS-80*. The LNW80 gives you the edge in satisfying your computation needs in business, scientific and personal computation. With performance of 4 MHz, Z80A CPU, you'll achieve performance of over twice the processing speed of a TRS-80*. This means you'll get the performance that is comparable to the most expensive microcomputer with the compatibility to the world's most popular computer (TRS-80*) resulting in the widest software base.

FEATURES:
- TRS-80 Model 1 Level II Software Compatible
- High Resolution Graphics
  - RGB Output - 384 x 192 in 8 Colors
  - NTSC Video or RF MOD - 128 x 192 in 8 Colors
  - Black and White - 480 x 192
- 4 MHz CPU
- 500/1000 Baud Cassette
- Upper and Lower Case
- 16K Bytes RAM, 12K Bytes ROM
- Solder Masked and Silkscreened

LNW SYSTEM EXPANSION

- BARE PRINTED CIRCUIT BOARD AND MANUAL	$69.95
WITH GOLD CONNECTORS	$84.95

The System Expansion will allow you to expand your LNW80, TRS-80*, or PMC-80** to a complete computer system that is still totally software compatible with the TRS-80* Model 1 Level II.

FEATURES:
- 32K Bytes Memory
- 5" Floppy Controller
- Serial RS232 120ma I/O
- Parallel Printer
- Real Time Clock
- Screen Printer Bus
- On Board Power Supply
- Solder Masked and Silkscreened

KEYBOARD

LNW80 KEYBOARD KIT $84.95

The Keyboard Kit contains a 63 key plus a 10 key, P.C. board, and remaining components.

LNDoubler

- Assembled and Tested $149.00

Double-density disk storage for the LNW Research's "System Expansion" or the Tandy's "Expansion Interface". The LNDoubler™ is totally software compatible with any double density software generated for the Percom's Doubler***. The LNDoubler™ provides the following outstanding features.

- Store up to 350K bytes on a single 5" disk
- Single and double density data separation
- Precision write precompensation circuit
- Software switch between single and double density
- Hardware override into single density only
- Easy plug in installation requiring no etch cuts, jumpers or soldering
- 35, 40, 77, 80 track 5" disk operation
- 120 day parts and labor Warranty

*** Doubler is a product of Percom Data Company, Inc.

DOS PLUS 3.2D $95.00

Micro Systems software's double density disk operating system. This operating system contains all the outstanding features of a well developed DOS, with ease in useability.

LNW DATA SEPERATOR

- Assembled and Tested $17.95

The LNW Data Separator provides you with a reliable and inexpensive means of solving your disk data read error problems for your 5" single density drives. Compatible with both the LNW System Expansion and Tandy's Expansion Interface. Some soldering is required.

CASE

LNW80 CASE $84.95

The streamline design of this metal case will house the LNW80, LWN System Expansion, LNW80 Keyboard, power supply and fan, LNDoubler™, or LNW Data Separator. This kit includes all the hardware to mount all of the above. Add $12.00 for shipping

PARTS AVAILABLE FROM LNW RESERARCH
4116 - 200ns RAM

6 chip set	$26.00
8 chip set	$33.50
16 chip set	$64.00
24 chip set	$94.00
32 chip set	$124.00

LNW80 "Start up parts set"	LNW80-1	$82.00
LNW80 "Video parts set"	LNW80-2	$31.00
LNW80 Transformer	LNW80-3	$18.00
LNW80 Keyboard cable	LNW80-4	$16.00
40 Pin computer to expansion cable		$15.00
System Expansion Transformer		$19.00
Floppy Controller (FD1771) and UART (TR1602)		$30.00

LNW RESEARCH
CORPORATION
14661-C MYFORD RD.
TUSTIN CA. 92680

Circle 219 on inquiry card.

VISA & MASTER CHARGE ACCEPTED Add $3.00 for shipping

ORDERS & INFO. NO. 714-552-8946
SERVICE NO. 714-641-8850

Listing 2 continued:

```
27300    01C7 0D89                FDB       $0D89                  CLI      0E
27400    01C9 4CA9                FDB       $4CA9                  SEI      0F
27500    01CB 4C41                FDB       $4C41                  SBA      10
27600    01CD 0C41                FDB       $0C41                  CBA      11
27700    01CF 1862                FDB       $1862                  FCB      12
27800    01D1 1862                FDB       $1862                  FCB      13
27900    01D3 1862                FDB       $1862                  FCB      14
28000    01D5 1862                FDB       $1862                  FCB      15
28100    01D7 5022                FDB       $5022                  TAB      16
28200    01D9 5041                FDB       $5041                  TBA      17
28300    01DB 1862                FDB       $1862                  FCB      18
28400    01DD 1021                FDB       $1021                  DAA      19
28500    01DF 1862                FDB       $1862                  FCB      1A
28600    01E1 0441                FDB       $0441                  ABA      1B
28700    01E3 1862                FDB       $1862                  FCB      1C
28800    01E5 1862                FDB       $1862                  FCB      1D
28900    01E7 1862                FDB       $1862                  FCB      1E
29000    01E9 1862                FDB       $1862                  FCB      1F
29100    01EB 0A41                FDB       $0A41                  BRA      20
29200    01ED 1862                FDB       $1862                  FCB      21
29300    01EF 0909                FDB       $0909                  BHI      22
29400    01F1 0993                FDB       $0993                  BLS      23
29500    01F3 0863                FDB       $0863                  BCC      24
29600    01F5 0873                FDB       $0873                  BCS      25
29700    01F7 09C5                FDB       $09C5                  BNE      26
29800    01F9 08B1                FDB       $08B1                  BEQ      27
29900    01FB 0AC3                FDB       $0AC3                  BVC      28
30000    01FD 0AD3                FDB       $0AD3                  BVS      29
30100    01FF 0A0C                FDB       $0A0C                  BPL      2A
30200    0201 09A9                FDB       $09A9                  BMI      2B
30300    0203 08E5                FDB       $08E5                  BGE      2C
30400    0205 0994                FDB       $0994                  BLT      2D
30500    0207 08F4                FDB       $08F4                  BGT      2E
30600    0209 0985                FDB       $0985                  BLE      2F
30700    020B 5278                FDB       $5278                  TSX      30
30800    020D 25D3                FDB       $25D3                  INS      31
30900    020F C2AC                FDB       $C2AC                  PUL A    32
31000    0211 42AC                FDB       $42AC                  PUL B    33  EXCEPTION
31100    0213 10B3                FDB       $10B3                  DES      34
31200    0215 5313                FDB       $5313                  TXS      35
31300    0217 C268                FDB       $C268                  PSH A    36
31400    0219 4268                FDB       $4268                  PSH B    37  EXCEPTION
31500    021B 1862                FDB       $1862                  FCB      38
31600    021D 4A93                FDB       $4A93                  RTS      39
31700    021F 1862                FDB       $1862                  FCB      3A
31800    0221 4A89                FDB       $4A89                  RTI      3B
31900    0223 1862                FDB       $1862                  FCB      3C
32000    0225 1862                FDB       $1862                  FCB      3D
32100    0227 5C29                FDB       $5C29                  WAI      3E
32200    0229 4EE9                FDB       $4EE9                  SWI      3F
32300    022B 38A7                FDB       $38A7                  NEG A    40
32400    022D 1862                FDB       $1862                  FCB      41
32500    022F 1862                FDB       $1862                  FCB      42
32600    0231 0DED                FDB       $0DED                  COM A    43
32700    0233 3272                FDB       $3272                  LSR A    44
32800    0235 1862                FDB       $1862                  FCB      45
32900    0237 49F2                FDB       $49F2                  ROR A    46
33000    0239 0672                FDB       $0672                  ASR A    47
33100    023B 066C                FDB       $066C                  ASL A    48
33200    023D 49EC                FDB       $49EC                  ROL A    49
33300    023F 10A3                FDB       $10A3                  DEC A    4A
33400    0241 1862                FDB       $1862                  FCB      4B
33500    0243 25C3                FDB       $25C3                  INC A    4C
33600    0245 5274                FDB       $5274                  TST A    4D
33700    0247 1862                FDB       $1862                  FCB      4E
33800    0249 0D92                FDB       $0D92                  CLR A    4F
33900    024B 38A7                FDB       $38A7                  NEG B    50
34000    024D 1862                FDB       $1862                  FCB      51
34100    024F 1862                FDB       $1862                  FCB      52
34200    0251 0DED                FDB       $0DED                  COM B    53
34300    0253 3272                FDB       $3272                  LSR B    54
34400    0255 1862                FDB       $1862                  FCB      55
34500    0257 49F2                FDB       $49F2                  ROR B    56
34600    0259 0672                FDB       $0672                  ASR B    57
34700    025B 066C                FDB       $066C                  ASL B    58
34800    025D 49EC                FDB       $49EC                  ROL B    59
34900    025F 10A3                FDB       $10A3                  DEC B    5A
35000    0261 1862                FDB       $1862                  FCB      5B
35100    0263 25C3                FDB       $25C3                  INC B    5C
35200    0265 5274                FDB       $5274                  TST B    5D
35300    0267 1862                FDB       $1862                  FCB      5E
35400    0269 0D92                FDB       $0D92                  CLR B    5F
35500    026B 38A7                FDB       $38A7                  NEG,X    60
35600    026D 1862                FDB       $1862                  FCB      61
35700    026F 1862                FDB       $1862                  FCB      62
35800    0271 0DED                FDB       $0DED                  COM,X    63
35900    0273 3272                FDB       $3272                  LSR,X    64
36000    0275 1862                FDB       $1862                  FCB      65
36100    0277 49F2                FDB       $49F2                  ROR,X    66
36200    0279 0672                FDB       $0672                  ASR,X    67
36300    027B 066C                FDB       $066C                  ASL,X    68
```

Listing 2 continued on page 354

NEECO

. . . Why not buy from the best ?

commodore

4008 (8K RAM - 40 Column)	$ 795
16K "B" (16K RAM - 40 Column)	995
32K "B"(32K RAM - 40 Column)	995
32K "N" (32K RAM - 40 Column)	1295
4032 "B" (32K RAM 4.0 Basic - 40 Column)	1295
4032 "N"(32K RAM 4.0 Basic - 40 Column)	1295
4016 "B" (16K RAM 4.0 Basic - 40 Column)	995
4016 "N" (16K RAM 4.0 Basic - 40 Column)	995
2022 Tractor Printer	795
4040 Dual Disk (340 2.0 DOS)	1295
8050 Dual Disk (1 Meg, 2.0 DOS)	1795
8010 IEEE Modem	395
CZN Cassette	95
PET - IEEE Cable	40
IEEE-IEEE Cable	50

INTERTEC DATA SYSTEMS

32K Superbrain (360K Disk Storage), CP/M*	$2995
64K Superbrain (360 Disk Storage), CP/M*	3150
64K Quad Density Superbrain (700K Disk Storage), CP/M*	3995

ATARI COMPUTER SYSTEMS

ATARI
A Warner Communications Company

ATARI 400 (8K RAM)	$499.00
ATARI 400 (16K RAM)	630.00
ATARI 800 (16K RAM)	1,080.00
ATARI 410 RECORDER	89.95
ATARI 810 DISK DRIVE	599.95

NEECO also carries all available ATARI software

ALTOS COMPUTER SYSTEMS

	RAM	DISK	
ACS 8000-1S	64K	250K	$2840
ACS 8000-28	64K	500K	3500
ACS 8000-1	64K	500K	3840
ACS 8000-2	64K	1M	4500
ACS 8000-4	64K	2M	5600
ACS 8000-5	64K	1M	5990
ACS 8000-6 Mul2 - Multi-User			
(14.5 M-Winchester)	112K	1M	10,670
(29 M-Winchester)	112K	1M	11,870
ACS 8000-6 Mul4 Multi-User			
(14.5 M-Winchester)	208K	1M	11,960
(29 M Winchester)	208K	1M	13,160

apple computer

Authorized Dealer

16K APPLE II+	$1330
32K " II+	1430
48K " II+	1530
APPLE DISK w/3.3 DOS	650
APPLE DRIVE Only	495

APPLE III in Stock!!

128K, with Monitor and Info Analystpak 4740

EPSON PRINTER MX-80

80 Columns, 9x9 Dot Matrix

Bidirectional Printing .. $645

Interface Cards

8140 (RS-232)	$55
8161 (IEEE 488)	55
8131 (Apple Card)	85
8230 (Apple Cable)	25
8220 (TRS-80 Cable)	35

PROFESSIONAL SOFTWARE

WordPro I (8K)	$29.95
WordPro III (40 Col.) 16K	199.95
WordPro III+ Enhanced Version	295.00
WordPro IV 80 Col., 32K	375.00
WordPro IV+ Enhanced Version	450.00

Multi-Cluster for Commodore Systems.

Allows 3 CPU's (Expandable to 8) to access a single Commodore Disk.

Multi-Cluster.................... $795 (3 CPU's)

Each Additional CPU $199 (up to 8)

DIABLO 630

45 CPS, Letter Quality

RS-232 Port $2,710

Tractor Option 250

NEC Spinwriter

5530 (Parallel)	$3055
5510 (Serial)	3055
5520 (KSR-Serial)	3415
TRACTOR OPTION	225

55 CPS
Letter Quality
High Reliability

C. ITOH Starwriter

FP 1500
25 CPs,
Letter
Quality

Serial or Parallel $1995

NEECO

679 Highland Avenue
Needham, MA 02194

NEECO Order Lines: (617) 449-1760

MON - FRI 9:00 - 5:00 VISA/MC Accepted Telex 951021

NEECO Order Lines: (617) 449-1760

Listing 2 continued:

```
36400    027D 49EC                FDB       $49EC               ROL,X     69
36500    027F 10A3                FDB       $10A3               DEC,X     6A
36600    0281 1862                FDB       $1862               FCB       6B
36700    0283 25C3                FDB       $25C3               INC,X     6C
36800    0285 5274                FDB       $5274               TST,X     6D
36900    0287 29B0                FDB       $29B0               JMP,X     6E
37000    0289 0D92                FDB       $0D92               CLR,X     6F
37100    028B 38A7                FDB       $38A7               NEG       70
37200    028D 1862                FDB       $1862               FCB       71
37300    028F 1862                FDB       $1862               FCB       72
37400    0291 0DED                FDB       $0DED               COM       73
37500    0293 3272                FDB       $3272               LSR       74
37600    0295 1862                FDB       $1862               FCB       75
37700    0297 49F2                FDB       $49F2               ROR       76
37800    0299 0672                FDB       $0672               ASR       77
37900    029B 066C                FDB       $066C               ASL       78
38000    029D 49EC                FDB       $49EC               ROL       79
38100    029F 10A3                FDB       $10A3               DEC       7A
38200    02A1 1862                FDB       $1862               FCB       7B
38300    02A3 25C3                FDB       $25C3               INC       7C
38400    02A5 5274                FDB       $5274               TST       7D
38500    02A7 29B0                FDB       $29B0               JMP       7E
38600    02A9 0D92                FDB       $0D92               CLR       7F
38700    02AB 4EA2                FDB       $4EA2               SUB A     80
38800    02AD 0DB0                FDB       $0DB0               CMP A     81
38900    02AF 4C43                FDB       $4C43               SBC A     82
39000    02B1 1862                FDB       $1862               FCB       83
39100    02B3 05C4                FDB       $05C4               AND A     84
39200    02B5 0934                FDB       $0934               BIT A     85
39300    02B7 3081                FDB       $3081               LDA A     86
39400    02B9 1862                FDB       $1862               FCB       87
39500    02BB 15F2                FDB       $15F2               EOR A     88
39600    02BD 0483                FDB       $0483               ADC A     89
39700    02BF 3E41                FDB       $3E41               ORA A     8A
39800    02C1 0484                FDB       $0484               ADD A     8B
39900    02C3 8E18                FDB       $8E18               CPX       8C
40000    02C5 0A72                FDB       $0A72               BSR       8D    EXCEPTION
40100    02C7 B093                FDB       $B093               LDS       8E
40200    02C9 1862                FDB       $1862               FCB       8F
40300    02CB 4EA2                FDB       $4EA2               SUB A     90
40400    02CD 0DB0                FDB       $0DB0               CMP A     91
40500    02CF 4C43                FDB       $4C43               SBC A     92
40600    02D1 1862                FDB       $1862               FCB       93
40700    02D3 05C4                FDB       $05C4               AND A     94
40800    02D5 0934                FDB       $0934               BIT A     95
40900    02D7 3081                FDB       $3081               LDA A     96
41000    02D9 4E81                FDB       $4E81               STA A     97
41100    02DB 15F2                FDB       $15F2               EOR A     98
41200    02DD 0483                FDB       $0483               ADC A     99
41300    02DF 3E41                FDB       $3E41               ORA A     9A
41400    02E1 0484                FDB       $0484               ADD A     9B
41500    02E3 8E18                FDB       $8E18               CPX       9C
41600    02E5 1862                FDB       $1862               FCB       9D
41700    02E7 B093                FDB       $B093               LDS       9E
41800    02E9 CE93                FDB       $CE93               STS       9F
41900    02EB 4EA2                FDB       $4EA2               SUBA,X    A0
42000    02ED 0DB0                FDB       $0DB0               CMPA,X    A1
42100    02EF 4C43                FDB       $4C43               SBCA,X    A2
42200    02F1 1862                FDB       $1862               FCB       A3
42300    02F3 05C4                FDB       $05C4               ANDA,X    A4
42400    02F5 0934                FDB       $0934               BITA,X    A5
42500    02F7 3081                FDB       $3081               LDAA,X    A6
42600    02F9 4E81                FDB       $4E81               STAA,X    A7
42700    02FB 15F2                FDB       $15F2               EORA,X    A8
42800    02FD 0483                FDB       $0483               ADCA,X    A9
42900    02FF 3E41                FDB       $3E41               ORAA,X    AA
43000    0301 0484                FDB       $0484               ADDA,X    AB
43100    0303 8E18                FDB       $8E18               CPX,X     AC
43200    0305 AA72                FDB       $AA72               JSR,X     AD
43300    0307 B093                FDB       $B093               LDS,X     AE
43400    0309 CE93                FDB       $CE93               STS,X     AF
43500    030B 4EA2                FDB       $4EA2               SUBA      B0
43600    030D 0DB0                FDB       $0DB0               CMPA      B1
43700    030F 4C43                FDB       $4C43               SBCA      B2
43800    0311 1862                FDB       $1862               FCB       B3
43900    0313 05C4                FDB       $05C4               ANDA      B4
44000    0315 0934                FDB       $0934               BITA      B5
44100    0317 3081                FDB       $3081               LDAA      B6
44200    0319 4E81                FDB       $4E81               STAA      B7
44300    031B 15F2                FDB       $15F2               EORA      B8
44400    031D 0483                FDB       $0483               ADCA      B9
44500    031F 3E41                FDB       $3E41               ORAA      BA
44600    0321 0484                FDB       $0484               ADDA      BB
44700    0323 8E18                FDB       $8E18               CPX       BC
44800    0325 AA72                FDB       $AA72               JSR       BD
44900    0327 B093                FDB       $B093               LDS       BE
45000    0329 CE93                FDB       $CE93               STS       BF
45100    032B 4EA2                FDB       $4EA2               SUBB      C0
45200    032D 0DB0                FDB       $0DB0               CMPB      C1
45300    032F 4C43                FDB       $4C43               SBCB      C2
45400    0331 1862                FDB       $1862               FCB       C3
```

Listing 2 continued on page 356

asap
computer products, inc.

NEW LOCATION

1198 E. Willow Street
Signal Hill, CA 90806
Toll Free (800) 421-7701 Outside Calif.
(213) 595-6431 Inside Calif.

ORDERING INFO

Name, address, phone
Ship By: UPS or Mail
Shipping Chrg. Add $2.50 up to 2 lbs. (UPS Blue)
U.S. Mail Add $1.50 (U.S. Only)
($25.00 Minimum Order)

TERMS

We Accept Cash, Check, Money Orders, Visa & Master Charge (U.S. Funds Only)
Tax: 6% Calif. Res.
COD's & Terms Available on Approval (School PO's Accepted)

MICROBYTE S-100 BOARDS



Z-80A/I-O $349.00
Assembled & Tested
Optional Monitor Program $50.00

- A complete single board Z-80A CPU with serial/parallel interface
- Fully compatible with the proposed IEEE S-100 Bus Standard
- Z-80A CPU (4MHz version of the Z-80)
- 158 instructions—superset of and upward compatible from the 8080's 78 instructions
- Up to 4K of on board Eprom with optional Z-80 monitor program — 1K(2708), 2K(2716) or 4K(2732)
- Full vectored interrupt capability — 8 bit with MNI (1 bit)
- 2MHz or 4MHz operation is jumper selectable
- Selectable auto-wait state insertion for extending M1*, MREQ*, IORQ* and/or on board ROM
- Dual RS-232 serial I/O ports using the Z80A-DART with individual baud rate selection (from 50-19,200 baud)
- Up to 24 bit parallel I/O port—fully programmable Intel 8255A



64K RAM Board
Assembled & Tested *Call for Price*

MICROBYTE

- Fully S100 bus compatible
- 64K x 8 bit dynamic RAM
- Low power:
  - \+ 8VDC @ 700 ma
  - \+ 16VDC @ 100 ma
  - − 16VDC @ 25 ma
- Built-in-parity with LED indicator and vector interrupt
- Memory addressable in four 16K banks
- Hidden refresh
- Gold contacts for high reliability
- 72-hour Burn-in
- Memory mapped via DIP switch
- Built-in programmable write-protect
- Programmable control port for parity and bank control
- Alpha-Micro Compatible



Disc Controller $389.00
Assembled & Tested
CPM Available (Optional)

MICROBYTE

- DMA to within 16M byte of memory
- State-of-the-art NEC765 LSI Controller
- IEEE-S100 compatible
- DMA arbitration allows use of multiple boards within a system
- PLL data recovery for totally reliable operation
- Write pre-comp switched at mid-disc for reliable double density operation
- Supports up to four (4) drives
- Power On, Power Off or Reset deselects drives to avoid damaging files
- Drive deselect Time Out, deselect drives not in use
- Single or double sided operation
- Single density/double density operation
- 8" standard drives
- Separate V_{CC} supply for data recovery to eliminate possible noise problems



I/O Board $289.00
Assembled & Tested
Cables Available (Optional)

MICROBYTE

- Quad RS-232C Serial Ports, One 20mA Current Loop Port
- Fully IEEE S-100 Bus Compatible
- Asynchronous Communications with Z80A-Dart(TM) or Synchronous Communications with Z80A-SIO/0(TM)
- Full Set of Modem Control Signals, including RI (Ring Indicator)
- Easily Configurable to Any Type of Terminal Interface
- I/O Servicing Environments: (1) Polled; (2) Bus Vector; (3) Z80 Mode 2 Vector
- Off-Board Interrupt Daisy Chain Capability
- Special Receive Conditions: (1) Framing Error; (2) Parity Error; (3) Receiver Overrun Error
- Baud Rates Selected Individually from 50 Baud to 300K Baud
- 72 Hour Burn-In

S.D. SYSTEM / S-100 BOARDS

EXPANDORAM I 2MHz DYNAMIC *RAM BOARD* KITS
16K $239.00
32K $265.00
48K $289.00
64K $315.00

EXPANDO RAM II 4MHz DYNAMIC RAM BOARD KITS
16K $250.00
32K $275.00
48K $300.00
64K $325.00

SBC-100 KIT $299.00
2.5 MHz/Z-80 CPU WITH SERIAL & PARALLEL I/O PORTS

SBC-200 KIT $325.00
4MHz/Z-80 CPU WITH SERIAL & PARALLEL I/O PORTS

VDB-8024 KIT $380.00
80x24 I/O MAPPED VIDEO BOARD WITH KEYBOARD I/O

VERSAFLOPPY I KIT $250.00
DISK CONTROLLER FOR 8" & 5¼" DRIVES
S-100 BUS COMPATIBLE

VERSAFLOPPY II KIT $350.00
NEW DOUBLE DENSITY DISK CONTROLLER FOR 8" & 5¼" DRIVES

PROM-100 KIT $210.00
S—100/EPROM PROGRAMMER FOR 2708, 2716, 2732, 2758 & 2516(TI)

ALL BOARDS ARE AVAILABLE (ASSEMBLED & TESTED)
CALL FOR PRICE & DELIVERY

SYSTEM SOFTWARE AVAILABLE ON REQUEST

CALIFORNIA COMPUTER®

2032	32K STATIC RAM BRD.
2065	64K DYNAMIC RAM BD.
2116	16K STATIC RAM BD.
2200	MAINFRAME
2422	DISK CONTROLLER
2501	MOTHERBOARD
2710	4-PORT SERIAL I/O
2718	2 SER. PORT & 2 PAR.
2720	4-PORT PARALLEL I/O
2802	6502 CPU BOARD
2810	Z-80 CPU BOARD
7114A	12K ROM/PROM BD.
7424A	CALENDAR CLOCK BD.
7440A	PROGRAMMABLE TIMER
7470	A/D CONVERTER
7710A	SERIAL SYNCH. BOARD
7712A	SERIAL SUNCH. BOARD
7720A	PARALLEL INTERFACE
7728A	CENTRONICS INTERFACE

CALL FOR PRICE & DELIVERY

CAPACITORS

.1 @ 12 Volt
Ceramic
8¢ ea.
or
100/$7.00

CONNECTORS

100 PIN IMSAI
GOLD/S-100
SOLDERTAIL
$2.40 ea.
or
10/$2.25 ea.

LO-PRO SOCKETS

	1-99	100 Up
14 PIN	.10	.09
16 PIN	.12	.11
18 PIN	.15	.13
20 PIN	.23	.21
24 PIN	.26	.24
28 PIN	.30	.28
40 PIN	.40	.38

(BURNDY/TIN SOLDERTAIL)

ATARI 800

(NEW 16K VERSION)

- COMPUTER CONSOLE
- ATARI BASIC 8K RAM
- 57 FULL STROKE ALPHANUMERIC KEYS PLUS 4 FUNCTION KEYS
- INVITATION TO PROGRAMMING CASSETTE
- OPERATORS MANUAL
- RF MODULATOR
- POWER SUPPLY

★ **ADDED OPTIONS**

- JOYSTICKS
- EDUCATION ROM (NO CHARGE)

CALL FOR PRICE
10% OFF SOFTWARE WITH PURCHASE

ATARI OPTIONAL ACCESSORIES

MODEL #	DESCRIPTION	PRICE
810	Disk Drive System	$ 499.00
815	Disk Drive System	$1199.00
820	40-col. Dot Matrix Printer	$ 349.00
822	40-col. Thermal Printer	$ 349.00
825	80-col. Dot Matrix Printer	$ 750.00
830	Acoustic Modem	$ 159.00
850	Interface Module	$ 175.00
CX853	16K RAM Module	$ 140.00
410	Cassette Recorder	$ 60.00

ATARI SOFTWARE

Description	Price
Basketball	$30.00
Super Breakout	$30.00
Chess	$30.00
Video Easel	$30.00
3-D Tic Tac Toe	$30.00
Star Raiders	$42.00
Music Composer	$42.00
Educational Sys. ROM	$19.95
Assembler/Editor	$45.00
Telelink I	$19.95
Space Invaders	$15.95
Kingdom	$12.95
Blackjack	$12.95
Biorhythm	$12.95
Graph It	$15.95
Energy Czar	$12.95
Mailing List	$16.95
Statistics I	$16.95
Paddle Controls	$17.95
Joysticks (pair)	$17.95

MODEMS

NOVATION CAT
300 BAUD, AUTO ANSWER/ACOUSTIC
$149.00 ea.

NOVATION D-CAT
300 BAUD/DIRECT CONNECT
$169.00 ea.
(OPTIONAL RS232 CABLE $22.00)

MONITORS

AMDEK 100
12" B&W $129.00
SANYO VM5012
12" B&W $260.00
AMDEK
13" Color $375.00
IN STOCK

PRINTERS

CENTRONICS 737-1
ANADEX DP8000
ANADEX DP9500
ANADEX DP9501
TEXAS INST 810
BASE 2 800 MST

CALL FOR PRICE & DELIVERY

QUME DT-8 DISK DRIVE

- Double-sided/Single-Double Density
- IBM-compatible/1.2 Mbytes/Disk
- Fast — 3 ms. Track to Track
- 154 Tracks/Daisy Chain 4 Drives
- ISO Standard Write Protect
- Programmable Door Lock

CALL FOR PRICE & DELIVERY

SHUGART SA 801R

8" Sgl.-Sided, Sgl./Dbl. Density Disk Drive
Call for Price & Delivery

DISKETTES

	Part #	Price Box of 10
Verbatim 5¼" (soft)	MD525-01	**$26.50**
Scotch 5¼" (soft)	744-0	**$33.00**
Scotch 5¼" (10-sec)	744-10	**$33.00**
Scotch 5¼" (16-sec)	744-16	**$33.00**
Memorex 5¼" (soft)	3421	**$24.00**
Scotch 8" DS (soft)	743-0	**$49.95**
Maxell 8" DS/DD	FD-2D	**$65.00**

New 16K RAM

MODULE FOR
ATARI 800 Computer Systems
$89.95 each
1 YEAR WARRANTY

INFLATION FIGHTER

4116's (200 ns.)
Apple, TRS-80, Heath
8 for $22⁰⁰

16- 49	$2.60
50- 99	$2.50
100-499	$2.40
500 Up	$2.25

2114 L-2/200 NS

1-16	$3.60 ea.
17-49	$3.40 ea.
50-99	$3.25 ea.
100-499	$3.00 ea.
500 Up	$2.85 ea.

COMPONENTS

74LS240	1.25 ea.
74LS241	1.10 ea.
74LS244	1.25 ea.
74LS373	1.25 ea.
74LS374	1.25 ea.
8T245	1.45 ea.

2708/450 NS

$5.25 ea.
OR
8/$40.⁰⁰

2716/5 VOLT

$8.00 ea.
450 NS.
Major Manufacturer

MICROPROCESSORS

8080A	$ 2.50
Z80A	$ 8.95
Z80A CTC	$ 7.95
Z80A DART	$13.95
Z80A SIO	$24.95
8255 AC5	$ 5.95
8257 AC5	$ 8.95
8224	$ 2.75

REGULATORS

320T5	.80	340T5	.70
320T12	.80	340T12	.75
78L12	.25		

RS-232 CONNECTORS

	DB25P	DB25S
1-9	2.90	3.80
10-24	2.75	3.70
25 Up	2.40	3.60

Data Phone Hood 1.00

MAIN/FRAME & DISK DRIVE CABINETS from INTEGRAND

MODEL X5 — Desktop Mainframe - 5 Cards - Small Power Supply $200
Cabinet size: 9.4"w x 16"d x 7.5"h. Cabinet painted dove grey, front panel is black. **No optional colors!** 5-position motherboard, 5 connectors installed, card cage with all guides. Reset switch on front panel. Power switch, 4 DB25 cutouts, 1 BNC mounting hole, 70CFM fan, EMI filter, 6' power cord, line fuse, and clamped flat cable exit on rear panel. PX/5 power supply (+8@10A, +16@1.5A, −16@1.5A). Power supply is a removable module.

MODEL 700D — Horizontal Desktop Disk/Cover - 2 Eight Inch Drives - Drives Horizontal $250
Cabinet size: 20"w x 23"d x 7.5"h. Cabinet painted dove grey, front panel is black. Mounting for 2 eight-inch Shugart SA801R Floppy Disk Drives (or mechanical equivalent). Drive mounting brackets supplied. Drives not supplied. 70CFM fan, 6' three-wire line cord, power switch, line fuse, EMI filter and clamped flat cable exit on rear panel. P794 power supply: +5@4A, +24@5A—6A peak, -5@.75A. All voltages regulated. Power supply is a removable module.

MODEL 800D — Desktop Main/Frame - 15 Cards - Standard Power Supply $255
Cabinet size: 17"w x 20.5"d x 7.5"h. Cabinet painted dove grey, front panel is black (other color schemes optional). 15-position IEEE compatible motherboard (will accept T801 terminator kit, optional), card cage with all guides. Reset switch on front panel. Power switch, 8'DB25 cutouts, 2 BNC mounting holes, 70CFM fan, EMI filter, 6' power cord, line fuse, and clamped flat cable exit on rear panel. P800 power supply (+8@15A, +16@3A, −16@3A). Power supply is a removable module. Motherboard connectors optional.

MODEL 700DS — Vertical Desktop Disk/Cover - 2 Eight Inch Drives - Drives Vertical $250
Cabinet size: 13.5"w x 23"d x 11"h. Cabinet painted dove grey, front panel is black. Mounting for 2 eight-inch Shugart SA801R Floppy Disk Drives (or mechanical equivalent). Drive mounting brackets supplied. Drives not supplied. 70CFM fan, 6' three-wire line cord, power switch, line fuse, EMI filter and clamped flat cable exit on rear panel. P794 power supply: +5@4A, +24@5A—6A peak, -5@.75A. All voltages regulated. Power supply is a removable module.

Circle 33 on inquiry card.

Listing 2 continued:

```
45500   0333 05C4           FDB     $05C4               ANDB    C4
45600   0335 0934           FDB     $0934               BITB    C5
45700   0337 3081           FDB     $3081               LDAB    C6
45800   0339 1862           FDB     $1862               FCB     C7
45900   033B 15F2           FDB     $15F2               EORB    C8
46000   033D 0483           FDB     $0483               ADCB    C9
46100   033F 3E41           FDB     $3E41               ORAB    CA
46200   0341 0484           FDB     $0484               ADDB    CB
46300   0343 1862           FDB     $1862               FCB     CC
46400   0345 1862           FDB     $1862               FCB     CD
46500   0347 B098           FDB     $B098               LDX     CE
46600   0349 1862           FDB     $1862               FCB     CF
46700   034B 4EA2           FDB     $4EA2               SUBB    D0
46800   034D 0DB0           FDB     $0DB0               CMPB    D1
46900   034F 4C43           FDB     $4C43               SBCB    D2
47000   0351 1862           FDB     $1862               FCB     D3
47100   0353 05C4           FDB     $05C4               ANDB    D4
47200   0355 0934           FDB     $0934               BITB    D5
47300   0357 3081           FDB     $3081               LDAB    D6
47400   0359 4E81           FDB     $4E81               STAB    D7
47500   035B 15F2           FDB     $15F2               EORB    D8
47600   035D 0483           FDB     $0483               ADCB    D9
47700   035F 3E41           FDB     $3E41               ORAB    DA
47800   0361 0484           FDB     $0484               ADDB    DB
47900   0363 1862           FDB     $1862               FCB     DC
48000   0365 1862           FDB     $1862               FCB     DD
48100   0367 B098           FDB     $B098               LDX     DE
48200   0369 CE98           FDB     $CE98               STX     DF
48300   036B 4EA2           FDB     $4EA2               SUBB,X  E0
48400   036D 0DB0           FDB     $0DB0               CMPB,X  E1
48500   036F 4C43           FDB     $4C43               SBCB,X  E2
48600   0371 1862           FDB     $1862               FCB     E3
48700   0373 05C4           FDB     $05C4               ANDB,X  E4
48800   0375 0934           FDB     $0934               BITB,X  E5
48900   0377 3081           FDB     $3081               LDAB,X  E6
49000   0379 4E81           FDB     $4E81               STAB,X  E7
49100   037B 15F2           FDB     $15F2               EORB,X  E8
49200   037D 0483           FDB     $0483               ADCB,X  E9
49300   037F 3E41           FDB     $3E41               ORAB,X  EA
49400   0381 0484           FDB     $0484               ADDB,X  EB
49500   0383 1862           FDB     $1862               FCB     EC
49600   0385 1862           FDB     $1862               FCB     ED
49700   0387 B098           FDB     $B098               LDX,X   EE
49800   0389 CE98           FDB     $CE98               STX,X   EF
49900   038B 4EA2           FDB     $4EA2               SUBB    F0
50000   038D 0DB0           FDB     $0DB0               CMPB    F1
50100   038F 4C43           FDB     $4C43               SBCB    F2
50200   0391 1862           FDB     $1862               FCB     F3
50300   0393 05C4           FDB     $05C4               ANDB    F4
50400   0395 0934           FDB     $0934               BITB    F5
50500   0397 3081           FDB     $3081               LDAB    F6
50600   0399 4E81           FDB     $4E81               STAB    F7
50700   039B 15F2           FDB     $15F2               EORB    F8
50800   039D 0483           FDB     $0483               ADCB    F9
50900   039F 3E41           FDB     $3E41               ORAB    FA
51000   03A1 0484           FDB     $0484               ADDB    FB
51100   03A3 1862           FDB     $1862               FCB     FC
51200   03A5 1862           FDB     $1862               FCB     FD
51300   03A7 B098           FDB     $B098               LDX     FE
51400   03A9 CE98           FDB     $CE98               STX     FF
51500                 *
51600                 *         FORMAT FLAGS
51700                 *
51800                 *  FLAGS ARE 1 BYTE LONG AND ARRANGED IN PAIRS.
51900                 *  BIT: 76543210
52000                 *       RR-FFFSS
52100                 *  WHERE: RR= REGISTER CODE, 0=NONE, 1=A, 2=B
52200                 *         FFF= ADDRESS MODE, 0=INHERENT, 1=RELATIVE, 2=INDEXED
52300                 *                            3=IMMEDIATE, 4=EXTENDED, 5=DIRECT
52400                 *                            6= NONE (FCB PSEUDO)
52500                 *         SS= SIZE OF INSTRUCTION IN BYTES.
52600                 *
52700   03AB 01     FTAB    FCB     $01                 00-0F   INHERENT
52800   03AC 00             FCB     0
52900   03AD 01             FCB     $01                 10-1F   INHERENT
53000   03AE 00             FCB     0
53100   03AF 06     BSR     FCB     $06                 20-2F   RELATIVE (USED BY BSR)
53200   03B0 00             FCB     0
53300   03B1 01             FCB     $01                 30-3F   INHERENT
53400   03B2 41             FCB     $41                 PULA AND PSHA
53500   03B3 41             FCB     $41                 40-4F   INHERENT
53600   03B4 00             FCB     0
53700   03B5 81     PULB    FCB     $81                 50-5F   INHERENT (USED BY PULB)
53800   03B6 00             FCB     0
53900   03B7 0A             FCB     $0A                 60-6F   INDEXEXED
54000   03B8 00             FCB     0
54100   03B9 13             FCB     $13                 70-7F   EXTENDED
54200   03BA 00             FCB     0
54300   03BB 4E             FCB     $4E                 80-8F           IMMEDIATE
54400   03BC 0F             FCB     $0F                 CPX,LDS
```

Listing 2 continued on page 358

NOT ANYMORE!

No this isn't a "Hard Disk". We used to call it that, sometimes. But somebody muddied the water.

"Hard Disk", unfortunately, now calls something else to mind. That little bitty guy with no backup capability and no way of switching media? It's a "Hard Disk" to work with, all right, in business applications. Some even say "Impossible Disk".

We'd like to avoid confusion between our Cameo database solution and the one that doesn't work so well. The Cameo DC-500 subsystem employs a decade-proven **cartridge** disk. Our backup capability is built in, and takes four minutes. The ability to switch applications (by exchanging the removable cartridge) means you can use your computer for more kinds of work. A ten megabyte (5 fixed + 5 removable) subsystem costs $5995, for your **TRS-80* (Mod. I or II), Apple*, Heath H89**^{T.M.} **or S-100** computer.

So call **us** "The **Cartridge Disk** Guys", please, and call us soon. We'll show you the **really** cost-effective solution to microcomputer database storage.

CAMEO ELECTRONICS INC.
1626 CLEMENTINE ANAHEIM, CA 92802
(714) 535-1682

* TRS-80 is a registered trademark of the Tandy Corp. *Apple is a registered trademark of Apple Corp.

Circle 61 on inquiry card.

Listing 2 continued:

```
54500   03BD 56                FCB      $56             90-9F                DIRECT
54600   03BE 16                FCB      $16             CPX,LDS,STS
54700   03BF 4A                FCB      $4A             A0-AF                INDEXED
54800   03C0 0A                FCB      $0A             CPX,JSR,LDS,STS
54900   03C1 53                FCB      $53             B0-BF                EXTENDED
55000   03C2 13                FCB      $13             CPX,,JSR,LDS,STS
55100   03C3 8E                FCB      $8E             C0-CF                IMMEDIATE
55200   03C4 0F                FCB      $0F             LDX
55300   03C5 96                FCB      $96             D0-DF                DIRECT
55400   03C6 16                FCB      $16             LDX,STX
55500   03C7 8A                FCB      $8A             E0-EF                INDEXED
55600   03C8 0A                FCB      $0A             LDX,STX
55700   03C9 93                FCB      $93             F0-FF                EXTENDED
55800   03CA 13                FCB      $13             LDX,STX
55900                 *
56000   03CB 19       FFLAG    FCB      $19             FCB FLAGS
56100                 *
56200   A04A                   ORG      $A04A
56300   A04A 20       LINE     RMB      32
56400   A06A 04                FCB      04
56500        A06B     WORKA    EQU      *
56600   A06B CE 01AB  FLAGD    LDX      #MTAB           MNEMONIC TABLE BASE
56700        A06C     WTAD     EQU      FLAGD+1
56800   A06E CE 03AB  WBYT     LDX      #FTAB           FLAG TABLE BASE
56900        A06F     WFAD     EQU      WBYT+1
57000   A071 0000     WBAS     FDB      0
57100   A073 0000     WFLG     FDB      0
57200   A075 0000     XSAV     FDB      0
57300   A077 00       LINES    FCB      0
57400        03       BYTE     EQU      WBYT-WORKA
57500        01       TAD      EQU      WTAD-WORKA
57600        06       BASE     EQU      WBAS-WORKA
57700        04       FAD      EQU      WFAD-WORKA
57800        08       FLAGA    EQU      WFLG-WORKA
57900        A04A     AADR     EQU      LINE
58000        A058     OPER     EQU      LINE+13          MNEMONIC POSITION
58100        A063     ABS      EQU      LINE+24         ABS. ADDRESS FOR RELATIVE MODES
58200        A05E     ARG      EQU      LINE+19         ARGUMENT POSITION
58300   A078 00                FCB      0,0,0
58400   A07B 00       SIZE     FCB      0
58500   A07C 0000     APPND    FDB      00              COMPLETION APPENDAGE ADDRESS
58600                          END
```

Listing 3: *Cross-references for symbols used in the disassembler source code of listing 2.*

```
       =
APP    =01A4    000E
APPND  =A07C    0011   0116
ASC    =0198    0192
BLUP   =0044    0048
BSR    =03AF    009B
CLOP   =00C9    00DD
CVASC  =00DF    0063   0088   00BE   00DB
DISPL  =0116    0105   0148   0154   0167
DLOOP  =017F    017C   0184
DUMV   =0114    015B
ERASE  =0169    0008
FCBFR  =015D    0112
FFLAG  =03CB    007D
FIN    =0123    011E
FLAGD  =A06B    00AA   00C0   00E5   00FE
FORM   =00FB    00F1   00F5
FTAB   =03AB    A06E
IMM    =0156    010E
IND    =014A    010B
LINE   =A04A    003D   0051   0161   0174   01A4
LINES  =A077    0005   011B
MTAB   =01AB    A06B
NEXTL  =0018    0014   0120
NFC    =0082    007B
NMR    =00E2    00D1
NOTA   =00F3    00EA
OFF    =00A8    0080   008C   0095   009E   00A5
OU     =01A0    019C
POS    =0130    012D
PULB   =03B5    0089   0092
REL    =0124    0108
SETM   =016D    0114   0124   014A
SETR   =00EE    00F9
SIZE   =A07B    00C5   0177
START  =0000    0016
TBSR   =0097    0090
TOASC  =018C    00DF   013C   0141
TPSH   =008E    0087
WBAS   =A071    0054
WBYT   =A06E    00BA
WFLG   =A073    00A0   0171   0186
XSAV   =A075    00C9   00D8
```

■

RIP US OUT!

$295 VERSUS THE OTHERS: VTS/80.

- The easiest-to-use full-feature CP/M word processor is priced lower than the rest. Hundreds of dollars lower!
- Fastest-to-learn—basic features in one hour. Full capability in half a day of use. No complicated symbolic commands!
- First with color-coded replacement keys—color and legends indicate function. No menus cluttering the screen.
- Kmega-supplied keytops are the reference card. One hundred fifty-page manual is color-coded to the keys.
- Optional SpellRite—the first authorized, fully integrated version of Spellguard, a 10,000-word-per-minute proofreader.

APPLE II PRODUCTS

- Peachtree 40: we install, train and service Peachtree on the Apple in Northern California. Call for pricing.
- Tax Preparer: too late for 1980, but time to automate your tax record-keeping for '81. Free schedule updates for '81 forms, when available from IRS. $150.
- Real Estate Analyzer: evaluate cash flow, ROI, depreciation, etc., to determine the value of a potential or existing investment. $150.

CP/M© Digital Research, Spellguard© ISA, Peachtree 40© RSI, VTS/80© NMP, Spell Rite™ Kmega, Tax Preparer and Real Estate Analyzer© Howardsoft

ORDER BLANK

☐ Send me VTS/80 with SpellRite integrated: $590 including diskette, manuals, and custom replacement keytops for my system.

☐ Send me VTS/80 alone: $295 including diskette, manual and custom replacement keytops for my terminal.

☐ Send me Spellguard alone. I already own the ______________ word processor.

☐ Send me ______________ for my Apple II. The price is ______, including diskette and manual.

☐ Send me a copy of your comparison of VTS/80, Word Star and Magic Wand.

My check for $______ is enclosed. (California residents add 6.5% tax.) Outside North America shipping is an additional $20.

Name______________________________

Street______________________________

City/State/Zip______________________________

Telephone______________________________

Computer______________________________

Terminal______________________________

Printer______________________________

Contact us or your local computer dealer.

Kmega

Kmega Microsoftware • 1080-F East Duane Ave.
Sunnyvale, CA 94086 • (408) 730-9203
Telex 172246

Circle 211 on inquiry card.

Build a Super Simple Floppy-Disk Interface, Part 1

James Nicholson and Roger Camp
1046 Gaskill
Ames IA 50010

For personal-computer users, a floppy-disk system represents the ultimate in mass storage because of its speed and capacity. The floppy-disk controller described in this article provides all the capabilities found in commercial systems, yet it is simple and economical because it requires only ten integrated circuits. Fundamental software will be provided (in the second part of this article) to control and perform data transfers, and discussion of file structuring and alternate hardware will give the experimenter ideas for improvements.

This system uses the FD400, an 8-inch floppy-disk drive manufactured by the Pertec Computer Corporation, and the popular Western Digital 1771 floppy-disk controller integrated circuit (which allows such special features as variable block size, soft sectoring, IBM compatibility, and much more). Although the specifics shown are for microcomputers based on the MOS Technology 6502 microprocessor, the controller could be adapted to other microprocessors with some care at a few crucial points. The 6502 offers some speed advantages and a programming ease not afforded by the others.

Fundamentals

The data recorded on floppy disks is logically arranged in concentric rings called *tracks*, with each track composed of blocks of data called *sectors*. The computer must be able to tell where a sector begins, and there are two ways of doing this. Each sector can be distinguished by its position relative to holes punched in the disk (this is called *hard sectoring*), or it can be distinguished by special sequences of information recorded on the disk (*soft sectoring*). In either case, the disk has one hole that is used as an index to signal the start of the first sector on all tracks.

This controller is simple and economical because it requires only ten integrated circuits.

The most common 8-inch floppy-disk format provides for 77 tracks of 26 sectors each, with 128 bytes recorded in each sector. The address of each sector, in the form of a track number (0 through 76) and a sector number (1 through 26), is recorded on the disk at the start of the sector itself.

The disk drive has two motors: one that spins the disk at 360 rpm (revolutions per minute), and one that moves the head from track to track on command. Each drive also has a printed-circuit board to control both motors. The inputs and outputs of this circuit board (see figure 1) follow a standard set by Shugart Associates, manufacturer of one of the first popular floppy-disk drives.

A single pulse on either the STEP-IN line or the STEP-OUT line moves the head one track toward the center of the disk (track 76) or toward the

About the Authors

Roger Camp is a Professor of Electrical Engineering at Iowa State University. He is the author of several technical papers and patents, and his most recent book is Micro-Processor Systems Engineering.

James Nicholson, currently Project Manager, Business Recovery Planning, has been involved in large data-center activities for Donnelley Marketing. He has designed and built several microcomputer systems in the last five years.

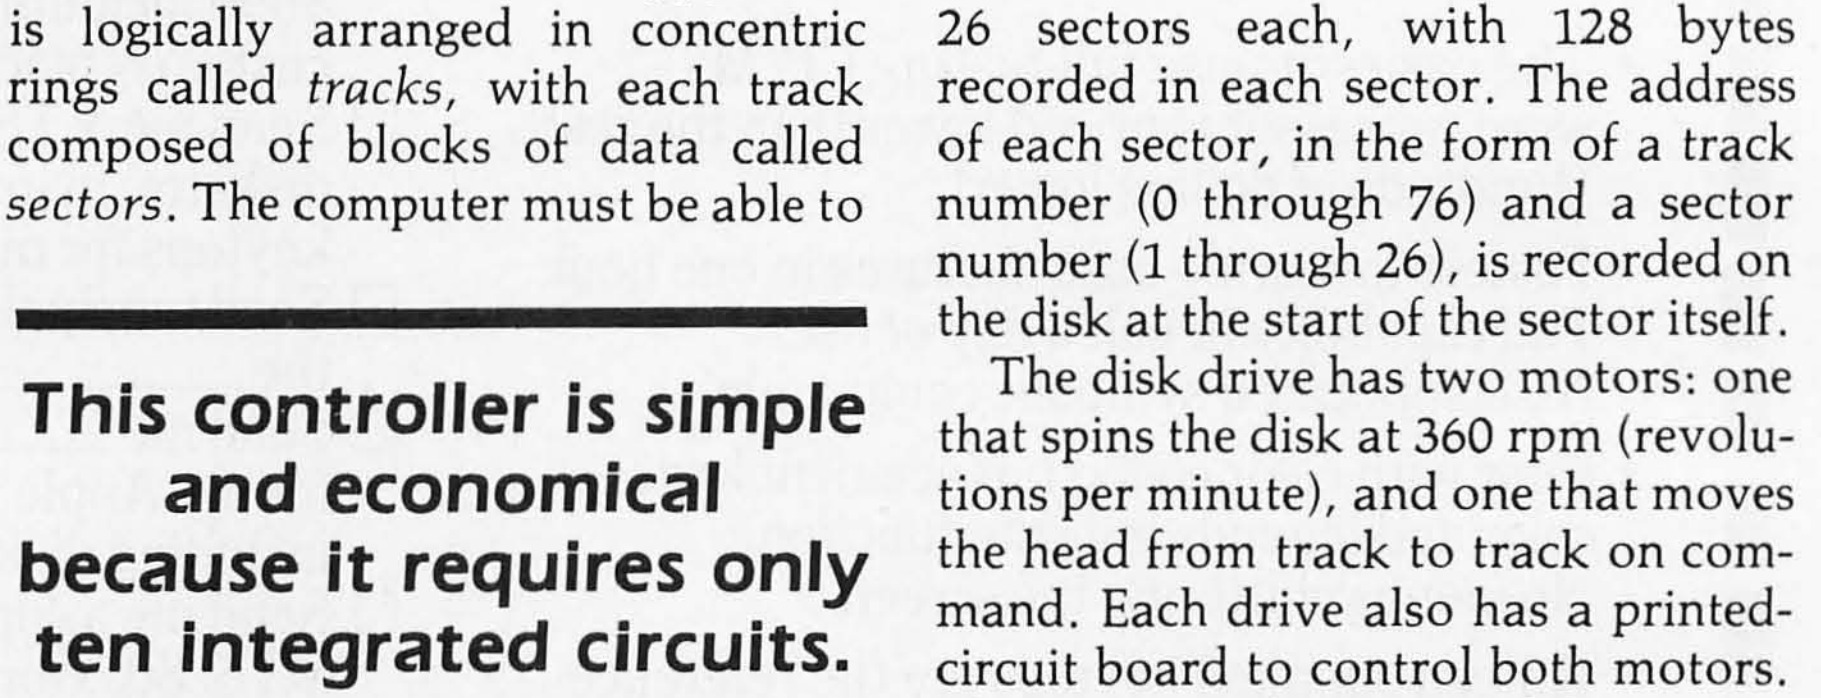

Photo 1: *The authors' wire-wrapped floppy-disk controller board.*

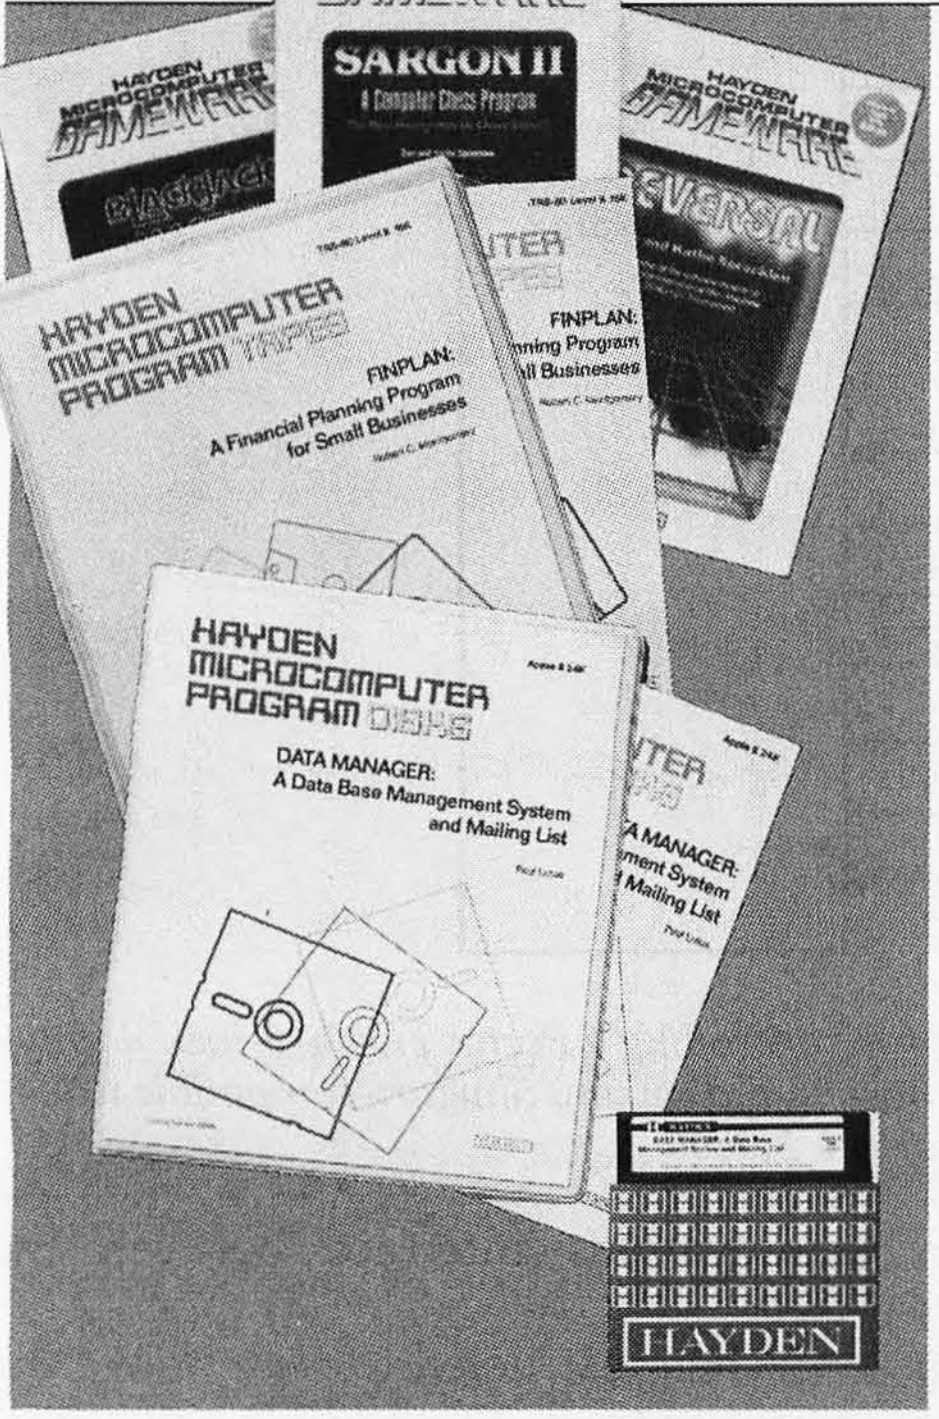

Hayden Performance Software - from gameroom fun to boardroom business!

NEW! **HISTO-GRAPH** (Boyd) A calendar-based histogram or bar-graph production system. Allows the user to enter numeric data that relates to a date, and reproduces that data as a high-resolution histogram. *09009, Apple II Disk, $29.95*

NEW! **DATA-GRAPH** (Boyd) Aids in the preparation of graphs and charts. Numeric data can be entered into Data-Graph and used to create colorful one-, two-, or four-quadrant graphs. *09109, Apple II Disk, $49.95*

NEW! **DOUBLE PRECISION FLOATING POINT FOR APPLESOFTTM** (S-C Software) Extends the accuracy of the arithmetic available on the Apple from nine digits to a full 21-digit precision on all functions in Applesoft compatible format. *09409, Apple II Disk, $29.95*

ORDER NOW!

Hayden Book Company, Inc.
50 Essex Street, Rochelle Park, NJ 07662

Send me the software checked below. A check or money order is enclosed. I understand that Hayden pays shipping and handling costs and that I can return any disk or tape within 10 days if it is defective or I am dissatisfied with it for any reason. Residents of NJ and CA must add sales tax. Offer good in US only. Name of individual ordering must be filled in.

☐ 03403
☐ 03404
☐ 03408
☐ 03409
☐ 03410
☐ 03414
☐ 03440
☐ 03444
☐ 03484
☐ 03504
☐ 03604
☐ 03804
☐ 03904
☐ 04804
☐ 04909
☐ 05103
☐ 05108
☐ 05303
☐ 05308
☐ 05903
☐ 07004
☐ 07009
☐ 07101
☐ 07103
☐ 07301
☐ 08609
☐ 09009
☐ 09109
☐ 09409
☐ 09704

Name ____________________

Address ____________________

City/State/Zip____________________

81-009 B 5/81

NEW! **OP-AMP DESIGN** (Gabrielson) Provides the necessary values for your design and will suggest appropriate op-amp types. Includes a choice of six op-amps, and the program will then determine if your selection of an op-amp will be acceptable within your chosen parameters. Can be updated to accommodate future op-amps. *09704, Apple II tape, $16.95*

LINE & VARIABLE CROSS REFERENCE GENERATOR (Johnson) Provides a cross-reference of line numbers and variable names. *07301, PET tape, $16.95*

APPLESOFT UTILITY PROGRAMS (Gilder) Increase your BASIC programming speed and flexibility. Contains 9 useful subroutines: 1. REM Writer 2. PRINT Writer 3. POKE Writer 4. Hexadecimal/Decimal Converter 5. Line Counter 6. Renumber 7. Append 8. Byte Counter 9. Slow List/Stop List *03504, Apple II tape, $29.95*

RENUMBER & APPEND: Utility Programs for the Apple (Gilder) Renumber your Applesoft program and append a second program to the one in memory. *03804, Apple II tape, $14.95*

REVIVE (Gilder) When a program is accidentally erased, REVIVE searches through memory and finds the information that enables it to restore the pointers that have been changed. *03604, Apple II tape, $19.95*

SLOW LIST/STOP LIST: Utility Programs for the Apple (Gilder) Start, stop, and control the speed of your program with Apple II's game paddles. *03904, Apple II tape, $10.95*

PSEUDODISK (Neuschatz) This money-saving program simulates a disk memory system for Integer BASIC programs. It allows multiple programs in memory at the same time which can be run from a catalog. *04804, APPLE II tape, $24.95*

6502 DISASSEMBLER (Stamm) Produce assembly language source files with labeled subroutines and references from programs already in memory. It is compatible with Hayden's ASSEMBLY LANGUAGE DEVELOPMENT SYSTEM. *08609, APPLE II Disk, $39.95*

DATA MANAGER: A Data Base Management System and Mailing List (Lutus) Store information on a floppy disk, and retrieve it quickly and easily by specific names, or by category. *04909, Apple II Disk Version, $49.95.*

Apple is a trademark of Apple Computer Company, Inc., and is not affiliated with Hayden Book Company, Inc.

FINPLAN: A Financial Planning Program for Small Businesses (Montgomery) Allows you to enter data from a balance sheet into the program, to make assumptions about the future growth of business, and to have the computer project results for up to a five year period based on those assumptions. And if you change any data, the program revises all resulting data automatically. The disk version can be used only with TRSDOS Version 2.3. *05103, TRS-80 Level II tape, $69.95; 05108, TRS-80 Level II Disk Version, $74.95*

SARGON II (Spracklen) The Champ of champs. "...an excellent program which will provide a true challenge for many players...Save your money and buy SARGON II..." *'80 Software Critque. 03403, TRS-80 Level II; 03404, Apple II; 03410, OSI C1P; 03440, OSI C4P; each tape $29.95. 03408, TRS-80 Level II Disk; 03409, Apple II Disk; 03414, OSI C1P Disk; 03444, OSI C4P Disk; 03484, C8P Disk; each $34.95*

BLACKJACK MASTER: A Simulator/Tutor/Game (Wazaney) A serious game that performs complex simulations and evaluations of playing and betting strategies. *05303, TRS-80 Level II tape, $24.95; 05308, TRS-80 Disk Version, $29.95*

REVERSAL (Spracklen) Winner of the software division of the *First International Man-Machine OTHELLOTM Tournament*, this version of the 200-year old game Reversi, features 27 levels of play and high-resolution color graphics. *07004, APPLE II tape, $29.95; 07009, APPLE II Disk, $34.95*

ROYAL FLUSH: Competitive Poker Solitaire (Wazaney) A game you can play alone or with any number of players. High score wins in this poker-based, fun-filled card game. Choose from possible game variations. *07101, PET; 07103, TRS-80 Level II, each tape, $14.95*

STARCLASH (Walton) An exciting game of galactic strategy for one or two players. *05903, TRS-80 Level II tape, $16.95*

PERFORMANCE! SOFTWARE

Available at your local computer store!

Hayden

50 Essex Street, Rochelle Park, NJ 07662 **Book Company, Inc.**

Circle 176 on inquiry card.

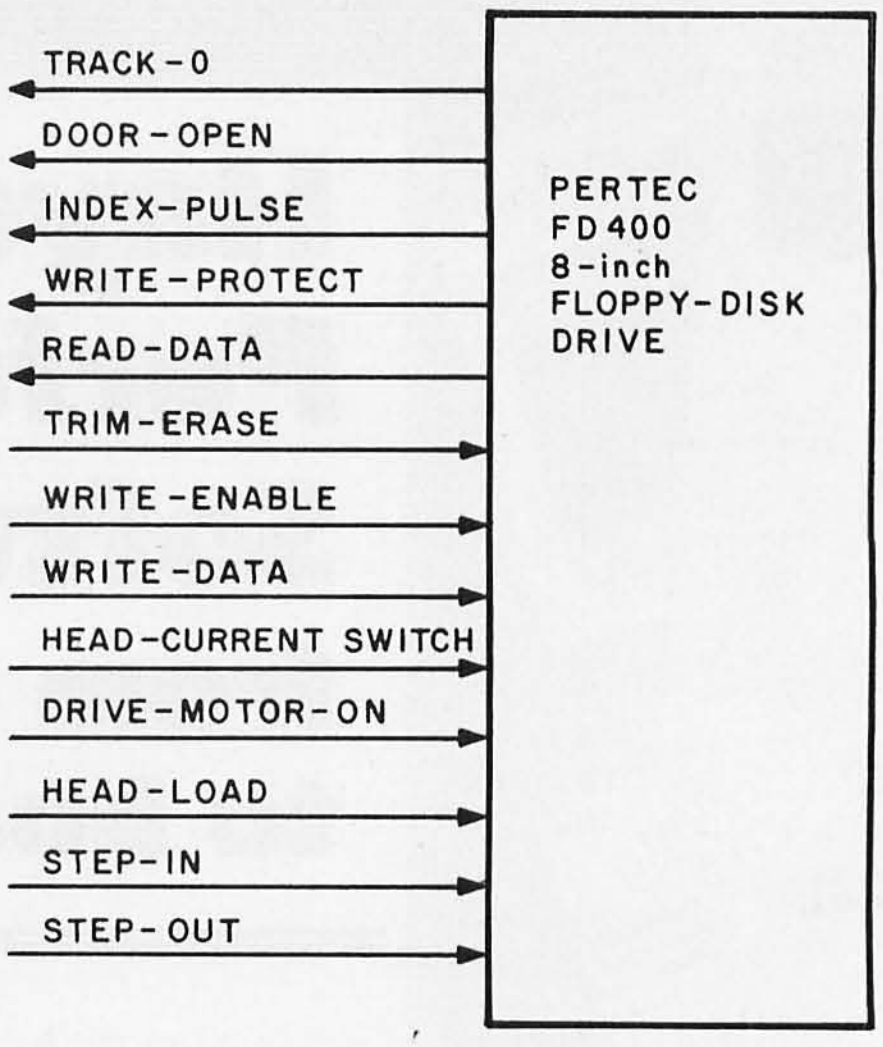

Figure 1: *Input and output lines available for controlling a Pertec FD400 8-inch floppy-disk drive. These signals are the same as those found on any Shugart-compatible drive, so nearly any drive may be substituted for the FD400.*

outside (track 0), respectively. When the head is positioned over track 0, the outermost track, the TRACK-0 output is activated. To turn on the spindle motor, the DRIVE-ON input must be activated, and the disk door in the front of the drive must be closed (this deactivates the DOOR-OPEN output line). As the disk rotates, a photoelectric sensor in the drive detects the index hole in the disk; this generates the INDEX signal that allows the system to begin counting sectors at the first one.

To read data, the HEAD-LOAD line is activated to force the head to contact the rotating disk surface. A mixture of data and clock bits are then detected and amplified by the drive's electronics; these appear as logic levels on the DATA-READ output at the rate of 250 K-bits per second.

To write data on the disk, the head must be loaded, the WRITE-ENABLE line must be activated, and the data must be sent to the drive on the WRITE-DATA line. (This must occur with very specific timing.) If the WRITE-PROTECT output has been activated, the drive has detected the presence of a write-protect notch in the disk's envelope.

Obviously, communication at this level between a disk drive and a microcomputer is possible but not desirable. The microcomputer would spend much of its time catering to the needs of the disk rather than computing. The purpose of the FD1771 (actually a microprocessor in its own right) is to act as a high-level communications interface between the two.

When instructed to *seek* (move the head) to track 30, the 1771 will generate the appropriate number of STEP-IN or STEP-OUT pulses to move the head from its current position, wherever it may be, to track 30. Another example of the 1771's capabilities is the process of reading a specific sector: the 1771 will search a given track for the proper sector address; when located, the data following the address is transferred to the microprocessor. Simultaneously, the 1771 can maintain synchronization with the disk drive and check for errors. Therefore, using the 1771 floppy-disk controller circuit results in a greatly simplified hardware and software design.

Software must be an integral part of the design of any computer subsystem—a subroutine of about 256 bytes is required to communicate the proper commands to the disk controller. Additional software is required to handle complex data-file structures (this software and various structuring techniques will be discussed in part 2 of this article).

Disk Format

Figure 2 schematically describes the format of recorded data on a soft-sectored disk. The pulse generated by the index hole passing the sensor provides a physical reference point to determine the beginning and the end of a track. The diagram represents 16 256-byte sectors (the authors' choice for format) rather than the usual 26

NEVER UNDER$OLD.

ALPHA BYTE PRESENTS...

Boards By California Computer Systems At Incredibly low prices!!!

S-100 Boards

Model 2065C 64K Dynamic RAM	$429
Model 2422 Floppy Disk Controller	$349
Model 2718 2/S + 2/P I/O	$269
Model 2810 Z-80 CPU	$249
2116A 16K Static RAM	$299
2032C 32K Static RAM	$599
2200A Mainframe	$339
2710A 4 Serial I/O	$245
2720A 4 Parallel I/O	$189

Apple Boards

7424 Calendar Clock	$99
7470 A to D	$99
7490 GPIB (IEEE)	$239
7710A Asynchronous	$139
7712A Synchronous	$159
7720A Parallel	$99
7728A Centronics Parallel	$99

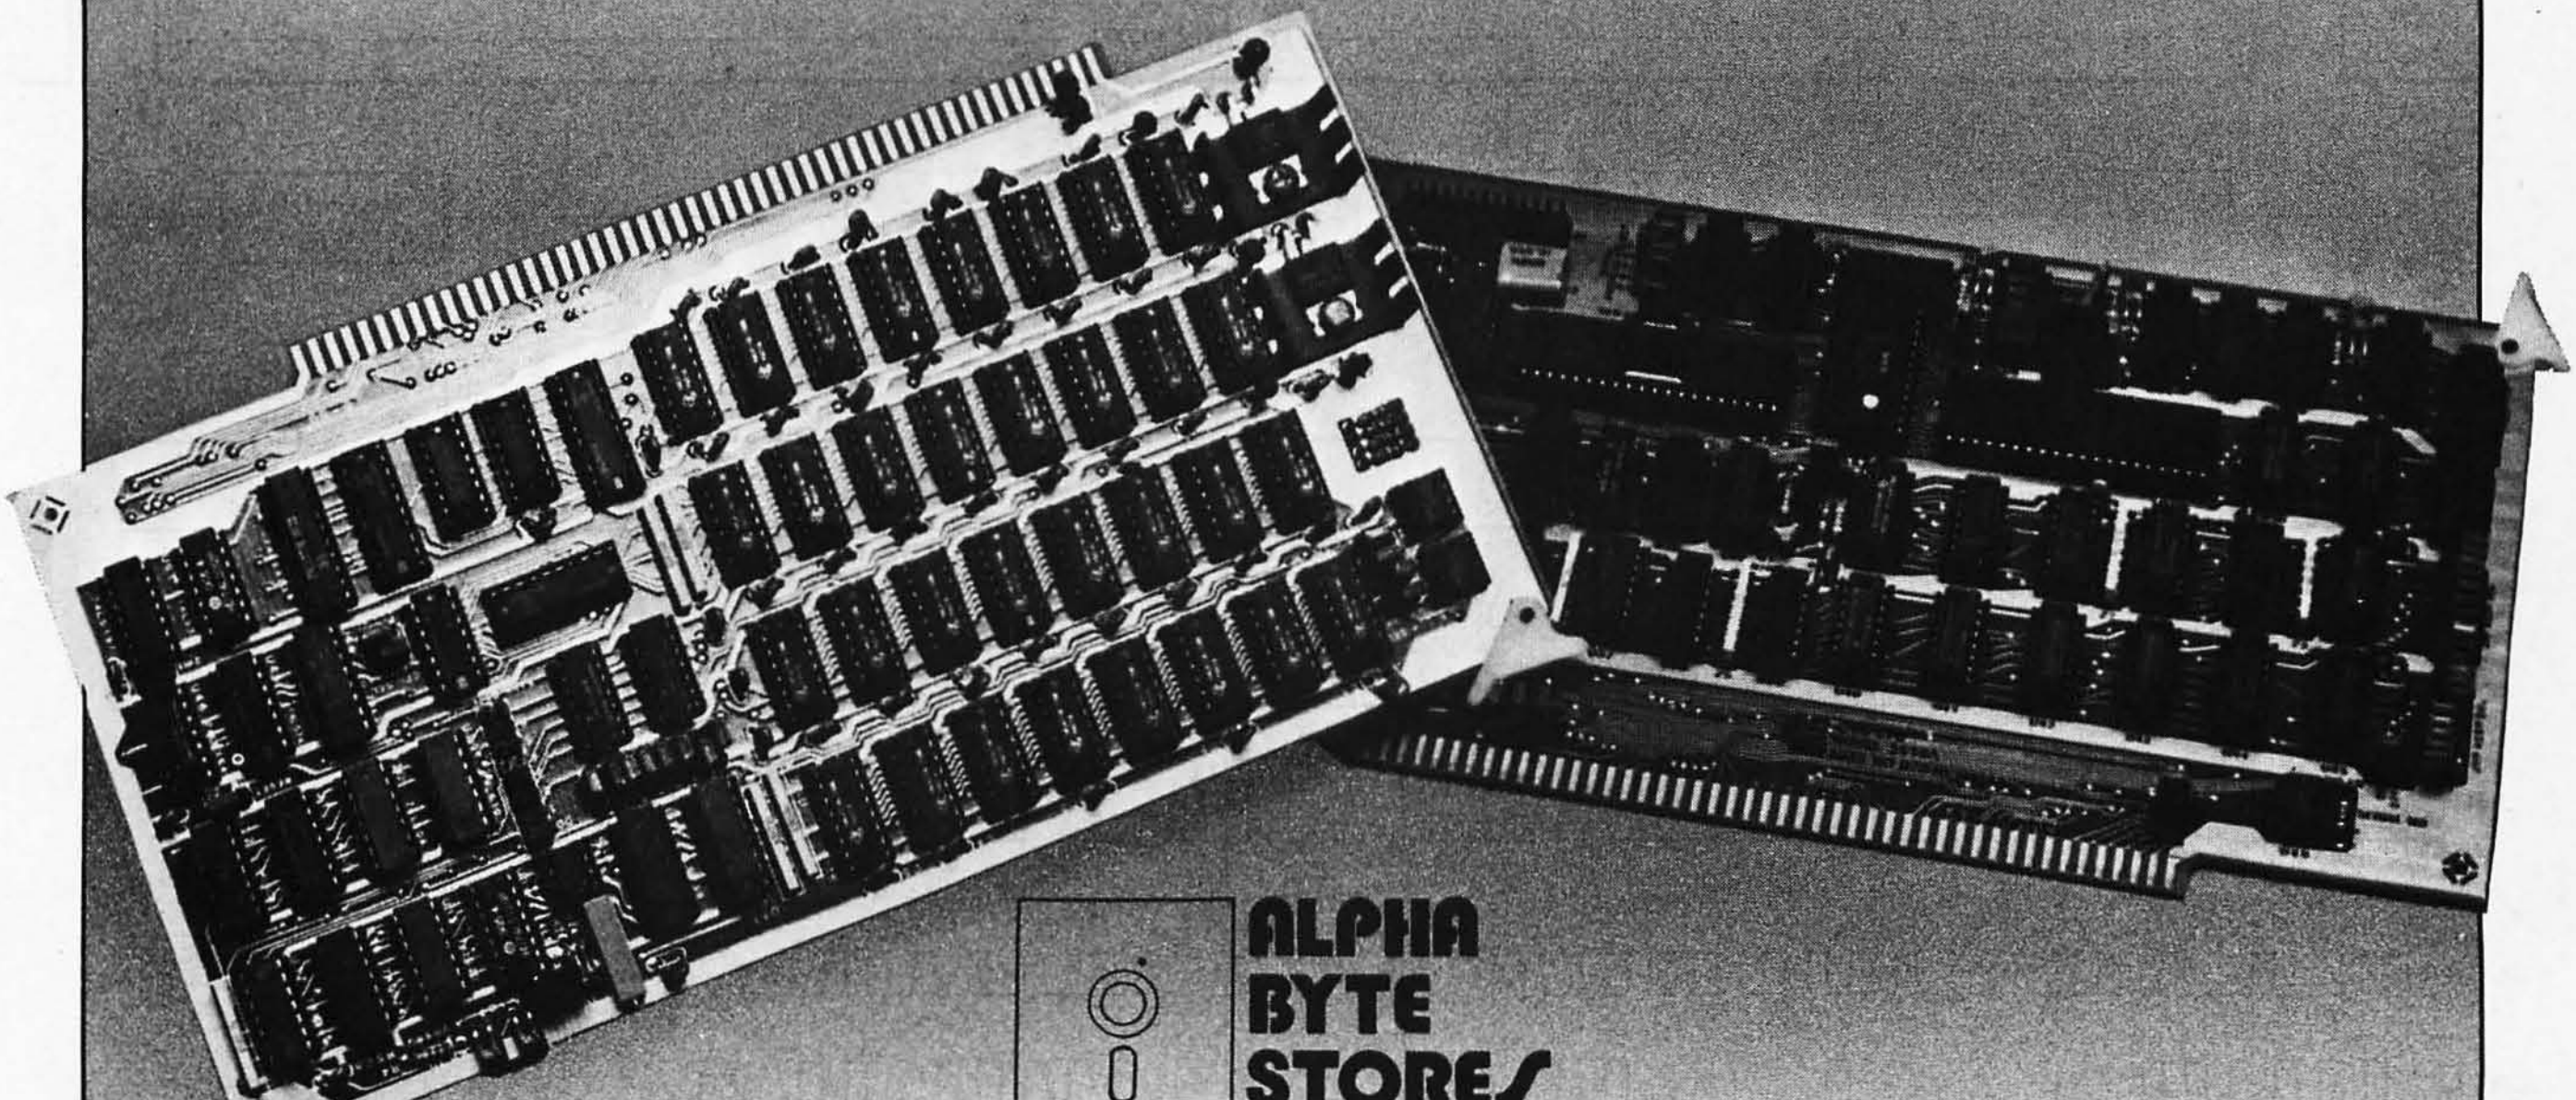

ALPHA
BYTE
STORES

(213) 883-8594

5115 Douglas Fir Road • Suite B • Calabasas, CA 91302

*Include $2.00 shipping and handling on all orders. Visa and Master Card accepted. Never undersold offer applies only to items currently deliverable from other retail vendors at advertised price. All never undersold offers good as supply lasts. Please add $2.00 for all COD orders. Please call for items not listed. We gladly answer any questions on all of our hardware, software, and supply needs. Quanitity discounts available. School purchase orders accepted. Please remember to figure competitors shipping and handling charges when arriving at never undersold price.

Circle 12 on inquiry card.

sectors containing 128 bytes.

The disk rotates once every 166.67 ms, which allows the drive to read 41,665 bits of information; that is, a byte every 32 µs. Each track contains 5208 bytes (divided into data and control bytes), as well as gaps between sectors. (The gaps are required to allow sufficient time to turn write-head current on and off without destroying valid data.)

The IAM (index-address mark) that provides a recorded indication of the beginning of the track has 16 sectors recorded after it. The sectors consist of two records: the ID (identification record) and the DATA (data record). The ID contains information on the track number and the sector number of the DATA that follows. Each of the records begins with an AM (address mark). In addition, each record is ended with a 2-byte CRC (cyclic-redundancy-check) code.

Each byte of data recorded on the disk consists of interleaved clock and data bits. The clock bits convey information used for synchronization and for the identification of AMs. AMs always have clock bits corresponding to hexadecimal C7 (D7 in the case of the IAM); all other bytes of information have clock bits corresponding to hexadecimal FF. In other words, some clock bits are omitted in AMs. This scheme allows the data bits of a data-address mark (hexadecimal FB) to be distinguished from a hexadecimal FB recorded as data.

Figure 2 also illustrates that these data and clock bits are recorded as a single stream. When reading from the disk, the 1771 separates the data and clock bits (although our system uses discrete components to achieve greater reliability).

As a general rule, the larger the sector, the greater the total amount of data that can be recorded on one disk. This is due to the reduced amount of area necessary for gaps and indexing information. Using 16 256-byte sectors, 315,392 bytes of data can be recorded. The usual configuration of 256-byte sectors allows tracks with only 15 sectors; however, it has been found that sufficient space is available to reliably record 16 sectors.

Western Digital's 1771 Floppy-Disk Controller

This device is essentially a microprocessor dedicated to the specific task of controlling disk drives (see figure 3). It has five programmable registers and accepts a number of commands through various combinations of them. For economic reasons, there is a desire to connect multiple drives to a single 1771, but, since the device "remembers" the track the head was last positioned to, switching from one drive to another would place an added burden on the driving software. A case can be made for complete duplication of the controller electronics for each disk drive.

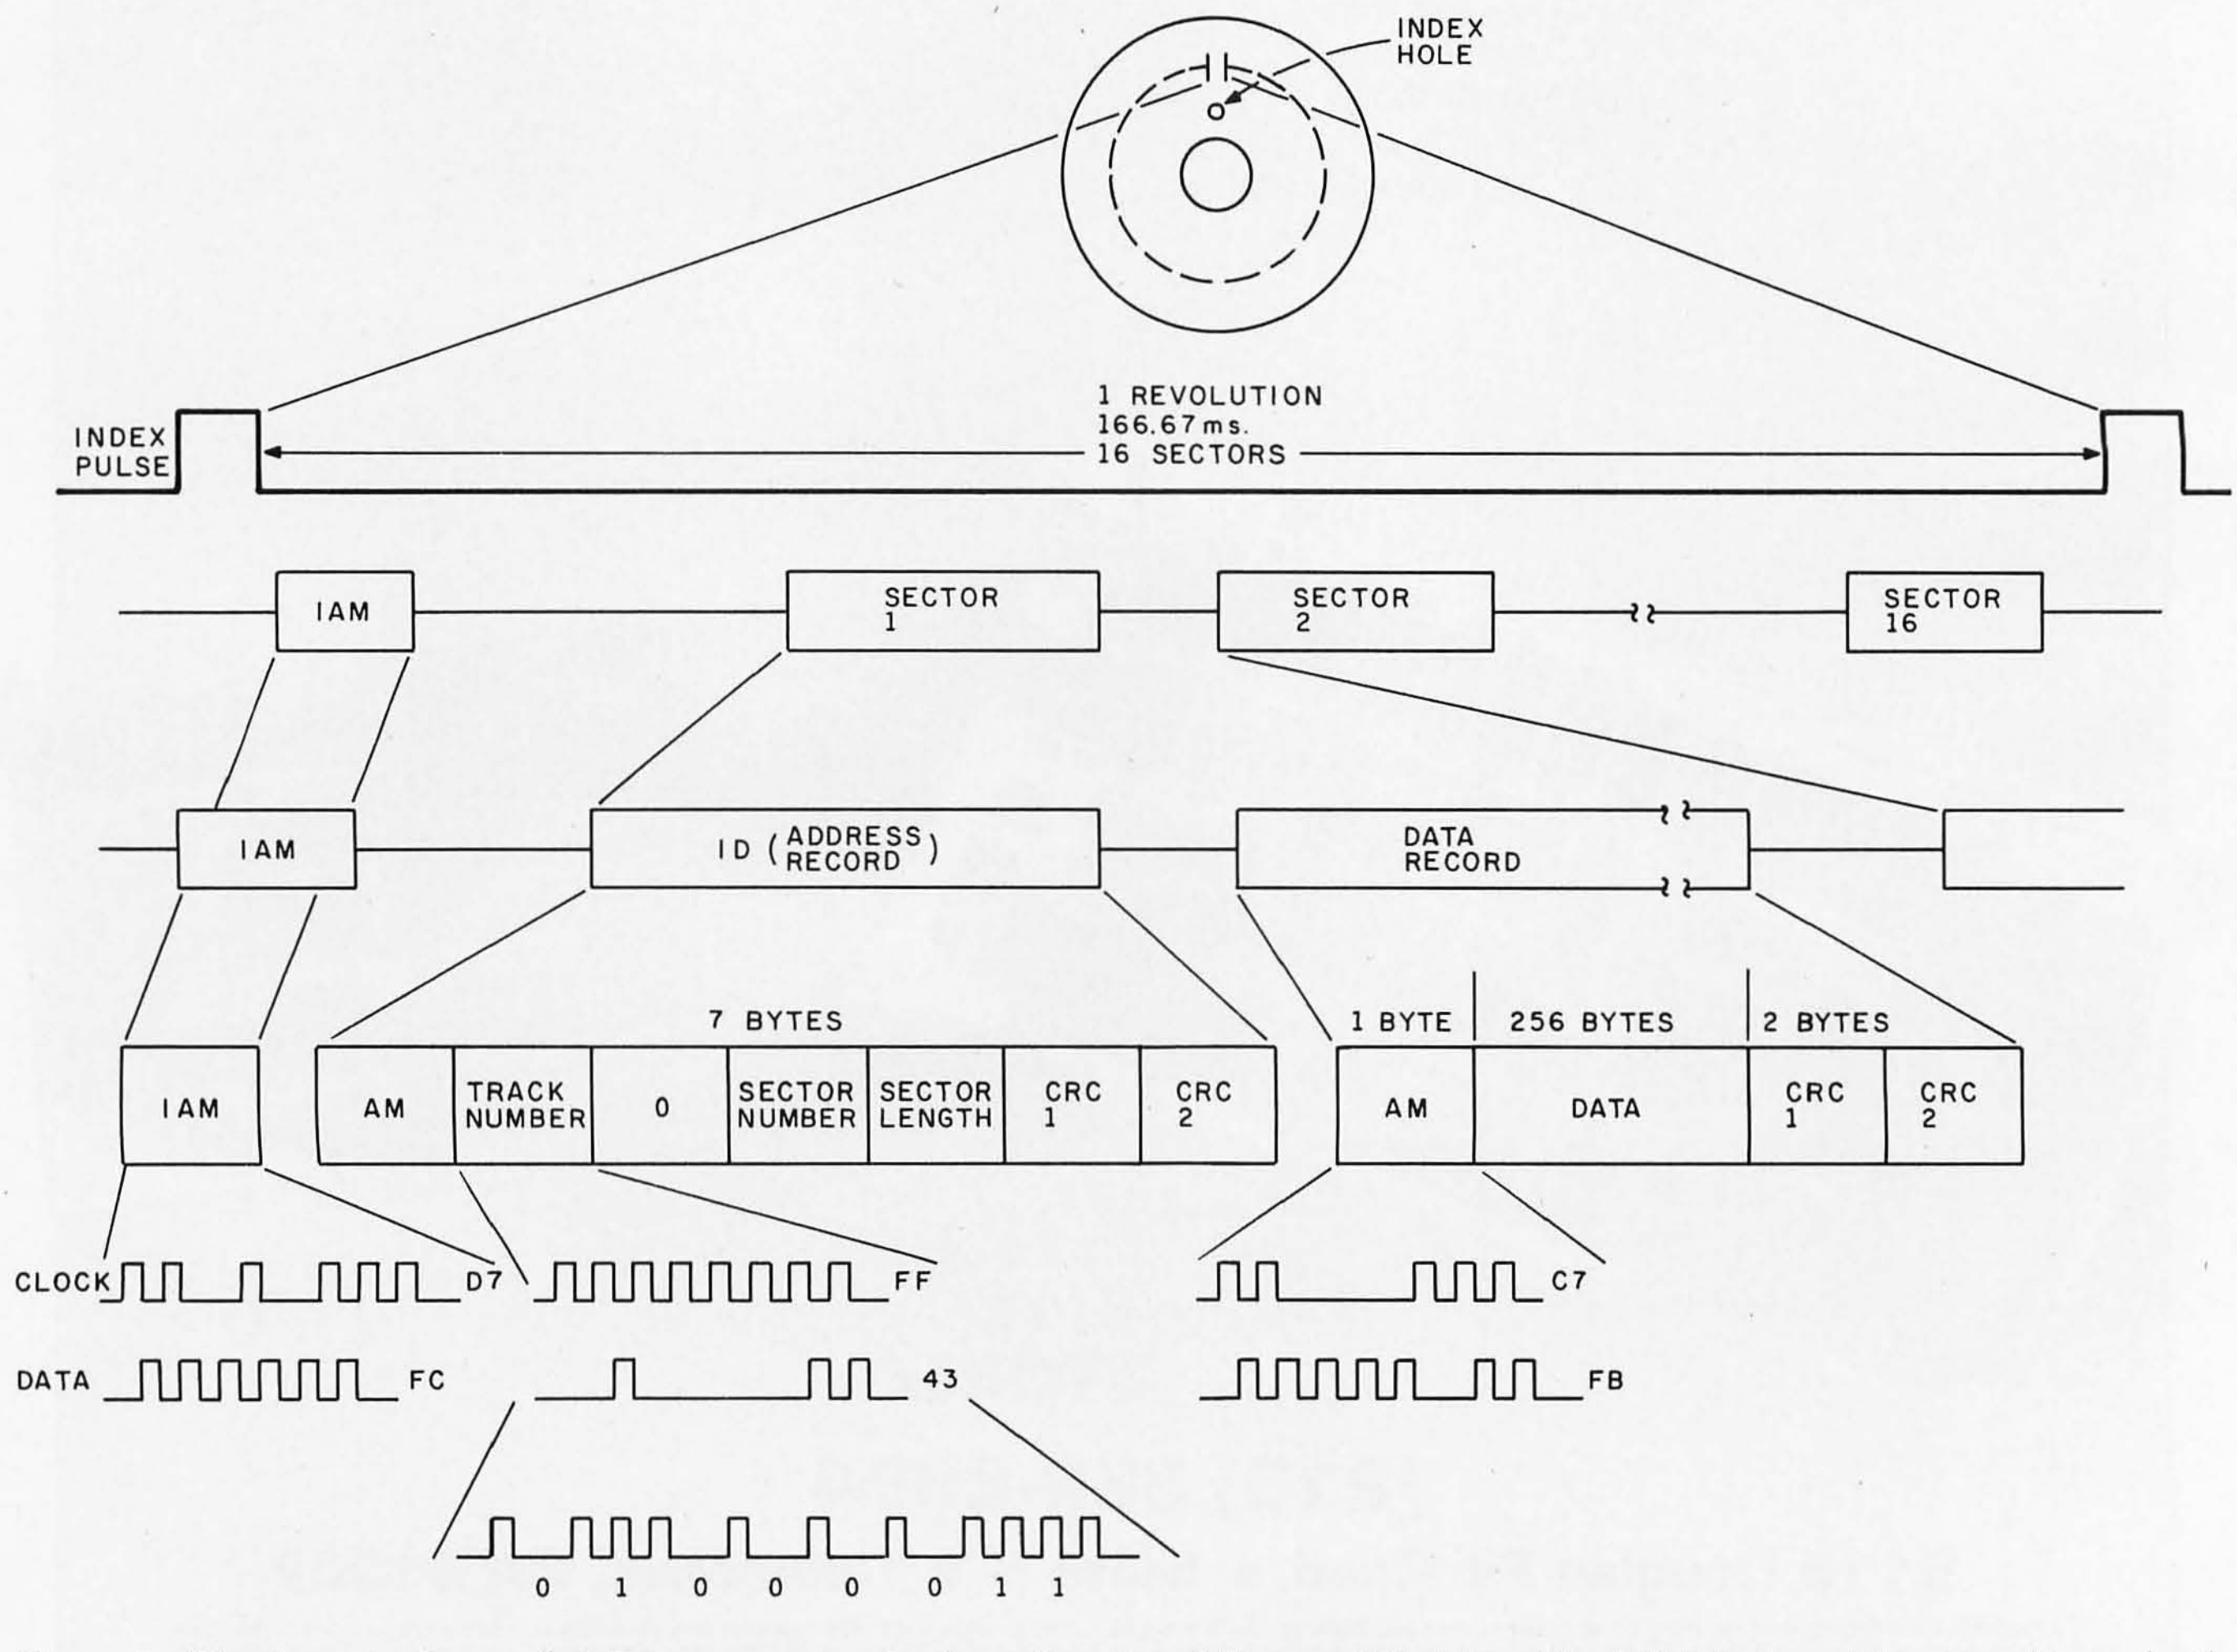

Figure 2: *The format of recorded data on one track of a soft-sectored floppy-disk drive. The IAM (index-address mark) marks the beginning of each track. See the text for details.*

Omikron's Mapper + NEWDOS/80 8" Drives for the TRS-80

NEWDOS/80 is Apparat's latest upgrade to NEWDOS. Features include variable length records, chaining, and drivers specifically configured for Omikron's MAPPER II. $150.

MAPPER II adapts the TRS-80 to run both 5" and 8" drives. With NEWDOS/80, storage is increased to 300K per 8" drive. $99 plus $50 per cable.

MAPPER I adapts the TRS-80 to run the vast library of CP/M software as well as the TRS-80 software. All Lifeboat Software may be ordered for the MAPPER I. All MAPPER I CP/M software is compatible with the CP/M for the Model II. With MAPPER II and 8" drives, the Model I becomes disk compatible with the Model II. Standard features include lower case support, serial and parallel printer drivers, and an addressable cursor. MAPPER I is supplied with complete utilities including a memory test, a disk test, a copy program, and a proprietary program for converting TRS-DOS files to CP/M files. $199.

WORD PROCESSING—MAPPER I supports professional word processors like the Magic Wand and Word Star (see reviews in June 80 Kilobaud). Omikron's implementation includes a blinking cursor, auto repeat, shift lock, debouncing, and an input buffer that eliminates missed characters. Magic Wand super discount price $299.

FIELD PROVEN DESIGNS—After one year of MAPPER production, Omikron has established an impeccable reputation for reliability, integrity, and user support. Omikron's customers include the US Government, major corporations, universities, medical doctors, and professionals in all fields.

SYSTEMS—Omikron sells complete systems featuring Model II compatible Shugart disk drives. Call for prices and delivery.

FOREIGN ORDERS must include full payment in US funds plus $25 for air shipping and handling.

See review in July 80 BYTE By Jerry Pournelle.

OMIKRON *Products that set Precedents.*
1127 Hearst St Berkeley, CA 94702 (415) 845-8013

*CP/M is a TM of Digital Research. TRS-80 is a TM of Tandy Corporation.

Circle 298 on inquiry card.

---

3 ALTERNATIVE INTERFACES FOR THE TRS-80

COMM-80™



Featured in May/June '80 BYTE

- RS-232-C port (50-19.2K baud) software/hardware selectable
- Centronics printer port 8-bit
- connects to keyboard or E. I.
- chain up to 16 units
- use with E. I. for 2nd printer
- includes terminal software

$139.95 Special

- only $179~~.9~~5 complete

ALL INTERFACES ARE RADIO SHACK HARDWARE AND SOFTWARE COMPATIBLE AND CARRY A 60 DAY WARRANTEE INCLUDING PARTS AND LABOR. ALL UNITS INCLUDE USER'S MANUAL, POWER SUPPLY & AUXILIARY TRS-BUS CONNECTOR FOR FUTURE EXPANSION.

DISK-80™



Featured in March '81 BYTE

- disk controller (4 drives)
- hardware data separator
- includes 16K of RAM provision for additional 16K
- buffered TRS-bus connector
- real-time clock
- printer port (optional)

ASSEMBLED & TESTED with 16K of RAM	$329.95
Centronics Printer Port add	$ 50.00
with 32K RAM add	$ 50.00
DISK-80 pc board	$ 48.00
Printer/Power Supply pc board	$ 16.00
Complete Kit with 16K RAM and Printer Port	$275.00

Dealer inquiries invited.

TRS-80 is trademark of Tandy Corp

CHATTERBOX™



Featured in Aug. '80 BYTE

- 300 baud originate modem
- Centronics printer port 8-bit
- RS-232-C port (50-19.2K baud)
- connects to keyboard or E. I.
- received data automatically routed to printer ports
- includes terminal software
- only $279.95 complete

Call 1-800-645-3479, in N.Y. 1-516-374-6793

or write: The MicroMint Inc.
917 Midway
Woodmere, NY 11598

MICRO MINT

The registers in the 1771 that can be programmed by the user are the data, track, sector, and command registers—there is also a status register that can be read from but not written to. These 8-bit registers form the basis for software control of any disk drive:

- Data register: In disk-reading operations, this register receives 8 bits of data in parallel from the disk via the shift register. The data is held until the computer can accept it, allowing the shift register to be ready for the next byte. During disk-writing operations, 8 bits of data are transferred in parallel from the computer to this register and held until they can be accepted by the shift register for transfer to the disk. When executing the seek command, the data register holds the address of the desired track.
- Track register: This register holds the track number of the current head position. The value is incremented by one for every track the head is stepped in (toward track 76), and decremented by one for every track the head is stepped out (toward track 0). The contents of the register are compared with the track number recorded in the ID field of sectors on the disk.
- Sector register: During read or write operations, the contents of this 8-bit register are compared with the sector number recorded in the ID field of sectors on the disk. The contents should not be changed while the device is busy.
- Command register: This register holds the command currently being executed. The register should not be loaded while the 1771 is busy unless the current command is to be overridden (this action causes an interrupt to be generated). The eleven commands understood by the 1771 are divided into four types, shown in table 1, according to the way their flag bits are defined.
- Status register: Information about the status of the controller can be read from this register. The meaning of the status bits may change depending on the current command.

Registers are accessed by placing the proper logic levels on the A0, A1, $\overline{\text{RE}}$, and $\overline{\text{WE}}$ lines, as shown in table 2. Other logic levels in the 1771 perform functions to:

- Generate and check the 16-bit CRC code
- Increment, decrement, and compare register values
- Detect ID, data, and index-address marks
- Provide control signals based on an external 2.0 MHz clock

A typical disk operation includes the following steps. First, the soft-

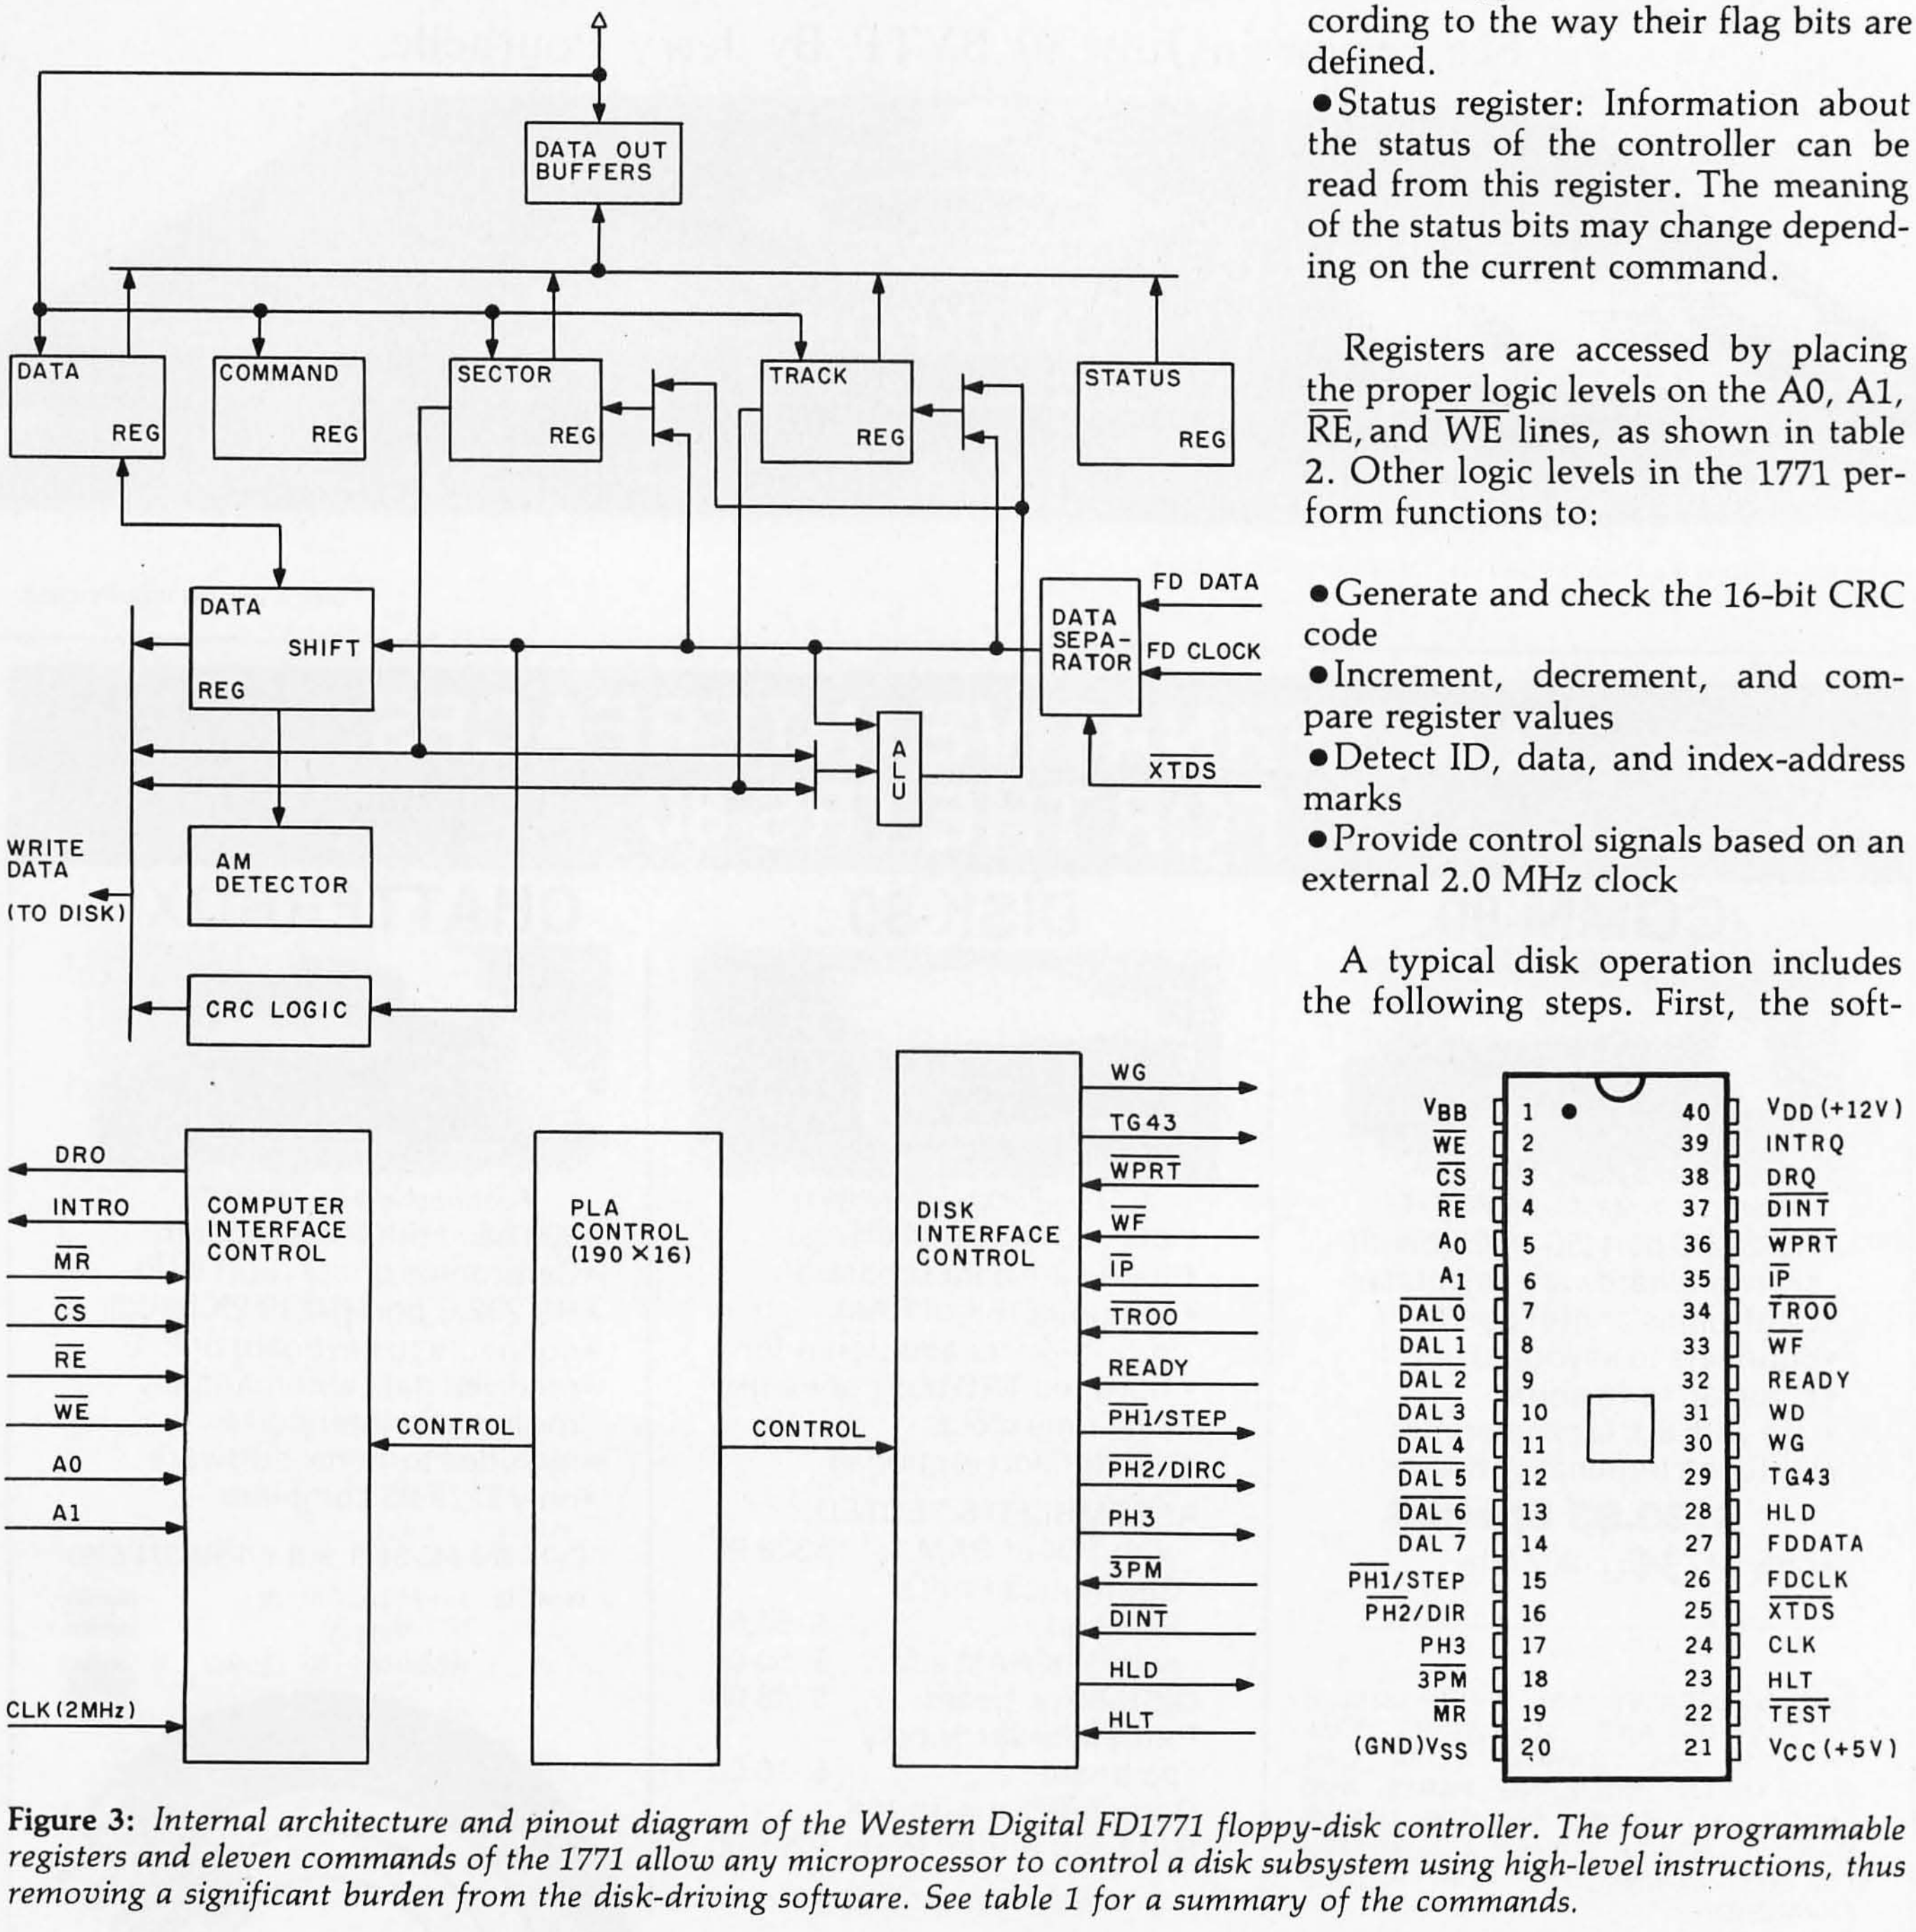

Figure 3: *Internal architecture and pinout diagram of the Western Digital FD1771 floppy-disk controller. The four programmable registers and eleven commands of the 1771 allow any microprocessor to control a disk subsystem using high-level instructions, thus removing a significant burden from the disk-driving software. See table 1 for a summary of the commands.*

Teach your little Apple to talk to Western Union, Telex and TWX.

It's big and it churns out reams of paper tape. You've seen it clattering away in late-night movies of Wall Street offices and newspaper city rooms. It's the old-fashioned Teletype™ machine, a product conceived in the Mechanical Age of Communication.

Microcom is proud to announce a successor from the Electronic Age of Communication. A software system anyone can run on any Apple II™ desktop computer. It's called Micro-Telegram™, available from your local Apple dealer.

Micro-Telegram performs all the functions of a Teletype machine, which means you and your Apple can access every single Western Union service, worldwide. Send mailgrams. Send and receive TWX®, Telex,® and international cables. Receive Infomaster® up-to-the-minute news, stock, foreign exchange, gold, futures, sports, and ski reports. Use your Apple to wire money. To send flowers. To check the snow at Sun Valley. To see what the Yen is selling for. To contact over 900,000 TWX and Telex subscribers around the world.

But unlike the Teletype machine, Micro-Telegram permits editing right on the screen, sends messages automatically without you in attendance, keeps directories and distribution lists, sorts your messages by individual user, and asks you in plain English for your commands. It's like getting a whole Teletype staff (operator, secretaries, clerks) along with your equipment, free of charge.

MICROCOM

We make little computers talk big.

Call 800-547-5995, ext. 188, toll free, for the Micro-Telegram-Apple dealer nearest you.

Dealer inquiries invited.

Microcom, Inc., 6 Faneuil Hall Marketplace, Boston, MA 02109. (617) 367-6362

Apple and Apple II are trademarks of Apple Computer, Inc. Western Union, Infomaster, TWX, Telex and Teletype are trademarks of Western Union, Inc.

Circle 441 on inquiry card.

TYPE	COMMAND	BITS 7	6	5	4	3	2	1	0
I	Restore	0	0	0	0	h	V	r_1	r_0
I	Seek	0	0	0	1	h	V	r_1	r_0
I	Step	0	0	1	u	h	V	r_1	r_0
I	Step In	0	1	0	u	h	V	r_1	r_0
I	Step Out	0	1	1	u	h	V	r_1	r_0
II	Read Command	1	0	0	m	b	E	0	0
II	Write Command	1	0	1	m	b	E	a_1	a_0
III	Read Address	1	1	0	0	0	1	0	0
III	Read Track	1	1	1	0	0	1	0	$\overline{s}$
III	Write Track	1	1	1	1	0	1	0	0
IV	Force Interrupt	1	1	0	1	I_3	I_2	I_1	I_0

(a)

BIT VALUES FOR TYPE 1
h = Head Load flag (Bit 3)
h = 1, Load head at beginning
h = 0, Do not load head at beginning
V = Verify flag (Bit 2)
V = 1, Verify on last track
V = 0, No verify
r_1r_0 = Stepping motor rate (Bits 1 through 0)
r_1r_0 = 11 gives 40 ms step time
u = Update flag (Bit 4)
u = 1, Update track register
u = 0, No update

(b)

BIT VALUES FOR TYPE II
m = Multiple Record flag (Bit 4)
m = 0, Single record
m = 1, Multiple records
b = Block length flag (Bit 3)
b = 1, IBM format (128 to 1024 bytes)
b = 0, Non-IBM format (16 to 4096 bytes)
a_1a_0 = Data Address Mark (Bits 1 through 0)
a_1a_0 = 00, FB (Data Mark)
a_1a_0 = 01, FA (User defined)
a_1a_0 = 10, F9 (User defined)
a_1a_0 = 11, F8 (Deleted Data Mark)

(c)

BIT VALUES FOR TYPE III
$\overline{s}$ = Synchronize flag (Bit 0)
$\overline{s}$ = 0, Synchronize to Address Mark
$\overline{s}$ = 1, Do not synchronize to Address Mark

(d)

BIT VALUES FOR TYPE IV
I_0 thru I_3 = Interrupt Condition flags (Bits 3 through 0)
I_0 = 1, Not Ready to Ready transition
I_1 = 1, Ready to Not Ready transition
I_2 = 1, Index pulse
I_3 = 1, Immediate interrupt
E = Enable HLD and 10 ms Delay
E = 1, Enable HLD, HLT and 10 ms delay
E = 0, Head is assumed engaged and there is no 10 ms delay

(e)

Table 1: *The high-level instructions of the FD1771 disk formatter/controller device. When one of the instructions defined by table 1a is loaded into the command register of the FD1771, the FD1771 executes one or a series of actions. Bits represented by a letter within a command are defined in the bit-value tables for that type of instruction, tables 1b through 1e.*

ware coordinating the disk operation checks to see if the controller is busy from the last command. If it is not, the software writes the desired command into the command register. If data is to be transferred as each byte is assembled (or disassembled) by the shift register, the controller sends a DRQ (*data request*) signal. When the operation is completed, the controller sends an INTRQ (*interrupt request*) signal. The status register can then be checked by the controlling software for seek, write protect, busy, or CRC errors.

Controller Hardware

The schematic diagram for the floppy-disk controller is given in figure 4. In addition to the 1771 and the 6520 PIA (peripheral interface adapter), circuitry is included for read/write control, clock and data bit separation, head loading, and inversion of various signals as required by the FD400 disk drive.

Three gates convert the DIR (direction) and STEP signals from the 1771 into the STEP-IN and STEP-OUT signals needed by the FD400 disk drive. The HEAD-LOAD signal is conditioned by a simple one-shot (monostable multivibrator) and an inverter; this guarantees a fixed 40 ms pause allowing the head to load and settle. Once the interval has passed, a signal is sent to the 1771 to acknowledge the fact.

The data-separator and clock circuit was designed by Steve Christiansen of Iowa State University. This circuit contains four of the ten integrated circuits in the system. (If the disk drive you intend to use has sepa-

A1	A0	Register Affected During Read ($\overline{RE}$ = 0, $\overline{WE}$ = 1)	Register Affected During Write ($\overline{RE}$ = 1, $\overline{WE}$ = 0)
0	0	Status Register	Command Register
0	1	Track Register	Track Register
1	0	Sector Register	Sector Register
1	1	Data Register	Data Register

Table 2: *Access to registers within the Western Digital FD1771 disk formatter/controller device. The FD1771 has five internal registers: command, data, sector, status, and track. A given register is read or written by placing the appropriate values on lines A1 and A0 and pulling down either the READ-ENABLE (RE) line for a read operation, or the WRITE-ENABLE (WE) line for a write operation. The sector and track registers specify the sector and track when these parameters are needed by a given command byte. The command register, when filled, causes one of eleven high-level instructions to be executed (see table 1). Data passes between the computer and the disk drive through the data register. After a command has been executed by the FD1771, the status register must be read before another command can be executed.*

Circle 442 on inquiry card.

OVER 8 MBytes OF SOFTWARE AT $8* PER DISKETTE FULL

The exchange library of The CP/M® Users Group has nearly 50 volumes of software available. Everything from editors, assemblers, languages, games, tools and more–and almost everything in full source code.

Send $6 for full library catalog.**

THE CP/M USERS GROUP

1651 Third Avenue, New York, N.Y. 10028.

*Domestic price. Inquire for overseas price.

**The complete catalog of CPMUG is available for $6 prepaid to the U.S., Canada and Mexico. $11 prepaid to all other countries.

® CP/M is a registered trademark of Digital Research. The CP/M Users Group is not affiliated with Digital Research.

ROBOTS

The New Industrial Revolution

Intelligent machines are rapidly appearing in factories, offices, homes, and automobiles. The face of the industrialized world is changing. Vast opportunities exist for those with a knowledge of this explosive field. **Robotics Age** will bring you the latest developments in **all aspects** of Robotics and Machine Intelligence. From introductory and non-technical survey articles to the latest state-of-the-art in hardware and software design. You will find articles on sensors and perception, computer reasoning and robot control, industrial robot applications and amateur robotics—as well as related new products, book reviews and technical abstracts.

YES! I want to stay up-to-date on this fascinating new technology!

Name Title

Company Address

City State/Providence/Country Postal Code

	United States	Canada Mexico*	Foreign Rates*
☐ 1 year (6 issues)	$15	$17	$19
☐ 2 years (12 issues)	$28	$32	$36
☐ 3 years (18 issues)	$39	$45	$51

*US Funds on US Bank

☐ Bill VISA ☐ MasterCard ☐ Bill me (N America only)

Card Number Expires

Signature

Send to: ROBOTICS AGE, PO Box 512, Tujunga, California 91042

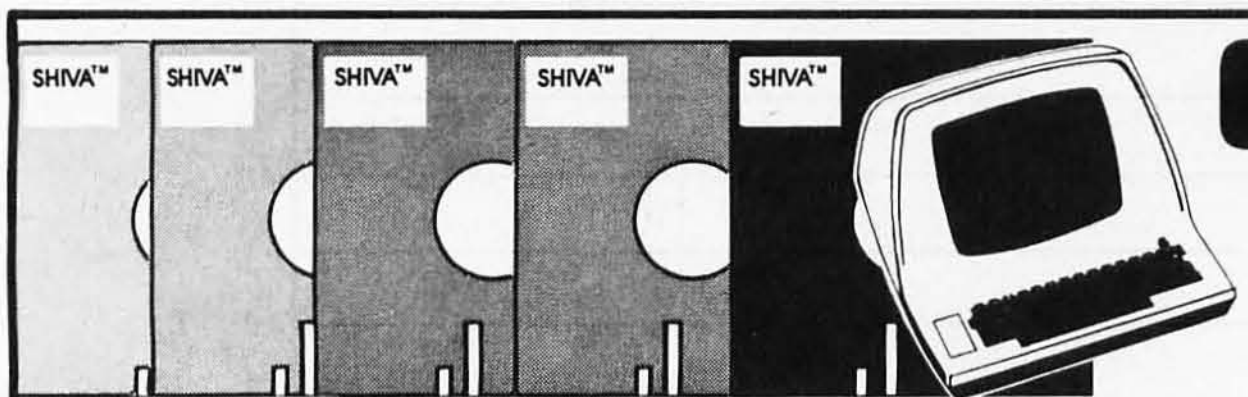

OMEGA RESEARCH™

presents **SHIVA™**

MULTI-USER ***MULTI-TASKING***

S-100 OR APPLE II

NOW 8 OR 16 BIT!!!

The world-famous **SHIVA™** Multi-User Real-Time Multi-Tasking Virtual Operating System with its unique **VIRTUAL-PERSONALITY™** disk-resident library of interface routines and Virtual R.A.M. mapping is now available in two versions: **SHIVA™** 1.2 for 8-bit C.P.U.'s and **SHIVA™** 1.6 for 16-bit processors. **SHIVA™** 1.2 pioneered the high-powered Virtual Operating System (VOS) for microprocessors with its user-reconfigurable Virtual R.A.M. assignment for up to 16-users or real-time tasks. Now **SHIVA™** 1.6 continues **Omega Research™**'s commitment to non-obsolescence and system superiority by extending **SHIVA™** into the 16-bit world of the 80's. **SHIVA™** 1.6 syntax is upward-compatible with **SHIVA™** 1.2, allowing **SHIVA™** users to recompile **SHIVA™** 1.2 programs to run under **SHIVA™** 1.6 easily, so users may purchase **SHIVA™** 1.2 now, and move up to a 16 bit processor later as their needs dictate with no fear of "software obsolescence." **SHIVA™** 1.6 is upward compatible with CP/M or CDOS files and programs through its **VIRTUAL-PERSONALITY™** disk-resident subroutines, supports hard disks as well as single or double-density floppies, features Logon and password protection, and features executive shell commands similar to UNIX in structure and versatility. **SHIVA™** interfaces currently to Microsoft Basic, Cobol, and Fortran; C; Forth; UCSD Pascal Programs; Pascal/M; CBASIC-2; APL; ALGOL-60; LISP; PL/I; MAC; and new interfaces are continually in development to keep **SHIVA™** users State-of-the-Art.

SHIVA™ 1.2 is available for 8080, 8085, 6800, 6502, and Z80-BASED SYSTEMS INCLUDING CROMEMCO, NORTHSTAR, VECTOR GRAPHIC, SWTP, DIGITAL GROUP, ALTOS, IMS, APPLE II, ITHACA INTERSYSTEMS, and TELETEK disk controllers. 6809 C.P.U. version is in development.

SHIVA™ 1.6 is available for 8086/8088/ and Z8000-2 based systems, with versions in development for 68000 based systems.

Both **SHIVA™** versions 1.2 and 1.6 provide full disk utilities for all users. **SHIVA™** 1.6 upgrades are available to registered **SHIVA™** 1.2 users within one year of purchase of **SHIVA™** 1.2 for half the current list price. **SHIVA™** — The State-of-the-Art in microprocessor operating systems.

SHIVA™ 1.2	
R.A.M. addressing to 1.048 megabytes on a Z80A-based system	
Minimum system **R.A.M.** (single user):	4K
Additional **R.A.M.** per user:	2K
Maximum # of users or tasks:	16
Maximum # of physical and logical drives:	128
R.A.M. Bank capacity:	16-64K Banks (1.048 megabytes)
System prices:	$400.00

SHIVA™ 1.6	
R.A.M. addressing to 128 megabytes on a Z8000-2 system	
Minimum system **R.A.M.** (single user)	4K
Additional **R.A.M.** per user:	2K
Maximum # of users or tasks:	16
Maximum # of physical and Logical drive:	256
R.A.M. Bank Capacity:	16-8 megabyte banks (128 megabytes)
System prices:	$650.00

Complete Documentation Included: Documentation available separately for $50.00. (Applicable to later purchase of **SHIVA™** system) Signed license agreement must be returned prior to all shipments.

CP/M is a trademark of Digital Research ● CDOS is a trademark of Cromemco, Inc. ● UNIX is a trademark of Bell Laboratories **SHIVA™, VIRTUAL-PERSONALITY™, and OMEGA RESEARCH™ are trademarks of OMEGA RESEARCH™.**

OMEGA RESEARCH™ P.O. Box 479, Linden, Ca. 95236 (209) 334-6666 **9 am to 5 pm Mon. - Fri.**

Circle 297 on inquiry card.

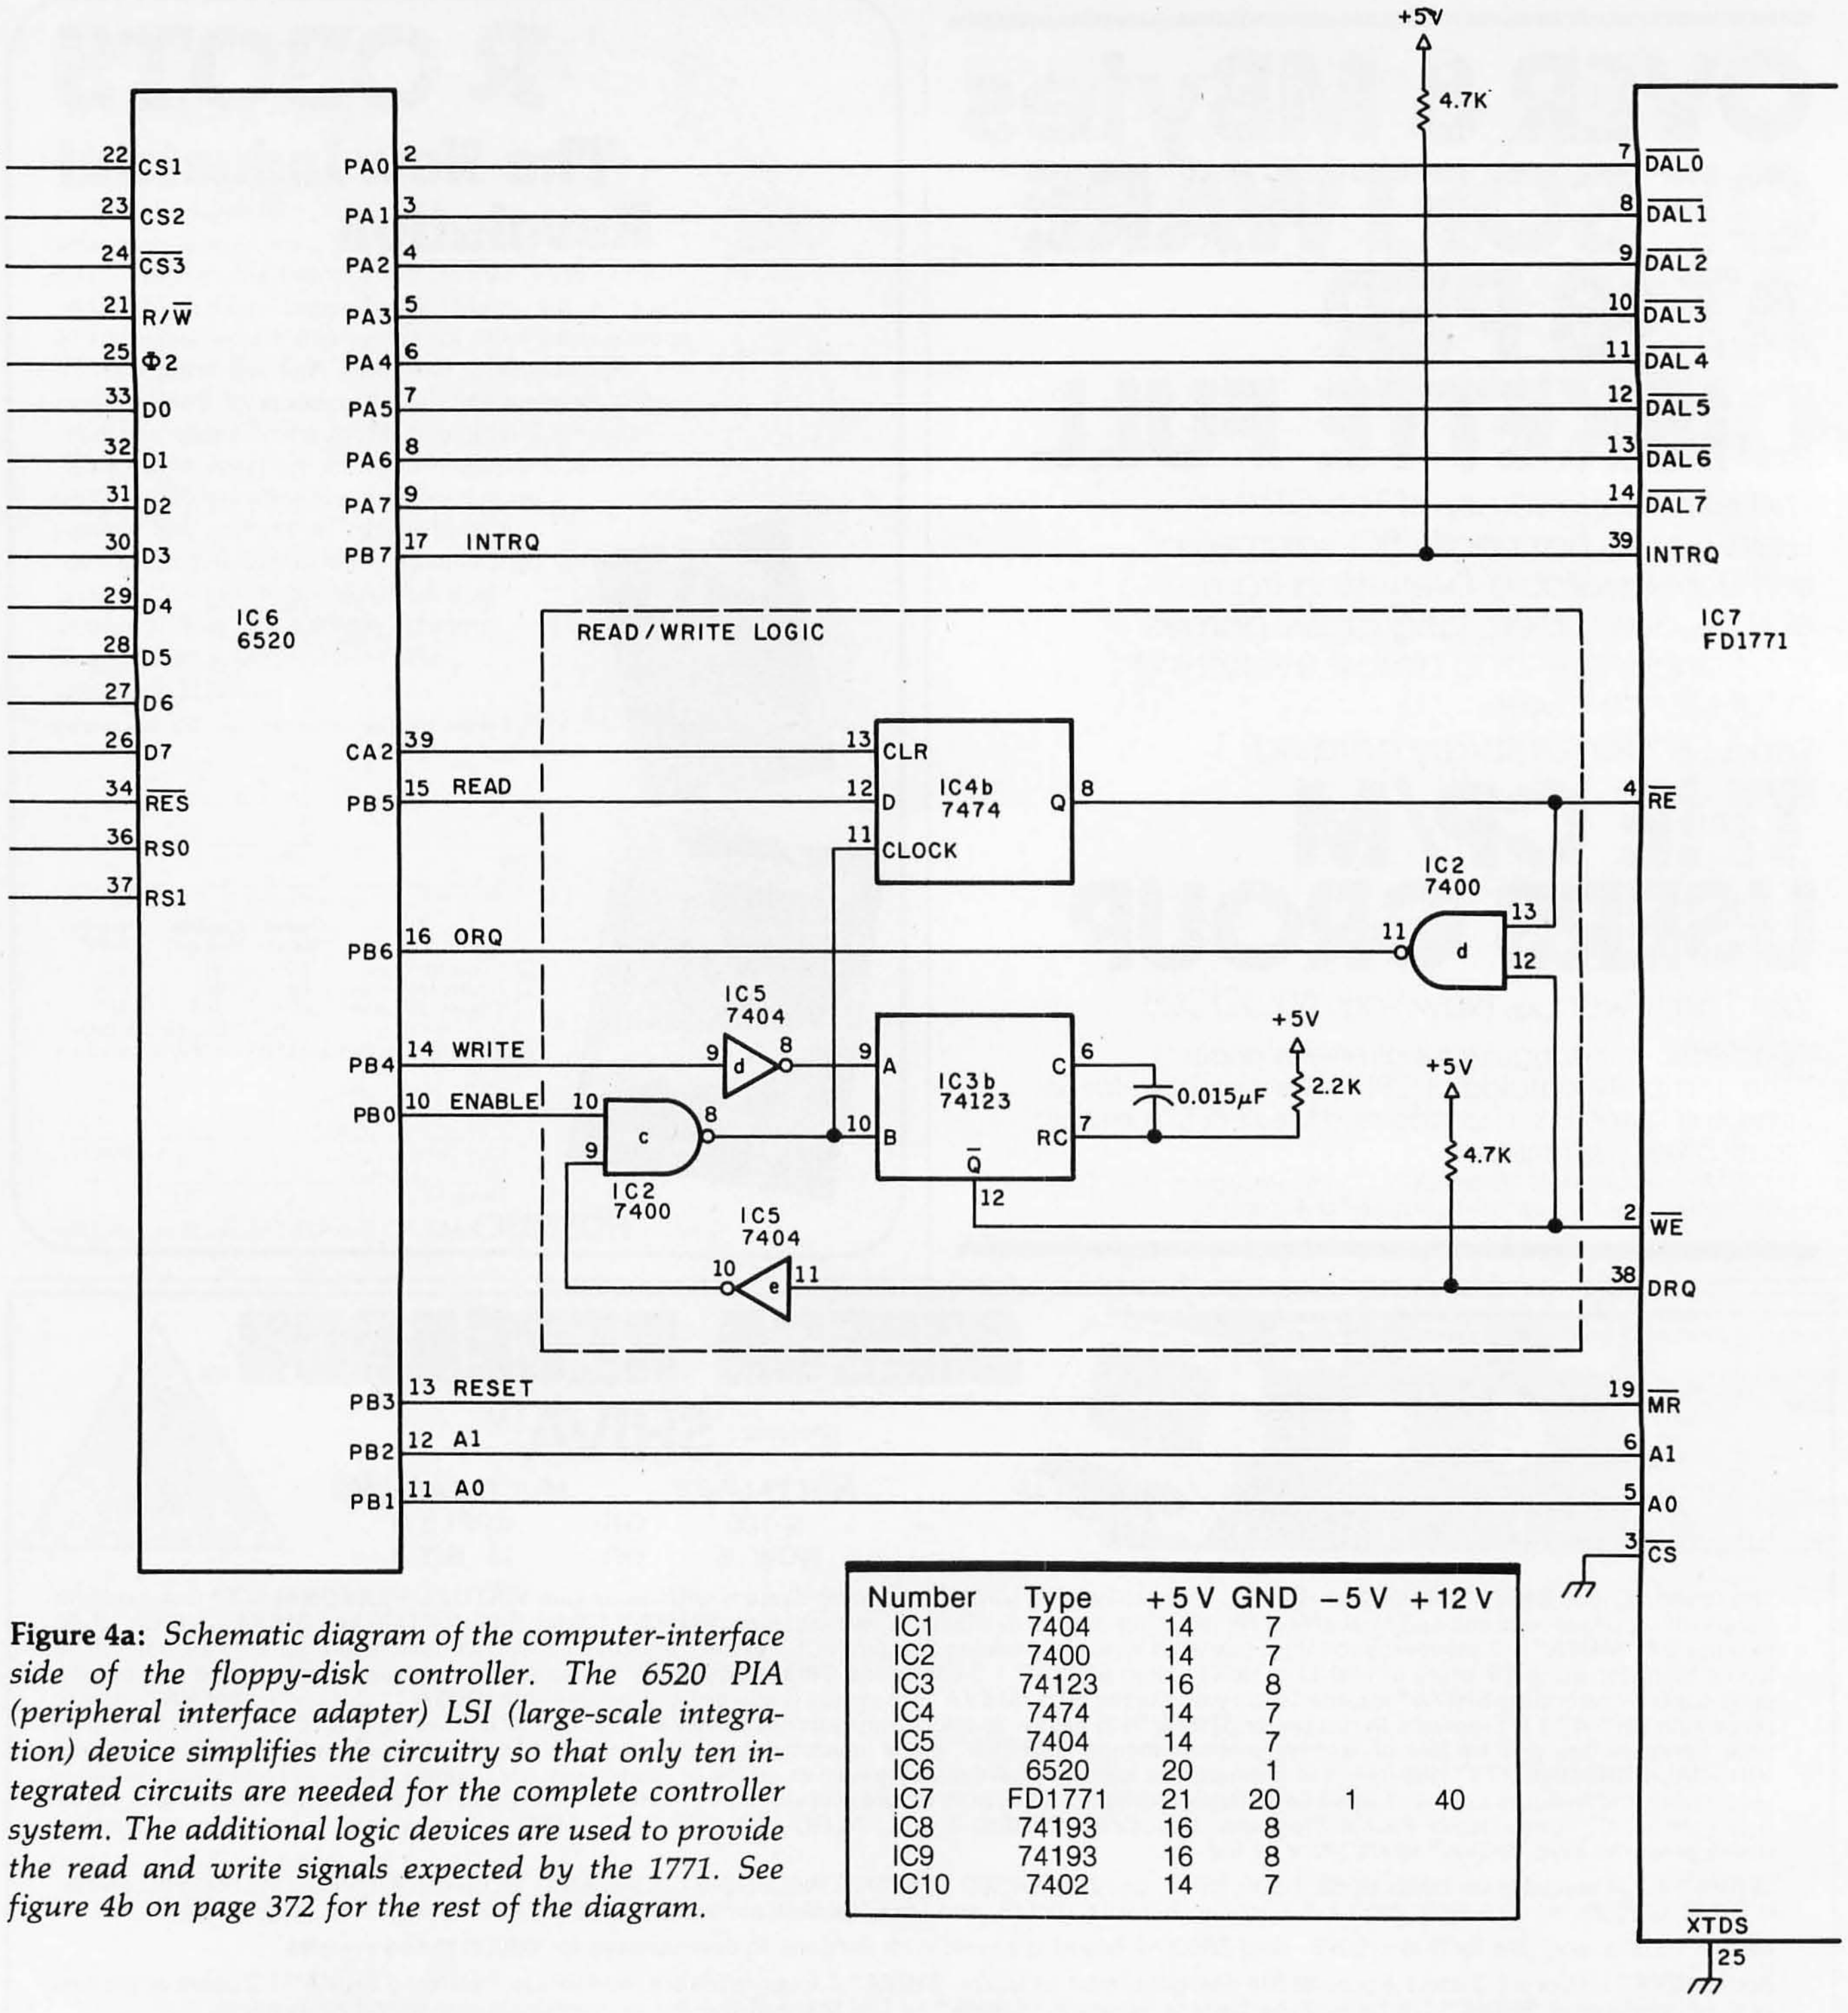

Number	Type	+5 V	GND	−5 V	+12 V
IC1	7404	14	7		
IC2	7400	14	7		
IC3	74123	16	8		
IC4	7474	14	7		
IC5	7404	14	7		
IC6	6520	20	1		
IC7	FD1771	21	20	1	40
IC8	74193	16	8		
IC9	74193	16	8		
IC10	7402	14	7		

Figure 4a: *Schematic diagram of the computer-interface side of the floppy-disk controller. The 6520 PIA (peripheral interface adapter) LSI (large-scale integration) device simplifies the circuitry so that only ten integrated circuits are needed for the complete controller system. The additional logic devices are used to provide the read and write signals expected by the 1771. See figure 4b on page 372 for the rest of the diagram.*

rated clock and data signals, you may be able to eliminate some of the circuitry shown. Remember that the 1771 requires a 2.0 MHz clock.)

The clock part of this circuit is a conventional TTL (transistor-transistor logic) crystal oscillator which also drives a divide-by-two stage to produce the 2.0 MHz clock signal. The data-separator part of the circuit inverts the raw signal from the disk drive and gates it out as data or clock information, depending on the state of the QD output of IC9.

There is a certain difficulty in determining, from a serial-bit stream, which bits are clock and which data (the two are interleaved, and some of the clock bits may be missing). The solution relies on the fact that, at most, three clock pulses will be omitted; if four in a row are omitted, the data and clock outputs are switched by the external data-separator circuit.

The read/write circuitry is very compact and plays a major role in the simplicity of the system. It is a subtle solution to a timing problem; the obvious approach of using the outputs of the 6520 to control $\overline{RE}$ and $\overline{WE}$ (the read- and write-enable lines) as input for the DRQ (data-request line) is too slow. The indicated circuitry using the ENABLE line causes each DRQ signal to automatically generate another $\overline{RE}$ or $\overline{WE}$ signal as required.

The 6520 has 20 programmable I/O (input/output) pins (see figure 5),


FORETHOUGHT PRODUCTS


Catalog of Minicomputer Supplies and Accessories
Inmac
International Minicomputer Accessories Corporation


ATARI 800
AXLON 256

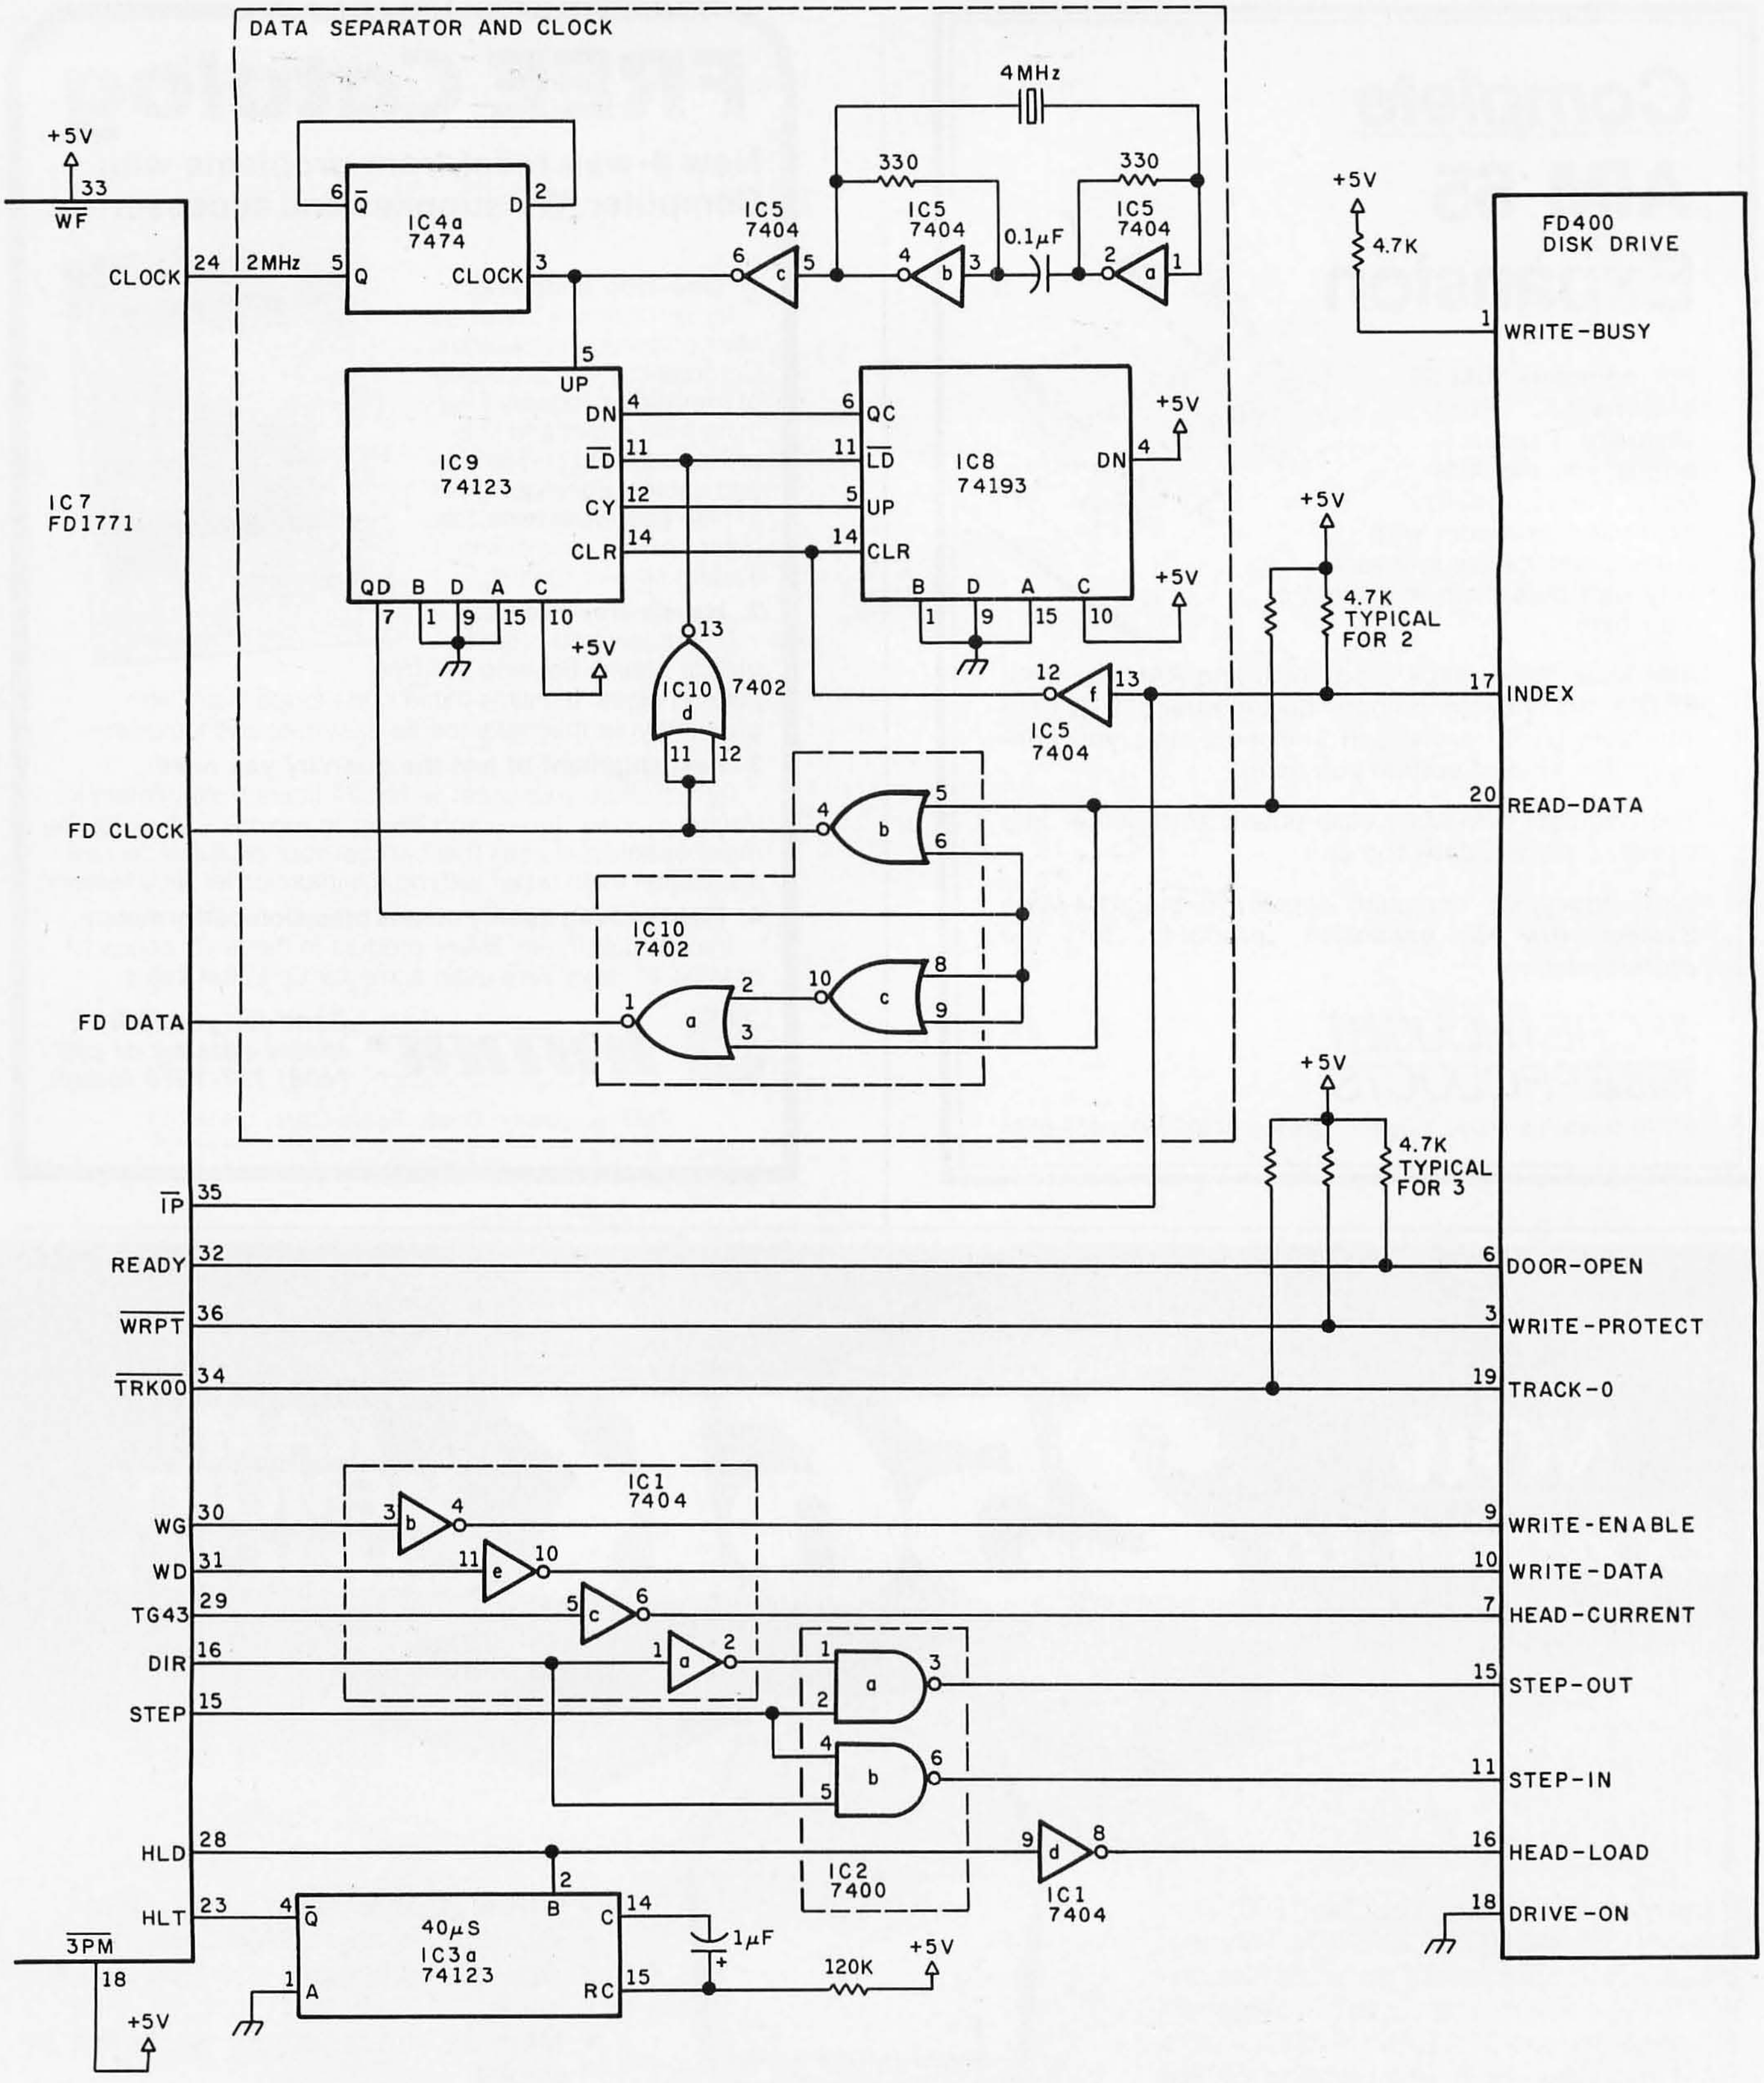

Figure 4b: *Schematic diagram of the drive-interface side of the floppy-disk controller. Clock signals and minor control functions are provided for by the additional circuitry, as well as the separation of recorded data from recorded synchronization pulses.*

of which only 17 are used in this system to interface with the 1771. The A port is programmed as eight bidirectional data lines, and is connected to the 1771's data lines, while the B port pins are programmed as necessary to provide control lines. The data lines of the 6520 can be connected to like lines on the microprocessor, while its three device-select lines can be connected to match whatever address-decoding scheme is appropriate. The

Circle 412 on inquiry card.

STRETCH THE POWER

Of Your HP-85 or Commodore Pet/CBM With **TNW's** IEEE-488 Bus System Building Blocks...



TNW-2000

TNW's RS-232 SERIAL INTERFACES

Connect your PET/CBM to any RS-232 Serial Printer, Plotter, CRT Terminal, Modem, or other device:

TNW-1000	ONE CHANNEL OUTPUT ONLY	**$129**
TNW-2000	ONE CHANNEL INPUT AND OUTPUT	**$229**
TNW-232D	TWO CHANNELS, INPUT & OUTPUT, 12 RS-232 CONTROL SIGNALS	**$369**

TURN YOUR PET INTO A TERMINAL

Access Timesharing Systems and Bulletin Boards with TNW's Pterm Software and full service telephone modem:

TNW-103	AUTO ANSWER/AUTO DIAL USE WITH DAA	**$389**

Pterm also works with acoustical couplers and other modems interfaced to the PET with the TNW-2000 or TNW-232D. Electronic mail and TWX Terminal programs also available. All units are addressable IEEE-488 devices, complete with power supply cabinet, full documentation and **one year** warranty.

TNW CORPORATION

3351 Hancock St. • San Diego, CA., 92110 (714) 225-1040
TWX910-335-1194
Visa/Mastercharge Welcome • Dealer inquiries invited

Circle 47 on inquiry card.

ATARI®

COMPLETE LINE OF ATARI PRODUCTS
20% OFF

Atari 800 with 16K	$810	**Atari 822** Printer	$360
Atari 800 with 24K	$895	**Atari 400** with 8K	$399
Atrai 815 Dual Disk Drive	$1200	**Atari 400** with 16K	$475
Atari 825 Printer	$800	**Atari 410** Cassette	$69
Atari 820 Printer	$360	**Atari 850** Interfaced Module	$176

SPECIAL 25% OFF **Atari 810** Disk Drive **$460**

NOW IN STOCK

Ramcram 32K RAM Modules	$199	**Visicalc**	$170
Kurta Graphics Tablet	$560	**Microtek** 16K RAM Boards	$100
Epson MX80 Printer	$520		

ALSO

SOFTWARE BY PDI, THESIS, BIT BUCKET AND MORE!

Z19 Terminals	$800
Novation DCAT Modems	$169
Intertec Super Brain 64K	$2810

PLUS

NEC Spinwriters, Diablo Printers, Complete lines of **Centronics Printers** and **Commodore Equipment. All** at reduced prices.

The Bit Bucket

168 NORTH BEACON STREET
P.O. BOX 365
NEWTON HIGHLANDS, MA 02161
617-783-3144

META TECHNOLOGIES

26111 Brush Avenue, Euclid Ohio 44132
CALL TOLL FREE 1-800-321-3552 TO ORDER
IN OHIO, call (216) 289-7500 (COLLECT)

MICROPARAPHERNALIA

DISKETTES (box of ten)

5¼" PLAIN JANE™	$21.95
PLAIN JANE™ *Gold*	$25.95
5¼" DATALIFE™ MD 525-01	$26.95
8" DATALIFE™ FD34-8000	$43.95

NEWDOS by APPARAT

NEWDOS/80 ★ SPECIAL ★	$129.95
NEWDOS + to NEWDOS/80 UPGRADE	CALL
NEWDOS + with ALL UTILITIES 35-track	$69.95
NEWDOS + with ALL UTILITIES 40-track	$79.95

BOOKS

TRS-80™ DISK AND OTHER MYSTERIES	$19.95
MICROSOFT™ BASIC DECODED	$29.95

1001 THINGS TO DO WITH YOUR PERSONAL COMPUTER

BY MARK SAWUSCH

333 pages

$7.95

333 pages, written in simple terms, of "what-to-do" and "how-to-do-it". Suitable not only for microcomputers, but for programmable calculators as well. Includes program listings, formulas, a glossary of computer terms and more! Definitely a MUST BUY!

A PARTIAL LIST OF APPLICATIONS

Electric Memorandum
Energy Efficiency Computation
Test Your Typing Speed
Statistical Analysis
Options Analysis
Logic Circuit Analysis
Antenna Design
Carpenter and Mechanic's Helper
Calculation of the Number of Days Between Two Dates
Income Tax
Speed Reading
Check Digit Generator
Personality Test
Morse Code
Finances and Investments
Biorythm
Letter Writing
Simultaneous Equation Solver
Real Estate Evaluation
Astrology
General Purpose Clock/Timer
Recipe Index/Calculator
RPN Calculator
Amateur Radio
Computer Assisted Instruction
Robotwar

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation. DATALIFE is a trademark of VERBATIM. PLAIN JANE, AIDS-I, AIDS-III, CALCS-III, CALCS-IV, MERGE-III are trademarks of MTC. © 1981 by Metatechnologies Corporation, Inc.

MOST ORDERS SHIPPED WITHIN ONE BUSINESS DAY

Products damaged in transit will be exchanged.

PRICES IN EFFECT May 1, 1981 THRU May 31, 1981,

Prices, Specifications, and Offerings subject to change without notice.

8105

WE ACCEPT
- VISA
- MASTER CHARGE
- CHECKS
- MONEY ORDERS
- C.O.D.

- Add $3.00 for shipping & handling
- $3.00 EXTRA for C.O.D.
- Ohio residents add 6½% sales tax.

CALL FOR INFORMATION ON OTHER PRODUCTS

Circle 234 on inquiry card.

PIA Register Selection and Function

RS1	RS0	R/$\overline{W}$	CRA2	CRB2	Function
0	0	X	0	X	Read *or* Write. DDRA
0	0	0	1	X	Write into ORA
0	0	1	1	X	Read from A-side input pins
0	1	X	X	X	Read *or* Write CRA
1	0	X	X	0	Read *or* Write DDRB
1	0	0	X	1	Write into ORB
1	0	1	X	1	Read from B-side input pins
1	1	X	X	X	Read *or* Write CRB

X = don't care

Control Register Bit Designations

	7	6	5 4 3	2	1 0
CRA	*IRQA1*	*IRQA2*	*CA2 Control*	*DDRA Access*	*CA1 Control*
CRB	*IRQB1*	*IRQB2*	*CB2 Control*	*DDRB Access*	*CB1 Control*

Control of CA2 Output Modes

	CRA			
Bit 5	*Bit 4*	*Bit 3*	*Mode*	*Description*
1	0	0	"Handshake" on Read	CA2 is set high on an active transition of the CA1 interrupt input signal and set low by a microprocessor "read A data" operation. This allows positive control of data transfers from the peripheral device to the microprocessor.
1	0	1	Pulse Output	CA2 goes low for one cycle after a "read A data" operation. This pulse can be used to signal the peripheral device that data was taken.
1	1	0	Manual Output	CA2 set low
1	1	1	Manual Output	CA2 set high

Table 3: *Control codes for the 6520. This device offers 20 pins that may be programmed (either individually or in groups) as input, output, or bidirectional lines.*

6520 controls and modes are listed in table 3.

Construction Notes

The prototype floppy-disk controller was built on a Vector 3677 wire-wrap board (see photo 1). There are no special layout considerations, but adequate power supply bypassing must be observed (i.e., 0.1 μf capacitors across the supply and ground pins of each integrated circuit). A 16-pin DIP (dual in-line package) socket is used to connect the controller to a ribbon cable from the disk drive (use proper terminations).

Debugging

The read/write circuit can be debugged by using a microcomputer. Move the DRQ input (IC5, pin 11 in figure 4) from the 1771 to a convenient 6520 output. With the microcomputer running a diagnostic program, check to see that the $\overline{\text{WE}}$ pulse (IC3, pin 12 in figure 4) is about 14 μs.

The data separator can be checked by using a single-pulse input signal in

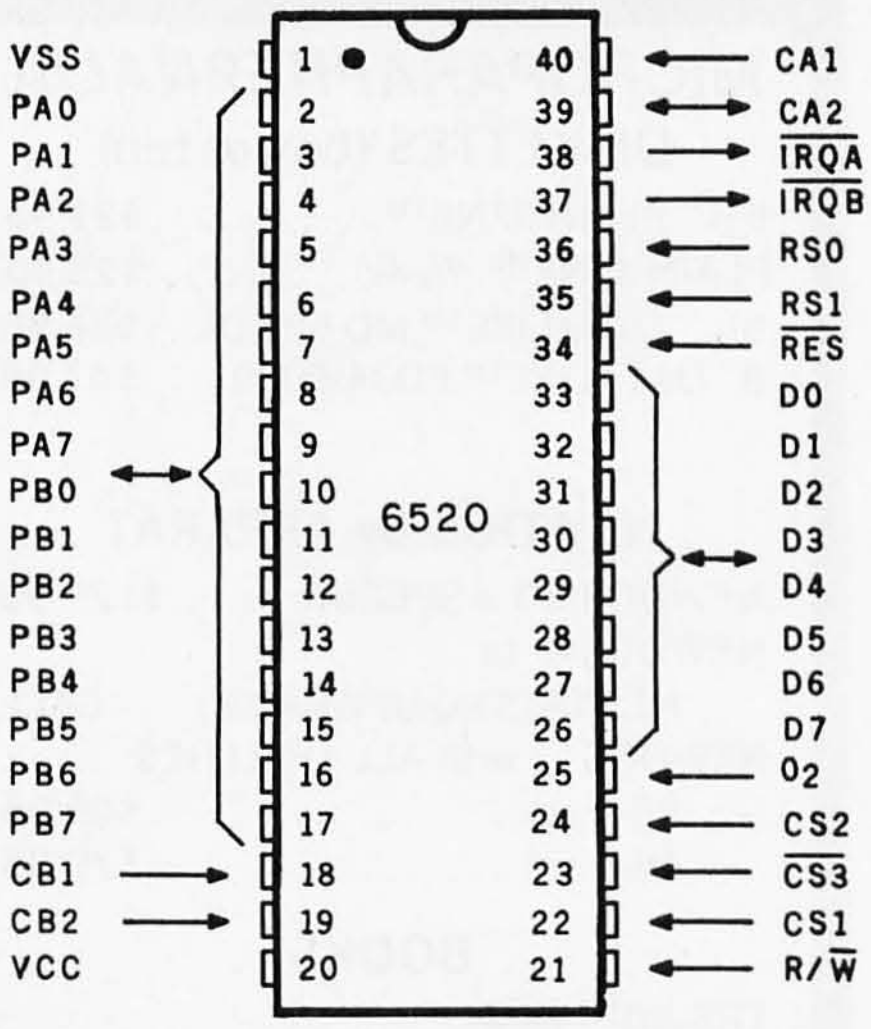

Figure 5: *Pin description of the MOS Technology 6520 PIA. Use of this particular device allows easy interfacing of a disk controller to a 6502-based computer. One I/O port handles control signals; the other is used to transfer parallel bytes of data.*

Circle 77 on inquiry card.

computer case company

comp case

• AP101	Apple II with Single Disk Drive	$109
• AP102	Apple II with Double Disk Drives	119
• AP103	Apple II, 9 inch Monitor & Double Drives	129
• AP104	Apple ///, two additional Drives & Silentype	139
• AP105	12 inch monitor plus accessories	99
• RS201	TRS-80 Model I, Expansion Unit & Drives	109
• RS202	TRS-80 Monitor or TV set	84
• RS204	TRS-80 Model III	129
• RS205	Radio Shack Color Computer	89
• P401	Paper Tiger 440/445/460	99
• P402	Centronics 730/737 - Line Printer II/IV	89
• P403	Epson MX70 or MX80	89
• CC90	Matching Attaché Case	75

computer case company

5650 INDIAN MOUND CT. COLUMBUS, OHIO 43213 (614) 868-9464

MasterCard VISA

Circle 416 on inquiry card.

TERMINALS FROM TRANSNET

PURCHASE PLAN • 12-24 MONTH FULL OWNERSHIP PLAN • 36 MONTH LEASE PLAN

		PURCHASE	PER MONTH		
	DESCRIPTION	PRICE	12 MOS.	24 MOS.	36 MOS.
DEC	LA36DECwriter II	$1,095	$105	$ 58	$ 40
	LA34 DECwriter IV	995	95	53	36
	LA34 DECwriter IV Forms Ctrl.	1,095	105	58	40
	LA120 DECwriter III KSR	2,295	220	122	83
	LA120 DECwriter III RO	2,095	200	112	75
	VT100 CRT DECscope	1,595	153	85	58
	VT132 CRT DECscope	1,995	190	106	72
TEXAS INSTRUMENTS	TI745 Portable Terminal	1,595	153	85	58
	TI765 Bubble Memory Terminal	2,595	249	138	93
	TI783 Portable KSR, 120 CPS	1,745	167	93	63
	TI785 Portable KSR, 120 CPS	2,395	230	128	86
	TI787 Portable KSR, 120 CPS	2,845	273	152	102
	TI810 RO Printer	1,895	182	102	69
	TI820 KSR Printer	2,195	211	117	80
DATAMEDIA	DT80/1 CRT Terminal	1,695	162	90	61
	DT80/5 APL CRT	2,095	200	112	75
	DT80/5L APL 15″ CRT	2,295	220	122	83
LEAR SIEGLER	ADM3A CRT Terminal	875	84	47	32
	ADM31CRT Terminal	1,450	139	78	53
	ADM42 CRT Terminal	2,195	211	117	79
HAZELTINE	1420 CRT Terminal	945	91	51	34
	1500 CRT Terminal	1,095	105	58	40
	1552 CRT Terminal	1,295	125	70	48
TELEVIDEO	920 CRT Terminal	895	86	48	32
	950 CRT Terminal	1,075	103	57	39
NEC SPINWRITER	Letter Quality, 55/15 RO	2,895	278	154	104
	Letter Quality, 55/25 KSR	3,295	316	175	119
QUME	Letter Quality KSR, 55 CPS	3,395	326	181	123
	Letter Quality RO, 55 CPS	2,895	278	154	104
HEWLETT PACKARD	2621A CRT Terminal	1,495	144	80	54
	2621P CRT Terminal	2,650	255	142	96
CENTRONICS	730 Desk Top Printer	715	69	39	26
	737 W/P Desk Top Printer	895	86	48	32

FULL OWNERSHIP AFTER 12 OR 24 MONTHS • 10% PURCHASE OPTION AFTER 36 MONTHS

ACCESSORIES AND PERIPHERAL EQUIPMENT

ACOUSTIC COUPLERS • MODEMS • THERMAL PAPER • RIBBONS • INTERFACE MODULES • FLOPPY DISK UNITS

OTHER POPULAR TERMINALS, COMPUTER PERIPHERALS AND COMPUTERS AVAILABLE.

TRANSNET CORPORATION
1945 ROUTE 22 • UNION, N.J. 07083 • (201) 688-7800
TWX 710-985-5485

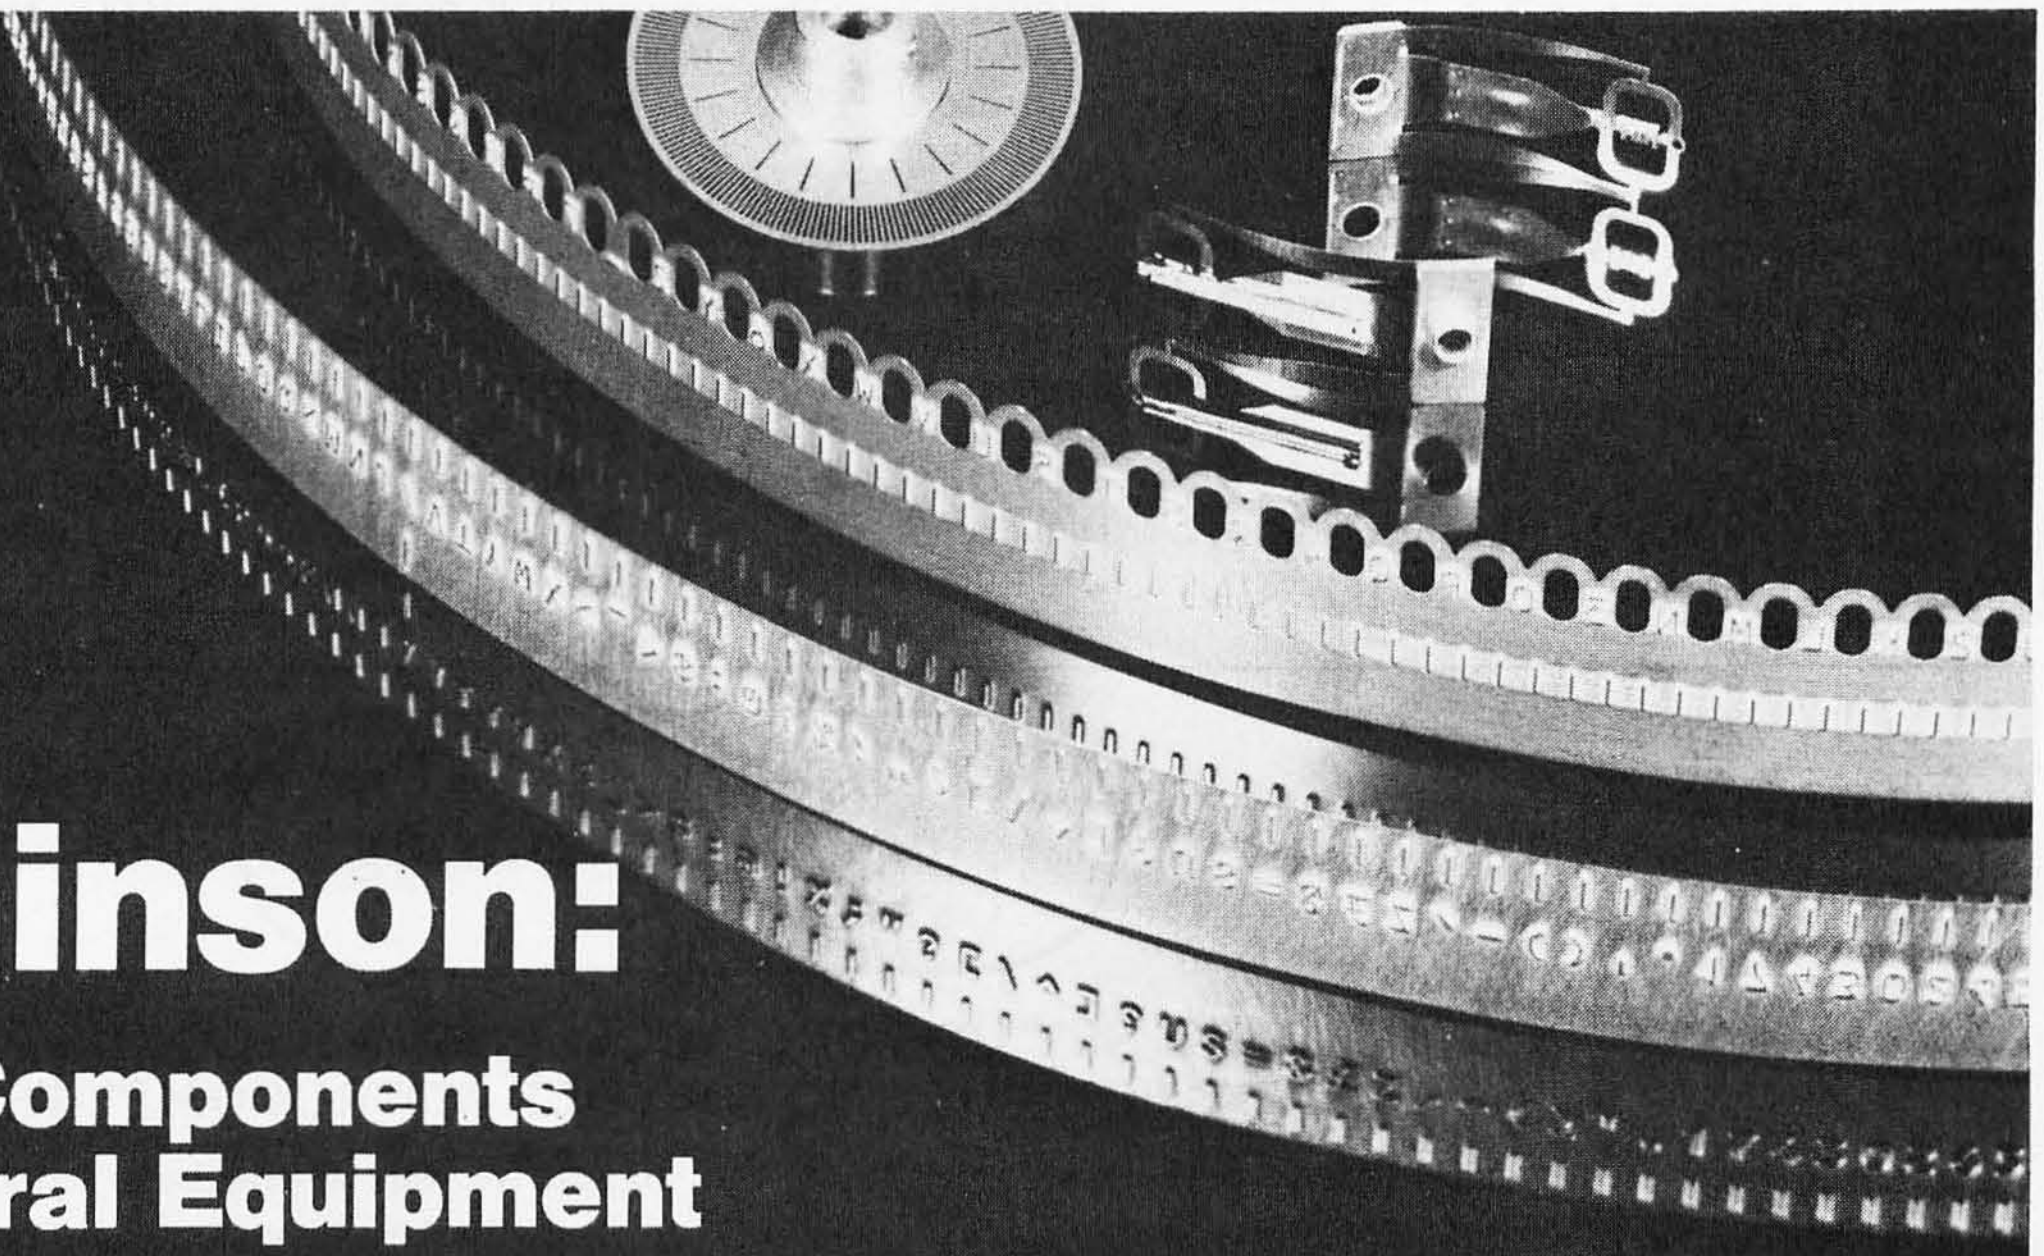

Hutchinson:

Precision Components for Peripheral Equipment

- Head Suspensions and Assemblies
- Font Bands
- Encoder Discs
- Fuser Components
- Actuator Bands

See us at Booth 463/464 at NCC.

HUTCHINSON
INDUSTRIAL
CORPORATION
40 West Highland Park
Hutchinson, Minnesota 55350
Telephone: (612) 587-5276

Circle 188 on inquiry card.

Circle 251 on inquiry card.

LET YOUR APPLE SEE THE WORLD!

The DS-65 Digisector® is a random access video digitizer which converts a TV camera's output into digital information the Apple can process. It features 256 X 256 resolution with up to 64 levels of grey scale. Scanning sequences are user programmable. On-board software in EPROM is provided for displaying digitized images on the Hi-Res screen.

Use the DS-65 for: Precision Security Systems • Computer Portraiture • Robotics • Fast to Slow Scan Conversion • Moving Target Indicators • Reading UPC codes, schematics, musical scores and paper tape •



NEW SOFTWARE FOR THE DS-65 IS NOW AVAILABLE ON DISK!

— Portrait System Software: This program includes captions and a credit line, reverse printing for T-shirt application and the option to save portraits on disk.

— Picture Scanner: Provides a variety of different dithering algorythms for compressing the digitized image into the Hi-Res screen.

Write or call for more information!

GIVE YOUR APPLE THE GIFT OF SIGHT!

DS-65 Price: $349.95
FSII Camera Price: $299.00
Combination Price: $599.00

Master Charge / Visa Accepted

THE MICRO WORKS

P.O. BOX 1110 DEL MAR, CA 92014 714-942-2400

lieu of the 4.0 MHz crystal oscillator signal. The output of IC9 should count through the full range of 0 through 15, starting at 4, while IC8 should count from 4 through 8.

The INTRQ and DRQ signals were connected to PB6 and PB7 of the 6520 because powerful testing instructions are available for these pins. If problems occur in this area, these instructions will come in handy.

Testimonials

This system has been built by several people and has been proven to work with minimal debugging, using wire-wrap, Slit-N-Wrap, and Super Strip techniques. The circuits are not the simplest possible; we have interfaced a 5-inch disk drive to the KIM and AIM systems using only three integrated circuits. The newer versions of the 1771, which allow the controller to be connected directly to data and address buses, do not need a 6520; but there is a case for isolating the microcomputer from the disk controller through a 6520. Whatever route you choose, this basic design will provide reliable, trouble-free operation.

In Part 2, next month, we will look at the software needed to use this controller.■

References

1. Allen, David M. "A Floppy Disk Interface." BYTE, January 1978, page 58.
2. Bal, Subhash, and Mike Wright. "LSI Controller." *Electronic Design*, September 1978, page 90.
3. Camp, Roger, Terry Smay and James Triska. *Micro Computer Systems Principles, 2nd Edition*. Matrix Publishers Inc, 1979.
4. Elinoff, Gary. "Floppy Disk Memory Systems." *Electronics Products*, May 1978, page 39.
5. *FD1771 A/B-01 Data Sheet*. Western Digital.
6. Hoeppner, John. "Interface a Floppy-Disk Drive to an 8080A-Based Computer." BYTE, May 1980, page 72.
7. *IBM Diskette General Information Manual*, No. GA 21-9182. International Business Machines Corporation.
8. Nicholson, James H. "A Super Simple Floppy Disk Controller." *Proceedings of the National Electronics Conference*, Volume 33.
9. *Operating and Service Manual No. 600203*. Pertec.
10. Welles, Kenneth B. "Build This Economy Floppy Disk Interface." BYTE, February 1977, page 34.

G & G Accounting

WILL SET UP YOUR ACCOUNTING RECORDS
READY FOR POSTING ON YOUR MICROCOMPUTER

Complete system-general ledger, payroll. etc-intergrated, but suggest we start with general ledger

Features: Menu-driven, all reports are 8½"×11", you pick account numbering system, one posting method provides that negative numbers are the credit side of the entry, a description field is associated with each side of an entry in update listings, budgeting

Cost for General ledger is $800, including initial set up of your accounts, software and manual, phone consultation and examining your files through a modem where you have that capability. Training at your site available at additional cost.

You must be or become familiar with Osborne manual, send us a good deal of information, have CP/M* and CBASIC2, and have at least 48K and one 8" double density disk drive.

* CP/M is a trademark of Digital Research

AN ACCOUNTING SYSTEM BUILT BY ACCOUNTANTS THAT
OTHER ACCOUNTANTS WILL LIKE

610 Park Boulevard • Austin, Texas 78751 • (512) 458-5760

Circle 223 on inquiry card.

ENERGY SOFTWARE

for engineers, designers, builders, etc.

PASSIVE SOLAR DESIGN: direct gain, sunspaces, trombe & water walls

PASODE 1:	Los Alamos SSF correlation model with economics computerized.	$295
EXFIND/LPMTZ:	Hourly simulation models for assessing building energy load dynamics and economics of passive design	$395/695
OVERHANG:	A 2-dimensional overhang shading design program	$195

CONSERVATION DESIGN: assess energy from a component or system level

BILL:	Correlation of a buildings energy bills and weather for conservation assessment . . .	$295
INSULATE:	Building surface insulation optimization and economics package.	$195

Programs available: TRS-80, APPLE II, CPM (CBASIC2, MICROSOFT), NORTHSTAR, ALPHA MICRO.

Orders: Prepaid/C.O.D. – 20% discount on 2 or more packages

LONDE • PARKER • MICHELS

7438 FORSYTH, SUITE 202
ST. LOUIS, MO. 63105
(314) 725-5501

Circle 60 on inquiry card.

The Art of Electronics

Paul Horowitz and Winfield Hill

"Although this book is for the beginner, it is thorough and abounds in information useful to readers who want to build electronic instruments and not just read about them. In their circuit examples, the authors almost always point out the specific devices they are using and why this device was chosen. This approach is much more useful than that taken by most texts... Along with an excellent presentation of the standard subjects..., the book contains very practical chapters on the design of power supply (including switching supplies), low-noise techniques, interfacing between analog and digital circuits, high-speed techniques, and electronic construction techniques... it does better than other general electronics texts on the microprocessor... *The Art of Electronics* is what we have been looking for." —*Physics Today* $24.95



at your bookstore or

Cambridge University Press

32 East 57th Street, New York, N. Y. 10022

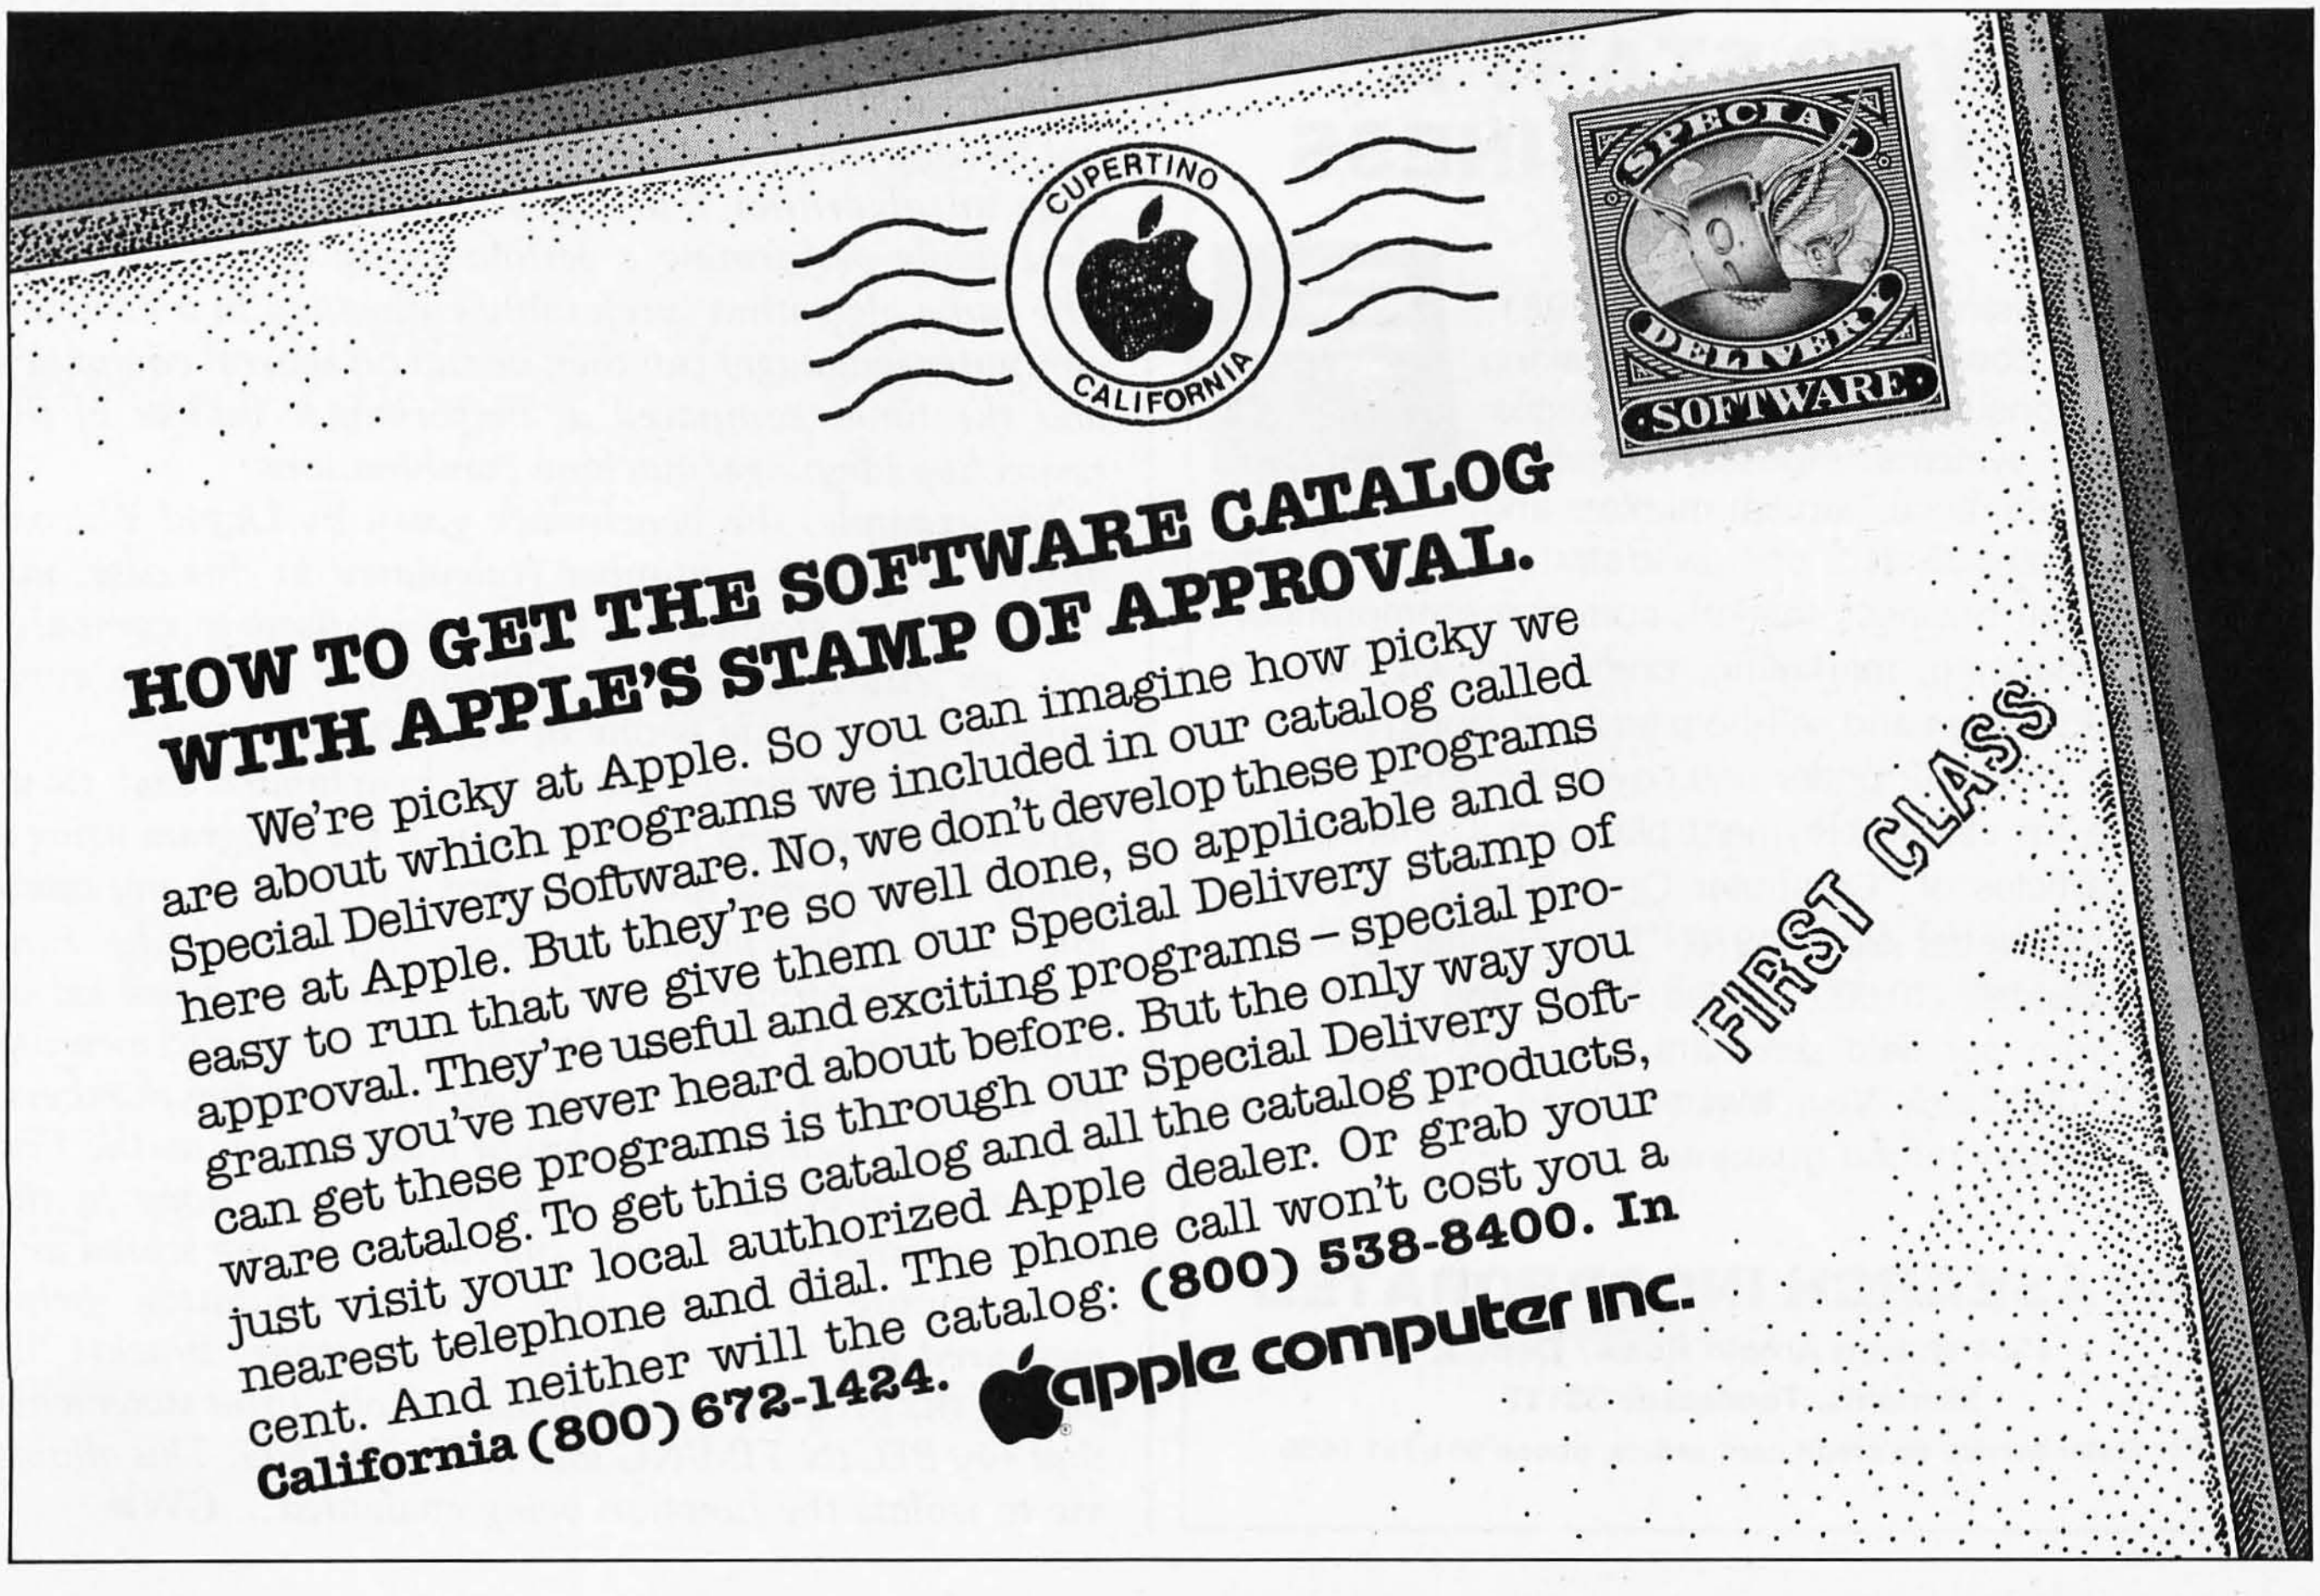

HOW TO GET THE SOFTWARE CATALOG WITH APPLE'S STAMP OF APPROVAL.

We're picky at Apple. So you can imagine how picky we are about which programs we included in our catalog called Special Delivery Software. No, we don't develop these programs here at Apple. But they're so well done, so applicable and so easy to run that we give them our Special Delivery stamp of approval. They're useful and exciting programs – special programs you've never heard about before. But the only way you can get these programs is through our Special Delivery Software catalog. To get this catalog and all the catalog products, just visit your local authorized Apple dealer. Or grab your nearest telephone and dial. The phone call won't cost you a cent. And neither will the catalog: **(800) 538-8400. In California (800) 672-1424.**

apple computer inc.

Technical Forum

Favorite Benchmarks and Other Programs

In the July 1980 BYTE, Carl Helmers wrote a Technical Forum entitled "Some More on Performance Evaluation" (page 216), in which he requested readers to send in benchmark routines that are "appropriate to the typical language and operating-system environment of the contemporary small computer." The following submission from David I Wilcox, of Mansfield, Pennsylvania, is one of the most noteworthy.

While in college, I was shown a simple way to calculate the number of decimal digits a computer retains in its internal representation of floating-point numbers. If:

$$A = 1./3.$$

then, by computing:

$$\mathrm{abs}(\log_{10}(\mathrm{abs}(1. - (A + A + A))))$$

the number of digits of accuracy is obtained.

The choice of 1./3. is deliberate because it is an infinitely repeating rational number in the binary-number system. Therefore, a difference between 1. and the sum $A + A + A$ must exist in any attempt to represent 1./3. with a finite number of bits.

If the machine does not have the common logarithm function available, then compute:

$$1./(\mathrm{abs}(1. - (A + A + A)))$$

The number of digits of accuracy is approximately the exponent of the result expressed in scientific notation. Better yet, use a calculator or math tables to find the common logarithm of the result.

The number of digits of accuracy available generally depends on both the machine and the language. This method offers a quick, in-the-store check of the actual number of digits used by a given system to represent floating-point numbers.

However, other letters we received bearing the "Favorite Benchmarks" title contained still more programs written in Pascal or BASIC that shaved minutes or seconds from the prime-number-generating program used as a benchmark in Carl Helmers's article. Although we appreciate the attempt at participation represented by these letters, they missed the point expressed by Carl Helmers in that article: "...the goal of the exercise was not to code the most efficient algorithm. It was, rather, to code an algorithm that takes a measurable amount of time while performing a certain group of calculations." The same algorithm (preferably embedded in a common computer language) can then be run on several computers and the times compared as performance indices of the respective language/machine combinations.

For example, the benchmark given by David Wilcox, above, results in a number (calculated in this case, not timed with a stopwatch) that can be used to compare, say, an Atari 400 with a Commodore PET; the comparison being made is one of digits of accuracy.

One prime-number-generating benchmark sent to us gave two times, one for execution of the program using a video terminal and another using a printer. In my opinion, such a benchmark confuses the issue under consideration (computer speed in generating a given set of prime numbers). Unless a benchmark is trying to measure the efficiency of a given computer in displaying numbers, the interval being timed should end as soon as the first display is printed. This assumes, as was done in the prime-number benchmark, that all results are stored and the printing is done after the computation being measured has finished. In fact, I sometimes bracket the part of the program being measured with print statements that say BEGIN TIMING and END TIMING. This allows me to isolate the function being evaluated.... **GW**■

Circle 197 on inquiry card.

Main/Frames from $200

Main/Frames from $200

- 14 Basic Models Available
- Assembled & Tested
- Power Supply: 8v@15A, ± 16v@3A
- 15 Slot Motherboard (connectors optional)
- Card cage & guides
- Fan, line cord, fuse, power & reset switches, EMI filter
- 8v@30A, ± 16v@10A option on some models


Rack mounted Main/Frame


8" Floppy Main/Frame (includes power for drives and main/frames)

Write or call for our brochure which includes our application note: 'Building Cheap Computers'

INTEGRAND

8474 Ave. 296 • Visalia, CA 93277 • (209) 733-9288
We accept BankAmericard/Visa and MasterCharge

Circle 357 on inquiry card.

IEEE-488 TO TRS-80* INTERFACE

Everything needed to add *powerful* BASIC GPIB-488 controller capability to TRS-80 Model 1 or 3, Level 2 or DOS with a minimum of 16K.



MODEL 488-80B
For Model 1 Operation



MODEL 488-80C
For Model 3 Operation

Price of Model 488-80B or 488-80C $245.
+ shipping, insurance & tax

Optional Relocatable Machine Level GPIB Driver for Assembler Level Programming-$35.00

WHEN ORDERING SPECIFY DISK OR TAPE

SCIENTIFIC ENGINEERING LABORATORIES
11 Neil Drive • Old Bethpage, NY 11804
Telephone: (516) 694-3205

**Trademark of Tandy Corp.*
There is no affiliation between Scientific Engineering Laboratories and Tandy Corp. or Radio Shack.

RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes —

HARD DISK MULTIPLEXOR WITH 10 MEG HARD DISK

FOR THE TRS-80* Mod II

NOW YOU CAN HAVE THAT LARGE COMMON DATA BASE!!

- Allows up to 4 Mod II's to connect to a single controller — up to 4 hard disk drives per controller. Users may access the same file simultaneously (first-come first-served).
- Uses Cameo controller and standard 10-megabyte cartridge (hard) disk drives along with RACET Hard/Soft Disk System (HSD) software.
- Access times 3 to 8 times faster than floppy. Mixed floppy/hard disk operation supported
- Compatible with your existing TRSDOS programs! All BASIC statements are identical.
- A single file may be as large as one disk. Alternate mode allows 24-million byte record range. Directory expandable to handle thousands of files.
- Includes special utilities — backup and copies, HPURGE for multiple deletions, HDCS directory catalog system, and Hard Disk Superzap. FORMAT utility includes options for specifying sectors/gran, platters/drive, logical disk size, etc.

HARD DISK DRIVE & CONTROLLER $5995 **RACET HSD Software $400**
Call for multiuser pricing. Dealers call for OEM pricing.

INFINITE BASIC (Mod I & III Tape or Disk) **Mod I $50.00, Mod III $60.00**
Extends Level II BASIC with complete MATRIX functions and 50 more string functions. Includes RACET machine language sorts! Sort 1000 elements in 9 seconds!! Select only functions you want to optimize memory usage.

INFINITE BUSINESS (Requires Infinite BASIC) **Mod I & III $30.00**
Complete printer pagination controls — auto headers, footers, page numbers. Packed decimal arithmetic — 127 digit accuracy +, −, *, /. Binary search of sorted and unsorted arrays. Hash codes.

BASIC CROSS REFERENCE UTILITY (Mod II 64K) **$50.00**
SEEK and FIND functions for Variables, Line Numbers, Strings, Keywords. 'All' options available for line numbers and variables. Load from BASIC — Call with 'CTRL'R. Output to screen or printer!

DSM **Mod I $75.00, Mod II $150.00, Mod III $90.00**
Disk Sort/Merge for RANDOM files. All machine language stand-alone package for sorting speed. Establish sort specification in simple BASIC command File. Execute from DOS. Only operator action to sort is to change diskettes when requested! Handles multiple diskette files! Super fast sort times — improved disk I/O times make this the fastest Disk Sort/Merge available on your TRS.
(Mod I Min 32K 2-drive system. Mod II 64K 1-drive. Mod III 32K 1-drive)

★★**NEW**★★ **DISCAT** (32K 1-drive Min) **Mod I, III $50.00**
This comprehensive Diskette Cataloguing/Indexing utility allows the user to keep track of thousands of programs in a categorized library. Machine language program works with all TRSDOS and NEWDOS versions. Files include program names and extensions, program length, diskette numbers, front and back, and diskette free space.

★★**NEW**★★
KFS-80 (1-drive 32K Min — Mod II 64K) **Mod I, III $100.00; Mod II $175.00**
The keyed file system provides keyed and sequential access to multiple files. Provides the programmer with a powerful disk handling facility for development of data base applications. Binary tree index system provides rapid access to file records.

★★**NEW**★★
MAILLIST (1-drive 32K Min - Mod II 64K) **Mod I, III $75.00; Mod II $150.00**
This ISAM-based maillist minimizes disk access times. Four keys — no separate sorting. Supports 9-digit zip code and 3-digit state code. Up to 30 attributes. Mask and query selection. Record access times under 4 seconds!!

★★**NEW**★★ **LPSPOOL** (32K 1-drive Min) **Mod I $75.00**
LPSPOOL — Add multi-tasking to permit concurrent printing while running your application program. The spooler and despooler obtain print jobs from queues maintained by the system as print files are generated. LPSPOOL supports both parallel and serial printers.

UTILITY PACKAGE (Mod II 64K) **$150.00**
Important enhancements to the Mod II. The file recovery capabilities alone will pay for the package in even one application! Fully documented in 124 page manual! XHIT, XGAT, XCOPY and SUPERZAP are used to reconstruct or recover date from bad diskettes! XCOPY provides multi-file copies, 'Wild-card' mask select, absolute sector mode and other features. SUPERZAP allows examine/change any sector on diskette include track-0, and absolute disk backup/copy with I/O recovery. DCS builds consolidated directories from multiple diskettes into a single display or listing sorted by disk name or file name plus more. Change Disk ID with DISKID. XCREATE preallocates files and sets 'LOF' to end to speed disk accesses. DEBUGII adds single step, trace, subroutine calling, program looping, dynamic disassembly and more!!

DEVELOPMENT PACKAGE (Mod II 64K) **$125.00**
Includes RACET machine language SUPERZAP, Apparat Disassembler, and Model II interface to the Microsoft 'Editor Assembler Plus' software package including uploading services and patches for Disk I/O.

CHECK, VISA, M/C, C.O.D., PURCHASE ORDER
TELEPHONE ORDERS ACCEPTED (714) 637-5016
*TRS-80 IS A REGISTERED TRADEMARK OF TANDY CORPORATION

RACET COMPUTES
1330 N. Glassel, Suite 'M'
Orange, CA 92665

RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes — RACET SORTS — RACET UTILITIES — RACET computes —

Circle 347 on inquiry card.

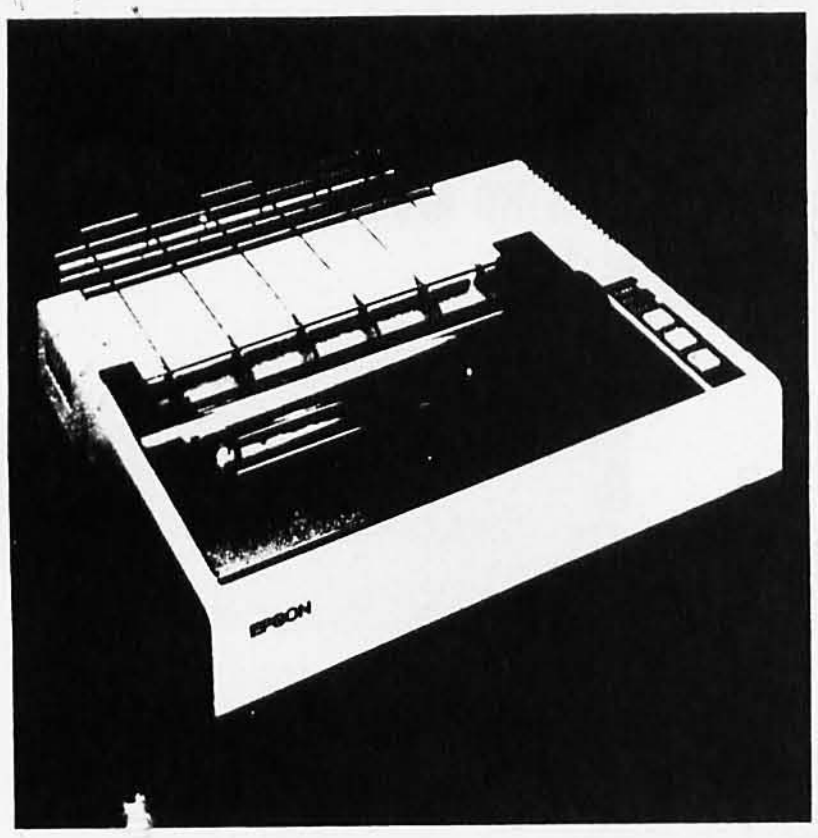

The Epson MX-80

$499

"At Microhouse, we treat our customers like family..."

Software

Software Manual
List & Manual/Only

☐ **WORDSTAR** The premier word processing software from MicroPro .... *$495.00* **$322/$40**

☐ **MAILMERGE** option for wordstar 2.X .... *$150.00* **$110/$25**

☐ **WORDMASTER** by MicroPro. .... *$150.00* **$119/$25**

☐ **SUPERSORT I** by MicroPro. Can be used as a stand-alone program or can be linked to programs with a Microsoft format. .... *$250.00* **$189/$25**

☐ **SUPERSORT II** A stand-alone-only version of above. ... *$200.00* **$165/$25**

☐ **DATASTAR** by MicroPro. .... *$350.00* **$269/$35**

☐ **dBASE II,** the assembly-language relational Database Management System for CP/M®. No need for host language. Handles up to 65,000 records (up to 32 fields of 1K each). English-like commands. Report generator with user-definable full-screen operation. Will read existing ASCII files. . . *$700* **$628/$20**

☐ **SPELLGUARD** checks 20 pages of copy for spelling mistakes and typos in less than a minute. Can be used with many CP/M® word processors (including WordStar). Lets operator review words it judges as potential errors. Operator may then change the suspect word or add it to SPELLGUARD's 20,000 word dictionary (dictionary size limited only by disk space). . *$295* **$230/$20**

☐ **BASIC 80** by Micro. Version 5.2 and 4.51 included. . . . *$350.00* **$299/$30**

☐ **BASIC COMPILER** by Microsoft. Language compatible with MBASIC. Includes MACRO 80 assembler .... *$395.00* **$330/$30**

☐ **muSIMP/muMATH** by Microsoft. muSIMP is a fast, efficient interpreter for sophisticated mathematical functions of up to 611 digits. muMATH is a package of programs written in muSIMP. Requires 40K. . . . *$250.00* **$225/$25**

☐ **TCS/Atlanta INTERACTIVE ACCOUNTING SYSTEM** for small businesses. New release. Each package can be used alone or post automatically to the General Ledger. Available in compiled version (no support language needed) or in source (MBASIC required). Needs 48K RAM, 132-col. printer, 24x80 CRT and CP/M®.

..... **COMPARE AT UP TO $530/pkg.**

GENERAL LEDGER	**$75/$25**
ACCOUNTS RECEIVABLE	**$75/$25**
ACCOUNTS PAYABLE	**$75/$25**
PAYROLL	**$75/$25**
ALL FOUR	**$259/$90**
SAMPLE PRINTOUT BOOK of ALL FOUR	**$15**

☐ **COMPILED VERSIONS**-(run 3-10 times faster than interpretive version)
Each package **$79/$25**
All four .... **$269/$90**

We will attempt to meet or beat any advertised price!

☐ **STRUCTURED SYSTEMS ACCOUNTING SYSTEM** (Requires CBASIC2, 2 disk drives, 24x80 CRT, 132-column width printer). . . . **LIST: $1250.00 each**

GENERAL LEDGER	**$699/$40**
ACCOUNTS RECEIVABLE	**$699/$40**
ACCOUNTS PAYABLE	**$699/$40**
PAYROLL	**$699/$40**
INVENTORY	**$337/$40**

☐ **EDIT 80** by Microsoft. .... *$120.00* **$82/$20**

☐ **TEXTWRITER III** by Organic Software. .... *$125.00* **$110/$20**

☐ **LETTERIGHT** by Structured Systems. .... *$200.00* **$135/$20**

☐ **DATEBOOK** by Organic Software. .... *$295.00* **$258/$25**

☐ **COBOL 80** Compiler by Microsoft. .... *$750.00* **$640/$30**

☐ **MSORT** by Microsoft. .... **$138/$15**

☐ **COBOL 80 w/MSORT.** Saving by buying both at the same time. **$759/$40**

☐ **Whitesmith's "C" COMPILER.** Conforms to full UNIX® version 7 C language. .... *$630.00* **CALL/$30**

☐ **STACKWORKS FORTH.** For Z80 or 8080 CPU (specify). Supplied in source. Assembler included. *$175.00* **$125/$30**

☐ **FORTRAN 80** by Microsoft. .... *$500.00* **$390/$30**

☐ **MACRO 80** by Microsoft. Assembler for 8080 and Z80 *$200.00* **$140/$20**

☐ **PASCAL/M** compiler by SORCIM. Full Wirth implementation. Produces P-code. .... *$175.00* **$139/$20**

☐ **PASCAL/Z** compiler by ITHACA INTERSYSTEMS. Produces Z80 native assembly code. .... *$395.00* **$359/$30**

Apple

☐ **VISICALC**—The electronic worksheet. Performs all arithmetic functions, net present value, and transcendental functions and instantly displays results where you want them. *$150.00* **$107.00**

☐ **CCA DATA MANAGEMENT SYSTEM** Stores and retrieves information in a way which lends itself to "row and column" storage, retrieval and analysis. Includes $130 page manual. *$99.50* **$74.00**

☐ **DESKTOP PLAN**—Apple Disk. *$99.50* **$74.00**

☐ **GAMES**—for Applesoft Disk: Gammon Gambler, Checker King, Microchess or Bridge Partner. *$24.94 ea.* **$19.20 ea.**

☐ **VITAFACTS**—A package of six programs designed to present straightforward up-to-date medical facts in a way that is fun and effective. Approved by the Canadian College of Family Physicians. Growing Up (Adolescence), Talking About Sex, Drinking & Drugs, Birth Control, Your Blood Pressure, Heart Attack *$119.70* **$89.95**

CP/M is a registered trademark of Digital Research.
UNIX is a registered trademark of Bell Labs.
APPLE is a registered trademark of Apple Computers.

CALL OR WRITE FOR FREE CATALOG

PRICES AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Circle 245 on inquiry card.

Book Reviews

Travels in Computerland, or Incompatibilities & Interfaces

by Ben Ross Schneider Jr
Reading MA:
Addison-Wesley
Publishing Company
1974, Softcover, $6.50

Reviewed by
Jonathan Jacky
6551 5th Ave NE
Seattle WA 98115

How many seemingly impractical projects have been attempted only because someone thought, "That should be a trivial exercise for a computer"? So it seemed to theater historian Ben Ross Schneider Jr, when he proposed organizing a data base from *The London Stage*, an eleven-volume, 8000-page calendar of eighteenth-century theater performances. As Schneider envisioned, "It would be like having an index to every kind of thing in the book, only the computer would even turn the pages and take notes for you."

As he became involved in the project, Schneider soon realized that what is conceivable for the computer is sometimes not easily accomplished. He learned that the system which saves the scholar months of repetitive clerical work may well require several times that much effort to get running. Schneider recounts his experience in *Travels in Computerland*, an entertaining book that gives a true-to-life case study illustrating information-retrieval techniques. It is the best account of an ambitious computing project I have read.

Schneider describes the problems of creating a computer-accessible data base from source text intended for human readers. He intended his data bank to produce, for

example, listings of every role an actor played during his career. That meant sorting all the entries in *The London Stage* by actor—but *The London Stage* was not arranged by actor; it consisted of theater programs arranged chronologically. Each program included many items: titles, roles, actors... To enable the computer to identify each item, they must be clearly delimited and follow each other in undeviating order.

Schneider believed that the syntax and typography of *The London Stage* satisfied these conditions, but programmer Will Daland recognized otherwise: "Too much variation," he explained. "A computer can't tolerate as much ambiguity as a human... The human being uses an immense store of experience to resolve ambiguities."

So they faced the mammoth task of recopying the entire text to better reveal its contents to the machine.

"The structure of *The London Stage*, which we had to describe before we could analyze it by machine, continually evaded us. To retrieve what was in it we had to know what kinds of things were in it and how this information was arranged. It was like nature itself. We always thought we knew more about it than we actually did."

Eventually they found the precise form in which the text would be presented to the computer, but only after Schneider learned to view his specialty from a new perspective. At one point he was startled when Daland, in trying to allow for all conceivable possibilities, suggested a plausible variation in eighteenth-century casting practices that had never occurred to Schneider. He recalls: "This episode is an example of how computer methods, by imposing logic, increase one's comprehension of one's subject. And that is

Microhouse Introductory Special:

The New ADDS Viewpoint Video Terminal

Features a detachable Tektronics-made keyboard with keypad. Function keys. Reverse video, half-intensity, underlining by fields. Printer port. ADDS quality construction.

$649

"...why not join the Microhouse family?"

and Save big!

Hardware

List / Microhouse Price

☐ **EPSON MX80 DOT MATRIC PRINTER** with its ingenious removable printhead, bidirectional and logic-seeking, adjustable tractor, fine print quality and standard features make this a real bargain. Parallel interface... *$645.00* **$499.00**

☐ **SERIAL or IEEE 488 INTERFACE** for the MX80 .... *$55.00* **$43.70**

☐ **APPLE INTERFACE CARD** for the MX80 (when ordered with the MX80) *$85.00* **$68.75**

☐ **TRS-80 EXPANSION CABLE.** (for MX 80) *$35.00* **$30.60**

☐ **APPLE CABLE** ...... *$25.00* **$21.90** (for MX 80)

☐ **EPSON MX70,** plain-Jane version of the MX80. Monodirectional, 80 cps, Graftrax II Graphics included. Adjustable tractor. Parallel version only. *$450* **$378.00**

☐ **DIABLO 630 RO PRINTER** uses plastic and metal print wheels. Fewer working parts mean less down time. Speed: 40 cps bidirectional, logic-seeking........ *$2185.00* **$1999.00**

☐ **IDS PAPER TIGER 560,** the 15" tiger. 150 cps, bidirectional, logic-seeking, 9-wire staggered printhead. Fixed & proportional text, automatic text justification. Up to 220 col. Parallel & serial interfaces............ *$1695* **$1464**

☐ **IDS PAPER TIGER 460.** *$1295.00* **$1072.00**

☐ **C. ITOH STARWRITER I** letter quality printer. Uses Diablo printwheel and ribbons. 25 cps. Bidirectional logic-seeking. Self-test. Friction feed. Parallel interface............. *$1895* **$1431**

☐ **C. ITOH STARWRITER II**—letter quality printer, similar to Starwriter I, but 45 cps. Parallel Version. *$2195.00* **$1873.00**

☐ **STARWRITER I Serial version** *$1960* **$1502**

☐ **ANADEX 9500 or 9501.** *$1437.00* **$1380.00**

☐ **ANADEX DP8000** . *$995.00* **$776.00**

☐ **CENTRONICS 704-1.** *$2280.00* **$1638.00**

☐ **CENTRONICS 737-1.** *$995.00* **$770.50**

☐ **TELEVIDEO 950C,** the newest and smartest Televideo. All features of the 920C plus detachable keyboard, smooth scrolling, split screen, graphics characters, 25th status line, 19.2 kilobaud max speed, buffered aux. port. *$1195* **$995**

We at Microhouse would like to thank you worldwide for your tremendous response to our wide range of discounted hardware and software. To serve you better, call or write us anytime for your hardware and software needs. If you don't see it, ask!

☐ **BIG DISCOUNTS ON DYNABYTE, CROMEMCO, NORTHSTAR AND IMS SYSTEMS. Call or write for prices!**

☐ **AUTO-CAT MODEM**—by Novation, the newest and most sophisticated modem in the CAT series. Three transmit/receive modes: automatic answer, manual answer, manual originate. Full or half-duplex. 0-300 baud. Local and remote-loopback test modes. Connects directly to a phone jack. *$249.00* **$212.75**

D-CAT MODEM ... *$199.00* **$156.00**

CAT MODEM *$189.00* **$146.00**

☐ **ALPHACOM SPRINTER 40**—the low-cost 40-column printer for Apple and Atari. Variable speeds up to 240 lines per minute! Includes graphics capability and four rolls of paper.
FOR APPLE *$433.00* **$333.00**
FOR ATARI *$372.00* **$286.00**

☐ **MPI 88G**—The low-cost printer with both adjustable tractor and friction feed. Dot addressable graphics for plotting, printing screen graphics, and drawing illustrations. 100 cps bidirectional, logic-seeking. RS232 and parallel interfaces standard.......... *$799.00* **$688.85**

☐ **LINK 80**—CP/M* communications program allows transfer of files between systems which both have LINK 80 utilizing a high-level protocol for error checking. Will also transfer files to and from other computers (micro to mainframe) not equipped with LINK 80. Will also let your micro act as a "dumb" terminal.............. *$100.00* **$65.00**

Diskettes

☐ **MAXELL 8" SINGLE**-sided Double Density Diskettes (Box 10). *$57.50* **$43.75**

☐ **MAXELL 8" DOUBLE**-sided Double Density Diskettes (Box 10). *$87.50* **$66.25**

☐ **MAXELL 5¼" SINGLE**-sided Double Density (Box 10) *$55.50* **$37.50**

☐ **MAXELL 5¼" DOUBLE**-sided Double Density (Box 10) *$82.50* **$62.50**

☐ **WABASH 8" SINGLE**-sided, single-density (Box 10)..... *$29.51* **$27.24**

☐ **WABASH 8" DOUBLE**-sided, double-density (Box 10)..... *$49.79* **$45.96**

☐ **SCOTCH HEAD CLEANING DISKETTES** includes two diskettes and bottle of cleaning solution. For single or double sided drives *$30.00* **$20.70**

VISA

MasterCard

Microhouse™
PO BOX 498B
BETHLEHEM, PA 18016
(215) 868-8219

Circle 246 on inquiry card.

why Will, who never studied it for an hour, could teach me something about theater history."

The book vividly conveys the day-to-day feel of the project. The reader shares Schneider's dismay when, as deadlines approach and seemingly banal practical problems threaten to scuttle the project, the drama scholar must become a reluctant expert in the countless technical aspects of computing.

Because this work was done in the premicroprocessor era (about ten years ago), some of the problems seem very dated; inestimable difficulty resulted when terminals capable of producing lower-case characters proved to be unavailable. Other problems are perennially familiar; Schneider ruefully recalls the time invested in "persuading data-processing firms to meet declared standards, and explaining to sales representatives what their products were." In a final, ironic twist, humanist Schneider realizes that his achievement is poorly accepted and little understood by fellow scholars because he neglected to communicate effectively with them.

This book should be required reading for anyone planning to apply a computer to an intricate real-world activity, be it business or research. The nature of Schneider's project, his unusual perspective and lively writing, and particularly his vivid characterizations and keen appreciation of the way personalities shape projects, recommend the book to those on the fringes of the computing world. *Travels in Computerland, or Incompatibilities & Interfaces* is especially relevant to those technologically innocent people who think that computers are for doing math, and wonder how anyone could think a machine can help him appreciate a work of art.■

Circle 76 on inquiry card.

MAIL ORDER DISCOUNTS

apple computer
Sales and Service

APPLE II PLUS 48K

$1,175



APPLE /// CALL FOR PRICES

ACCESSORIES

DISK II DRIVE & CONTROLLER (DOS 3.3)	525	MICROSOFT Z-80 SOFTCARD SYSTEM	290
DISK II DRIVE ONLY	455	MICROSOFT 16K RAM CARD	169
INTEGER BASIC FIRMWARE CARD	149	VIDEX 80 COLUMN BOARD & SWITCH	330
APPLESOFT II FIRMWARE CARD	149	HAYES MICROMODEM II	315
M&R SUP-R-MOD RF MODULATOR	30	LEEDEX 12" B&W MONITOR	149
CENTRONICS PRINTER INTERFACE CARD	179	SANYO 12" GREEN MONITOR	265
HIGH-SPEED SERIAL INTERFACE CARD	145	SILENTYPE PRINTER W/INT. CARD	535
SSM AIO SERIAL/PARALLEL I/O CARD	185	EPSON MX-80 PRINTER	620
LANGUAGE SYSTEM W/PASCAL	420	MPI 88G PRINTER	695
DAN PAYMAR LOWER CASE ADAPTER	45	QUME SPRINT 5/45 PRINTER	2,550

SOFTWARE

APPLE DOS TOOLKIT	65	APPLE FORTRAN	159
APPLE PLOT	60	APPLEWRITER	65
TAX PLANNER	99	DOW JONES PORTFOLIO EVALUATOR	45
APPLE PILOT	125	DOW JONES NEWS & QUOTES REPORTER	85
VISICALC	119	THE CONTROLLER BUSINESS SYSTEM	515
DESKTOP PLAN	79	SUPER INVADER (DISK)	23
CCA DATA MANAGEMENT	85	BASF 5¼" DISKETTE (10)	30

TO ORDER: Please send cashier's check, money order or personal check (allow 10 business days to clear). VISA and Master Card credit card service add 2%. American Express credit card service add 5%. Shipping, handling and insurance in U.S. add 3% (minimum $3). California residents add 6% sales tax. Foreign orders add 10% for shipping. Equipment is subject to price change and availability. All equipment carries factory warranty. TELEX: 697120 DATAMAX-SDG

computer age, inc.

Authorized Apple Dealer & Service Center
4688 CONVOY ST., SUITE 105, SAN DIEGO, CA 92111 (714) 565-4062

Circle 80 on inquiry card.

Getting the best prices just became as easy as 1-2-3.

1 *Visicalc*™ For anyone who works with numbers. The most useful, versatile program yet designed for personal and business computing. List $150. **$99*.**

2 *Microsoft Z-80® SoftCard*™ Expands the capabilities of Apple II®, allows you to use any Z-80 program and provides Microsoft BASIC. List $349. **$275.**

3 *Epson MX 80*™ The top of the line 80-column printer that does what even the most expensive printers can't do. Unique disposable print head. List $645. **$499.**

There's no such thing as a "second" in this industry. So why pay inflated prices? Our huge volume/low overhead means you can get what you've waited for *now*. Similar values on a wide variety of computer-related items. Send check, MC or Visa. *Shipping & handling:* Visicalc or Z-80, add $5. Epson sent C.O.D. PRICES EFFECTIVE THIS MONTH ONLY. WRITE FOR CATALOG.

COMPUTER COMPANY OF AMERICA

P.O. Box 9488, 7635 Fulton Avenue
North Hollywood, CA 91606 • (213) 999-6350

*$99 unit is for Apple II, similar low prices for units to use with other computers.

GET YOUR DISKETTE HEADS "COMPUTER ROOM CLEAN" FOR

30% OFF

Suggested list price $30.00

Right now, we're offering *you* a special deal: Big savings on the cost of the unique 3M Brand Diskette Head Cleaning Kit. To get the deal, just buy one box of 10 Scotch® Brand Diskettes at our regular price. So you get reliable media *plus* the kit that keeps your diskette drive working right. (Not yet available for Burroughs Mini-Disk II, Vydec or 96 TPI Drives.)

MINIS Or MAXIS
Same Price:
10 For $34.50

Checks, M.O., MC and Visa
Accepted. No COD's

FREE CATALOG

P. O. Box 327
Center Valley, Pa. 18034
Phone (215) 439-1717

Disks, Etc.

Authorized Distributor
Information Processing Products

3M

Circle 454 on inquiry card.

• TRS-80 • APPLE 2 • ATARI • SCORCERER •

SCORCERER • TRS-80 • APPLE 2 • ATARI • SCORCERER • PET

PET • TRS-80 • APPLE 2 • ATARI • SCORCERER • PET • TRS-80

FREE CATALOG
over 150 items
ORDER TOLL FREE

(800) 327-7172

IN FLORIDA (305) 862-6917
nuf said

TRS-80 • APPLE 2 • ATARI • SCORCERER

(305) 862-6917

ai Adventure INTERNATIONAL
A DIVISION OF SCOTT ADAMS, INC
BOX 3435 • LONGWOOD, FLA. 32750

Circle 9 on inquiry card.

Ask BYTE

Conducted by Steve Ciarcia

Here's LED In Your Display

Dear Steve,

I enjoyed your article "Self-Refreshing LED Graphics Display" (October 1979 BYTE, page 58), and think I can use such an output display. My present system is a KIM-1 computer with an 8 K-byte memory board. I use the KIM-1's keypad and LED display for input and output, but I'm having difficulty expanding the display board.

Your design is an 8 by 16 display, but I would like to expand that to 8 by 64; then I could have a small amount of alphanumerics and graphics.

Near the end of your article, you mentioned that to expand on your design, simply add more memory and column decoders. Please be more specific. Would I have to use six address lines, and spread this out over four 74154 1-of-16 decoders? I assume a total of eight 7489 memory devices would be needed. How do I tie this stuff together? Would this affect the refresh and scan rates? Could I substitute LS-type logic circuits in your design?

Charlie Timbers

There are several ways to expand the basic 8 by 16 display into an 8 by 64. The easiest thing to do is to make four of the basic units, then change the addressing to be four blocks of sixteen, for a total of sixty-four 8-bit output ports. To accomplish this, the address decoding presently done by IC1 and IC2 must be changed. Figures 1a and 1b should help.

*You can use LS TTL (transistor-transistor logic) devices for those integrated circuits that have an equivalent. Some don't. ...***Steve**

Figure 1

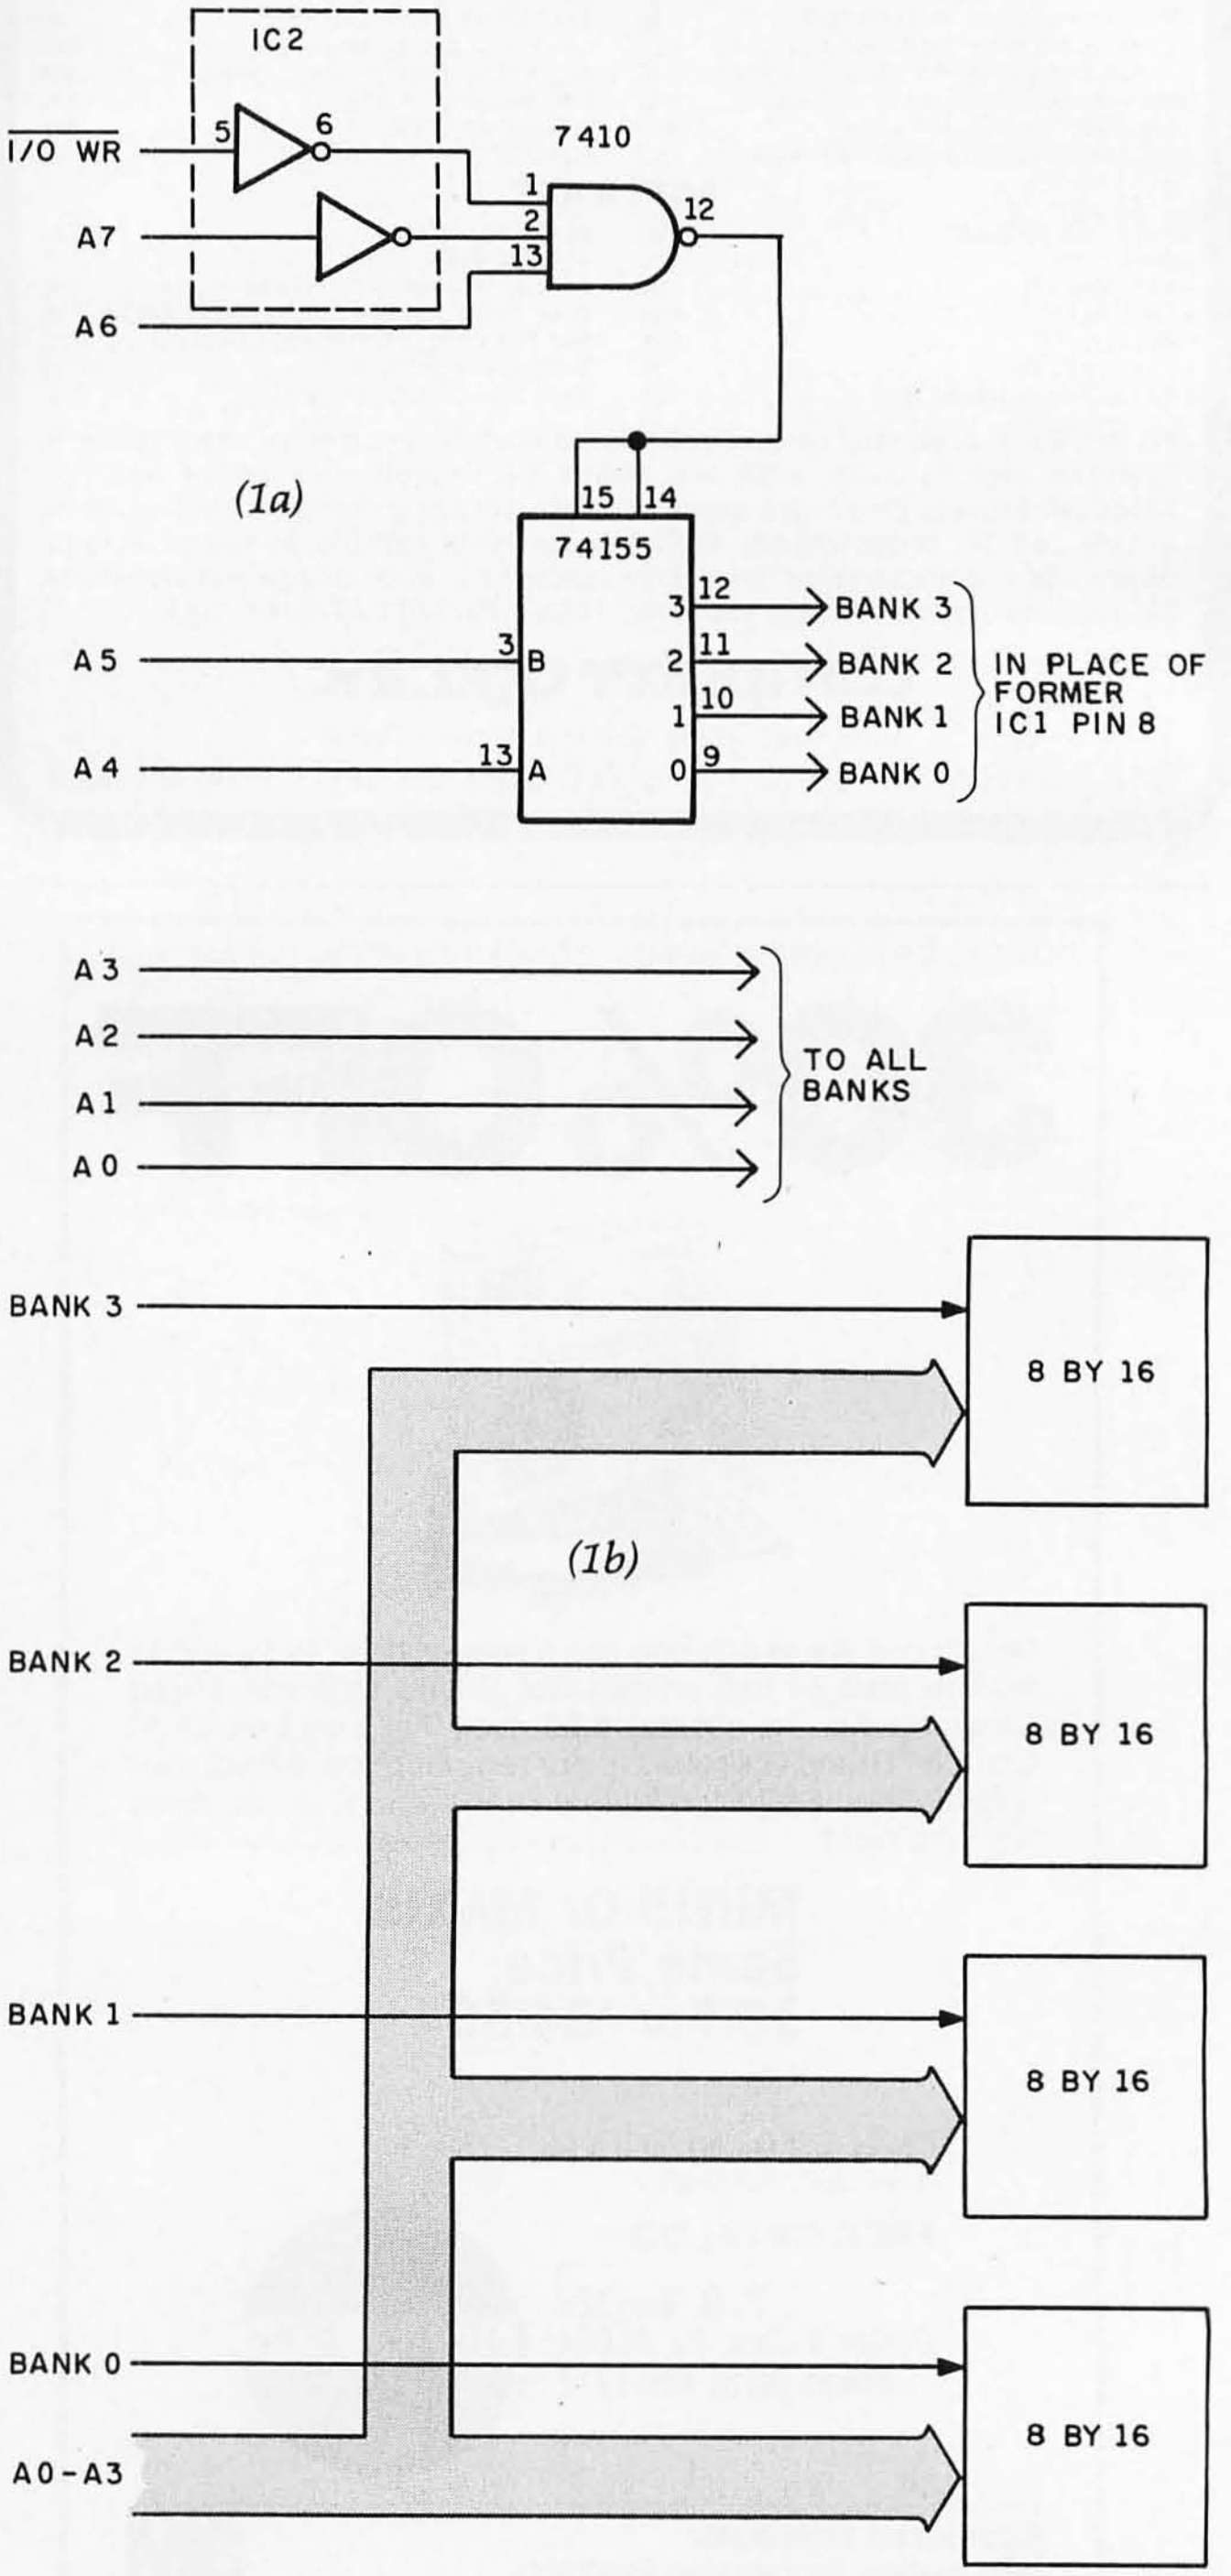

Circle 443 on inquiry card.



ROBOTICS AGE

presents

The Annual 1981

ROBOTICS INDUSTRY DIRECTORY

The Directory contains comprehensive listings of:

- Robot Companies that manufacture complete systems
- Related Manufacturers of robot modules and components
- Institutions, laboratories, and universities performing research related to Robotics
- Consulting firms with expertise in the field

Each entry will consist of a brief description of the product line, activity, service, etc., with the name, address, and phone number of a knowledgeable representative.

Who needs the Robotics Industry Directory?

- **Engineering Personnel:** technical proposal preparation, technology surveys, systems integration, cost estimation.
- **Management:** consulting services, feasibility studies, in-house requirements.
- **Procurements:** bid package preparation, general equipment specification, sources, costing.
- **Marketing:** product planning, market surveys, sales projections, competitive appraisal.

Order Today — Only $24.95

(Canada $26.45 US, other Foreign $31.45 US)

Robotics Industry Directory, PO Box 372, Tujunga, CA 91042

Circle 200 on inquiry card.

APPLE NEW! GRAPHICS

SCIENTIFIC PLOTTER



VISICHART™


```
BUFFER 00002 SCALE  00002
LEFT   00038 RIGHT  00293 SKIP   00001
BOTTOM 00002 TOP    00384 OFFSET-00001
CURSRX 00038 VALUE  00044 CURSRY 00002
```

CURVE FITTER



FOR LABS

BY PAUL K. WARME

SCIENTIFIC PLOTTER **48K APPLE II +, $25**

Draws professional-looking *graphs of your data.* EASIER, FASTER, NEATER and more ACCURATE than handplotting. *You choose data format, length and position of axes, 20 symbols, error bars, labels anywhere in 4 orientations, etc.* Includes 5 DEMOS on disk with 30-PAGE MANUAL.

CURVE FITTER **48K APPLE II +, $35**

Selects the *best curve to fit your data.* SCALE, TRANSFORM, AVERAGE, SMOOTH, INTERPOLATE (3 types), LEAST SQUARES FIT (3 types), EVALUATE UNKNOWNS from fitted curve. Includes 5 DEMOS on disk with 33-PAGE MANUAL.

VISICHART™ **48K APPLE II +, $75**

NEW tools for *lab data management.* FAST plots of 4 data sets with SCROLLING in 4 directions, ZOOM scaling on X and Y axes, 2 types of graphic CURSORS and on-screen STATUS REPORT. PLOTS A/D INPUT *while sampling.* ADD, SUBTRACT, MULTIPLY, DIVIDE, INTEGRATE, DIFFERENTIATE, AVERAGE or NORMALIZE data sets with SIMPLE COMMANDS. *Ideal for spectra, chromatograms, rate curves, etc.* Includes SAMPLE DATA on disk with 28-PAGE MANUAL.

SPECIAL! All 3 programs on one disk, only $120. Since each program uses the same data format on disk, data may be shared.

BUY THESE PROGRAMS AT YOUR LOCAL DEALER OR ORDER DIRECT. For more information, ask for FREE brochure or send $5 for any manual ($12 for all 3), deductible with purchase. Add $1.50 shipping on all orders. For fastest service, call in your VISA or Master Card order.

iMi INTERACTIVE MICROWARE, INC.
P.O. Box 771, Dept. B State College, PA 16801
CALL (814) 238-8294 for IMMEDIATE ACTION

A REFURBISHED "SELECTRIC" ASCII TERMINAL FOR THE SMALL BUSINESSMAN OR SERIOUS HOBBYIST.

The AJ 841 I/O terminal. Now available from dealers nationwide.

Demand for our AJ 841 I/O computer terminal has been great. And now it's getting even greater. So call your local computer shop dealer right away. Supply is limited! You may never have another opportunity like this one to buy your own *professional* terminal.

*Suggested retail price

The AJ 841 features:

- Serial RS-232 interface
- ASCII code
- 14.9 cps printout
- High quality Selectric printing
- Heavy-duty Selectric mechanism
- Off-line use as typewriter
- Documentation included
- 30-day warranty on parts and labor (details available on request)

Call toll-free now

For location of your nearest AJ dealer, call toll-free:

800/538-9721

California residents call collect 408/263-8520, Extension 263.

Available only in the continental United States

ANDERSON JACOBSON

Circle 25 on inquiry card.

GIFTS FROM PROMETHEUS
NEW for APPLE II(1)
Advanced products at
Down-to-Earth
PRICES

DUAL SERIAL CARD-1. All functions of two independent serial cards on one board—plus more. Provides Apple II(1) users with two simultaneous asynchronous serial channels. DSC-1 appears as two separate logical serial cards to the Apple II(1). Fully software compatible with all Apple II's(1) and Microsoft software. 2716 EPROM used for easy driver modification. In addition, the second serial channel supports these extra features: • Strapable DCE/DTE. • Secondary RS-232 handshake functions (DCD, DTR, DSR) • Strapable logical slot location and hardware looks like it's another slot. **Order: PP-DSC-1 @ $189.00 each.**

DUAL SERIAL/PARALLEL CARD-1. As with the Dual Serial Card-1 (above), the Dual Serial/Parallel-1 provides Apple users with simultaneous use of one full serial port and one parallel port. Both ports strapable for any Apple peripheral slot. Fully compatible with all Apple and Softcard (CP/M) software. Drivers for serial interface and Centronics parallel interface are contained in modifiable industry standard EPROM. Serial port is configured like DSC-1. **Order: PP-DSP-1 @ $189.00 each.**

MEMORY EXPANSION MODULE-1. Expand your Apple II(1) to a full 64K RAM system with highest quality 16K dynamic RAMS. Fully buffered to provide reliable operation – even with fully loaded Apples. Total compatibility with Microsoft Softcard(2)/CP/M(3) and all Apple software. Supplied complete with installation instructions and test program. **Order: PP-MEM-1 @ $149.50 each.**

PASCAL MT+ MEM-1. A modular native Z-80 code Pascal compiler. ISO standard. Includes a MEM-1 (detailed above). Have a full Pascal compiler at half the Apple price. Requires a Microsoft Softcard(2) and two disk drives. Note that the Pascal MT+ alone is normally $250.00. **Order: PP-PMT-1 @ $299.00 each.**

16K RAM ADD-ON KITS. For TRS-80 and Apple II(1). Eight (8) full-specification industry standard 16K RAMS. These are not seconds. **Order: PP-RAK-16 @ $29.00 each.**

All Prometheus boards are completely tested and burned-in prior to shipment. One-year warranty covers parts and labor. **MONEY BACK GUARANTEE:** Order now without risk. Boards may be returned, in good condition, after up to 10 days of trial for a full and prompt cash refund. California: add 6% tax; BART Counties, 6½%. Orders under $150, add $3.00 postage, for handling charge. Freight allowed on orders over $150. *Dealer inquiries invited. Quantity discounts available.*

VISA master charge

PROMETHEUS
PROMETHEUS PRODUCTS INCORPORATED
4509 Thompson Ct. • Fremont, CA 94538 • (415) 791-0266

Registered Trade Marks: (1) Apple Computers, Inc. (2) Microsoft Consumer Products (3) Digital Research, Inc.

Circle 336 on inquiry card.

One Shall Be Two

Dear Steve,

We use Maxell MD1 single-sided 5-inch floppy disks on our Apple II. We noticed that the disks have a head-access slot on both sides, so we decided to experiment. We cut a write-enable notch on the opposite edge, and, to our surprise, we were able to write a full 16 sectors on the other side of a single-sided disk. A scan of the disk showed the written data to be in good shape and no physically damaged areas. So, what is the difference between single-sided and double-sided disks—and why purchase a double-sided disk at the extra cost?

Michael Berch
John Oswalt
Berkeley CA

The answer to your question involves how disks are manufactured and tested, rather than any physical difference between them. Both sides of a disk are usually capable of data storage, but, on a single-sided disk, only one is guaranteed.

When a disk is made, it is tested for data retention. This means writing data (usually at a higher density than you will ultimately use) onto the disk and reading it back. If all goes well, the disk is certified. On double-sided disks, both sides are checked and certified.

As a matter of economics, some manufacturers do not bother to check more than what is required to meet production schedules. For example, if 100,000 disks are made and 10,000 must be certified as double sided, the manufacturer may stop testing both sides after getting 10,000 good ones. This often requires checking 15,000 disks to get the 10,000 that pass. Most often, the 5000 rejects end up in the single-sided

Circle 261 on inquiry card.

REFORMATTER™

© MicroTech Exports 1980

With **REFORMATTER** disk utilities you can read and write IBM 3740 and DEC RT-11 single density formatted diskettes on your CP/M® system.

REFORMATTER enables you to access large system databases, improve data exchange with other organizations, increase program development capabilities, and use your micro in distributed processing.

REFORMATTER programs feature bi-directional data transfer and full directory manipulation. ASCII/EBCDIC conversion provided with CP/M ↔ IBM. *MP/M is now fully supported.*

Program Data Sheets, Application Guides, and Machine Compatibility Guides available.

Each program $195.00 from stock. Specify CP/M ↔ IBM or CP/M ↔ DEC. Order from MicroTech Exports, Inc., 467 Hamilton Ave., Suite 2, Palo Alto, CA 94301 ☐ Tel: 415/324-9114 ☐ TWX: 910-370-7457 MUH-ALTOS ☐ Dealer and OEM discounts available.

VISA

CP/M® is a registered trademark of Digital Research.

Circle 178 on inquiry card.

S-100 Modem

An Atlanta bulletin board system uses a Hayes S-100 modem around the clock. Since March 1979, it has logged over 21,500 calls and been down a mere 10 minutes. For performance like this, depend on the Hayes Micromodem 100.™ Features include automatic dialing/answering, 45 to 300 baud operation, a built-in serial interface and direct connection to any modular phone jack.

The Micromodem 100 — and Micromodem II™ for Apple II* computers — are now available nationwide. Call or write for the name of your nearest dealer.

Hayes™

Hayes Microcomputer Products Inc.
5835 Peachtree Corners East, Norcross, GA 30092 (404) 449-8791

Micromodem 100 & Micromodem II are trademarks of Hayes Microcomputer Products Inc. *TM Apple Computer Inc.

COMPLETE
SYSTEM
SUPPORT

Colonial Data SB/70
Altos
Zenith/Heath Z-89
TRS-80 MOD' II

ACCOUNTING
INVENTORY CONTROL
MAILING LIST
WORD PROCESSOR

SOFTWARE PRICES
START AT $125

CALL IN
YOUR ORDER NOW!
(617) 373-1599

"We're doing to SOFTWARE what 'MICRO' did for the computer."

S&M SYSTEMS, INC

P.O. Box 1225, 2 Washington Street, Haverhill, Ma. 01830

SPECIALISTS
IN
FULL SERVICE
SYSTEMS

Circle 354 on inquiry card.

ENTREPRENEURS NEEDED MORE THAN EVER IN THE MICROCOMPUTER INDUSTRY.

The shortage of knowledgeable dealers/distributors is the #1 problem of microcomputer manufacturers. Over 300 new systems houses will go into business this year, but the number falls short of the 1200 needed. It is estimated that the nationwide shortage of consultants will be over 3000 by 1981. The HOW TO manuals by Essex Publishing are your best guide to start participating in the continued microcomputer boom.



$36. No. 10

HOW TO START YOUR OWN SYSTEMS HOUSE
6th edition, March 1980

Written by the founder of a successful systems house, this fact-filled 220-page manual covers virtually all aspects of starting and operating a small systems company. It is abundant with useful, real-life samples: contracts, proposals, agreements and a complete business plan are included in full, and may be used immediately by the reader.

Proven, field-tested solutions to the many problems facing the small systems house are presented.

From the contents:
• New Generation of Systems Houses • The SBC Marketplace • Marketing Strategies • Vertical Markets & IAPs • Competitive Position/Plans of Major Vendors • Market Segment Selection & Evaluation • Selection of Equipment & Manufacturer • Make or Buy Decision • Becoming a Distributor • Getting Your Advertising Dollar's Worth • Your Salesmen: Where to Find Them • Product Pricing • The Selling Cycle • Handling the 12 Most Frequent Objections Raised by Prospects • Financing for the Customer • Leasing • Questions You Will Have to Answer Before the Prospect Buys • Producing the System • Installation, Acceptance, Collection • Documentation • Solutions to the Service Problem • Protecting Your Product • Should You Start Now? • How to Write a Good Business Plan • Raising Capital

$28. No. 16

HOW TO BECOME A SUCCESSFUL COMPUTER CONSULTANT
by Leslie Nelson, 2nd revised edition, Jan 1981

Independent consultants are becoming a vitally important factor in the microcomputer field, filling the gap between the computer vendors and commercial/industrial users. The rewards of the consultant can be high: freedom, more satisfying work and doubled or tripled income. **HOW TO BECOME A SUCCESSFUL COMPUTER CONSULTANT** provides comprehensive background information and step-by-step directions for those interested to explore this lucrative field:

• Established consulting markets • How to get started • Itemized start-up costs • Are you qualified? • Beginning on a part-time basis • The Marketing Kit • Should you advertise? • Five marketing tips • Getting free publicity • How much to charge • When do you need a contract? • Sample proposals • Which jobs should be declined • Future markets • The way to real big money • Avoiding the legal pitfalls • How consultants' associations can help you • The National Register of Computer Consultants • How others did it: real-life sample cases • and much more.



$30. No. 32

FREE-LANCE SOFTWARE MARKETING 3rd edition, June 1980

Writing and selling computer programs as an independent is a business where • you can get started quickly, with little capital investment • you can do it full time or part time • the potential profits are almost limitless. Since the demand for computer software of all kinds is growing at an explosive rate, the conditions for the small entrepreneur are outstanding.

This manual will show you how to sell your own computer programs using these proven techniques: • direct to industries • through consulting firms • through manufacturers of computer hardware • in book form • mail order • through computer stores. It will show you how to profitably sell and license all types of software ranging from sophisticated analytical programs selling for thousands of dollars, down to simple accounting routines and games for personal computers.

The book will guide you step by step through the process of marketing, advertising, negotiating a contract, installing software, training users and providing maintenance and support. It also contains sample software contracts that have been used in actual software transactions. Also included are tips on how to negotiate with a large corporation, ways of avoiding personal liability, techniques for obtaining free computer time and hints on how to run a free-lance software business while holding a full-time job.

ESSEX PUBLISHING CO. Dept. 2
285 Bloomfield Avenue • Caldwell, N.J. 07006

Order books by number. Send check, money order (U.S. $), VISA or Master Charge #. Publisher pays 4th class shipping. For UPS shipping (USA only) add $1.00 per book. For Air Mail shipping add $2.50 per book in the USA, $6.00 in Mexico and Central America, $12.00 per book elsewhere. N.J. residents add 5% sales tax.
☐ No. 10 ☐ No. 16 ☐ No. 32 ☐ Check enclosed ☐ Credit card ☐ 4th class ☐ UPS ☐ Air

Name ____________

Address ____________

City ____________ State ____________ Zip ____________

Card # ____________ Exp. ____________

For faster shipment on credit card orders call (201) 783-6940 between 9 and 5 Eastern time.

Circle 155 on inquiry card.

stock (presuming that one side was good). The remaining 85,000 are only checked for one good side.

In your case, one of the following situations may exist:

1. *Both sides were checked, but the manufacturer decided to put the disk in a single-sided envelope anyway.*
2. *The second side was untested by the manufacturer.*
3. *The second side failed the manufacturer's data test, and the disk could only be certified as single sided.*

In the first case, you are handed a golden opportunity. Cut another access hole and use the other side. In the second and third cases, you are playing the odds. Of course, all three are merely conjecture, since the manufacturer doesn't specify the performance capabilities of the uncertified side.

I suggest that you only use the modified disks for noncritical storage. While it may appear that your experiment has always worked in the disks you've tried, this may be more of a testimonial to the quality of that particular manufacturer's product than a general axiom for all disk users. ...**Steve**

RF Substitute?

Dear Steve,

I've been thinking about buying either an Apple II or an OSI C4P. While saving money and trying to make my decision, I ordered an Interact computer from Manu-Tronics. Each of these devices needs either a monitor or a television set with an RF (radio-frequency) modulator. Since I already have a videocassette recorder, can I hook the device into the video input jack of the cassette recorder and use its built-in RF modulator (channel 3 for

Circle 379 on inquiry card.

TWICE THE BYTE!

8" DISK CONTROLLER

NOW—DOUBLE SIDED OPTION!

- DOUBLES APPLE][STORAGE
- APPLE DOS COMPATIBLE
- SHUGART 800 OR 850 COMPATIBLE
- IBM 3740 DATA ENTRY CAPABILITY
- CP/M, UCSD PASCAL CAPABILITY

Available at your local APPLE Dealer: **$400.**

SVA

SORRENTO VALLEY ASSOCIATES
11722 SORRENTO VALLEY RD.
SAN DIEGO, CA 92121

Circle 68 on inquiry card.

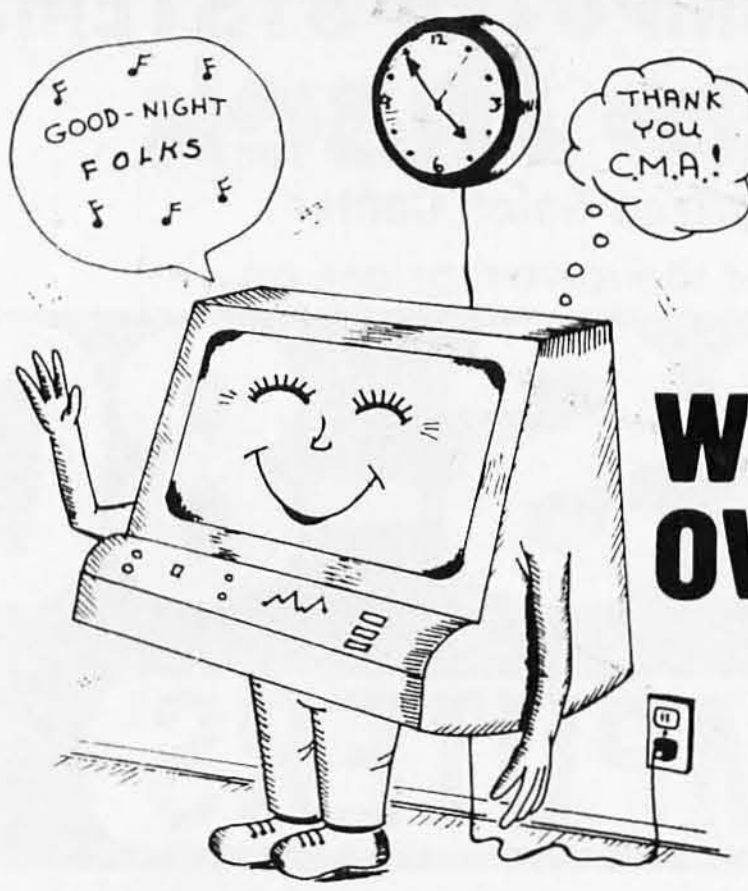

WORKING OVERTIME

APPLICATIONS WHICH SAVE TIME

Payroll, Word Processing, Accounting & Financial Management, Educational Administration, Legal, Medical & Dental Systems

Check your Local Dealer or Contact:

Charles Mann & Associates
7594 San Remo Trail
Yucca Valley, Ca. 92284
(714) 365-9718

Apple II TRS-80 TI 99/4

Colorful Graphics Programs for Apple II, Atari, TI 99/4

LAND WAR: A unique computer war game. Similar to board war games, but the playing field is drawn on the screen in hi-resolution color. The players must maneuver infantry and armored units over terrain that includes rivers, forests and cities. To win, a player must occupy his opponent's city, and destroy his opponent's armies. Two players can oppose each other, or one player fight a computer general.

All this for only $20.00

Apple II with 24K RAM; Atari with 24K RAM.
Not available for TI 99/4.

COLOR SOFTWARE, PO Box 24214, Indpls, IN 46224

Name: ____________________

Street: ____________________

City: ____________________

State: ________ Zip: ________

Computer:
___ Apple II
___ Atari
___ TI 99/4

Programs desired:
___ Land War ($20)
___ Startrek ($15)
___ Dry Well ($15)
___ Baseball ($25)

Send for illustrated catalog with these and other programs which all make full use of the graphics capabilities of these computers.

Add one dollar for first class postage.

______ Total enclosed.

3-D STARTREK: Play the popular computer game in three dimensions instead of two. Hi-resolution display shows stars and Klingons scaled according to distance from the Enterprise. Discover new planets, destroy Klingons, and save the Federation.

$15.00

Apple II, 32K RAM; Atari, 16K RAM; and TI 99/4.

DRY WELL: Entertaining strategy game of oil exploration. Discover the pattern of the oil deposits and maximize the profits of your oil-drilling company. Pattern of deposits is different every game.

$15.00

Apple II, 24K RAM, ROM Applesoft; Atari, 16K RAM; TI 99/4

MAJOR LEAGUE BASEBALL: Strategy game based on 1980 Major League teams. You manage your favorite team and make all the decisions. Includes 26 teams with 25 players per team. Also includes utilities to make and modify your own teams.

$25.00 (on disk)

for Apple II only. Requires 48K RAM, ROM Applesoft, and one disk.

Circle 72 on inquiry card.

TEXAS COMPUTER SYSTEMS
Radio Shack
Authorized Sales Center
We offer the lowest prices on
TRS-80®
COMPUTERS

MODEL II 64K
$3349
An excellent computer for your business needs. Easy expandability & compatibility. No formal operator training needed. All accessories available —disk expansions, printers and software. Quick delivery-airfreight from Dallas.

Model III 16K LIII $849
Color Computer 4K LI $339
Model III 32K 2 Disks - $Call
Pocket Computer & Acc. $Call

PRINTERS

DAISY WHEEL II
$1695
Carbon ribbon typewriter quality for word processing. 43 cps. Standard Centronics parallel interface. Full 16" width, individual sheets or friction feed. Tractor feed $250 extra. Fastest Daisy Wheel available at this price.

EPSON MX-80
$Call
Letter quality matrix similar to Line Printer IV and Centronics Printer but has full software control of 40, 80, 66 or 132 columns. 80cps bidirectional, tractor feed, disposable printhead. $300 less than nearest competitive printer. Best buy in multi-strike letter quality printer. Lists at $645. Our price includes cable & shipping.

ANADEX 9500/9501
$1385
200cps 7x9 or 9x9 matrix, dot addressable graphics, excellent quality & price. 10, 12, 13.3, 16.7 cpi, 6 or 8 lpi, standard parallel, serial, and current loop interfaces included.

LINE PRINTER V
$1616
160cps. Designed for heavy business use. Bidirectional, 7x9 matrix.

LINE PRINTER VI
$1015
Fast, versatile, takes single sheets & pin fed forms, 100 cps bidirectional, low profile. List $1160.

CUSTOM SOFTWARE FROM TCS
Model I & III Programs
for the Epson MX-80 Printer

You get 6 programs for one low price. A library on disk or tape of programs and subroutines designed for gaining maximum use of the Epson MX-80 printer.

BIGLETT/BAS—Produce large graphic letters and dump them to the printer/screen/disk. Works from any Basic program.
EPSON/SUB—Subroutine to easily use all of the EPSON printer commands. Merge into any Basic program.
DEFSTATE/SUB—Collection of pre-defined commands accessible from any Basic program. Auto line centering, titles with borders, etc., instantly with one word commands.
DEMO/BAS—Tutorial program with 100's of REM remarks to guide you thru the use of your computer.
JKL PATCH—A patch to NEWDOS 2.1/80's JKL screen printer function to print graphics from screen in the Regular Epson printer mode.
ARTICLE—Complete article on many printer possibilities plus new ideas, concepts, & trouble shooting tips.

Model I or III, Tape or Disk
$39.95 for all 6 programs
$29.95 if purchased with Epson printer

The DOS Disk Library of Programs
A library of 5 programs for NEWDOS80, NEWDOS 2.1, TRSDOS (Model I & III)

DIRMAINT—A super directory-maintenance program. Purge, copy, rename, re-format, etc., quickly with minimum typing. Super graphic displays for easy use.
FILEMAINT—Creates master directory of all files on your library of diskettes. Master file is handled on disk, not on memory, for maximum speed. Access any file in 2 seconds. 48K supports 200 diskettes. 32K about 100. Takes less than hour to run 100 diskettes thru system.
CHAINBLD/BAS—A super chaining file creation editor & assembler for NEWDOS80. Very fast, easy to use. Reads and edits existing files.
HOMEMAIL—Unique home mailing list that stores data by modifying program itself. Fast & efficient for home user with less than 100 names.
GASMILE—Maintains excellent records of auto gas use & complete reports on MPG, etc. Also provides car maintenance alerts.

Model I or III Disk **$39.95** for all 5 programs

Infinite Basic Diskette
A diskette of programs written in RACET's Infinite Basic. User must have Infinite Basic (both modules). Extremely useful program with REM remarks to guide you in easy use of the 100 extra commands provided by this software system.

Included on the disk is program to maintain a Video Cassette Library, an in-memory Mailing List, a demonstration of Matrix Techniques and equation solution, a screen input system routine. Also a complete article on Infinite Basic with valuable information on commands that are glossed over in the original documentation.

Model I or III Disk only **$39.95**

We can Air Freight from Dallas to major a/p near you for fast, efficient service. Call for information.
- *Payment: Money Order, Cashier's Check, Certified Check. Personal Checks require 3 wks. to clear. VISA, MC, add 3%.
- *Prices subject to change any time.
- *No tax out-of-state. TX add 5%.
- *All items new, guaranteed by manufacturer.
- *Delivery subject to availability.
- *Shipping extra, quoted by phone.

TEXAS COMPUTER SYSTEMS
An Authorized **RADIO SHACK®** Sales Center F701
Box 1174, Brady, Texas 76825
TOLL FREE Number 800-351-1473
Texas Residents 915-597-0673

Circle 404 on inquiry card.

my area) for my display?

John Ramler
Alexandria VA

I was hoping someone would ask that question.

Videocassette recorders have an input jack that is normally intended for use with a TV camera. In general, a camera has a 1-volt peak-to-peak output signal into a 75-ohm load. Most computers with a straight video output try to conform to this specification, so they should be compatible.

To make sure, I connected the output of an Apple II to the camera input of a Magnavox videocassette recorder. The camera/tuner and VTR/TV switches were set to camera and VTR, respectively. In my opinion, it worked well. However, it was necessary to reduce the TV's color-control setting to keep the letters from running together. Once adjusted properly, it made a satisfactory monitor.

*An additional benefit of this technique is that you can record anything on the screen. ...***Steve**

Simple Case Conversion

Dear Steve,

I read Roger L Degler's "A Lowercase to Uppercase Converter," and it seems I have a similar problem. (See the September 1980 BYTE, page 326.) I own an uppercase-only keyboard, but I would like to use lowercase on my video-interface board. Is there some sort of uppercase-to-lowercase converter I could put between my keyboard and video board and still have an operational shift key? I'm sure many BYTE readers have the same problem.

Andrew Meyer
White Plains NY

To get lowercase codes from a keyboard that has uppercase-only output, it is necessary to make the fifth bit high (assuming 7-bit ASCII code), so that an "A" (1000001) becomes an "a" (1100001), and so on.

*If your keyboard output is DTL (diode-transistor logic), RTL (resistor-transistor logic), or TTL (transistor-transistor logic), it can be modified a number of ways. One method is the way Roger Degler suggested in his article. Another way, simpler but much less sophisticated, is shown in figure 2. You'll note that pressing the "shift key" causes bit 5 to be high. ...***Steve**

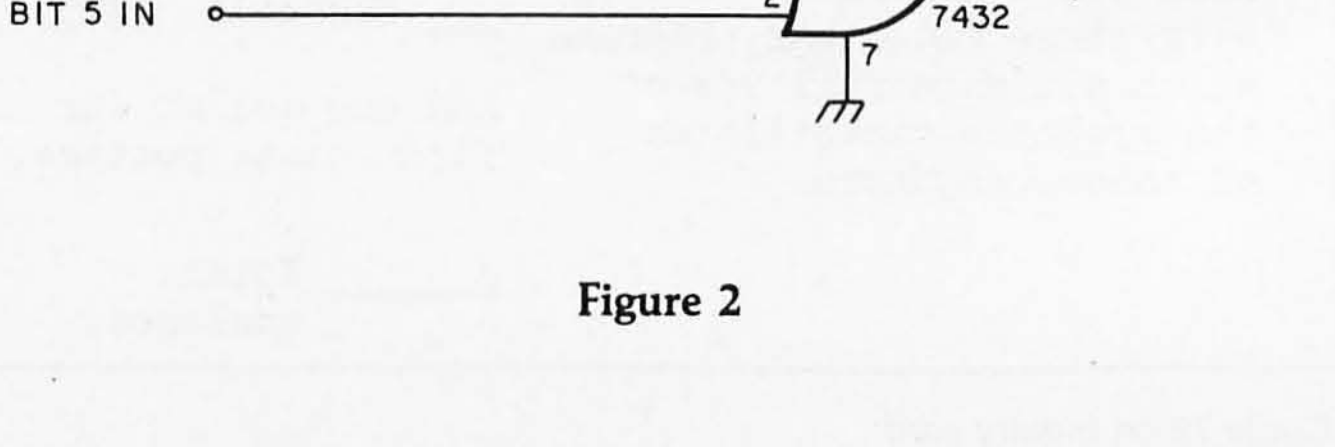

Figure 2

Circle 67 on inquiry card.

COMPUTER HOBBYIST SPECIALS!

WHILE THEY LAST!!!! SAVE!!

Daisy Wheel Terminals

RS-232, used, off-lease. Features Diablo Hytype 1 printer, up to 30 CPS, plot & text modes, dual pitch and much, much more. Includes data, operation manual, schematics. "As-is" machines may need some service.

Add $40 for Hdlg. and Pkg.
Pay Shipping When Delivered.

TESTED & FUNCTIONAL	"AS-IS"... ONLY
NOW ONLY **$1299.00** ea.	**$899.00** ea.

SURPLUS

* "SELECTRIC" TYPEWRITER TERMINALS

15" "Selectric" typewriter terminals are complete with solenoid drivers and RS-232 Serial I/O circuitry. BCD or correspondence code. Each unit includes operational printer, power supply, and untested RS-232 I/O board. Features:

- Full KSR Capability
- 88 Character Set (Upper and Lower Case)
- 134.5 Baud I/O
- 132 Col.
- 14 CPS Rate
- Standard Typewriter KBD
- 117 VAC. 60 Hz Operation

No type element included. Line cord and some data included.

* Reg. Trademark of IBM Corp.

BDC Code Terminal	**$489.00** EACH
Correspondence Code Terminal	**$569.00** EACH
Printer Maintenance Manual	**$20.00** EACH

Add $20 For Hdlg. & Pkg. - Pay Shipping When Del.

Write or Call for our Bargain-Packed PERIPHERAL FLYER!!
Prices are Subject to Change on All Items

CFR Associates, Inc.

MAIL ORDERS:
Box 144, Newton, N.H.
03858

PHONE ORDERS:
617/372-8536
(Sorry, No Collect Calls)
MasterCharge & VISA Welcome

WAREHOUSE:
18 Granite Street
Haverhill, Mass. 01830

Circle 327 on inquiry card.

Attention TRS-80 Mod II owners: P&T CP/M® 2 has more to offer!

More Disk Storage 596K bytes with double density on standard single sided disk drives. It that's not enough, versions are available for double sided expansion drives (1.2M bytes per disk) and the Cameo Hard disk system (10M bytes.)

More CRT Functions P&T CP/M 2 has the most advanced screen driver available for the Mod II including: erase to end of line/screen, insert/delete line, cursor addressing, non-scrolling area on screen, and much more.

More Serial I/O Capabilities The serial drivers in P&T CP/M 2 support ETX/ACK, XON/XOFF, and request to send handshaking. Direct control of serial ports is also available for special applications.

More Documentation We provide the standard CP/M manuals and our own 150 page manual written specifically for P&T CP/M 2.

More Utilities We have added 14 of our own utility programs for the Mod II to the standard CP/M utilities.

More Useful System Functions P&T CP/M 2 has all sorts of useful features you won't find elsewhere: type-ahead buffer for keyboard input, system time of day clock, automatic program execution and lots more.

Prices

Standard P&T CP/M 2	$185
P&T CP/M 2 for Shugart 850 2 sided drives	$220
P&T CP/M 2 for Cameo Hard Disk system	$250

We also carry other software packages, single & double sided expansion drives and the Cameo Hard Disk System. Write for details.

Prepaid, COD, Mastercharge or Visa orders accepted
Shipping extra. California residents add 6% sales tax

PICKLES & TROUT

P. O. BOX 1206, GOLETA, CA 93116, (805) 685-4641

CP/M is a trademark of Digital Research Inc. TRS-80 is a trademark of Tandy Corp.

Big Savings On Atari & PET!

No Risk - No Deposit On Phone Orders - Shipped Same Day You Call° - C.O.D. or Credit Card

* On all in stock units

Please Call Between 11AM & 6PM (Eastern Standard Time)

(800) 233-8950



Atari® 800™

List $1080
only
$759

ATARI®

400 8K	419
400 16K	449
410 Recorder	62
815 Disk	1199
810 Disk	489
822 Printer	359
825 Printer	779
830 Modem	159
850 Interface Module	179
CX852 8K RAM	94
CX853 RAM	149
CX70 Light Pen	64
CX30 Paddle	18
CX40 Joystick	18
CX8100 Blank Diskettes (5/box)	22

CXL4104 Mailing List	$17
CX4107 Biorhythm	13
CXL4007 Music Composer	45
CX4110 Typing	20
CX4101 An Invitation to Programming	17
CXL4015 TeleLink™	20
CXL4004 Basketball	$30
CX4105 Blackjack	13
CXL4009 Chess	30
CXL4011 Star Raiders™	45
CX4111 Space Invaders	18
CXL4006 Super Breakout™	30
CXL4010 3-D Tic-Tac-Toe	30
CXL4005 Video Easel™	30

commodore

4032N	$1090
4032B	1090
8032	1499
NEW -	
VIC - 20	299
8096	1890
CBM 2022 Printer	675
CBM 4040 Drive	1090
CBM 8050 Drive	1420
CBM C2N Drive	87
PET-IEEE Cable	37
IEEE-IEEE Cable	46

Software

WordPro 3 (40 col.)	$186
WordPro 4 (80 col.)	279
WordPro 4 Plus (80 col.)	339
Visicalc - Apple	122
Visicalc - Atari	163
Visicalc - PET	163
Commodore Tax Package	399

Microtek - for Atari

Microtek 16K RAM	99
Microtek 32K RAM	189

Disks

Sycom 5¼" Single Density Box of 10	$29
Maxell 5¼" Floppy- MD1 Single Density Box of 10	34
MD2 Double Density Box of 10	44

Printers

Trendcom 200	489
Epson MX-80	539
Commodore Tally 8024	1679

To Order:
Phone orders invited (800 number is for order desk only). Or send check or money order. Equipment shipped UPS collect. Pennsylvania residents add 6% sales tax. Add 3% for Visa or MC. Equipment is subject to price change and availability without notice.

Computer Mail Order **501 E. Third St.** **Williamsport, PA 17701** **(717) 323-7921**

Circle 444 on inquiry card.

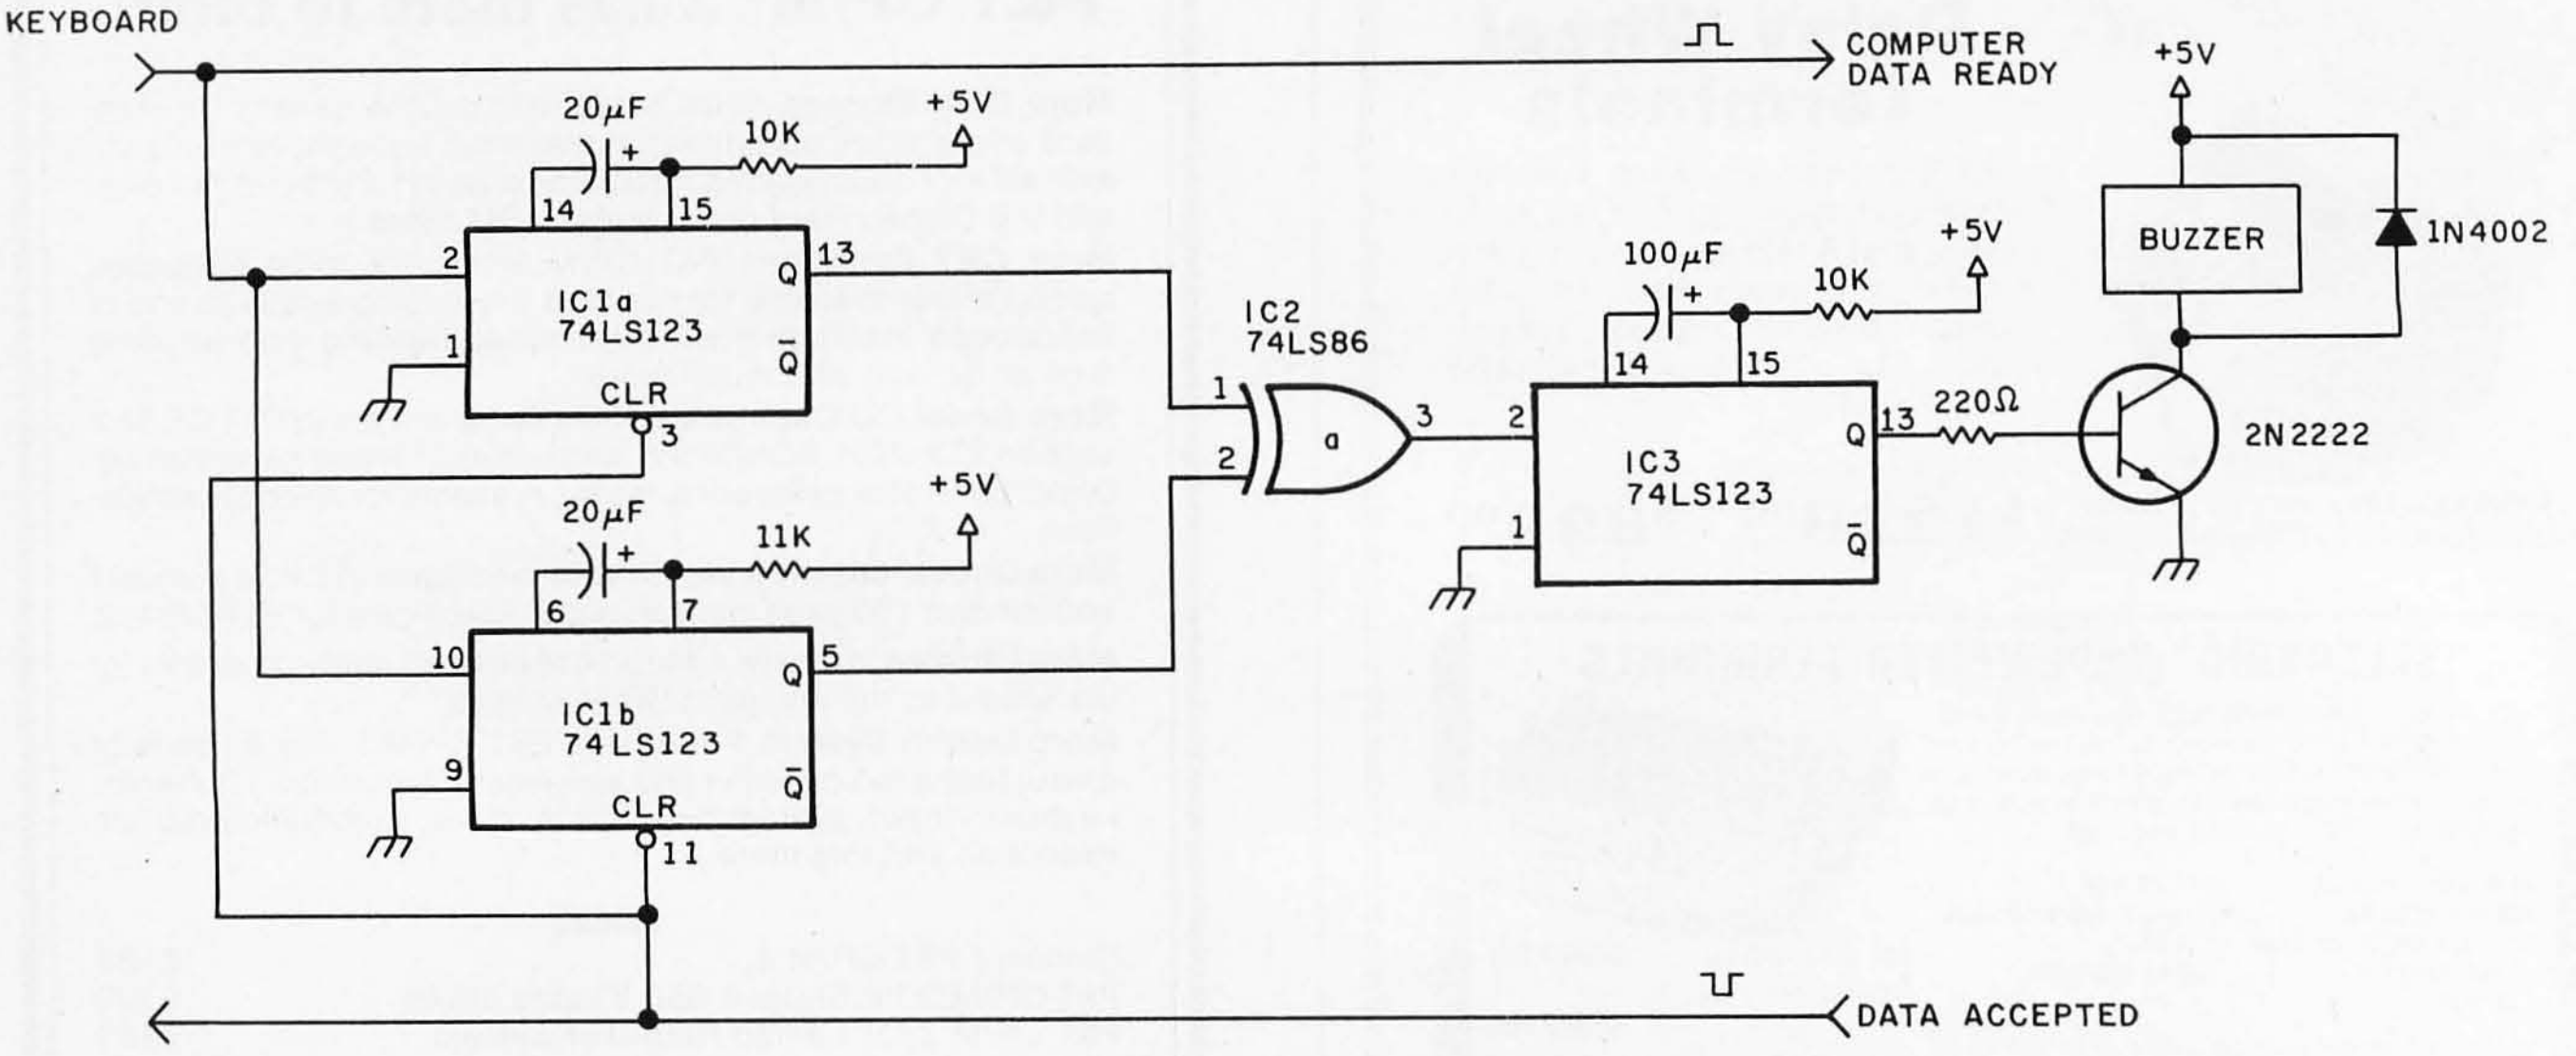

Figure 3

IC Number	Type	+5V	GND
IC1	74LS123	16	8
IC2	74LS86	14	7
IC3	74LS123	16	8

Where'd You Get Those Beepers?

Dear Steve,

I'm connecting a keyboard to a parallel port. I need a simple circuit that beeps if a pulse does not happen on the Data Accepted line within a set period of time after the pulse on the Data Ready line.

Can you help me?

David Smith
North Bergen NJ

There are many ways to design the circuit you want. One method is shown in figure 3. This circuit uses three monostable multivibrators and an Exclusive-OR gate to detect the missing Data Accepted pulse. When a key is pressed, the resulting Data Ready strobe fires IC 1a and IC 1b. IC 1a is "set" for the longest time you will allow before signaling a missing Data Accepted pulse (perhaps 50 ms). IC 1b is set a few microseconds to a few milliseconds longer than 1a (it only has to be 50 ns longer).

*When these two one-shots fire, they open a timing window for the Data Accepted strobe. If it is received within the period allowed by 1a, then 1a and 1b are reset (no beep). If, however, no Data Accepted pulse is received, 1a will time-out before 1b. The opposite logic outputs of the two one-shots are then sensed by an Exclusive-OR, IC 2, which fires IC 3. IC 3 is a one-shot set for 200 ms and connected to a beeper. As long as the Data Accepted pulse is received within 50 milliseconds, you should never hear it....***Steve**

In "Ask BYTE," Steve Ciarcia answers questions on any area of microcomputing. The most representative questions received each month will be answered and published. Do you have a nagging problem? Send your inquiry to:

Ask BYTE
c/o Steve Ciarcia
POB 582
Glastonbury CT 06033

If you are a subscriber to The Source, send your questions by electronic mail or chat with Steve (TCE317) directly. Due to the high volume of inquiries, personal replies cannot be given. Be sure to include "Ask BYTE" in the address.

Circle 290 on inquiry card.

OHIO DATA

Modem Kit

300 Baud Acoustic Coupler

$69.00

Includes:
- Power Supply
- Speakers
- Printed Circuit Board
- All Integrated Circuits, Resistors & Capacitors
- Instruction and Trouble Shooting Book

Order Direct or Call for the Location of the Closest Dealer

Add $4.00 for Shipping Charge.
Ohio Residents add 6.5% for Sales Tax

VISA MASTERCHARGE

OHIO DATA PRODUCTS CORPORATION
14600 Detroit Avenue ● Cleveland, Ohio 44107 ● (216) 221-9000
Allow 6 weeks for Delivery

Circle 398 on inquiry card.

NEW TARBELL S-100 CPU/IO BOARD

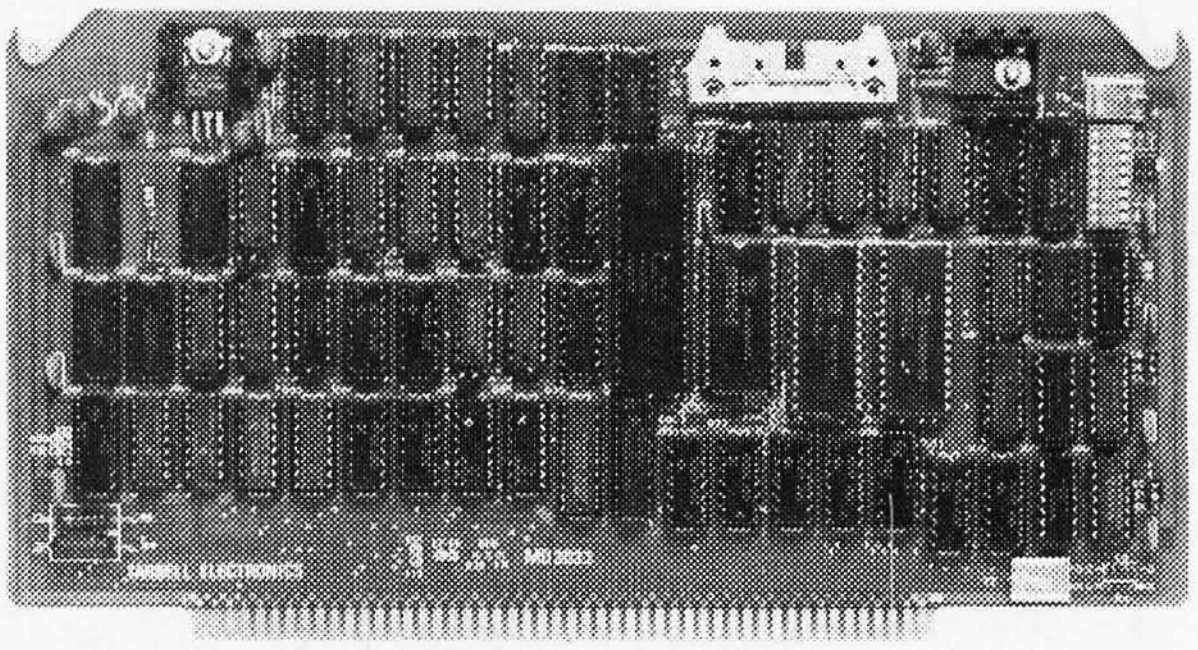

- Z-80™ will run at 2 or 4 Mhz
- 2 RS-232 Serial I/O ports
- Powerful Memory Management
- Programmable Timer
- Full masked priority interrupts
- Has everything needed for MP/M™
- 6 month full warranty

Z-80 is a trademark of Zilog Inc.
MP/M is a trademark of Digital Research

Tarbell Electronics

950 Dovlen Place, Suite B
Carson, CA 90746
Phone (213) 538-4251

META TECHNOLOGIES

M T C

26111 Brush Avenue, Euclid Ohio 44132
CALL TOLL FREE 1-800-321-3552 TO ORDER
IN OHIO, call (216) 289-7500 (COLLECT)

MICROPARAPHERNALIA

DISKETTES (box of ten)

5¼" PLAIN JANE™	$21.95
PLAIN JANE™ *Gold*	$25.95
5¼" DATALIFE™ MD 525-01	$26.95
8" DATALIFE™ FD34-8000	$43.95

NEWDOS by APPARAT

NEWDOS + to NEWDOS/80 UPGRADE	CALL
NEWDOS + with ALL UTILITIES	
35-track	$69.95
40-track	$79.95

BOOKS

TRS-80™ DISK AND OTHER MYSTERIES	$19.95
MICROSOFT™ BASIC DECODED	$29.95
1001 THINGS TO DO WITH YOUR PERSONAL COMPUTER	$ 7.95



80 – 20 = 129^{95}

THE ORIGINAL NEWDOS/80 WITH MTC QUE CARD

★ SPECIAL PRICE ★

SAVE $20 **$129.95**

Apparat's long-awaited successor to NEWDOS+ is here! This is not an enhanced version of NEWDOS, but a completely new product. Simplified DOS commands can be instantly executed from BASIC, even within a program, without disturbing the resident code. System options, such as password protection, number and type of disk drives, BREAK key enable/disable and lowercase modification recognition, can be quickly and easily changed. Five new random-access file types allow record lengths of up to 4096 bytes, and no FIELDing! A powerful CHAIN facility allows keyboard INPUTs to be read from a disk file. An improved RENUMBER facility permits groups of statements to be relocated within program code. Diskettes may even be designated as RUN-ONLY! Features all NEWDOS+ utilities (SUPERZAP 3.0, etc.) and much more! One MTC technical staff member said having NEWDOS/80 is "better than sex" (you'll have to judge for yourself!). Includes 180-page instruction manual and MTC QUE card.

NEWDOS/80 # SPECIAL #	$129.95
MTC QUE Card only	$ 7.50

CALL REGARDING OUR NEWDOS+ UPGRADE PRICING

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation. DATALIFE is a trademark of VERBATIM. PLAIN JANE, AIDS-I, AIDS-III, CALCS-III, CALCS-IV, MERGE-III are trademarks of MTC.
1981 by Metatechnologies Corporation, Inc.

MOST ORDERS SHIPPED WITHIN ONE BUSINESS DAY
Products damaged in transit will be exchanged.

PRICES IN EFFECT May 1, 1981 THRU May 31, 1981.
Prices, Specifications, and Offerings subject to change without notice.
8105

WE ACCEPT
- VISA
- MASTER CHARGE
- CHECKS
- MONEY ORDERS
- C.O.D.

- Add $3.00 for shipping & handling
- $3.00 EXTRA for C.O.D.
- Ohio residents add 6½% sales tax.

CALL FOR INFORMATION ON OTHER PRODUCTS

Circle 235 on inquiry card.

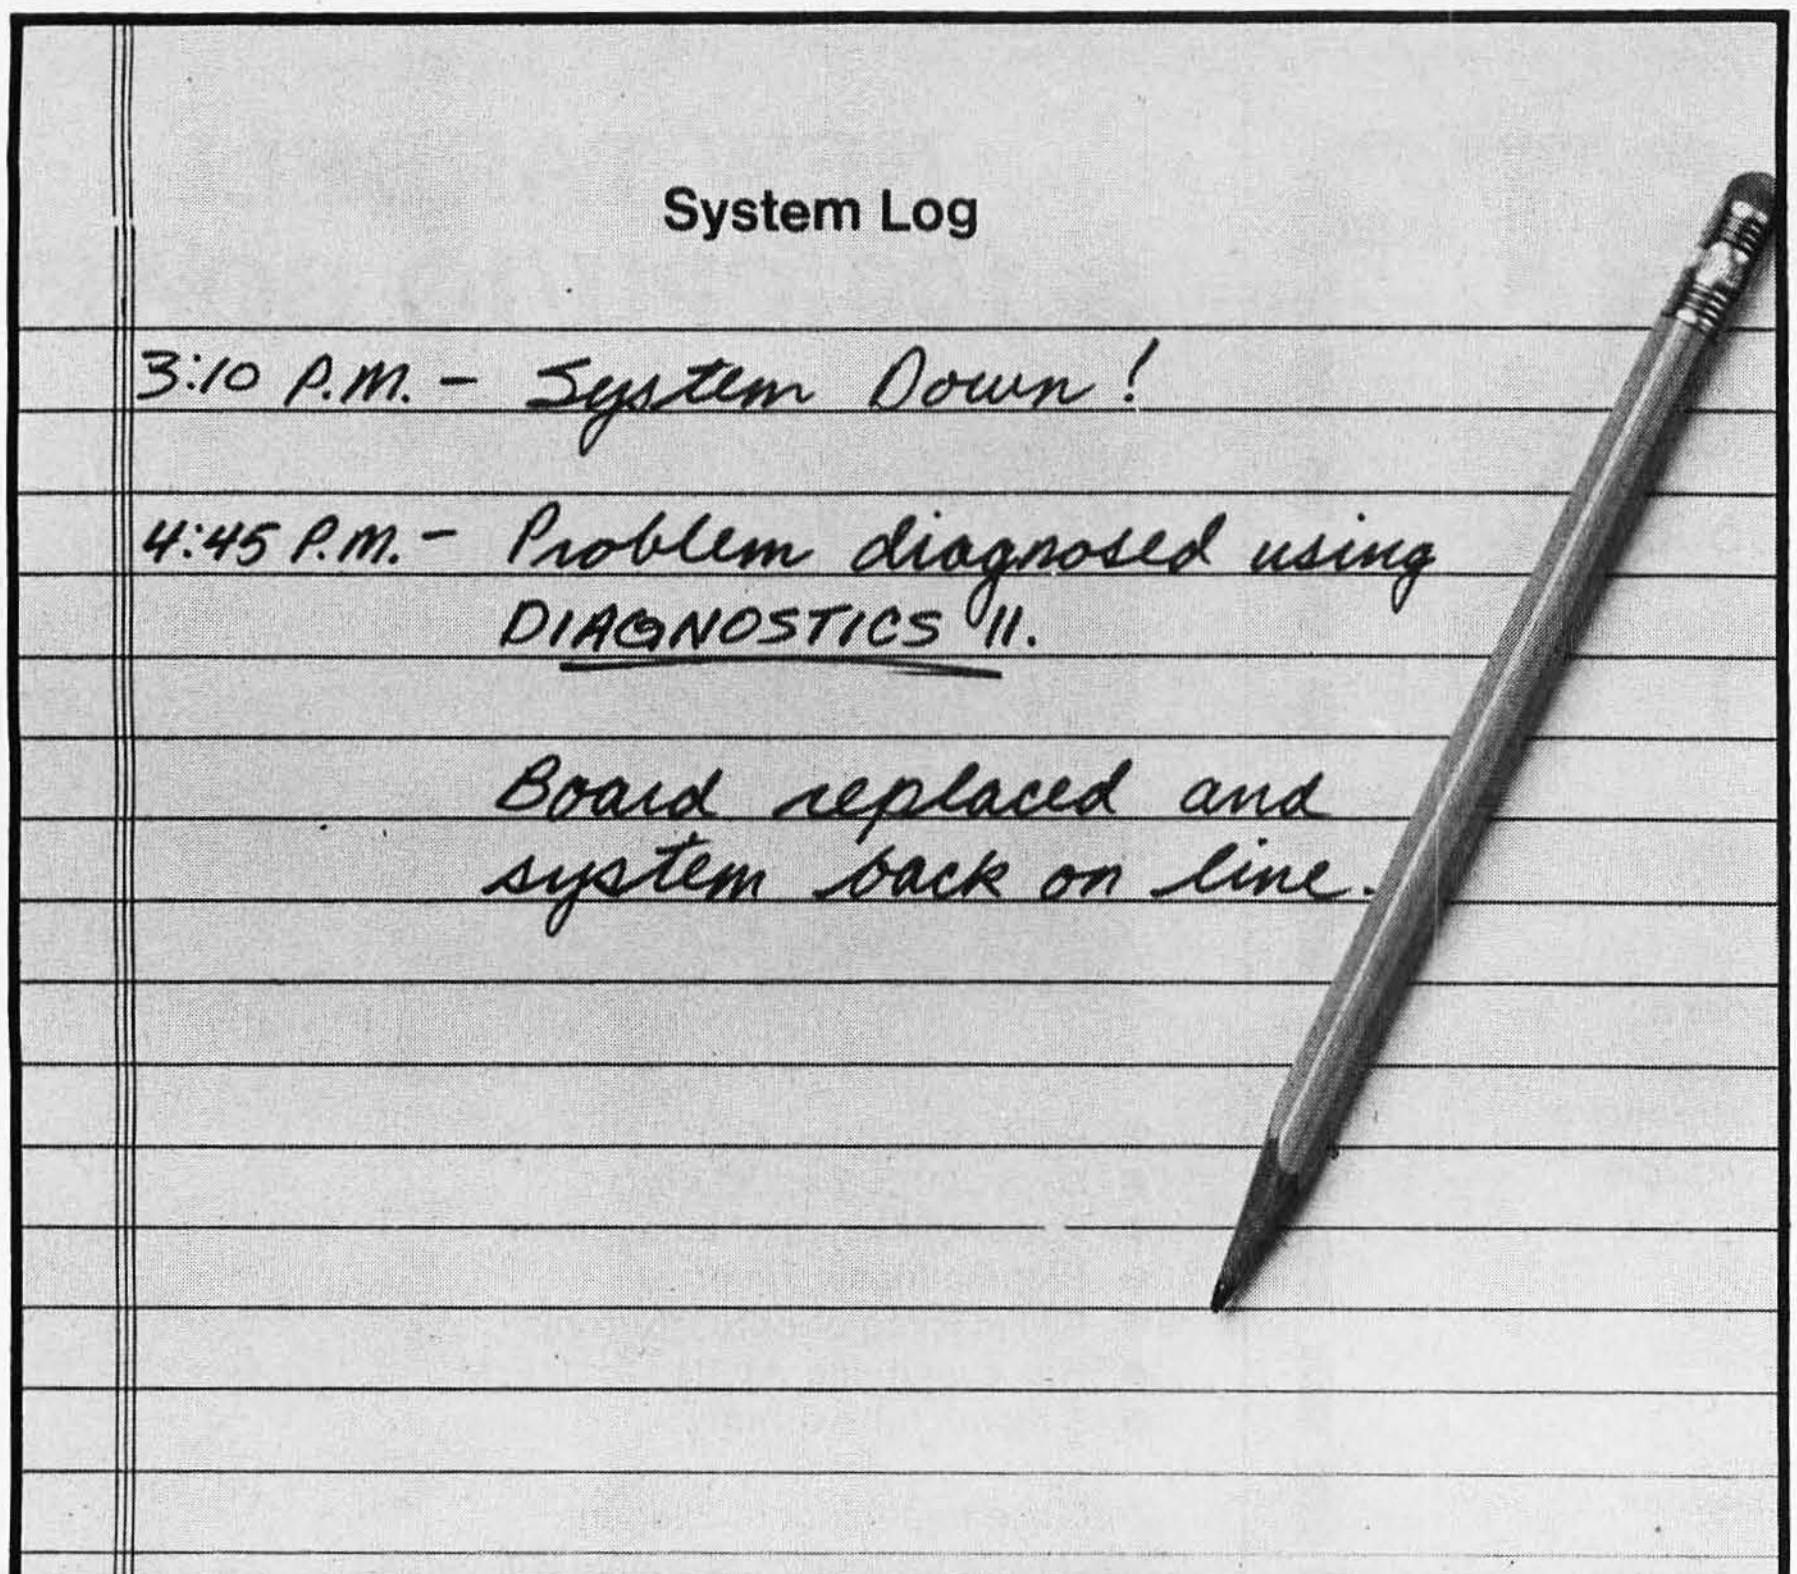

DIAGNOSTICS II

Diagnostics II is SuperSoft's expanded Diagnostic package.

Diagnostic II builds upon the highly acclaimed Diagnostics I. It will test each of the five areas of your system:

Memory Terminal Printer CPU Disk

Every test is expanded.

Every test is "submit"-able. A "submit" file is included in the package which "chains" together the programs in Diagnostics II, achieving an effective acceptance test. All output can be directed to a log file for unattended operation, for example over night testing. Terminal test is now generalized for most crt terminals. A quick-test has been added for quick verification of the working of the system.

The memory test is the best one we have encountered. It has new features, including:

- default to the size of the CP/M Transient Program Area (TPA)
- printout of a graphic memory map
- burn in test
- bank selection option
- memory speed test

Diagnostics-II still includes the only CPU test for 8080/8085/Z80.

A Spinwriter/Diablo/Qume test has been added, which tests for the positioning and control features of the Spinwriter/Diablo/Qume as well as its ASCII printing features. (Serial Interface only)

And, as with all SuperSoft products, a complete online HELP system and user manual is included.

Price: $100.00 (manual only): $15.00

Requires: 32K CP/M

CP/M Formats: 8" soft sectored, 5" Northstar, 5" Micropolis Mod II, Vector MZ, Superbrain DD/QD

VISA master charge

All Orders and General Information:
SUPERSOFT ASSOCIATES
P.O. BOX 1628
CHAMPAIGN, IL 61820
(217) 359-2112
Technical Hot Line: (217) 359-2691
(answered only when technician is available)

CP/M REGISTERED TRADEMARK DIGTAL RESEARCH

SuperSoft
First in Software Technology

Software Received

Apple

Astro-Scope, horoscope for the Apple II. Floppy disk, $30. Astro-Graphics Services Inc, POB 28, Orleans MA 02653.

E, Applesoft editing utility for the Apple II Plus. Cassette, $14.95. Apollo Software Company, 318 Harvard St, Suite 10, Brookline MA 02146.

Electronics I, electronics-design application programs for the Apple II. Floppy disk, $29.95. Howard W Sams & Company Inc, 4300 W 62nd St, POB 558, Indianapolis IN 46268.

Electronics II, electronics-design programs for the Apple II. Floppy disk, $29.95. Howard W Sams & Company Inc (see above).

Electronics III, electronics-design programs for the Apple II. Floppy disk, $29.95. Howard W Sams & Company Inc (see above).

Masterdos, disk customizing programs for the Apple II Plus. Floppy disk, $29.95. Masterworks Software Inc POB 7000-285, Rolling Hills Estates CA 90274.

Micro-Painter, color drawing program for the Apple II. Floppy disk, $34.95. Datasoft Inc, 16606 Schoenborn St, Sepulveda CA 91343.

1981 Tax Preparer, IRS tax-preparation aid for the Apple II. Floppy disk, $99. Howard Software Services, 7722 Hosford Ave, Los Angeles CA 90045.

Reversal, graphics strategy game for the Apple II (plays Othello, a trademark of CBS Inc). Floppy disk, $34.95. Hayden Book Company Inc, 50 Essex St, Rochelle Park NJ 07662.

Sex-O-Scope, horoscope for the Apple II. Floppy disk, $30. Astro-Graphics Services Inc (see above).

TRS-80

Active Filter Design,

Circle 373 on inquiry card.

The WORKSHEET Problem-Solving Language

Want to play "What-if"? Want to do Real Estate Analysis, Family Budgeting, Taxes, Company Cash Flow; want to simulate complex and interrelated processes? WORKSHEET is a powerful language designed for the purpose of writing programs to solve these and all other problems that involve a row-column "spreadsheet". Even novice programmers are solving complicated problems on the first day!

WORKSHEET is not a hybrid text editor or a toy. **It is a complete, self-documenting model-building system.** List the assumptions that went into your budget with the SHOWFIL program—even the boss will understand!

Change the assumptions, the relationships, or the data, and produce a new spreadsheet, neatly captioned, in minutes.

Model too big to fit on a single page? Format it dynamically—one page of 12 (or any number) columns, or 2 pages of 6 columns, or whatever tells your story best.

Conditional evaluation of a variable? Reference to variables in different rows, several columns back? No problem!

Sample models include portfolio valuation, real estate evaluation, iterative solution of a Diophantine equation, family budget, product profit based on exponentially damped growth of sales.

Use it for tough, professional jobs— it's the only CP/M modeling system that can handle them!

Requires 48K CP/M system and Microsoft Basic , C Basic or North Star Basic running under CP/M with Matchmaker II.

WORKSHEET Language disk (5" or 8" CP/M) . . . . (specify version)	$199.95
80-Page Manual only	$ 19.95

The SoHo Group
140 Thompson St., Suite 4-B
New York, NY 10012

Circle 278 on inquiry card.

DIGITAL DATA RECORDER
MODEL CC-9B

For five years now, the CC series recorders have been the industry NRZ Asynchronous recorder standard. Now the D series sets a new standard in stability and reliability with its tachometer feedback LC stabilized motor circuit.

- 4800 or 9600 Baud (3" or 6" per second)
- 10^{-8} Error Rate RS232 or TTL In and Out
- RTS motor start
- CTS Data start
- DB 25 or special connector optional
- *110/220 - 50/60 Hz*
- *Wow & Flutter* ±.3%
- Speed Stability (long term) ±.1%

DC1 Model
Price $275.00
DC2 Model
Price $285.00

NATIONAL MULTIPLEX CORPORATION

260 Lackland Drive East
Middlesex, New Jersey 08846
Tel. (201) 356-9200 TWX 710-997-9530

MICROSTAT
NOW AVAILABLE FOR CBASIC2*

MICROSTAT is *the* statistics package for microcomputers, and is proving itself to users around the world, including:

Stanford, Harvard, Johnson & Johnson, Duke, University of Washington, UCLA, Lockheed, University of Pennsylvania, Oklahoma State, U.S. Geological Survey, Monsanto, University of Toronto, Sweden's National Central Bureau of Statistics, Utah State, Butler University, SUNY, Van Camps, Texas A&M, University of Wisconsin

and a growing list of other organizations. MICROSTAT's Data Management Subsystem (DMS) makes creating your own data files easy and includes numerous editing and transformation capabilities. Files produced by DMS can then be used to generate statistics in all common statistical areas (e.g., descriptive statistics, ANOVA, correlation, multiple regression, probability and hypothesis tests, nonparametrics and others) plus some not so common ones. Whether pure reserch or industrial quality control, MICROSTAT is the statistics package for you.

MICROSTAT sells for $250.00 and is supplied on 8" SD or 5¼" (North Star) disks. The user's manual sells for $18.00 and includes sample data and printouts. Please specify version when ordering. Foreign inquiries, please write directly to us.

master charge
THE INTERBANK CARD

ECOSOFT
P.O. Box 68602
Indianapolis, IN 46268
(317) 283-8883

* *CBASIC2 is a registered trade mark of Digital Research.*

Circle 143 on inquiry card.

A.



26x14½x8
$39.95

B.



26x24x18
$59.95

C.

24x24x14
69.95

A. The lectern for your Apple is an ideal desk-top unit.
B. The CRT flat top has a multiple number of uses - ideal for large CRT with storage shelf.
C. The printer secretary is designed for several different printers - with a shelf for paper storage, slotted top and back for paper feed.

Exteriors are walnut grain Formica.
To order, send check or money order to:

Data Design

P.O. Box 1252
Kissimmee, FL 32741

Add $6.00 for freight & handling - FL res. add 4% tax.

Circle 111 on inquiry card.

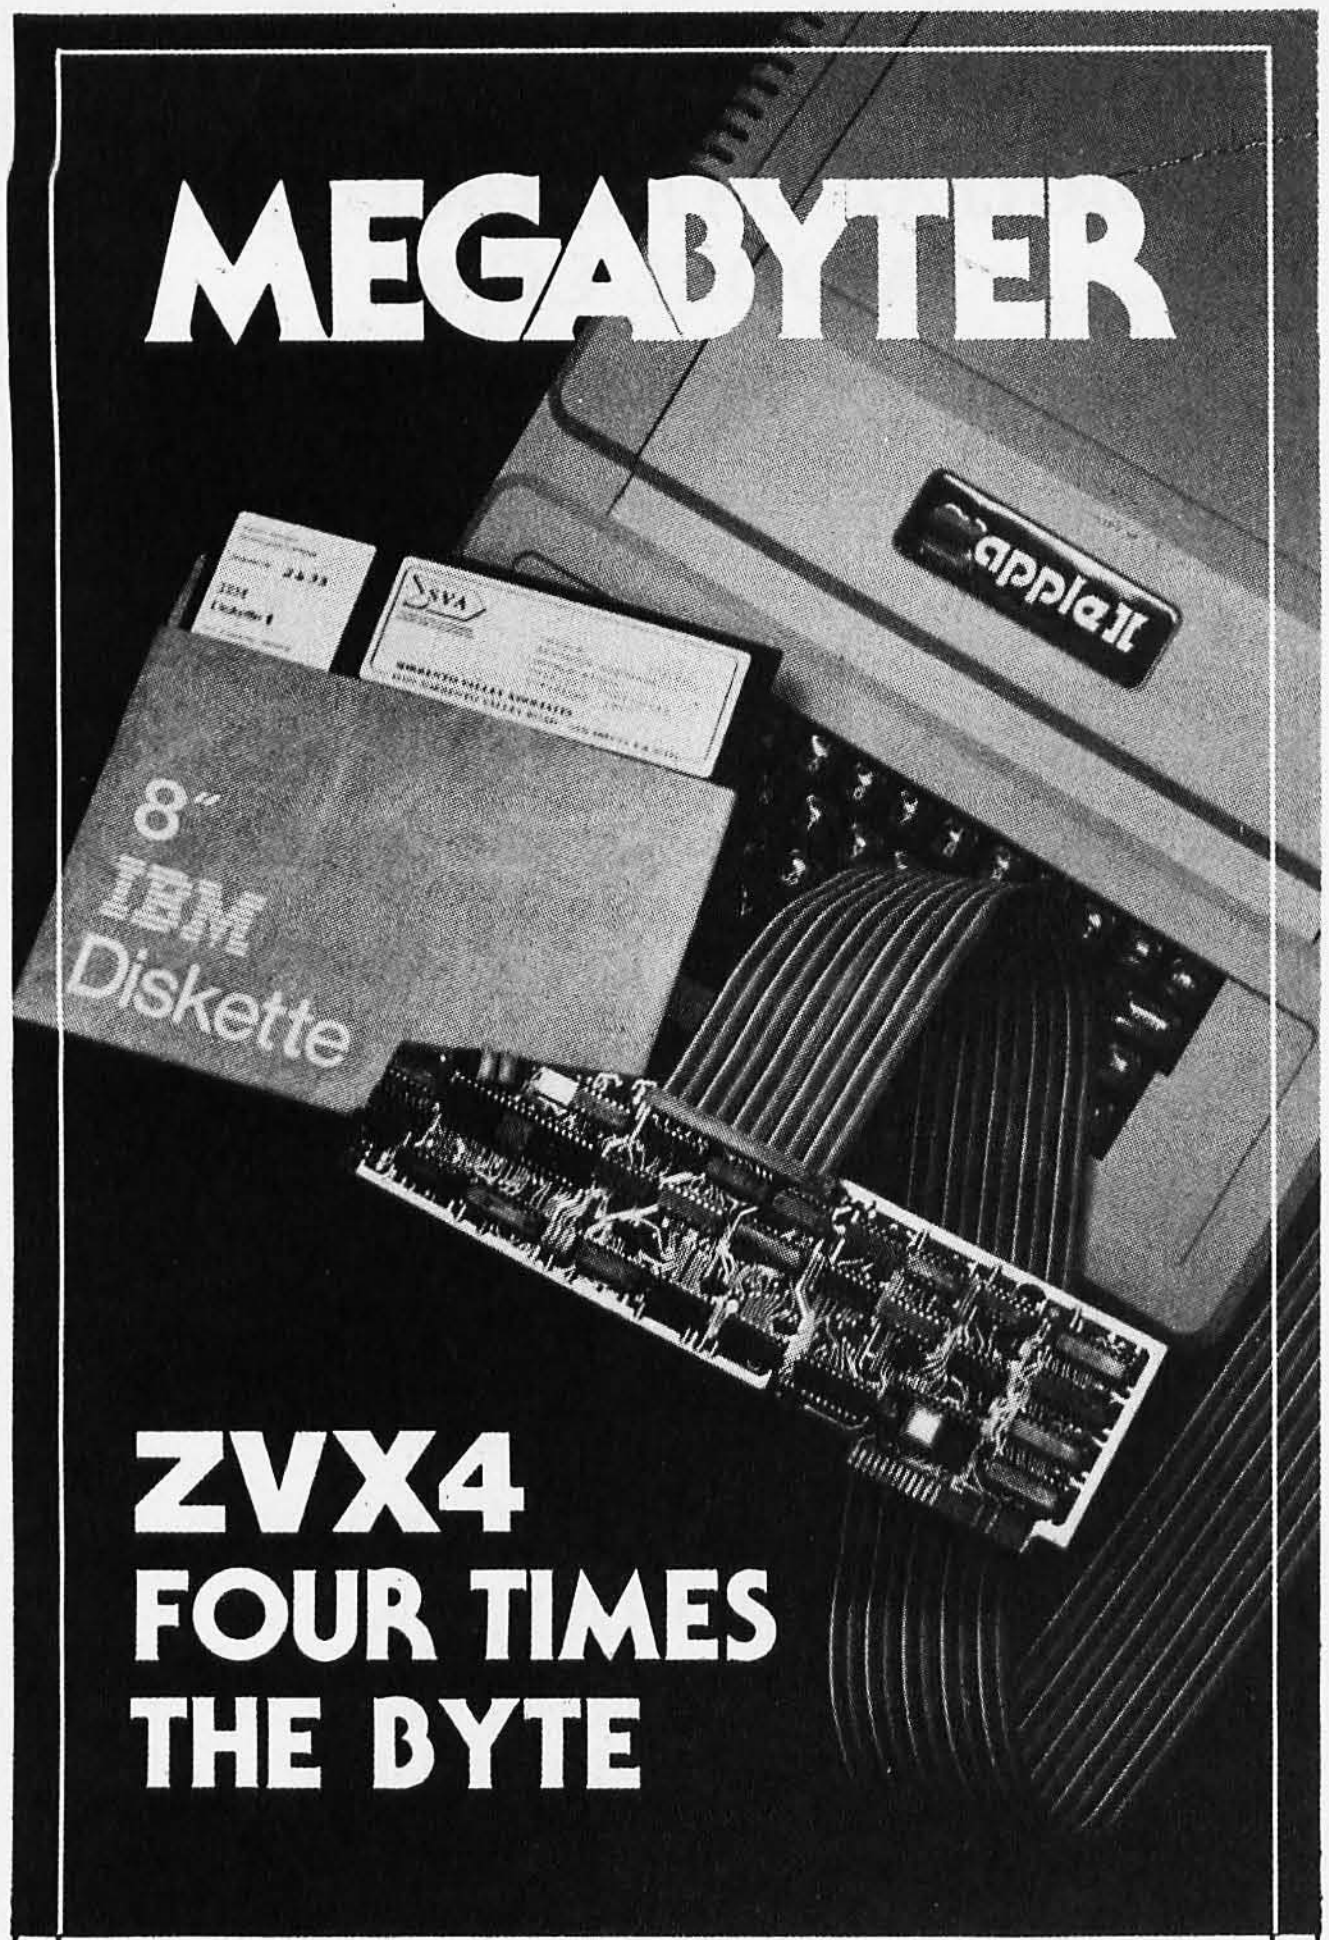

Software Received

electronic-design program for the TRS-80. Cassette, $24.95. Howard W Sams & Company Inc, 4300 W 62nd St, POB 558, Indianapolis IN 46268.

Arcade-80, arcade-like graphics game for the TRS-80. Floppy disk, $24.95. Datasoft Inc, 16606 Schoenborn St, Sepulveda CA 91343.

Cosmic Fighter, graphics arcade game for the TRS-80. Cassette, $17.95. Big Five Software, POB 9078, Van Nuys CA 91409.

Descriptive Statistics & Regression Analysis, statistics package for the TRS-80. Cassette, $24.95. Howard W Sams & Company Inc (see above).

Football Classics, graphics strategy game for the TRS-80. Floppy disk, $24.95. Datasoft Inc (see above).

Genealogy, genealogy program for the TRS-80 Model II. Eight-inch floppy disk, $250. John J Armstrong, 3700 Whispering Pine Rd #47B, Mobile AL 36608.

Iago, graphics strategy game for the TRS-80 (plays Othello, a trademark of CBS Inc). Cassette, $19.95. Datasoft Inc (see above).

Plotting Graphs for Line Printer, graphing program for the TRS-80. Cassette, $24.95. Howard W Sams & Company Inc (see above).

Plotting Graphs for Video Display, graphing program for the TRS-80. Cassette, $24.95. Howard W Sams & Company Inc (see above).

Real-Estate, real-estate program for the TRS-80 Pocket Computer. Cassette, $24.95. Radio Shack, 1300 One Tandy Center, Ft Worth TX 76102.

Other Computers

Atari Character Generator, graphics utility for the Atari 400 and 800. Cassette, $15.95. Datasoft Inc, 16606 Schoenborn St, Sepulveda CA 91343.

C Compiler Version 1.4, programming language for the CP/M system. Eight-inch floppy disk, $145. B D Software, Cambridge MA 02139 (distributed by Lifeboat Associates, 1651 Third Ave, New York NY 10028).

Chest of Classics, collection of games for the Sinclair ZX80. Cassette, $9.95. Lamo-Lem Labs, POB 2382, La Jolla CA 92038.

MINCE Version 2.4, word processor for the CP/M system. Eight-inch floppy disk, $125. Mark of the Unicorn, POB 423, Arlington MA 02174.

Telelink I, terminal program for the Atari 400 and 800. Program cartridge, $19.95. Atari Inc, POB 427, Sunnyvale CA 94086.■

This is a list of software packages that have been received by BYTE Publications during the past month. The list is correct to the best of our knowledge, but it is not meant to be a full description of the product or the forms in which the product is available. In particular, some packages may be sold for several machines or in both cassette and floppy-disk format; the product listed here is the version received by BYTE Publications.

This is an all-inclusive list that makes no comment on the quality or usefulness of the software listed. We regret that we cannot review every software package we receive. Instead, this list is meant to be a monthly acknowledgment of these packages and the companies that sent them. Companies sending software packages must include the suggested list price of the packages and (where appropriate) the alternate forms in which they are available.

Circle 355 on inquiry card.



Boards for S-100 BUS from S.C. Digital

"CPUI-Z80"

Advanced Z80A based CPU board

$219 Assembled and Tested
$149 Kit *(less Interrupt)

Features: Model CPUI-Z80
● 2/4 Mhz SW selectable. ● Built in 8 Prioritized Vectored Interrupts with 8 possible levels of Nested Interrupts using powerful Mode 2 of Z80, all done in Hardware, expandable with external ckt. ● Vector Jump on RESET, in 4K increments. ● Supports 2K of EPROM (not supplied), DMA, dynarmic RAM refresh . . . many more.
*Kit comes with all parts except chips connected to Interrupts.



"INTERFACE: 1"

I/O, Memory Interface Board

$229 Assembled and Tested
$169 Kit

Features: Model 3SPC
● 3 Serial w RS232C or 20ma Current Loop, 1 Parallel. ● 4K of EPROM/ROM and 4K of RAM (ROM/RAM not supplied). ● Built in Kansas City Standard Cassette interface usable to 1200 Baud. ● Generates all popular baud rates up to 19.2K baud, including 110 & 134.5. ● SW settable Address, Baud Rates, Ports.

"UNISELECT" **16K Static RAM** with universal Bank Select
Model 16KUS $235 A & T, with 200 nsec memory chips.

All boards meet IEEE-S100 standards. Fully socketed, solder masks, gold contacts, and guaranteed for one full year. Kit guaranteed parts, only.
Delivery: from stock to 72 hours. **Ordering:** You may call for M.C., Visa or C.O.D. orders. (Add $4.00 for C.O.D.) Personal checks o.k., but M.O. speeds shipment. Takes 7 to 15 days to clear personal checks before shipping.
Undamaged boards can be returned within 10 days for full refunds. Illinois residents add 5¼% sales tax.

O.E.M. PRICING AVAILABLE, DEALER INQUIRY INVITED

S.C. Digital
P.O. Box 906
Aurora, IL 60507
Phone:
(312) 897-7749

Turn your Selectric into a word processing system for only $599

ESCON
PRODUCTS, INC.
12919 Alcosta Boulevard
San Ramon, CA 94583
Call Toll Free:
800-227-2148

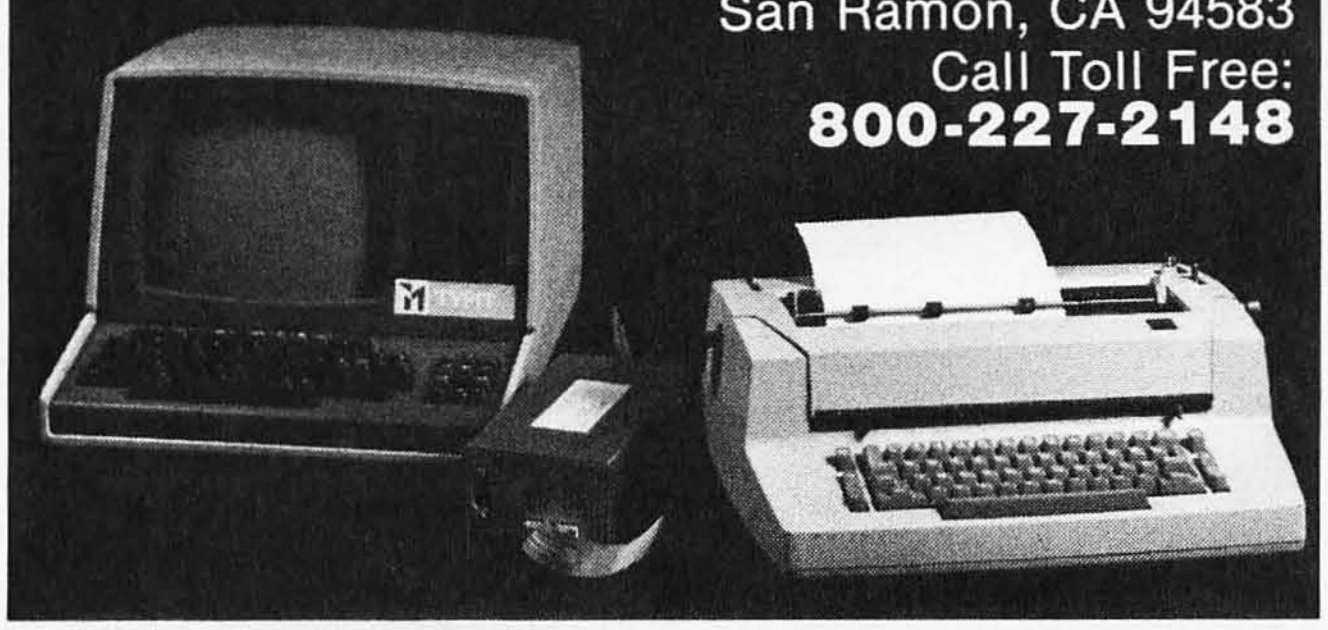

DEALERS !!!

Tired of losing sales
because your source is out
of stock or they just
don't carry the product . . .

NOT ANY MORE !
with

Computers West

COMPUTERS WEST

CA 415/944-9431
AZ 602/949-1117

- Leasing Program Available -

Circle 96 on inquiry card.

800-323-1780* NCE's HOTLINE FOR SAVINGS

- **Ribbons for:** Diablo, Qume, IBM, Wang, NEC, All Data Printers and Typewriters.
- **Printwheels, Elements and Thimbles.**
- **Magnetic Media:** Floppy disks, mini-floppy, Tape, Packs and Cassettes.
- **Disc storage systems, Quiet-izers, Anti-static mats, Ink rolls and much more.**
- **Terminals and accessories.**

• TO ORDER •
Phone orders invited, using credit cards. Or send check, cashiers check or money order that draws on a U.S. bank. Please add 3% ($5.00 Minimum) for handling, shipping and insurance. Illinois residents add 5¼% sales tax. **Mail order pricing only. Catalog mailed upon request.**

WARRANTY
So great is NCE'S confidence in its Thoroughbred Series Diskettes, that each Disk is guaranteed for 10mm passes and for 2 full years against manufacturing defects. Send for full Warranty information.

REMARKABLE NCE'S THOROUGHBRED SERIES, DISKETTES

A New Classic on the Track!

- 100% Certified - EACH AND EVERY DISKETTE,
- Precise, special burnishing,
- Packaged in crushproof plastic storage boxes.
- All mini disks include hub rings attached.
- Warranteed for 10 mm passes and 2 full years.
- Superior to disks selling for twice the price.
- Quite simply, **THE BEST DISK EVER BUILT.**

Partial Selection	Box of 10
5¼" (SS-SD)	29.95
8" (SS-SD)	32.50
8" (SS-DD)	50.00
8" (DS-DD)	52.50

NCE SUPPLY CORPORATION
"Run With the Thoroughbreds"
Satisfaction Guaranteed

NCE Supply Corp.
195 Kehoe Blvd. Bldg. 5
Carol Stream, IL 60187

Phone: 800-323-1780 Toll Free
***312-682-0001 Within Illinois**
TELEX 724389 ATTNNCE
•Distribution Worldwide

Circle 279 on inquiry card.

Books Received

AIM-65, Laboratory Manual and Study Guide, Leo J Scanlon. Somerset NJ: John Wiley & Sons Inc, 1981; 21.5 by 28 cm, 179 pages; softcover, ISBN 0-471-06488-2, $7.95.

APL-Stat, James B Ramsey and Gerald L Musgrave. Belmont CA: Lifetime Learning Publications, 1981; 21.5 by 28 cm, 356 pages; softcover, ISBN 0-534-97985-8, $14.95. Solutions manual for above $3.95.

Apple Machine Language, Don Inman and Kurt Inman. Reston VA: Reston Publishing Company Inc, 1981; 16 by 24 cm, 296 pages; hardcover, ISBN 0-8359-0231-5, $9.95.

The Calculator Afloat, Captain Henry H Shufeldt, USNR (retired) and Kenneth E Newcomer. Annapolis MD: Naval Institute Press, 1980; 16 by 23.5 cm, 225 pages; hardcover, ISBN 0-87021-116-1, $16.95.

Computers in Society, Donald H Sanders. New York: McGraw-Hill Book Company, 1981; 19.5 by 24 cm, 622 pages; hardcover, ISBN 0-07-054672-X, $16.95.

Disassembled Handbook for TRS-80, Volume III, Robert M Richardson. Chautauqua NY: Richcraft Engineering Ltd, 1981; 24 by 28 cm, 239 pages; softcover, ISBN-none, $18.

Electric Machines and Transformers, Leonard R Anderson. Reston VA: Reston Publishing Company Inc, 1981; 18.5 by 24 cm, 305 pages; hardcover, ISBN 0-8359-1615-4, $18.95.

Experimentation with Microprocessor Applications, Thomas W Davis. Reston VA: Reston Publishing Company Inc, 1981; 17.5 by 23.5 cm, 237 pages; softcover, ISBN 0-8359-1812-2, $9.95.

Fifty BASIC Exercises, J P Lamoitier. Berkeley CA: Sybex, 1981; 18 by 23 cm, 253 pages; softcover, ISBN 0-89588-056-3, $12.95.

FORTRAN IV, Second Edition, J Friedmann, P

Circle 71 on inquiry card.

SB/70



SINGLE BOARD TECHNOLOGY

Basic system with: 600K bytes **$2995.**

- 1.2 megabytes $3995.
- 2.4 megabytes $4995.

Suggested list price.

A Z80A CPU combined with the CP/M® operating system opens new vistas to software availability for eight-bit micros. FORTRAN, COBOL, BASIC, APL, PL/1 and Pascal are available now to accommodate today's scientific, educational, sophisticated small business and personal system users.

- 4MHz Z80A CPU
- CP/M 2 operating system
- 64K 200ns main memory
- 6K 300ns video memory
- 8-inch dual floppy drives
- color video text & graphics
- sound generator
- 2-serial ports
- 2-parallel ports
- 4-counter/timers

Quantity discounts are available.
OEM inquiries are invited. Please contact:

COLONIAL DATA SERVICES CORP.
105 Sanford St., Hamden, Connecticut 06514
(203) 288-2524 EAST COAST • (415) 957-9195 WEST COAST

®CP/M is a registered trademark of Digital Research, Inc.

Circle 59 on inquiry card.

S-100 GRAPHICS

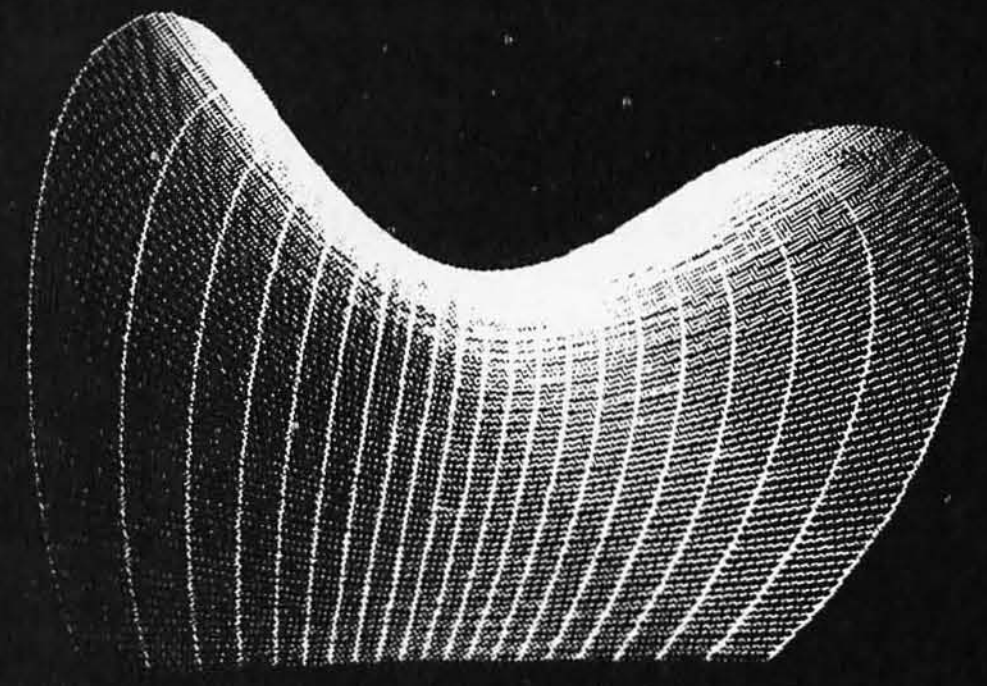

Unretouched photograph

- 512 x 640 matrix available in black and white, gray tones, or color
- Bit mapped design for high speed performance
- Easily expandable from basic black and white by adding memory planes.
- Variety of software: graphical BASIC, Tektronix emulator, printer drivers, character editor
- Compatible monitors and printers available.

CDL

CAMBRIDGE DEVELOPMENT LABORATORY
36 Pleasant Street, Watertown, MA 02172
(617) 926-0869

ANNOUNCING THE 256K BYTE RAM BOARD

The company that was first with the 8088 on the S100 bus, now introduces the LDP 256K RAM board. The board is presently configured as a 64K Dynamic board with upgrade kits available in August to a full 256K Bytes.

Buy the RAM with the future. Why settle for anything less! The RAM features the following: parity for error control, meets all IEEE 696 specifications, 8/16 bit operations, no wait states with a 5 MHz 8088.

Introductory 64K price of $695 until June 15th after which it will be $795.

LDP88 — The first, the best and the least expensive 8088 CPU available for the S100 bus.
LDP72 — Advanced floppy disk controller: single and double density operation, single or double sided drives, 5 1/4" or 8" drives.
LDP1 — For the person who prefers the complete package, the LDP1 has 64K of RAM, 8088 CPU, 8" floppy disk with controller, mainframe and power supply with either 86-DOS or CP/M-86.

PRICES	KIT	ASSEMBLED & TESTED
LDP64 K RAM	n/a	$695.00
LDP88	$349.95	399.99
LDP72	219.95	274.95
S100 Prototype Board	29.95	
86-DOS	195.00	
CP/M-86	250.00	
Micro Soft Basic 86	500.00	86-DOS required
	350.00	with LDP1 and 86-DOS
	250.00	CP/M-86 required
Rev. A LDP88's while they last	275.00	
LDP1 with CP/M-86 or 86-DOS	3499.99	

LOMAS DATA PRODUCTS
11 Cross Street
Westborough, MA 01581
Telephone (617) 366-4335

PASCAL/M is a trademark of Sorcim
CP/M-86 is a trademark of Digital Research
86-DOS is a trademark of Seattle Computer Products

Circle 222 on inquiry card.

Clipper™





LINE VOLTAGE TRANSIENT CLIPPING

Features Parallel Operation **5000 Hits/Second**

PROTECTS:
- Computers
- Micro-Computer Systems
- Word Processors
- Cash Registers
- Power Supplies

PROTECTS AGAINST:
- High Energy Voltage Transients
- On-Off Switching
- Lightning Induced Transients
- Inrush of On/Off Power

DYMARC INDUSTRIES, INC.

TRANSIENT VOLTAGE SURGE SUPPRESSOR 678F UL LISTED

Dealer Inquiries invited.

7133 Rutherford Rd. Baltimore, Md. 21207
(301) 298-3130 800-638-9098

Circle 138 on inquiry card.

Circle 93 on inquiry card.

ATTENTION GOVERNMENT D P USERS AND PURCHASERS

We represent many fine micro products and manufacturers on the GSA Schedule, including

Apple, Cromemco and Computer Corporation of America

Purchasing from the Schedule will save you the time consumed by the bid process. Products shipped throughout the United States and world-wide. Visit or write any of our stores for more information or to receive our catalogue of products represented.

Computers, Etc.............
the dependable store

257 West Street, Annapolis, MD 21401 — (301) 268-6505
13A Allegheny Avenue, Towson, MD 21204 — (301) 296-0520
9330 Georgia Avenue, Silver Spring, MD 20910 — (301) 588-3748
or Call (301) 268-5801

*Career Opportunities Available * An Equal Opportunity Employer*

HOBBYISTS!

EPROM PROGRAMMING

for as low as **$9.95**

LTSI will reproduce your program on an EPROM supplied by us

- Input from Master EPROM, Truth Table, or Paper Tape in standard format
- Output to 2708, 2716, 2732, 2564 U.S. manufactured EPROM

Output to EPROM device	INPUT Master EPROM or Paper Tape	FROM: Non-returnable Truth Table	Charge for each extra programmed EPROM
2708	$ 9.95	$ 24.95	$ 8.00
2716	$20.95	$ 50.95	$15.00
2732	$35.95	$ 80.95	$30.00
2564	$95.95	$155.95	$90.00

Blank TRUTH TABLE entry forms available upon request

TERMS:

- Checks or money orders (do not send cash)
- Allow up to 4 weeks for delivery
- Illinois residents add 6% sales tax.

LOGIC TECHNOLOGY SERVICES, INC.
2400 E. Oakton
Arlington Heights, IL 60005/312-364-4670

Please reproduce the enclosed (MASTER EPROM, PAPER TAPE, Non-returnable TRUTH TABLE) program on a (2708, 2716, 2732, 2564) EPROM. You will find enclosed my check or money order for $ ____________.

# of EPROMS requested ________

NAME ____________________

ADDRESS ____________________

CITY/STATE/ZIP ____________________

PHONE ____________________ SIGNATURE ____________________

Circle 220 on inquiry card.

Greenberg, and A Hoffberg. Somerset NJ: John Wiley & Sons Inc, 1981; 17 by 25.5 cm, 499 pages; softcover, ISBN 0-471-07771-2, $10.95.

Fundamental Structures of Computer Science, W A Wulf, M Shaw, P N Hilfinger and L Flon. Reading MA: Addison-Wesley Publishing, 1981; 17 by 24.5 cm, 621 pages; hardcover, ISBN 0-201-08725-1, $21.95.

H-8 Programming for Beginners, Don Inman and Bob Albrecht. Portland OR: Dilithium Press, 1980; 13.5 by 21.5 cm, 194 pages; softcover, ISBN 0-918398-17-7, $8.95.

LISP, P H Winston and B K P Horn. Reading MA: Addison-Wesley Publishing, 1981; 16 by 23.5 cm, 430 pages; softcover, ISBN 0-201-08329-9, $13.95.

Multinational Computer Nets, Richard H Veith. Lexington MA: Lexington Books, 1981; 16.5 by 23.5 cm, 133 pages; hardcover, ISBN 0-669-04092-4, $18.95.

Problem-Solving and Structured Programming in Pascal, Elliot B Koffman. Reading MA: Addison-Wesley Publishing, 1981; 16 by 23 cm, 483 pages; softcover, ISBN 0-201-03893-5, $13.95.

Programmer's Guide to LISP, Ken Tracton. Blue Ridge Summit PA: Tab Books Inc, 1980; 13 by 21 cm, 210 pages, softcover, ISBN 0-8306-1045-6, $6.95; hardcover. ISBN 0-8306-9761-6, $10.95.

Protocols & Techniques for Data Communication Networks, Franklin F Kuo, editor. Englewood Cliffs NJ: Prentice-Hall Inc, 1981; 18.5 by 24 cm, 468 pages; hardcover, ISBN 0-13-731729-8, $29.95.

The Small Computer in Small Business, A Guide to Selection and Use, Brian R Smith. Brattleboro VT: Stephen Greene Press, 1981; 16 by 23.5 cm, 143 pages; hardcover, ISBN 0-8289-0407-3, $12.50.

Small Computers for the Small Businessman, Nicholas Rosa and Sharon Rosa. Portland OR: Dilithium Press, 1980; 14 by 21 cm, 301

Circle 149 on inquiry card.

DISK DRIVE WOES?
PRINTER INTERACTION?
MEMORY LOSS?
ERRATIC OPERATION?

Don't Blame The Software!

Power Line Spikes, Surges & Hash could be the culprit!
Floppies, printers, memory & processor often interact! Our unique ISOLATORS eliminate equipment interaction AND curb damaging Power Line Spikes, Surges and Hash.

- **ISOLATOR (ISO-1) 3 filter isolated 3-prong sockets; integral Surge/Spike Suppression; 1875 W Maximum load, 1 KW load any socket $62.95**
- **ISOLATOR (ISO-2) 2 filter isolated 3-prong socket banks; (6 sockets total); integral Spike/Surge Suppression; 1875 W Max load, 1 KW either bank $62.95**
- **SUPER ISOLATOR (ISO-3), similar to ISO-1 except double filtering & Suppression $94.95**
- **ISOLATOR (ISO-4), similar to ISO-1 except unit has 6 individually filtered sockets $106.95**
- **ISOLATOR (ISO-5), similar to ISO-2 except unit has 3 socket banks, 9 sockets total $87.95**
- **CIRCUIT BREAKER, any model (add-CB) .... Add $ 8.00**
- **CKT BRKR/SWITCH/PILOT (-CBS) .... Add $16.00**

Master-Charge, Visa, American Express
Order Toll Free 1-800-225-4876
(except AK, HI, MA, PR & Canada)

ESP Electronic Specialists, Inc.
171 South Main Street, Natick, Mass. 01760
Technical & Non-800: 1-617-655-1532

Circle 275 on inquiry card.

THE FORTH SOURCE™

Specializing in the FORTH language.

Printed Material

Using FORTH, Manual	$25.00
PDP-11 User's Guide	20.00
Systems Guide to fig-FORTH	20.00
CalTech FORTH Manual	11.00
TinyPASCAL in fig-FORTH	10.00
fig-FORTH Cross Compiler	30.00

PLUS many source listings

Machine Readable H89 & Z89 Disks & Documentation

Operating System, with tutorial	$135.00
fig-FORTH, CP/M, with tutorial	135.00
TinyPASCAL, with source	75.00
fig-FORTH, CP/M	65.00

Write for complete FORTH List.

MOUNTAIN VIEW PRESS
PO BOX 4656
Mt. View, CA 94040

Circle 268 on inquiry card.

DEC LSI-11 Components

Dependable service at discount prices

Domestic and Export



Mini Computer Suppliers, Inc.
25 Chatham Rd., Summit, N.J. 07901
Since 1973
(201) 277-6150 Telex 13-6476

©Mini Computer Suppliers, Inc. 1979

Save on Calculators

Model	Retail	Your Cost
New Hp-41CV 2.2K bytes, 4 mem. modules built-in, slanted keyboard	$325.00	**$269.95**
System One, HP41CV & Card Reader	495.00	**394.95**
System Two, HP41CV-Card Reader & Printer	840.00	**669.95**
Card reader for 41C/41CV	215.00	169.95
Printer for 41C/41CV	385.00	289.95
HP-41C new price	250.00	**189.95**
Quad Ram to upgrade the HP41C to 2.2K bytes leaving 3 ports...Plugs into the 41C	95.00	84.95
Optical Wand for 41C/41CV	125.00	109.95
Memory Modules for 41C/41CV	39.50	27.95
HP-34C Scientific	150.00	119.95
HP-38C Bus./R.E.	150.00	119.95
HP-33C Scientific	90.00	78.95
HP-32E Adv. Scientific	55.00	49.95
HP-37E Bus. Calc.	75.00	63.95
HP-67 Programmable Sci.	375.00	299.95
HP-97 Prog. Printer Sci.	750.00	579.95
HP-85 Computer	3250.00	**2495.00**
New HP-83 Computer, similar to HP-85 without printer & cassette		1795.00

HEWLETT PACKARD
Olympic Sales is an HP authorized dealer.

Call us for the best deal.

"C" stands for continuous memory.

One year guarantee by HP on all calcs, 90 days on computers. All units complete.

apple computer

APPLE II and APPLE III
Huge inventory of Apple II computers. 16K-32K-48K. Disk drives, monitors, 80 column card. Dow Jones & Quote Reporter.
Pascal-Fortran—DOS 3.3, etc. You name it...we've got it at super low prices.

Immediate delivery on Apple III computers 96K and 128K systems. Call us!

Apple II
personal computer

Computers at unbeatable prices

Texas Instruments	
99/4 console computer	$449.95
TI-5230 printer (was $495)	169.95
TI-59	199.95
PC 100C	149.95
EPSON MX80 printer	499.95
Atari 800 16K cnsle compu	759.95
Atari TV Game	144.95
Mattel Intel TV Game	239.95
Mattel Race Horse Anlyzr	89.95
Centronics printer PI for **Apple & Radio Shack** computers. Was 495.00	189.95

Call us for best prices

Centronics printers	17 models
Novation models CD-CAT/CAT	7 models
Shugart disk drives	6 models
Paper Tiger printers	5 models
Hazeltine video display terminals	7 models
Diablo printers	4 models
DEC VT100 & VT103	2 models

RCA VideoDisc SFT 100 player $469.95 (Many motion picture discs available) Call us
SCM Typewriters • 320 models **Seiko** watches • **Royal • Victor • Canon • Sharp • Casio and more.**

Prices f.o.b. L.A. Minimum freight & handling charge—$4.95. In CA, add 6% sales tax.
Goods subject to availability. We'll beat any advertised price if competitor has goods on hand.
Call Mon-Sat 7AM-6PM.
Outside CA, toll free **800-421-8045**
Inside CA, toll free **800-252-2153**

VISA

master charge

OLYMPIC SALES COMPANY, INC.
216 South Oxford Ave • P.O. Box 74545 • Los Angeles, CA 90004 • (213) 381-3911
Order Desk (213) 739-1130 • Customer Service (213) 739-1100 • Telex 67-3477

Circle 294 on inquiry card.

Circle 421 on inquiry card.

Leverage Brings the Power of "C" to Today's CP/M Machines

Integration into Tomorrow's UNIX Environments is Anticipated

Industry analysts now agree that UNIX will be the dominant operating system for 16-bit microcomputer systems.* UNIX, which is widely recognized as the best operating system ever developed, is written in the powerful systems programming language "C". Because of this, applications programs written in "C" can interact directly with the operating system, giving them a clear-cut advantage over programs written in other languages.

Leverage is a general purpose information management utility now available for use with 56K CP/M machines. Since it is written entirely in "C", *Leverage* can easily be integrated into future UNIX systems. This gives current *Leverage* users the capability of upgrading to 16-bit micro systems without costly re-programming or database conversions.

Leverage combines a number of powerful tools, including full screen data entry, report generation, word processing and subset extraction, into an integrated, easy-to-use package. The *Leverage* system allows you, for example, to computerize your mailing lists, personnel files, or inventory system. (*Leverage* can outperform, feature for feature, any mailing list program on the market.)

*See, e.g., *Byte Magazine* "Bytelines" column of Nov 1980, Dec 1980 and Feb 1981; *Comm. ACM* 24,2 (Feb 1981), 57-58; Sept 1979 *Byte* p. 82.
Leverage is a trademark of Urban Software Corp., UNIX of Bell Labs, CP/M of Digital Research.

Leverage Program $185
Manual Alone .... $ 15 (Credited to subsequent program purchase)
Leverage Newsletter ..... $ 10 /year (First year included with purchase)
For complete details on *Leverage* and current information on hardware compatibility, call or write for a brochure.

Urban Software Corporation
19 West 34th Street • New York, N.Y. 10001 • (212) 947-3811

(212) 986-7690
MAIL ORDER ONLY
Micro Computer DISCOUNT Company
Your One Stop For. . .Quality and Huge Savings
QUALITY • DELIVERY • SERVICE
60 E. 42nd St. Suite 411 New York, NY 10017

SALE!
EPSON MX-80
EPSON MX-70
MX-80FT
PAPER TIGER
445 & 460 & 560
CALL FOR PRICE

CENTRONICS
CALL FOR PRICES

APF
IM1 - $495
IM2 - $988

COMMODORE
16K - $888
32K - $1088
2022 - $695
2040 - $1088
8050 - $1535
8032 - $1495

SUPERBRAIN*
32K - $2445
64K - $2749
64KQD - $3395

ATARI
800—$795

XYMEC
HQ 1000 - $2395

NEC
SPINWRITER
5510 - $2795
5520 - $2990

DIABLO
630
$ 2195
1730 - $2195

MAIL ORDER ONLY
Send Certified Check (Personal or Company Checks require 2 weeks to clear.)
We pay all shipping and insurance charges except items marked with asterisk.
VISA, MasterCharge add 5% N.Y.S. Residents add appropriate sales tax.

* (DENOTES ITEMS SHIPPED F.O.B. NYC)

PHONE (212) 986-7690

pages; softcover, ISBN 0-918398-31-2, $12.95.

33 Challenging Computer Games for TRS-80/Apple/PET, David Chance. Blue Ridge Summit PA: Tab Books Inc, 1981; 13 by 21 cm, 256 pages; softcover, ISBN 0-8306-1275-0, $7.95; hardcover, ISBN 0-8306-9703-9, $14.95.

Troubleshooting Solid-State Circuits, G Loveday and A Seidman. Somerset NJ: John Wiley & Sons Inc, 1981; 23.5 by 19 cm, 110 pages; softcover, ISBN 0-471-08371-2, $7.95.

Understanding Computer Systems, Harold W Lawson, Jr. Linkoping, Sweden: Harold W Lawson Jr, 1979; 20.5 by 29 cm, 150 pages; softcover, ISBN 91-7372-222-9, $15.25.

Understanding Microprocessors, Lloyd Rich. Reston VA: Reston Publishing Company Inc, 1981; 16 by 23.5 cm, 296 pages; hardcover, ISBN 0-8359-8057-X, $17.95.

Without Me You're Nothing, The Essential Guide to Home Computers, Frank Herbert with Max Barnard. New York: Simon and Schuster, 1980; 16.5 by 24 cm, 304 pages; hardcover, ISBN 0-671-41287-6, $14.95.

Word Processing, Rod Van Uchelen. New York: Van Nostrand Reinhold Company, 1981; 20.5 by 23.5 cm, 128 pages; softcover, ISBN 0-442-28646-5, $7.95.■

This is a list of books received at BYTE Publications during this past month. Although the list is not meant to be exhaustive, its purpose is to acquaint BYTE readers with recently published titles in computer science and related fields. We regret that we cannot review or comment on all the books we receive; instead, this list is meant to be a monthly acknowledgment of these books and the publishers who sent them.

Circle 309 on inquiry card.



Pacenter™

Desoldering Systems

MODEL PC-10: Finger Controlled

REMOVE ANY COMPONENT FROM ANY PCB . . . QUICKLY AND SAFELY

MODEL PC-20: Footpedal Controlled





STANDARD SYSTEM FEATURES

- Lightweight and Portable
- Internal Vacuum Pump
- Sodr-X-Tractor Handpiece
- Variable Temperature Control

PACE™
INCORPORATED

9893 Brewers Court ■ Laurel, Md. 20810 ■ phone (301) 490-9860

Circle 168 on inquiry card.

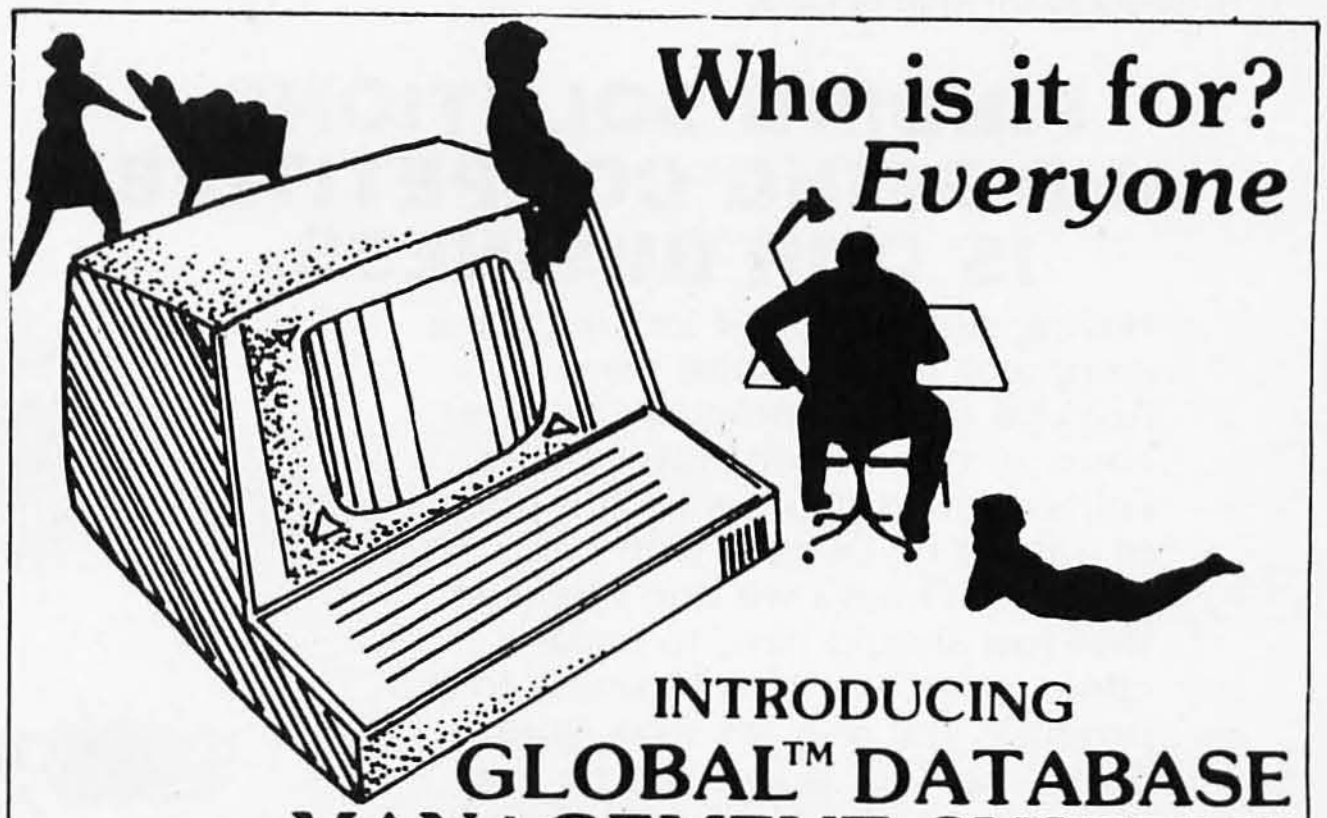

Who is it for? *Everyone*

INTRODUCING

GLOBAL™ DATABASE MANAGEMENT SYSTEM©

The *Only* System Your Microcomputer Will *Ever* Need

Extremely comprehensive, versatile user-oriented management system for database creation and list maintenance. Runs under CP/M* and CBASIC2 on a microcomputer system in only 48K RAM.**

Completely user-defined file structure with sequential, random and linked file maintenance; user-defined number of fields; data transfer between records; high speed search algorithms; built-in ISAM; fast sort/merge utility; record selectable output can be formatted and printed on various forms (labels, envelopes, etc.); links to CP/M commands or programs with automatic return to Global.

Supplied on standard 8" IBM disk (TRS-80 Model II), complete with BASIC subroutine library in source code, with comprehensive manual.

* *Trademark of Digital Research* ** *Trademark of Software Systems*

Shipping and Handling Included **$300**

MANUAL ONLY . . .$30

DEALER INQUIRIES WELCOME

GLOBAL PARAMETERS
1505 Ocean Ave., Brooklyn, N.Y. 11230 212/258-5003

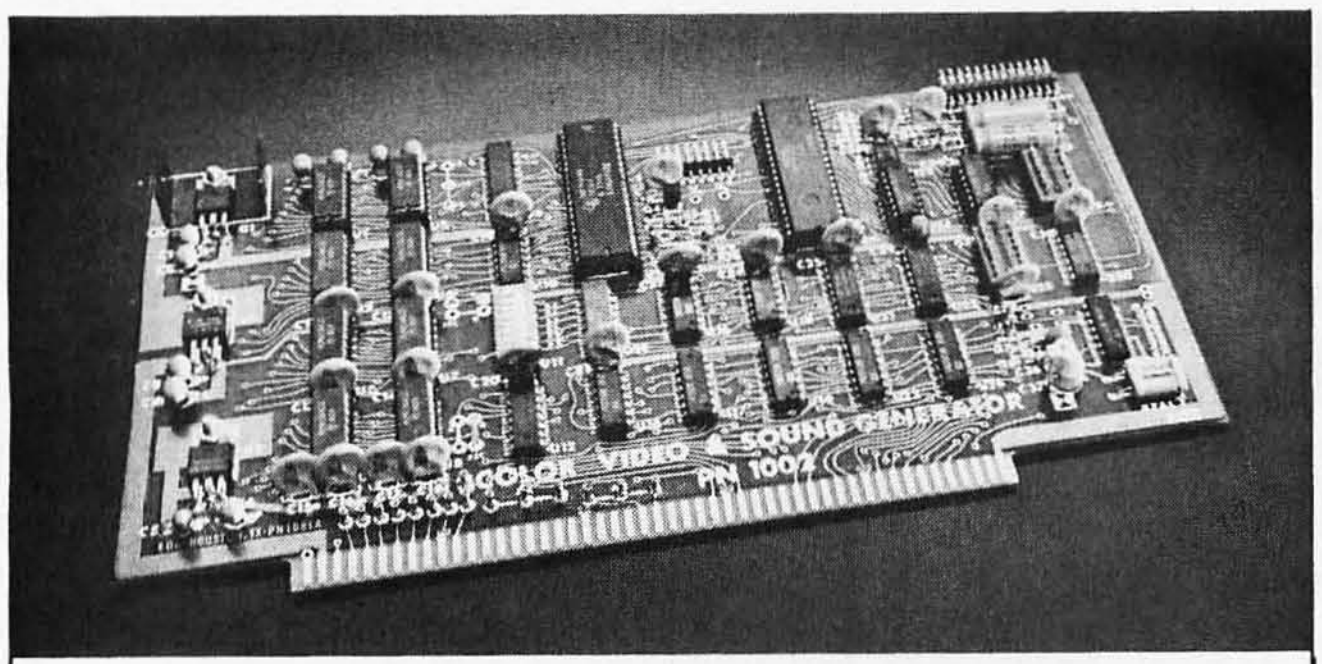

NOW WITH TMS 9918A

SINGLE BOARD COLOR VIDEO AND SOUND GENERATOR KIT $350*
COLOR VIDEO KIT............. $320*
*STANDARD KIT INCLUDES TMS 9918, ADD $25 FOR TMS 9918A.

COLOR VIDEO PROCESSOR

• Text, Graphics, Animation • 16 Colors • 256 x 192 Resolution • NTSC Composite Video Output • Uses TMS 9918 • Includes I/O Mapped 16K Video Memory • 3D Simulation with 32 Video Sprites • 2 Byte X-Y Positioning • Real Time Clock • 8 Level Interrupt Selection • Inexpensive RF Modulator allows easy connection to any color TV • Video over Video and Extended Graphics II Mode with TMS 9918A •

PROGRAMMABLE SOUND GENERATOR

• Music, Sound Effects, Tone Signaling, Ultrasonics • 27 Hz to 111 KHz Range • 3 Programmable Analog Channels with Separate Frequency, Volume and White Noise Control • 10 Selectable Envelope Wave Shapes under Software Control • Two 8-Bit Programmable I/O Ports for use as External Keyboard/Display Interface • Power Amplifier for driving External Speaker •

Texas residents add 5% sales tax. Prices include complete documentation with programming examples. PC board is solder-masked with gold contacts. Add $100 for assembled and tested units. Send $14.50 for 120 page manual, refundable with order. Compatible with Z80, 8085 and 8080 at 2 or 4 MHz on S-100 buss.

EDA ELECTRONIC DESIGN ASSOCIATES
P.O. Box 94055 Houston, Texas 77018 (713) 999-2255

Circle 146 on inquiry card.

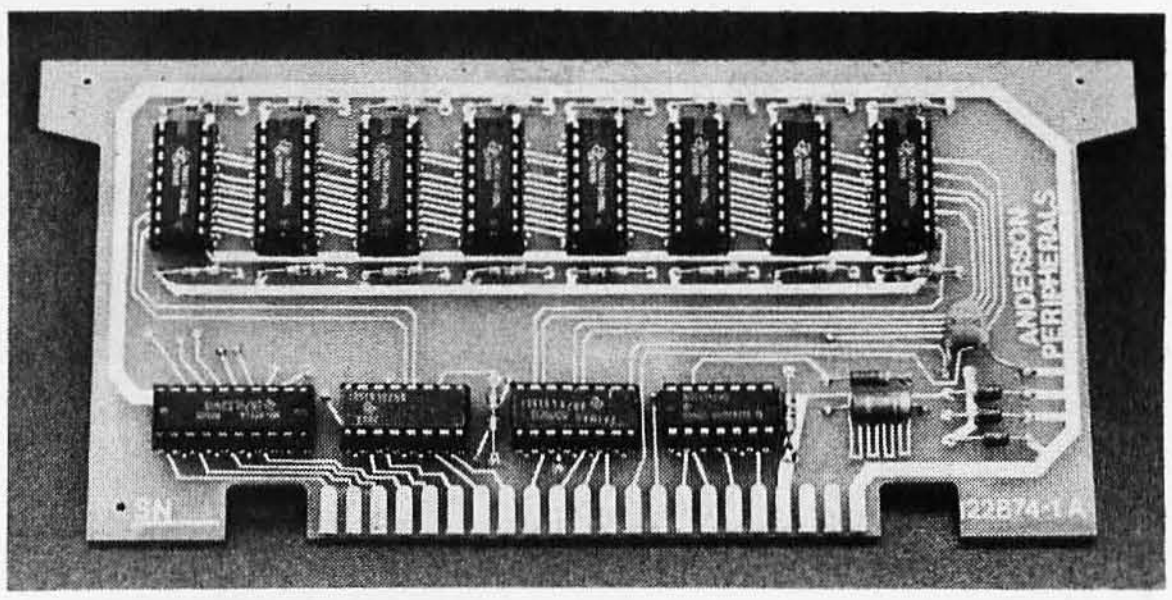

Memory Boards for ATARI™ 800 & 400 Computers

Assembled and Tested
Ready to plug in
Completely Compatible
One Year Warranty
No Modifications necessary

16K	$ 99.95
16K with gold plated connector tabs	109.95
32K with gold plated connector tabs	199.95

Visa and Mastercard accepted Quality discounts available
Dealer inquiries invited

Anderson Peripherals, Inc.

P.O. Box 629
Richardson, Texas 75080
214-231-6866

™ATARI is trademark of Atari Corp.

Circle 26 on inquiry card.

Circle 295 on inquiry card.

FINDING SOLUTIONS AND BEING COMPETITIVE IS OUR BUSINESS.

apple computer Authorized Dealer

Having problems and looking for a computer to help solve them? Are you finding computer dealers come in one of two ways? Either Full system support with Full price or Take it or Leave it with Low price. At Omega we don't believe that you should have to make a choice. Yes, we're in business to sell products but also, to solve your problems. Our prices will be the lowest possible. Our support and product quality will be second to none. Check out our Mail Order prices in this ad (our retail prices will be higher). See if you don't agree with our first claim. For our second claim, call us with your data processing needs and problems. Better yet, come in and see us. Finding solutions and being competitive is our business. We never forget either of them.

APPLE III	$CALL
APPLE II "PLUS" 48K	$ 1169.95
HEWLET PACKARD 85 or 83	$ CALL
APPLE II ACCESSORIES:	
Disk II with controller	$ 535.00
Disk II 2nd drive	455.00
Graphics Tablet	665.00
Language System with PASCAL	395.00
Silentype Printer W/Int	526.00
Integer Firmware Card	152.00
Microsoft Z-80 Softcard	259.00
Videx videoterm 80 col Card	279.00
Sanyo 12" Green Monitor	269.00

Supplies:
Scotch Diskettes - Best of Quality!
price per box of (10)

744-0, 10, 32	$ 27.00
740-0 SS/SD 0 Sector	31.00
741-0 SS/DD 0 Sector	37.00
743-0 DS/DD No Format	44.00
New Products:	
Videx L/C Adapter	110.00
Microsoft 16K RAM Card	169.00
D.C. Hayes Micromodem II	315.00
Novation DCAT Modem	195.00
EPSON MX-80	**CALL**

Mail Order Terms of Sales: Price based on prepaid orders. NO COD's. Visa or Master Charge orders add 3% to purchase price. Allow 14 working days for personal and company checks to clear. Order under $100.00 add $3.00 for shipping and handling. All orders (unless specified in ad) within Continental U.S. shipped U.P.S. no charge. APO or out of Continental U.S. write or call for shipping charges. All prices subject to change and all offers subject to withdrawl without notice. CA residents add 6% sales tax.

OMEGA MICRO COMPUTERS

The Problem Solving Company 3447 Torrance Boulevard • Torrance, California 90503 • (213) 370-9456

MARK GORDON COMPUTERS©

DIVISION OF MARK GORDON ASSOCIATES, INC.
P.O. Box 77, Charlestown, MA 02129 (617) 491-7505

COMPUTERS	
Atari 800 W 16K	799.00
4K Model III	599.00
Model II 64K System	3499.00
16K Model III	879.00

DISK DRIVES	
40 Track 5¼ inch drive	314.00
80 Track 5¼	544.00
4 Disk Drive Cable	39.00

PRINTERS	
Centronics 730	599.00
Epson MX80	Call for price
Epson MX70	Call for price
Centronics 737	849.00
Okidata Microline 83	999.00
Okidata Microline 82	729.00
Integral Data 440G	999.00
NEC 5510 w-tractor	2679.00
Okidata Microline 80	499.00
Diablo 630	2495.00

MISC HARDWARE	
Expansion int TRS-80(Ok)	269.00
Novation D-Cat Modem	166.00
16K Memory Kit	41.99
Leedex Monitor	119.00
Leedex 100G	139.00
Leedex Color Monitor	399.00
Printer Cable for above	49.00
ISO-2 Isolator	54.00
AC LINE FILTER	24.00

STORAGE MEDIA	
Scotch-box 10-5¼	27.00
Memorex-box 10-5¼	22.00
Plastic Storage Box	5.00

OPERATING SYSTEMS	
NEWDOS by APPARAT INC	49.00
NEWDOS+ by APPARAT INC	99.00
MMS FORTH DISKETTE-PRIMER	79.95
NEWDOS 80	149.00

BUSINESS SOFTWARE FOR TRS-80 BY SBSG

Free enhancements and upgrades to registered owners for the cost of media and mailing. 30 day free telephone support. User reference on request.

Fully Interactive Accounting Package. General Ledger, Accounts Payable, Accounts Receivable and Payroll Report Generating

Complete Package (requires 3 or 4 drives)	$475.00
Individual Modules (requires 2 or 3 drives)	$125.00
Inventory II (requires 2 or 3 drives)	$99.00
Mailing List Name & Address II (requires 2 drives)	$129.00
Intelligent Terminal System ST-80 III	$150.00
The Electric Pencil from Michael Shrayer	$150.00
File Management System	$ 49.00

FINE PRINT

TRS-80 is a Tandy Corporation trademark. Use of above operating systems may require the use of Radio Shack TRS-DOS. Radio Shack equipment subject to the will and whim of Radio Shack.

ORDERING INFORMATION

We accept Visa and Mastercharge. We will ship C.O.D., certified check, or money order only. There will be a 40 percent deposit required on all C.O.D. orders over $300.00. Massachusetts residents add 5 percent sales tax.

master charge THE INTERBANK CARD

To order, call toll-free 1-800-343-5206
For information call 617-491-7505

VISA

The Company cannot be liable for pictorial or typographic inaccuracies.
The above prices do not include shipping.

Circle 170 on inquiry card.

Clubs and Newsletters

Microcomputers In Planning Association

This group is dedicated to using micrcomputers in the field of planning. The emphasis is on the use of microcomputers for physical or social planning, in public agencies, academia, or private firms. The dues are $10 per year, which includes a bimonthly newsletter.

For further details, contact the group at 1204 People's Bldg, 60 Monroe at Ionia, Grand Rapids MI 49503, (616) 454-9375.

MP/M Users Group

MAPS is an MP/M users group that publishes a quarterly newsletter called *MAPS Digest*. The newsletter contains application reports, compatibility issues, MP/M support product reviews, and problem areas and solutions discovered by MP/M users. Members receive a list of programs in the MAPS software library and can participate in the MAPS bulletin-board service. Contact Digiac Corporation, Commercial Products Division, 175 Engineers Rd, Smithtown NY 11787, (516) 273-8600.

Monadnock Computer Society

The Monadnock Computer Society meets on the first Thursday of each month at the Keene State College Library in Keene, New Hampshire. Club members own and use the most popular microcomputers on the market. The club is actively seeking information from other organizations. *MCS Output*, a monthly


ORIG
ANS
OFF HOOK
SEND
REC
CARRIER
MICRONET
MICROMATE ELECTRONICS, INC.

Circle 124 on inquiry card.

COMPUTER CENTER proudly announces the

GRAND Opening

of our newest New York showroom
480 LEXINGTON AVENUE
(American Brands Bldg. Between 46th & 47th St.)
scheduled opening April 16th.

featuring...
Tomorrow's Computers Today from
Cromemco

Complete Software Support for all Cromemco Systems

SPECIAL PRICING AVAILABLE
•
WARRANTY-SERVICE INCLUDED

Hardware & Software • Educational Library • Professional Assistance
for Business • Engineering • Industry • Education • Home Entertainment

COMPUTER CENTER
DigiByte Systems Corp.

31 East 31st Street
(between Madison & Park Avenues)
New York • (212) 889-8130

480 Lexington Avenue
(American Brands Bldg. between 46th & 47th St.)
New York • (212) 687-5090

Mon. Tues. Wed. & Fri. 10 AM to 7 PM • Thurs. 10 AM to 8 PM • Sat. 10 AM to 6 PM

TYPEWRITER TURNS PRINTER FOR UNDER $300





Our simple plug-in module converts Olivetti or Olympia electronic typewriters into computer printers or computer terminals!!

- No modifications to the typewriter
- Takes only minutes to install
  NO EXPERIENCE NECESSARY
- Does not affect Olivetti warranty
- Does not affect normal typewriter functions
- All typewriter functions can be computer controlled
- RS232C, IEEE and parallel interfaces available
- KSR version turns typewriter into a computer terminal
- Fully assembled, tested and burned in

Available for the following:

Olivetti ET121 R/O $295
KSR $445
Olympia ES100 R/O $295
KSR $445

All prices in U.S. funds.

Please make cheque or money order payable to:
Vertical Data Systems Inc.
1215 Meyerside Dr., Unit 2A
Mississauga, Ontario
Canada L5T 1H3

*Module for Olivetti Praxis 30 (35) now available.

Please send me an interface kit for:

PRAXIX 30/35 ☐ ET121 ☐ ES100 ☐ R/O ☐
KSR ☐ Serial ☐ Parallel ☐ IEEE ☐

Name ________

Address ________

State ______ Zip ______ Visa ☐ Mastercharge ☐

Card Number ______ Expiry Date ______

See us at Booth 5520

Circle 427 on inquiry card.

newsletter, is available. Contact Doug Scribner, POB 405, Keene NH 03431, (603) 352-5558.

Computer Neophyte Newsletter

ComputerTalk Associates, publisher of *ComputerTalk for the Pharmacist*, has introduced a monthly newsletter for first-time buyers and users of small-business computers. The newsletter covers software, hardware, legal issues, new products, and it gives advice on what to look for when purchasing a computer. It is designed for readers with no prior background in electronic data processing. Subscriptions are available for $35 per year from ComputerTalk Associates, Whitpain Office Campus, 1750 Walton Rd, Blue Bell PA 19422, (215) 825-4918.

TRS-80 Users Group of Delaware

If you live in the Delaware Valley area, there's a users group that would like to hear from you. For more information on the group and its activities, contact Tim J Ihde, 1116 Piper Rd, Wilmington DE 19803, (302) 478-7415.

PDP-8 Users Software Exchange

There's a free software exchange service for DEC (Digital Equipment Corporation) PDP-8 users. The service allows users to submit their software for exchange credits that can be used to obtain any software listed in the *Quarterly Software Exchange Bulletin*. Also available is the electronic magazine *Digital Digest*. Contact PDP-8 Software Exchange, 3169 Holcomb Bridge Rd, Suite 307,

Department 1019, Norcross GA 30071, (404) 447-4736.

Computernews for Dentists

This monthly 4-page newsletter contains information about computers, developments in technology, and explanations of components. The newsletter shows dentists how the computer can help in their work, especially in management. *Computernews for Dentists* is published by Praxis Computer Inc, 431 St Paul St, St Catherines, Ontario, L2R 3N4, Canada, (416) 688-2611.

MICRO

MICRO (Midwest Interactive Computer Organization) meets on the second Saturday of each month. Dues are $15 per year. Members own Apple, TRS-80, OSI, TI 99/4, KIM, Technico, and other makes of computers. Contact MICRO at 1520 W Capitol Dr, Appleton WI 54911.

The Aurora Computer Society

The Aurora Computer Society meets on the second Wednesday of each month at the Holyrood School, 7920 94th Ave, Edmonton, Alberta, at 7:30 PM. The group is involved in computer-to-amateur radio interfacing and BASIC classes. Members own PET, TRS-80, SwTPC, and other kinds of microcomputers. A monthly magazine, *Intercom 80*, features technical articles and news of the Society. They are interested in communicating with other groups. Contact Bob Huntingford, POB 4342 South Edmonton, Alberta; or Bill Gillespie, 10129 90th St, Edmonton, Alberta, T5H 1R5, Canada.■

Circle 62 on inquiry card.

What do you want your computer and video player to do that they can't do now?

☐ A. Display videotape segments then automatically switch to computer text.

☐ B. Display multiple-choice options at each stage of the presentation, then, depending on the choice made, replay any portion of text and/or video, or move on to new material.

☐ C. Show any portion of the computer text and/or videotape (randomly accessed) depending on the pace and/or choices of the user.

☐ D. ALL OF THE ABOVE . . . and do it all on one screen.

If you checked D, contact us for more information on Cavri Interactive Video. We offer a reasonably priced, sophisticated system that links an Apple* or an RS-232 interfacing computer with a Sony or Panasonic VCR and TV screen — **with no modification**. Included are simple, straightforward instructions for writing your programs. Plus frame-accurate stops and switches with no accumulated error.

Write or call today and join the many companies, large and small, that are improving their audiovisual training and testing with the new technology pioneered by Cavri.

Training, of course, is only one application. Now you can catalogue anything — for example, a museum can videotape its paintings, sculptures, and artifacts, then show them by artist, subject, date, or any other grouping, regardless of the sequence in which they were recorded on the videotape. Tell us your application, and we can help by supplying the system and guidance on programming and videotape or videodisc production.

Cavri
interactive video

26 Trumbull Street, New Haven, CT 06511
(203) 562-4979

*TM — Apple Computer Co.

ELIMINATE INTERACTING FLOPPIES, PRINTERS

and processors with these AC power centers that have spike suppressors and filtered AC sockets.

8 sockets, 3 pairs individually filtered, spike suppression

MFJ-1107
$69^95

12 sockets, one filter for all, spike suppression

MFJ-1106
$49^95

12 sockets, spike suppression

MFJ-1105
$39^95



New MFJ multi-outlet AC power centers let you eliminate interaction of floppies, printers, memory, etc. caused by power line coupling, and eliminate power line spikes that can cause memory loss, errors, and erratic operation.

MFJ-1107, varistors (from each line to ground and line to line) suppress spikes.

8 sockets (4 pairs), all 3-prong. RFI pi-filters on each line for each of 3 pairs of sockets isolate equipment from each other and power line. Fourth pair is unswitched/unisolated.

Lighted power switch. Pop-Out fuse. 3-wire 6 foot cord, 15A/125VAC. 1875 watts total.

Rugged heavy-guage aluminum case. Black. Easy mounting slots. 18"L x 2-3/4"W x 1-7/8"H.

MFJ-1106, similar to 1107 but 12 sockets (2 unswitched), one filter for all, has spike protection, lighted switch, fuse.

MFJ-1105, same as 1106, less RFI filter.

Order from MFJ and try it — no obligation. If not delighted, return it within 30 days for refund (less shipping). One year unconditional guarantee.

Order today. Call toll free 800-647-1800. Charge VISA, MC or mail check, money order for amount as indicated above plus $4.00 shipping each.

Eliminate spikes and interaction, order now.

CALL TOLL FREE . . . 800-647-1800

Call 601-323-5869 for technical information, order/repair status. Also call 601-323-5869 outside continental USA and in Mississippi.

MFJ ENTERPRISES, INCORPORATED
Box 494, Mississippi State, MS 39762

Circle 237 on inquiry card.

A File Catalog System for UCSD Pascal

Edward Heyman
300 Center Hill Rd
Centerville DE 19807

It doesn't take long to accumulate a large number of disks with assorted software, particularly if you insist on a reasonable amount of backup. Finding a program you worked on two months ago can be a problem without some type of file organization. Ward Christenson provided the CP/M world with that organization in his UCAT disk catalog system. I'd be lost without it.

As my collection of UCSD Pascal files grew I needed a system similar to UCAT to cope with the problem. Hence, I created CATALOG (see listing 1). Written in Pascal, it does all the things that UCAT does as fast or faster than UCAT (even though UCAT is written in assembly language). A new directory can be merged into a 600-entry catalog in about 30 seconds. A search for a file in a 600-entry catalog takes less than a second. A 600-entry catalog uses about thirty-six blocks, as does the backup file. The program code file and pointer file use another twenty blocks for a total of ninety-two blocks.

What CATALOG Does

CATALOG maintains a file of records in which each record is similar to a UCSD Pascal directory entry. The record contains the name of the volume, the file name, the type of file, the date the file was last changed, and the length of the file. CATALOG gets the records directly from a volume directory during UPDATE. Once the CATALOG file is filled with records you can locate a file with the SEARCH command.

Being lazy, I like to have my machine do as much of my work as possible, so I've added a few bells and whistles to the essential features.

Using CATALOG

For the CATALOG program to work, the files MASTCAT.DATA and CAT.POINT.DATA must be on Drive five. If they are not, the program asks if you want to create them. The first time the program is run you must respond with a "Y" to the prompts for file creation before you can proceed.

Thereafter, executing CATALOG will bring forth the command line:

```
CATALOG→S)earch D)isplay B)ackup U)pdate
        R)emove Q)uit.
```

The S Command

Entering "S" will put the program in the Search mode with the prompt:

```
ENTER THE NAME OF FILE TO BE FOUND→
```

Uppercase must be used for the file name. Wild-card searches can be made by replacing the wild-card section with "=". For example, the following entries may be made to find CATALOG.TEXT:

```
CATALOG.TEXT
CAT=
=LOG.TEXT
```

The directory of an entire volume can be obtained by typing the name of the volume followed by ":".

Entering file name FREE.SPACE will display a list of all the cataloged volumes, the available space, and the most recent date of catalog update of each volume.

The output of the Search command can be directed to the printer by typing "<" before the name of the file to be searched.

The D Command

Entering "D" in response to the main prompt line will display the entire catalog in alphabetical order.

The B Command

Entering "B" in response to the main prompt line will display all files that exist on only one volume (all files that do not have a backup). The routine checks only for the same file name; therefore, files with the same name but different dates are considered to be backed up.

The U Command

A response of "U" to the main prompt line will activate

the update routine, which will produce the prompt:

ENTER UNIT NUMBER CONTAINING UPDATE VOLUME→

If UNIT 5 is selected, the catalog file will be updated with the contents of the volume containing the catalog files (with the exception of MASTCAT.DATA). For all other volumes UNIT 4 should be used.

The update procedure will first rename the main catalog file (MASTCAT.DATA) to BACKCAT.DATA and then read the directory for the volume on the selected unit and create a file name FREE.SPACE with the unused space on the volume. It will then sort the files by alphabetical order and merge the volume list with the *catalog file* (MASTCAT.DATA) and at the same time create the pointer file (CAT.POINT.DATA.).

While merging, any file names added will be displayed on the console terminal and any files that were previously on the volume but were removed will be removed from the master file and displayed as having been deleted. After completion, the number of entries in both the main and backup files will be displayed.

The beauty of Pascal is its self-documenting features—the program should not be difficult to follow.

The R Command

Entering an "R" in response to the main prompt will invoke the prompt line:

ENTER NAME OF VOLUME TO BE REMOVED→

Entering a volume name and a carriage return will cause all entries in the main catalog file for the selected volume to be removed from the file and to be listed on the terminal.

The Q Command

To leave CATALOG enter "Q". UNIT 4 will be checked to see if it contains the booted system volume; if not, a prompt to insert the original system volume will be displayed on the terminal before the program is exited (to prevent a system crash).

How the Program Works

The beauty of Pascal is its self-documenting features—the program should not be difficult to follow.

Since most systems will not have sufficient memory to hold a copy of both the old (BACKCAT.DATA) and the new catalog (MASTCAT.DATA) at one time, the files are read in and written out in sections. OCAT and NCAT are arrays that hold the records read from the old file and the records to be written to the new file, respectively. The size of these arrays is determined by the constant MAXREC. MAXREC should be adjusted to suit your memory size. NREC and OREC are variables associated with the number of records read or records written during the current read or write. DREC is associated with the

number of records in the directory. OTOTREC and NTOTREC are the total records read or written to or from a file.

In order to speed the action of the SEARCH command a pointer file is created during UPDATE. The index to the pointers are the characters "A" to "Z". The array holding the pointers is called DEXRAY and is stored on disk in the file CAT.POINT.DATA. The pointer list is created by calls to the procedure SETDEX. It is written to file by procedure WRITEDEX and read into array DEXRAY by procedure READDEX.

Procedure BACKUP checks to see if the file name of a record is unequal to its predecessor and successor. If it is, it is not backed up. Since the array is not large enough to hold all of the catalog file, provisions must be made to compare the last entry in one array with the first entry in the next array. The Boolean variables PASS and UNBACK are used for this purpose.

To simplify the logic of procedure MERGE, several IF statements as well as the CASE statement have been used. The problem may be stated as follows:

- If the current directory record file name is less than the current old catalog record file name, insert the directory record in the new catalog and increment the new file pointer (NREC) and the directory pointer (D).
- If the current directory record file name is equal to the current old catalog record file name, check the volume names. If the current directory record volume name is less than the old catalog record volume name, insert the directory record and increment the new catalog (NREC) and the directory (D) pointers. If the current directory record volume name is equal to the old catalog record volume file name, insert the directory record and increment NREC, OREC, and D. If the directory record volume name is greater than the old file record name, insert the old catalog record into the new catalog and increment the new catalog and old catalog pointers.
- If the current directory record file name is greater than the old catalog record file name, insert the old catalog record in the new catalog and increment the new catalog pointer and the old catalog pointer. If the directory record volume name is equal to the old file record volume name, do not enter the record in the new catalog, and simply increment the old catalog pointer.

I hope that you will find CATALOG useful in keeping track of your files and programs.■

Listing 1: *A disk catalog system for UCSD Pascal. This program maintains a file of records in which each record is similar to a UCSD Pascal directory. Each record contains the name of the volume, the file name, the type of file, the date the file was last changed, and the length of the file.*

```
{$S+}{L CONSOLE:}{L PRINTER:}{L CAT.PRN.TEXT}

PROGRAM CATALOG;

{* written by edward heyman     *}
{* 300 center hill road         *}
{* centerville delaware 19807 *}

CONST
        BLANKS = '                 ';
        MAXREC=200;
        MAXREC_1=201;
        NFILENAME='#5:MASTCAT.DATA';
        OFILENAME='#5:BACKCAT.DATA';
        PFILENAME='#5:CAT.POINT.DATA';
        CLEARSCREEN=12;

TYPE

     DATE_RECORD = PACKED RECORD
                        MONTH: 0..12;
                        DAY: 0..31;
                        YEAR: 0..100
               END;

     DIR_SIZE = 0..77;
     VOL_ID = STRING[7];
     FILE_ID = STRING[15];
     FILE_TYPE = (UNTYPED,XDISK,CODE,TEXT,
                 INFO,DATA,GRAF,FOTO,SECUREDIR);
     DIR_RECORD = RECORD
                  FIRST_BLOCK: INTEGER;
                  LAST_BLOCK: INTEGER;
```

Listing 1 continued on page 411

Listing 1 continued:

```
                  CASE DIR_FILE_KIND:FILE_TYPE OF
                    SECUREDIR,UNTYPED:
                                       (DIR_VOL_NAME:VOL_ID;
                                        ZERO_BLOCK,
                                        NUM_OF_FILES,
                                        TOTAL_BLOCKS:INTEGER;
                                        LAST_BOOT:DATE_RECORD);
                    XDISK,CODE,TEXT,INFO,DATA,
                    GRAF,FOTO:
                               (DIR_FILE_NAME:FILE_ID;
                                LASTBYTE:1..512;
                                DIR_FILE_DATE:DATE_RECORD)
                END;

     CATALOG_RECORD=PACKED RECORD
                   VOL_NAME:VOL_ID;
                   FILE_NAME:FILE_ID;
                   FILE_KIND:FILE_TYPE;
                   FILE_DATE:DATE_RECORD;
                   FILE_SIZE:0..988;
            END;

     DIRECTORY = ARRAY[DIR_SIZE] OF DIR_RECORD;
     CATARRAY = ARRAY [0..MAXREC] OF CATALOG_RECORD;
     FILEN = STRING[20];
     RECNUM = 0..MAXREC_1;
     INDEX = 'A'..'Z';
     INDEXARRAY = ARRAY [INDEX ] OF INTEGER;

VAR

        NREC,NLREC,OREC,OLREC,DREC,DLREC:RECNUM;
        NTOTREC,OTOTREC:0..2047;
        REMOV,NFILEEND,OFILEEND,DONE:BOOLEAN;
        CH:CHAR;
        DEX: INDEX;
        DEXRAY : INDEXARRAY;
        P : FILE OF CHAR;            {used to switch from console to printer}
        VOL,TEST,SYSTEMVOLUME:VOL_ID;
        CATFILE,OCATFILE,NCATFILE:FILE OF CATALOG_RECORD;
        NCAT,OCAT:CATARRAY;
```

Listing 1 continued on page 412

HARDWORKING SOFTWARE

DISSAX/TXTBOOK/FRMFLEX

DISSAX/ A cunning two-pass 8080/Z80 disassembler that produces print and directly assembleable source outputs. **DISSAX** is a sophisticated cross referencing tool that puts references where they belong, as line comments, not in a separate output section. Requires 16K CP/M. Manual $5/ Object $85/ Source $150.

TXTBOOK/ Text formatting software for sophisticated document preparation or mass mailings, with the best price to performance ratio of any similar product. **TXTBOOK** gives you total control over all facets of document preparation, including multi-level text insertion, several footnote styles, and automatic table of contents generation. Requires 40K CP/M. CBASIC2 INT and Microsoft BASIC COM formats. Manual $15/ Object $100/ Source $200.

FRMFLEX/ A complete forms handling system allowing independent CRT input and printer output formats. The only system of its kind, **FRMFLEX** gives you complete control over forms creation, updating, and data entry with simple user oriented techniques. Requires 32K CP/M and addressable cursor CRT. CBASIC2 INT and Microsoft BASIC COM formats. Manual $20/ Object $175/ Source $350.

CP/M is a trademark of Digital Research.

CBASIC2 is a trademark of Compiler Systems, Inc.

Manual prices applicable to software purchase.

Delivered by CEXEC on 8" single density soft sectored disks.

Discount for purchase of all three programs, Manual $30/ Object $300/ Source $600.

California residents add 6½% sales tax.

cexec INC. **San Francisco**

211 Sutter Street Suite 300
San Francisco, California 94108
(415) 981-4724

McLean Va **Houston** **Dallas**

Listing 1 continued:

```
FUNCTION LOOKUP(FN:FILEN):BOOLEAN;FORWARD;

SEGMENT PROCEDURE INITIALIZE;
  VAR
        I:RECNUM;
        CAT:CATARRAY;
        DEXFILE:FILE OF INDEXARRAY;
  BEGIN
    IF (NOT LOOKUP(NFILENAME))
      THEN BEGIN
             WRITELN('THERE IS NO FILE NAMED ',NFILENAME,' ON THIS DISK');
             WRITELN('DO YOU WANT TO CREATE A ',NFILENAME,'  {Y/N}');
             REPEAT
               READ(CH)
             UNTIL (CH IN ['Y','y','N','n']);
             IF ((CH<>'Y') AND (CH<>'y')) THEN EXIT(CATALOG);
             writeln('FILLING ARRAY[0]');
             WITH CAT[0] DO
               BEGIN
                 VOL_NAME:='       ';
                 FILE_NAME:='               ';
                 FILE_KIND:=UNTYPED;
                 FILE_DATE.MONTH:=0;
                 FILE_DATE.DAY:=0;
                 FILE_DATE.YEAR:=0;
                 FILE_SIZE:=0;
               END;
             FOR I:=1 TO MAXREC DO CAT[I]:=CAT[0];
             writeln('ARRAY IS FILLED');
             REWRITE(CATFILE,NFILENAME);
               FOR I:=0 TO MAXREC DO
                 BEGIN
                   CATFILE^:=CAT[I];
                   PUT(CATFILE);
                 END;{for I}
             CLOSE(CATFILE,LOCK)
           END{if}
      ELSE WRITELN('THE FILE ',NFILENAME,' ALREADY EXITS ON THIS VOLUME ');
```

Listing 1 continued on page 413

Listing 1 continued:

```
   IF NOT LOOKUP(PFILENAME)
     THEN BEGIN
             WRITELN('THERE IS NO FILE NAMED ',PFILENAME,' ON THIS DISK');
             WRITELN('DO YOU WANT TO CREATE A ',PFILENAME,'  {Y/N}');
             REPEAT
               READ(CH)
              UNTIL (CH IN ['Y','y','N','n']);
              IF ((CH<>'Y') AND (CH<>'y')) THEN EXIT(CATALOG);
              FOR DEX:='A' TO 'Z' DO DEXRAY[DEX]:=0;
              REWRITE(DEXFILE,PFILENAME);
              DEXFILE^:=DEXRAY;
              PUT(DEXFILE);
              CLOSE(DEXFILE,LOCK);
              WRITELN(PFILENAME,' WRITTEN TO DISK')
              END{if}
      ELSE WRITELN('FILE ',PFILENAME,' EXISTS');
END;{init}




FUNCTION LOOKUP;
{returns TRUE if filename present FALSE if not}
    VAR
          IOR:0..15;
    BEGIN
      {$I-}
      RESET(CATFILE,FN);
      IOR:=IORESULT;
      CLOSE(CATFILE);
      {$I+}
      IF (IOR=0)
          THEN LOOKUP:=TRUE
          ELSE BEGIN
                 LOOKUP:=FALSE;
                 IF(IOR<>10) THEN WRITELN('IORESULT FOR ',FN,' IS ',IOR);
          END;{else}
    END;{lookup}
```

Listing 1 continued on page 414

AT LAST,

THE ULTIMATE INVENTORY CONTROL SYSTEM

for the TRS-80!

Why the ultimate? Because it turns your Model II TRS-80 microcomputer into a powerful control system that keeps track of your inventory by *both* kind and class, so you can tell not only how many jelly beans you've got, but how many of them are red and how many are black. And how many red jelly beans are big. And how many are small. And how much they cost. Better yet, if you consume your inventory by kit, just tell the system what's in the kit. Then when you withdraw some kits, it automatically adjusts the inventory level for all the components in that kit. When the inventory gets down to a predetermined level, it even tells you it's time to order and where to order. And with the wide variety of reports it can supply, you keep track of costs, usage patterns, and a host of other variables. But best of all, the system operates just like the manual inventory control system you're used to, so you don't have to learn a new way of doing things — its easy-to-follow self-teaching manual makes it a snap to run.

The system requires a Model II TRS-80 with 64K memory, a 132-column printer, and one or two 8" floppy disk drives.

Single diskette system with up to 950-item capacity	$385
Two diskette system with up to 2450-item capacity	$445
Manual only (credited towards purchase price)	$ 50

Softstar Corp.

36 Deville Drive, Selden, NY 11784

516-561-1891

System comes ready to use, source code license is available, dealer inquiries invited.

™TRS-80 is a registered trademark Tandy Corporation

Circle 374 on inquiry card.

Listing 1 continued:

```
PROCEDURE WAIT;
  BEGIN
    GOTOXY(10,24);
    WRITE('PRESS SPACE BAR TO CONTINUE');
    READ(CH)
  END;{wait}

PROCEDURE MEM(PN:STRING);
  BEGIN
      writeln('MEMORY AVAILABLE AT PROCEDURE ',PN,' = ',MEMAVAIL);
  END;



PROCEDURE GET_SYS_VOL(VAR VOL:VOL_ID);
{sets name of volume in drive 4}
  VAR
      I,J: INTEGER;
      SPS:STRING[16];
      AVOL:VOL_ID;
      DIR: DIRECTORY;
  BEGIN
    UNITREAD(4,DIR[0],2048,2);
    VOL:=DIR[0].DIR_VOL_NAME;

    SPS:=COPY(BLANKS,1,7-LENGTH(VOL));
    AVOL:=CONCAT(VOL,SPS);
  END;{set_sys_vol}

PROCEDURE READDEX;
{reads the file of pointers to the first occurrence of each letter in the alpha
  VAR
      DEXFILE : FILE OF INDEXARRAY;
  BEGIN
    RESET(DEXFILE,PFILENAME);
    DEXRAY:=DEXFILE^;
    GET(DEXFILE);
       CLOSE(DEXFILE);
  END;{readdex}

PROCEDURE ENTER_VOL_NAME;
  VAR
        SPS:VOL_ID;
```

Listing 1 continued on page 415

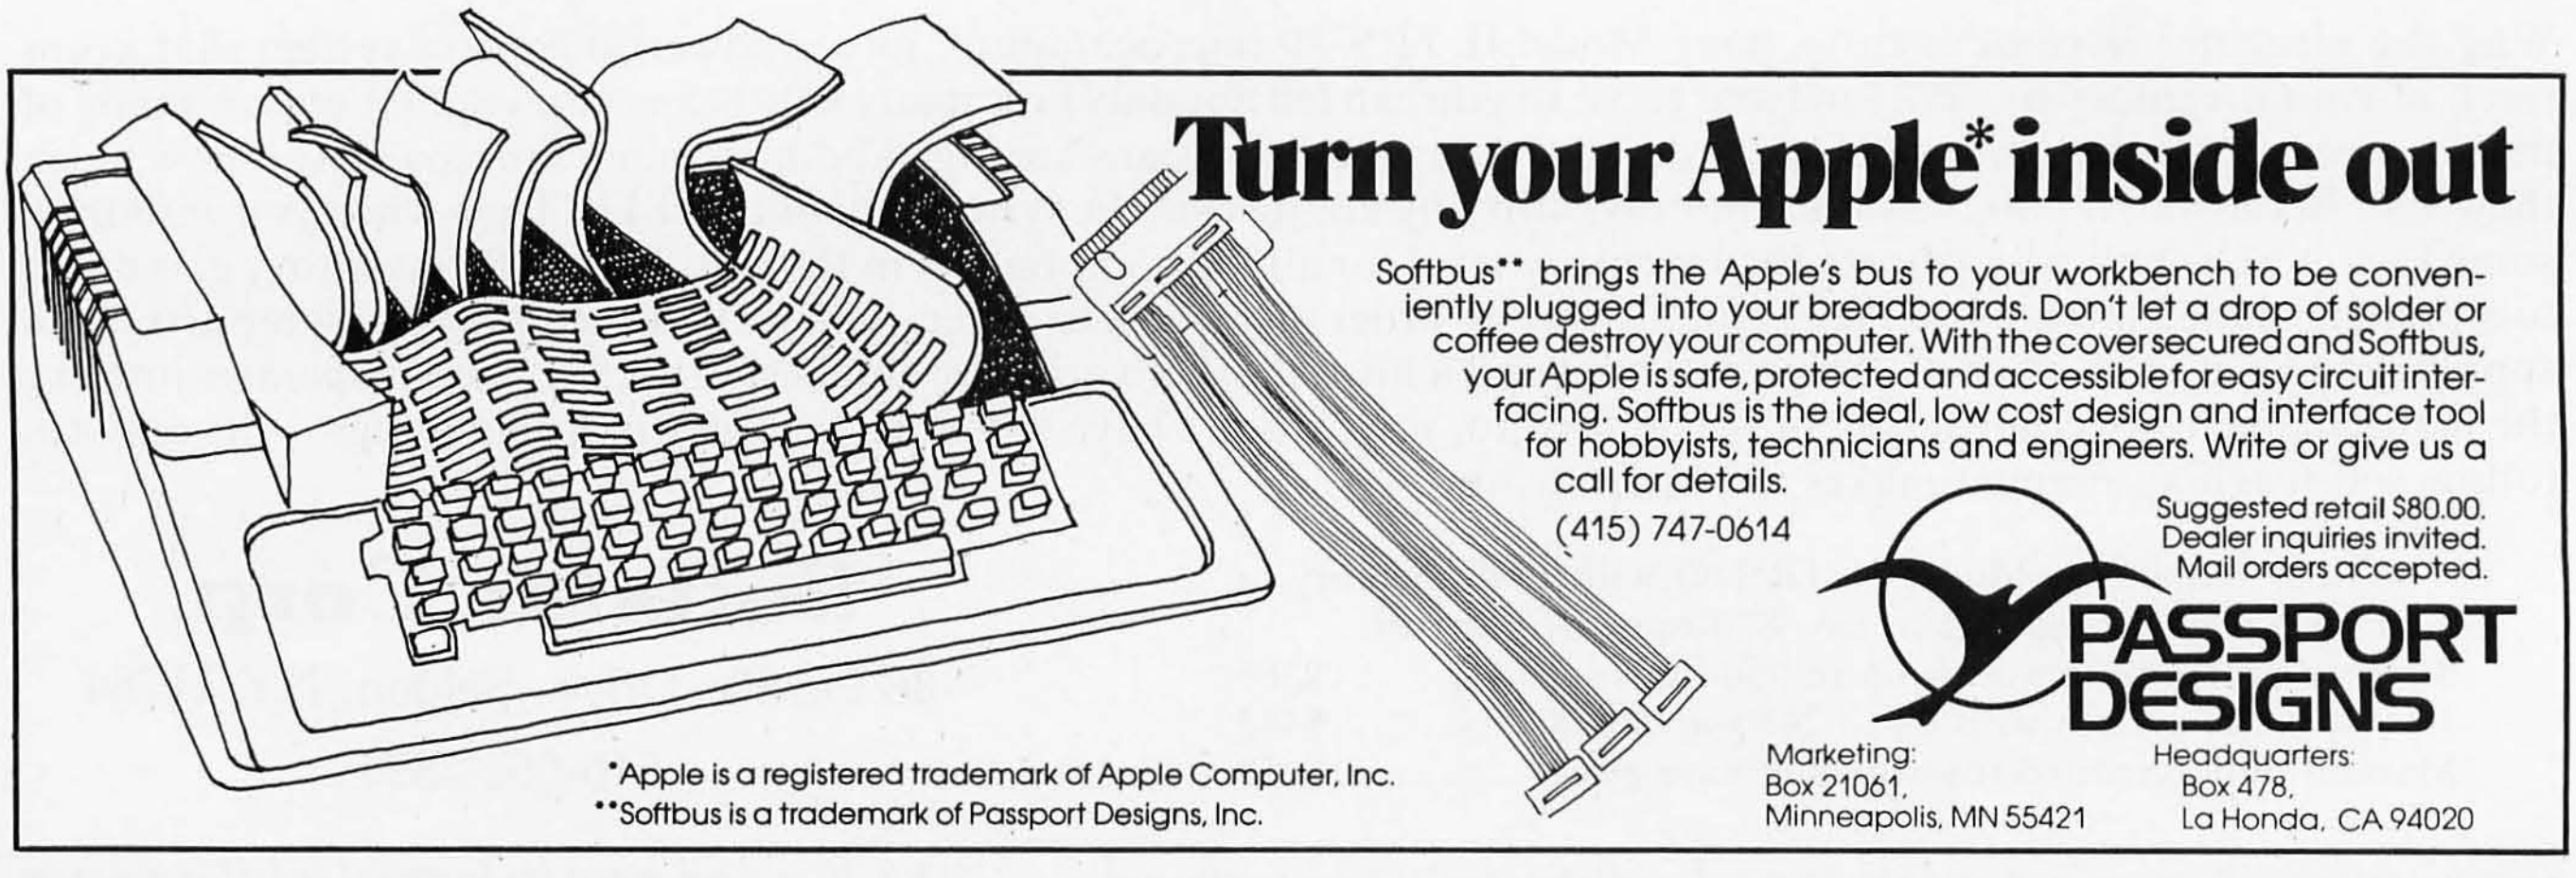

Listing 1 continued:

```
  BEGIN
    VOL:='        ';
    REPEAT
      WRITE(CHR(CLEARSCREEN));
      WRITE('ENTER NAME OF VOLUME TO BE REMOVED --> ');
      READLN(VOL);
    UNTIL (LENGTH(VOL)<=8);
    IF (POS(':',VOL)<>0) THEN DELETE(VOL,POS(':',VOL),1);
    SPS:=COPY(BLANKS,1,7-LENGTH(VOL));
    VOL:=CONCAT(VOL,SPS);
    WRITELN(VOL,'|');
    DREC:=0
  END;{enter_vol_name}


PROCEDURE PRINT_DATE (REC:DATE_RECORD);
{prints date to console or printer}
BEGIN
 WITH REC DO
   BEGIN
      WRITE(P,DAY:3,'-');
        CASE MONTH OF
          1: WRITE(P,'Jan');
          2: WRITE(P,'Feb');
          3: WRITE(P,'Mar');
          4: WRITE(P,'Apr');
          5: WRITE(P,'May');
          6: WRITE(P,'Jun');
          7: WRITE(P,'Jul');
          8: WRITE(P,'Aug');
          9: WRITE(P,'Sep');
          10: WRITE(P,'Oct');
          11: WRITE(P,'Nov');
          12: WRITE(P,'Dec');
        END;{case}
        WRITE(P,'-',YEAR:2,'  ':3);
     END;{with}
   END;{print_date}
```

Listing 1 continued on page 416

COMPUTER EQUIPMENT & SOFTWARE BARGAINS

EVERY MONTH

BUY, SELL OR TRADE ALL TYPES OF COMPUTER EQUIPMENT AND SOFTWARE (pre-owned and new) among 20,000 readers nationwide in BIG (11x14") pages. Classified ads are *only* 10¢ per word and are indexed for *easy* and *fast* location. Subscription: $10 a year / 12 issues. Money back guarantee. Sample copy, $1.50.

COMPUTER SHOPPER
P.O. Box F-14
Titusville, FL 32780
(305) 269-3211
MasterCard or VISA subscription orders only, call **TOLL FREE 1-800-528-6050 Ex. 184**.

Circle 87 on inquiry card.

HEADERS

PRINTED CIRCUIT RIGHT ANGLE MOUNT

34 PIN HEADER
3M 3413-1003 $1.25 EA
40 PIN HEADER
ALPHA $1.50 EA
50 PIN HEADER
3M 3433—1002 $1.75 EA

40 PIN CONNECTOR



3M 3417
$1.50
EACH

22/44 EDGE CONNECTOR
TIN SOLDERTAIL .156"x.200"

LARGE QUANTITIES AVAILABLE
$1.35 each 10 for $12.50

7-17vdc S.S. BUZZER

- Fits dip socket
- CMOS compatible
- Max current 14mA
- Sound output 70dB @ 20 cm

$1.25 each

FLAT LEVER HANDLE MINI TOGGLE

SPDT
RATED
6 AMPS @ 125 V
1/4 - 40 BUSHING
$1.00 each
10 for $8.50

Litronix FRL-4403
FLASHER LED

diffused red led
with built in flashing unit
T 1 ¾ package
pulse rate 3hz @ 5v 20 ma.
2 for $1.70

ALL ELECTRONICS CORP.
905 S. Vermont Ave.
Los Angeles, Calif. 90006
(213) 380-8000
Mon. - Fri. 9 AM - 5 PM
Saturday 10 AM - 3 PM

TERMS
- Quantities Limited
- Min. Order $10.00
- Add $2.00 Shipping USA
- Calif. Res. Add 6%
- Prompt Shipping

SEND FOR FREE CATALOG

Circle 10 on inquiry card.

MEMOREX Floppy Discs

Lowest prices. **WE WILL NOT BE UNDERSOLD!!** Buy any quantity 1-1000. Visa, Mastercharge accepted. Call free (800)235-4137 for prices and information. All orders sent postage paid.

PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. (In Cal. call
(805) 543-1037.)

Circle 311 on inquiry card.

Listing 1 continued:

```
PROCEDURE PRINT_KIND(FILE_KIND:FILE_TYPE);
{prints file type to console or printer}
   BEGIN
     CASE FILE_KIND OF
        XDISK: WRITE(P,'Bad block');
        CODE:  WRITE(P,'Code file');
        TEXT:  WRITE(P,'Text file');
        INFO:  WRITE(P,'Info file');
        DATA:  WRITE(P,'Data file');
        GRAF:  WRITE(P,'Graf file');
        FOTO:  WRITE(P,'Foto file');
      END; { case }
   END;{print_kind}

PROCEDURE PRINT_RECORD(CAT1:CATALOG_RECORD);
{prints record to console or printer}
    BEGIN
      WITH CAT1 DO
        BEGIN
          WRITE(P,FILE_NAME,'  ':18-LENGTH(FILE_NAME));
          WRITE(P,VOL_NAME,' ':8-LENGTH(VOL_NAME));
          WRITE(P,FILE_SIZE:4);
          PRINT_DATE(FILE_DATE);
          PRINT_KIND(FILE_KIND);
          WRITELN(P);
        END;{with}
    END;{print_record}

PROCEDURE READ_NEW_CAT;
{reads NREC records or to eof from NCATFILE}
  VAR
        I:RECNUM;
  BEGIN
    I:=1;NREC:=0;
    GET(NCATFILE);
    WHILE (NOT EOF(NCATFILE)) DO
        BEGIN
          NCAT[I]:=NCATFILE^;
          IF ((NCAT[I].VOL_NAME='       '))
            THEN BEGIN
                   NREC:=I-1;
                   NTOTREC:=NTOTREC+NREC;
                   NFILEEND:=TRUE;
                   EXIT(READ_NEW_CAT);
                 END;{if}
```

Listing 1 continued on page 417

Listing 1 continued:

```
          IF (I=NLREC)
             THEN BEGIN
                   NREC:=I;
                   NTOTREC:=NTOTREC+I;
                   EXIT(READ_NEW_CAT);
                  END;{if}
          I:=I+1;
          GET(NCATFILE);
        END;{while}
      NREC:=I-1;
      NTOTREC:=NTOTREC+NREC;
      NFILEEND:=TRUE;
  END;{nreadcat}

PROCEDURE READ_OLD_CAT;
{reads OREC records or to eof from OCATFILE}

VAR
      I:RECNUM;
BEGIN
  I:=1;OREC:=0;
  GET(OCATFILE);
  WHILE (NOT EOF(OCATFILE)) DO
      BEGIN
        OCAT[I]:=OCATFILE^;
        IF ((OCAT[I].VOL_NAME='       '))
          THEN BEGIN
                 OREC:=I-1;
                 OTOTREC:=OTOTREC+OREC;
                 OFILEEND:=TRUE;
                 EXIT(READ_OLD_CAT);
               END;{if}
        IF (I=OLREC)
          THEN BEGIN
                 OREC:=I;
                 OTOTREC:=OTOTREC+I;
                 EXIT(READ_OLD_CAT);
               END;{if}
        I:=I+1;
        GET(OCATFILE);
      END;{while}
    OREC:=I-1;
    OTOTREC:=OTOTREC+OREC;
    OFILEEND:=TRUE;
END;{readcat}
```

Listing 1 continued on page 418

Data Acquisition and Control for the TRS-80*

Eight protected analog inputs
0-5 Vdc 8 ± 1 bits
Eight protected digital inputs
Eight optoisolated digital outputs
Two joystick ports

Up to 4000 bytes/second A/D.
Interrupt-driven software.
Detailed applications manual for:

- HOME SECURITY — burglary, fire
- ENERGY MONITOR — fuel use, etc.
- WEATHER STATION — temperature, solar
- APPLIANCE CONTROL — lights, alarms
- GRAPHICS & GAMES — software included

The STARBUCK-8882 is fully compatible with any Model I Level II TRS-80. Installation takes less than a minute. Suitable for home and laboratory, the STARBUCK-8882 can also be used with the optional joysticks for graphics & games. With the TRS-80 expansion interface, the STARBUCK-8882 can also be operated off the interrupt clock, acquiring and storing data without interfering in any way with normal TRS-80 operation. The software package allows you to take data while *simultaneously* using the TRS-80 for any other purpose!

STARBUCK-8882: Includes case, power supply, connector cable, extra expansion card edge, complete software package, and detailed applications manual.

Assembled and Tested	$180.00 ppd.
Manuals &documentation only	$ 4.00 ppd.

To order, write:

STARBUCK DATA CO.
P.O. Box 24, Newton, MA 02162

Massachusetts residents add 5% sales tax.

*TRS-80 is a trademark of Tandy Corp.

Listing 1 continued:

```
PROCEDURE WRITECAT;
{writes NREC records to NCATFILE}
  VAR
        I:RECNUM;
  BEGIN
    IF (NTOTREC=0) THEN WITH NCAT[0] do
                      BEGIN
                        VOL_NAME:='     ';
                        FILE_NAME:='               ';
                        FILE_KIND:=UNTYPED;
                        FILE_DATE.MONTH:=0;
                        FILE_DATE.DAY:=0;
                        FILE_DATE.YEAR:=0;
                        FILE_SIZE:=0;
                        NCATFILE^:=NCAT[0];
                        PUT(NCATFILE);
                      END;
    FOR I:=1 TO NREC DO
      BEGIN
        NCATFILE^:=NCAT[I];
        PUT(NCATFILE);
        WRITE('.');
      END;
    WRITELN;
    NTOTREC:=NTOTREC+NREC;
    NREC:=0;
    IF DONE THEN CLOSE(NCATFILE,LOCK);
  END;{writecat}
PROCEDURE DISPLAY;
{writes the entire MASTCAT.DAT file to the console}
   VAR
         I:RECNUM;
   BEGIN
    REWRITE(P,'CONSOLE:');
    IF ( LOOKUP(NFILENAME))
      THEN BEGIN
             NREC:=0;
             RESET(NCATFILE,NFILENAME);
             REPEAT
               READ_NEW_CAT;
               FOR I:=1 TO NREC DO PRINT_RECORD(NCAT[I]);
             UNTIL NFILEEND;
```

Listing 1 continued on page 419

Listing 1 continued:

```
               CLOSE(NCATFILE);
               WAIT;
             END{then}
             ELSE WRITELN(NFILENAME,' NOT PRESENT');
      WRITELN('MASTCAT CONTAINS ',NTOTREC,' RECORDS');
      CLOSE(P);
      WAIT;
  END;{display }

PROCEDURE BACKUP;
{compares file names and reports files without backup}
  VAR
          PASS,UNBACK:BOOLEAN;
          N:RECNUM;
  BEGIN
    PASS:=FALSE;UNBACK:=FALSE;
    REWRITE(P,'CONSOLE:');
    IF ( LOOKUP(NFILENAME))
        THEN BEGIN
               WRITE(CHR(CLEARSCREEN));
               WRITELN('THE FOLLOWING FILES ARE NOT BACKED UP');
               RESET(NCATFILE,NFILENAME);
               REPEAT
                 IF (PASS AND UNBACK)
                    THEN IF (NCAT[0].FILE_NAME<>NCAT[1].FILE_NAME)
                             THEN PRINT_RECORD(NCAT[0]);
                 READ_NEW_CAT;
                 FOR N:=1 TO NREC-1 DO
                    IF ((NCAT[N].FILE_NAME <> NCAT[N-1].FILE_NAME) AND
                           (NCAT[N].FILE_NAME <> NCAT[N+1].FILE_NAME))
                                   THEN PRINT_RECORD(NCAT[N]);
                 PASS:=TRUE;
                 IF (NCAT[NREC].FILE_NAME <> NCAT[NREC-1].FILE_NAME)
                        THEN UNBACK:=TRUE;
                 NCAT[0]:=NCAT[NREC];
                 IF (NFILEEND AND UNBACK) THEN PRINT_RECORD(NCAT[NREC]);
               UNTIL NFILEEND;
               CLOSE(NCATFILE);
            END{if}
        ELSE WRITELN(NFILENAME,' NOT PRESENT');
     CLOSE(P);
     WAIT;
  END;{backup}
```

Listing 1 continued on page 420

Listing 1 continued:

```
PROCEDURE UPDATE;

VAR
        DCAT : ARRAY [DIR_SIZE] OF CATALOG_RECORD;
        RN:RECNUM;

  PROCEDURE RENAME;      {changes name of MASTCAT.DATA to BACKCAT.DATA}
    VAR
          I:INTEGER;
          SPS:STRING[16];
          VOL,AVOL:VOL_ID;
          DIR:DIRECTORY;
    BEGIN
      UNITREAD(5,DIR[0],2048,2);
      VOL:=DIR[0].DIR_VOL_NAME;
      SPS:=COPY(BLANKS,1,7-LENGTH(VOL));
      AVOL:=CONCAT(VOL,SPS);
      FOR I:=1 TO DIR[0].NUM_OF_FILES DO
          WITH DIR[I] DO
            IF (DIR_FILE_NAME='MASTCAT.DATA')
              THEN DIR_FILE_NAME:='BACKCAT.DATA';
      UNITWRITE(5,DIR[0],2048,2);
    END;{rename}

  PROCEDURE WRITEDEX;
  {writes a file of pointers to the first occurrence of each letter in the alph
    VAR
        DEXFILE : FILE OF INDEXARRAY;
    BEGIN
      REWRITE(DEXFILE,PFILENAME);
      DEXFILE^:=DEXRAY;
      PUT(DEXFILE);
      CLOSE(DEXFILE,LOCK);
    END;{writedex}

  PROCEDURE SORT;
  {sorts the directory file in alphabetical order}
    VAR
          I:RECNUM;
          BUF:CATALOG_RECORD;       {holds record during exchange}
          FLAG:BOOLEAN;             {FALSE if an exchange made during pass}
```

Listing 1 continued on page 421

Listing 1 continued:

```
   BEGIN
     WRITELN('SORTING ',DREC,' RECORDS');
     REPEAT
       FLAG:=TRUE;
       FOR I:=DREC DOWNTO 2 DO
          IF (DCAT[I].FILE_NAME < DCAT[I-1].FILE_NAME) THEN
             BEGIN     {exchange routine}
               BUF:=DCAT[I];
               DCAT[I]:=DCAT[I-1];
               DCAT[I-1]:=BUF;
               FLAG:=FALSE;
             END;{if}
      WRITE('.');
      UNTIL FLAG;
      WRITELN;
      WRITELN('DONE SORTING');
    END;{sort}

PROCEDURE GETDIR;
{reads directory of update volume and puts it in DCAT}
  VAR
      DIRX:DIRECTORY;
      UNITNUM,I: INTEGER;
      CHBUF : char;
      VOL:VOL_ID;
      SPS:STRING[16];
      BLOCKS_USED:0..988;


  BEGIN
  BLOCKS_USED:=10;       {assumes duplicate directories}
  DREC:=0;
    MEM('GETDIR');
    repeat
      WRITE('Enter unit number for required directory --> ');
      READLN(UNITNUM);
      WRITELN
    until unitnum in [ 4 .. 5 ];
    UNITREAD(UNITNUM,DIRX[0],2048,2);            {read directory into array DIF
    IF IORESULT <> 0
      THEN
        BEGIN
          WRITELN('Unit not online');
          EXIT(CATALOG);
        END;
```

Listing 1 continued on page 422

Bring the computer to your senses

The Soundchaser* computer music system transforms the Apple II** into an expandable, professional quality, polyphonic keyboard synthesizer and sequencer. Soundchaser's music modules include a 4 octave keyboard housed in an attractively finished wood cabinet complete with polyphonic interface card, connector and control software. The synthesizer voice card provides 3 analog/digital hybrid, studio quality programmable synthesizers. Each synthesizer consists of a wide range, waveform select oscillator, digitally controlled 24 dB/octave, low pass resonant filter, user definable LFO, fully programmable envelope generators, and a digitally controlled amplifier. System software includes a 4 channel sequencer which supports up to 12 synthesizers!

Explore Soundchaser's musical horizons.
Play the sounds at your fingertips.
Keyboard: $650.00,
3 Synthesizer voice card: $350.00.
Write or call for details.
Dealer inquiries invited.
(415) 747-0614

PASSPORT DESIGNS

Marketing:
Box 21061,
Minneapolis, MN 55421

Headquarters:
Box 4/8,
La Honda, CA 94020

*Soundchaser is a trademark of Passport Designs, Inc.
**Apple is a registered trademark of Apple Computer, Inc.

Circle 318 on inquiry card.

Listing 1 continued:

```
  VOL:=DIRX[0].DIR_VOL_NAME;
  SPS:=COPY(BLANKS,1,7-LENGTH(VOL));  {put VOL in consistent format}
  VOL:=CONCAT(VOL,SPS);
  FOR I:=1 TO DIRX[0].NUM_OF_FILES DO       {move directory to DCAT}
    BEGIN
      WITH DIRX[I] DO
        BEGIN
          IF LENGTH(DIR_FILE_NAME)>0
            THEN
              BEGIN
                DREC:=DREC+1;
                WITH DCAT[DREC] DO
                  BEGIN
                    VOL_NAME:=VOL;
                    FILE_NAME:=DIR_FILE_NAME;
                    SPS:=COPY(BLANKS,1,15-LENGTH(FILE_NAME));
                    FILE_NAME:=CONCAT(FILE_NAME,SPS);
                    FILE_KIND:=DIR_FILE_KIND;
                    FILE_DATE:=DIR_FILE_DATE;
                    FILE_SIZE:=LAST_BLOCK-FIRST_BLOCK;
                    BLOCKS_USED:=BLOCKS_USED+FILE_SIZE;
                  END;{with}
              END;{if length}
        END;{with dirx}
    END;{for}
{create entry with name FREE.SPACE containing the unused space on the volume}
      DREC:=DREC+1;
      WITH DCAT[DREC] DO
```

Listing 1 continued on page 423

At last --- the DYNATYPER™
TYPEWRITER INTERFACE!

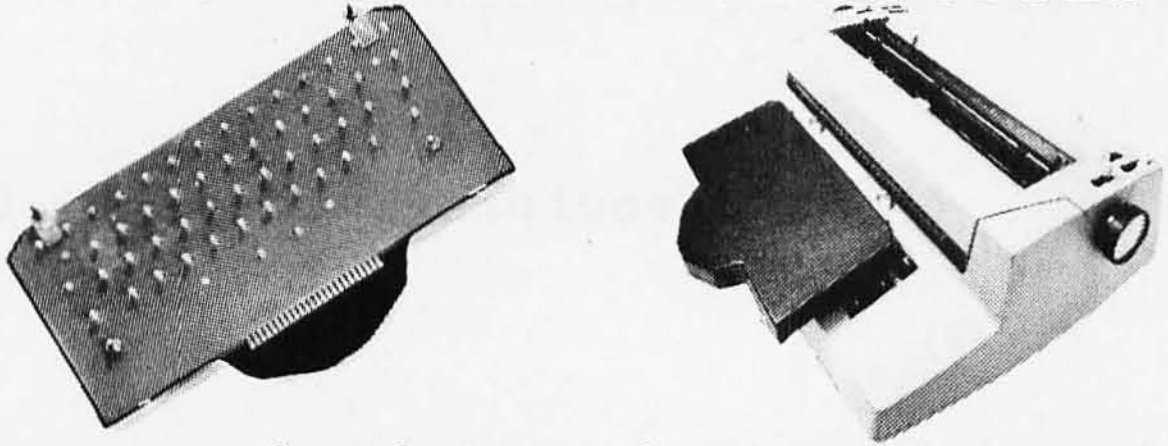

Turn your electric typewriter into a low cost, high quality hard copy printer. 1 year warranty

DYNATYPER – Rochester Data's patented* Computer/Typewriter Interface is the industry standard for typewriter output.

- 2 minutes to initially install and 5 seconds to remove or replace.
- You do not have to modify your typewriter. All factory warranties and maintenance agreements on your typewriter will be honored.
- Compatible with all power carriage return typewriters having standard U.S. keyboard. The Dynatyper works with Selectrics (model 1) and most non-Selectrics (model 2). Please specify. Typewriter conversion between models takes 2 minutes and the kit (17 plungers) is available for a nominal fee.

RS-232 with BASIC available NOW for $699

- Delivery: Stock to two weeks. Price $499 for complete system. F.O.B. Rochester, Domestic. VISA and Master Card accepted. Call Ken Yanicky at 716-244-7804

*Pat. Pending

ROCHESTER DATA incorporated

Dynatyper is a registered trademark of Rochester Data
3000 Winton Road South, Rochester, N.Y. 14623

Circle 452 on inquiry card.

SPECIAL SALE PRICES

NorthStar	List	SALE
HORIZON-2D-64K	4195	3230
HORIZON-2Q-64K	4495	3425
HRZ DOS 5.2	25	10
N* T-SHIRTS S M L XL	8	5
NEW HRAM-32	599	475
NEW HRAM-48	849	700
NEW HRAM-64	1099	875
NEW HSIO/4 4 pt. I/O board	359	300
Anadex DP-9500/01	1650	1300
Anadex DP-9000/01	1550	1200
EPSON MX-80	645	525
EPSON MX-70	449	400

Special Sale Prices valid through 6/15. Most items available for immediate delivery. TERMS: prepayment, VISA/MC. Prices includes 3% cash discount.

PRICES INCLUDE TESTING AND 48 HR. BURN-IN BEFORE SHIPMENT

FREE! All New 64 Page Discount Catalog
Circle Reader Service Number.

adc
Box 4011
Arlington, VA 22209
703/522-6692
Wholesale

"Horizon" and the North Star logo are registered trademarks or trademarks of North Star Computers, Inc.

Circle 453 on inquiry card.

Listing 1 continued:

```
        BEGIN
          VOL_NAME:=VOL;
          FILE_NAME:='FREE.SPACE';
          SPS:=COPY(BLANKS,1,15-LENGTH(FILE_NAME));
          FILE_NAME:=CONCAT(FILE_NAME,SPS);
          FILE_KIND:=INFO;
          FILE_DATE:=DIRX[0].LAST_BOOT;
          FILE_SIZE:=DIRX[0].TOTAL_BLOCKS-BLOCKS_USED;
        END;{with}
  END;{setdir}


  PROCEDURE SETDEX;
  {if first occurance of file name with DEX as first letter then
                              put record number in DEXRAY and increment DEX}
   BEGIN
     IF NCAT[NREC].FILE_NAME[1] >= DEX
     {have we reached or exceeded the next index?}
         THEN BEGIN
                IF NCAT[NREC].FILE_NAME[1] > DEX
                   THEN REPEAT                    {fills dexray to the next valid index}
                          DEXRAY[DEX]:=0;
                          IF DEX='Z' THEN EXIT(SETDEX);
                          DEX:=SUCC(DEX);
                        UNTIL (NCAT[NREC].FILE_NAME[1] = DEX);
                DEXRAY[DEX]:=NTOTREC+NREC;
                IF DEX='Z' THEN EXIT(SETDEX);
                DEX:=SUCC(DEX);
              END;{if}
    END;{setdex}

  PROCEDURE MERGE;
  {merges DCAT with OCAT to form NCAT}
    VAR
          X,Y,Z:1..33;
          CONTINUE:BOOLEAN;
          OO,O,D:RECNUM;
    BEGIN
      DEX:='A';                      {set first match char for index at 'A'}
      O:=OREC;
      OREC:=1;
      D:=1;
                                     {REMOV is true if volume to be deleted}
      IF (NOT REMOV) THEN VOL:=DCAT[1].VOL_NAME;
                                     {DREC+1 is 1 more than the number of files in DCAT}
       WHILE (D < DREC+1) DO
        BEGIN
          WITH DCAT[D] DO
            BEGIN{with}
              IF (FILE_NAME < OCAT[OREC].FILE_NAME)
                  THEN X:=10
                  ELSE IF (FILE_NAME = OCAT[OREC].FILE_NAME)
                          THEN X:=20
                          ELSE X:=30;

              IF (VOL_NAME < OCAT[OREC].VOL_NAME)
                     THEN Y:=1
                     ELSE IF (VOL_NAME = OCAT[OREC].VOL_NAME)
                             THEN Y:=2
                             ELSE Y:=3;

                 Z:=X+Y;
                 IF ((OREC=0) or (OREC>O)) THEN Z:=11;
```

Listing 1 continued on page 424

Listing 1 continued:

```
            CASE Z OF
                11,12,13,21 : BEGIN       {add record to NCAT from DCAT}
                                NREC:=NREC+1;
                                NCAT[NREC]:=DCAT[D];
                                D:=D+1;                  {increment D}
                                WRITE('ADD  ',NCAT[NREC].FILE_NAME:18);
                                WRITELN(NCAT[NREC].VOL_NAME:10)
                              END;

                22          : BEGIN           {add record to NCAT from DCAT}
                                NREC:=NREC+1;
                                NCAT[NREC]:=DCAT[D];
                                OREC:=OREC+1;            {increment OREC}
                                D:=D+1                   {increment D}
                              END;

                23,31,33    : BEGIN           {add record to NCAT from OCAT}
                                NREC:=NREC+1;
                                NCAT[NREC]:=OCAT[OREC];
                                OREC:=OREC+1;            {increment OREC}
                              END;

                32          : BEGIN               {do not add record to NCAT}
                                WRITE('DELETE ',OCAT[OREC].FILE_NAME:18);
                                WRITELN(OCAT[OREC].VOL_NAME:10);
                                OREC:=OREC+1;            {increment OREC}
                              END;
            END;{case of Z}
        SETDEX;         {check poniter index}
      END;{with}
   IF (NREC=NLREC) THEN WRITECAT;     {NLREC is the max array size}
   IF ((OREC>OLREC) AND (NOT OFILEEND)) {if you are out of OCAT get some more}
         THEN BEGIN
                READ_OLD_CAT;
                O:=OREC;
                OREC:=1;
              END;{if}
  END;{while}          {DCAT is empty}
REPEAT                 {get whats left of OCAT}
  CONTINUE:=FALSE;
  IF (OREC<=O)
        THEN FOR OO:=OREC TO O DO
                IF (OCAT[OO].VOL_NAME <> VOL)
                    THEN BEGIN
                            NREC:=NREC+1;
                            NCAT[NREC]:=OCAT[OO];
                            IF (NREC=NLREC) THEN WRITECAT;
                            SETDEX;
                          END{then}
                    ELSE BEGIN
                           WRITE('DELETE ',OCAT[OO].FILE_NAME:18);
                           WRITELN(OCAT[OO].VOL_NAME:10)
                         END;{else}
  IF (NOT OFILEEND) THEN BEGIN        {if you are out of OCAT get some more}
                          READ_OLD_CAT;
                          O:=OREC;
                          OREC:=1;
                          CONTINUE:=TRUE;
                        END;{if}
UNTIL (NOT CONTINUE);
IF (DEX <'Z')
  THEN FOR CH:=DEX TO 'Z' DO DEXRAY[CH]:=DEXRAY[PRED(DEX)];
```

Listing 1 continued on page 425

Listing 1 continued:

```
 DONE:=TRUE;
 WRITECAT;
 WRITEDEX;
END;{match}

BEGIN{update}
  REWRITE(P,'CONSOLE:');
  IF LOOKUP(OFILENAME)
      THEN BEGIN
             RESET(OCATFILE,OFILENAME);
             CLOSE(OCATFILE,PURGE);                    {remove old BACKCAT}
           END;{if}
  RENAME;                                              {MASTCAT --> BACKCAT}
  IF (NOT REMOV)
            THEN BEGIN
                   GETDIR;
                   SORT;
                   FOR RN:=1 TO DREC DO PRINT_RECORD(DCAT[RN]);
                 END;{if}
  IF LOOKUP(OFILENAME)
        THEN BEGIN
               RESET(OCATFILE,OFILENAME);
               READ_OLD_CAT;
             END{if}
        ELSE OREC:=0;
  REWRITE(NCATFILE,NFILENAME);
  NREC:=0;
  MERGE;
  CLOSE(OCATFILE);
  CLOSE(P);
  WRITELN('BACKCAT CONTAINS  ',OTOTREC,' RECORDS');
  WRITELN('MASTCAT CONTAINS  ',NTOTREC,' RECORDS');
  CLOSE(NCATFILE,LOCK);
  WAIT;
END;{update}


PROCEDURE SEARCH;
    VAR
        STOP,FOUND:BOOLEAN;
        TAR1,TAR2:CHAR;
        START:INTEGER;
        WILDCARD:0..16;
        CAT:CATALOG_RECORD;
        TARGET,SPS:STRING;

   PROCEDURE LONGSEARCH;
   {search used when alphabetical pointer cannot be used }

VAR
           N:RECNUM;

BEGIN
  DELETE(TARGET,1,1);                  {remove wildcard char}
  writeln(TARGET);
  REPEAT
    READ_NEW_CAT;
    FOR N:=1 TO NREC DO IF POS(TARGET,NCAT[N].FILE_NAME) <> 0
                              THEN PRINT_RECORD(NCAT[N]);

  UNTIL (NFILEEND);
  CLOSE(NCATFILE);
  WAIT;
```

Listing 1 continued on page 426

Listing 1 continued:

```
       CLOSE(P);
       EXIT(SEARCH)
     END;{longsearch}

    PROCEDURE SEARCH_FOR_VOLUME;
     VAR
                BLKS,SPS:STRING[7];
                N:RECNUM;

     BEGIN
       BLKS:='       ';
       DELETE(TARGET,POS(':',TARGET),1);
       SPS:=COPY(BLKS,1,7-LENGTH(TARGET));
       TARGET:=CONCAT(TARGET,SPS);
       writeln(TARGET);
       REPEAT
         READ_NEW_CAT;
         FOR N:=1 TO NREC DO
           IF (NCAT[N].VOL_NAME=TARGET) THEN PRINT_RECORD(NCAT[N]);
       UNTIL (NFILEEND);
       CLOSE(NCATFILE);
       WAIT;
       CLOSE(P);
       EXIT(SEARCH)
     END;{vsearch}

BEGIN{search}
  STOP:=FALSE;FOUND:=FALSE;
  REPEAT
    WRITE('ENTER NAME OF FILE TO BE FOUND--> ');
    READLN(TARGET);
    IF(LENGTH(TARGET)>16) THEN WRITELN('NAME TOO LONG ');
  UNTIL (LENGTH(TARGET)<=16);
  IF (POS('<',TARGET)=1)     {'<' sends output to printer}
            THEN BEGIN
                   DELETE(TARGET,1,1);
                   REWRITE(P,'PRINTER:');
                 END{if}
            ELSE REWRITE(P,'CONSOLE:');
  RESET(NCATFILE,NFILENAME);
  IF (POS(':',TARGET)<>0) THEN SEARCH_FOR_VOLUME;
  WILDCARD:=POS('=',TARGET);
  IF (WILDCARD = 1) THEN LONGSEARCH;
  IF (WILDCARD > 1) THEN TARGET:=COPY(TARGET,1,WILDCARD-1);
  TAR1:=TARGET[1];                {TAR1 used to set pointer from DEXRAY}
  IF (WILDCARD <> 2)              {TAR2 used to end search}

       THEN TAR2:=TARGET[2]
       ELSE TAR2:='z';
IF (TAR1 < 'A')
    THEN START:=0
    ELSE IF (TAR1 > 'Z')
          THEN START:=DEXRAY['Z']
          ELSE START:=DEXRAY[TAR1];
SEEK(NCATFILE,START);
GET(NCATFILE);
REPEAT
  CAT:=NCATFILE^;
  IF ((WILDCARD = 0) AND (POS(TARGET,CAT.FILE_NAME) = 1))
                                           THEN BEGIN
                                             PRINT_RECORD(CAT);
                                             FOUND:=TRUE;
                                           END;
```

Listing 1 continued on page 427

Listing 1 continued:

```
    IF ((WILDCARD > 1) AND (POS(TARGET,CAT.FILE_NAME) >= 1))
                                            THEN BEGIN
                                              PRINT_RECORD(CAT);
                                              FOUND:=TRUE;
                                            END;

    IF ((CAT.FILE_NAME[1] > TAR1 ) OR (CAT.FILE_NAME[2] > TAR2))
                  THEN STOP:=TRUE;
    GET(NCATFILE);
  UNTIL (STOP OR EOF(NCATFILE));
  IF (NOT FOUND) THEN WRITELN('FILE ',TARGET,' NOT FOUND');
  CLOSE(NCATFILE);
  CLOSE(P);
  WAIT
END;{SEARCH}


BEGIN {main}
  IF ((NOT LOOKUP(NFILENAME)) OR (NOT LOOKUP(PFILENAME))) THEN INITIALIZE;
  GET_SYS_VOL(SYSTEMVOLUME);      {record system volume name for rebooting}
  DLREC:=MAXREC;OLREC:=MAXREC;NLREC:=MAXREC;
  READDEX;                {load the pointer array}
  REPEAT
    REMOV:=FALSE;NFILEEND:=FALSE;OFILEEND:=FALSE;DONE:=FALSE;
    NREC:=0;OREC:=0;DREC:=0;
    NTOTREC:=0;OTOTREC:=0;
    VOL:='       ';
    REPEAT
      WRITE(CHR(CLEARSCREEN));
      MEM('MAIN');
      WRITE('CATALOG -->  S)earch D)isplay B)ackup U)pdate R)emove Q)uit');
      READ(KEYBOARD,CH);
      WRITELN;
    UNTIL (CH IN ['R','r','B','b','U','u','S','s','D','d','Q','q']);
    CASE CH OF
          'U','u' : UPDATE;

          'S','s' : SEARCH;

          'D','d' : DISPLAY;

          'R','r' : BEGIN
                      REMOV:=TRUE;
                      ENTER_VOL_NAME;
                      UPDATE
                    END;{case of R}

          'B','b' : BACKUP;


          'Q','q' : REPEAT
                      GET_SYS_VOL(TEST);
                      IF (TEST=SYSTEMVOLUME)
                            THEN EXIT(CATALOG)
                            ELSE WRITELN('INSERT SYSTEM DISK AND PRESS RETURN');
                      READLN(CH)
                    UNTIL CH='P';

         END;{case}
  UNTIL (CH IN ['Q','q']);
END.
```

BYTE's Bits

Market Report for Software Writers

The 1981 Software Writers Market lists more than 1800 firms that will market and distribute programs developed by independent software writers. The report outlines the usual procedures you must take to contact one of these firms with information about a program. If a firm deems that a program has market potential, it will enter into an agreement with you, market the software, and either pay you a royalty based on sales or buy the rights to the program for exclusive use.

The 1981 Software Writers Market provides addresses and telephone numbers of key contact people in service bureaus, hardware manufacturers, mail-order distributors, book publishers, computer magazines, consulting companies, and more than 1500 retail computer stores. It explains how companies market software, what kinds of software they seek, how you are dealt with, royalty rates, and contract details. The price for *The 1981 Software Writers Market* is $45 (with updates offered).

For complete details, contact Kern Publications, 190 Duck Hill Rd, Duxbury MA 02332, (617) 934-0445.

Computer Literacy Kits for Schools

More than 700 Apple dealers in the US and Canada are participating in the Apple Seed program, which provides qualifying elementary and high school students with computer-course materials. Under the program, Apple Computer will donate a $500 bonus kit of course materials to junior and senior high schools which qualify as "start-up" schools and which buy a 32 K-byte Apple computer with at least one disk drive. Schools that are initiating computer education curricula and schools that are expanding ongoing computer education programs with additional Apple systems are welcomed under the plan.

The Apple Seed kit contains a computer-literacy program for teachers and a course for students, including tutorial materials in BASIC for classes with up to 25 students. Books on microcomputers and systems, computer components for informational purposes, computer literacy programs, an Applesoft BASIC tutorial, and an educational-software directory are incorporated within the course materials. Systems must be purchased from an authorized Apple dealer before July 31, 1981. The offer is limited to one set of materials per school.

For complete details on the Apple Seed computer-literacy program, contact Apple Computer, 10260 Bandley Dr, Cupertino CA 95014.

New Network System

The COMNET network links customers' terminals or computers nationwide in a 24-hour store-and-forward message service. Messages are sent to domestic or international Telex numbers, or by Mailgram. Data bases, wire-service news bulletins, financial reports, a section for technical questions, and classified ads are available.

Normal access to COMNET is via a 300 bps asynchronous ASCII terminal, using TYMNET. The basic monthly fee is $10, with incremental charges for various services.

To subscribe to COMNET, you must normally have a Visa or a MasterCard account although other credit arrangements can be negotiated. For details on options and service fees, contact Cantlin Communications, 11532 Poes St, Anaheim CA 92804, (714) 530-6693.■

AIM 65. The professional's microcomputer.

Printer, display, full keyboard. Under $500.00.

For professional learning, designing and work, Rockwell's AIM 65 microcomputer gives you an easy, inexpensive head start.

- 20-column printer and display
- Dual cassette, TTY and general purpose I/Os
- R6502 NMOS microprocessor
- System expansion bus
- Read/write RAM memory
- Prom/ROM expansion sockets
- Self-prompt interactive monitor firmware
- Terminal-style keyboard
- Options include:
  - —Prom Programmer module
  - —RM 65 standard modules and card cages

For more on AIM 65 and how you can develop programs in assembly language, BASIC, PL/65 or FORTH, write Rockwell International, Electronic Devices Division RC55, P.O. Box 3669, Anaheim, CA 92803. For location of nearest distributor or dealer call 800-854-8099 (in California 800-422-4230).

Rockwell International
...where science gets down to business

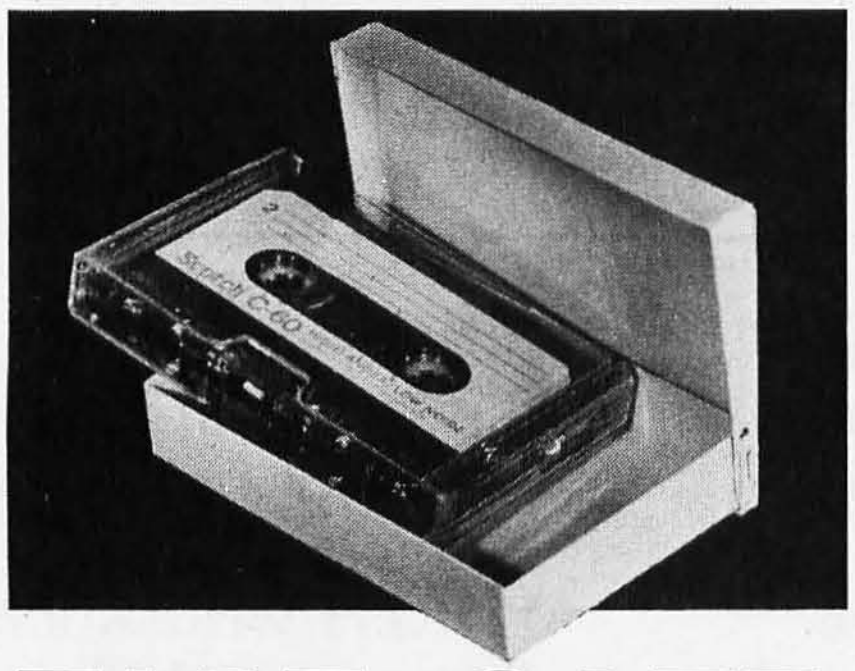

Programming Quickies

Printf for the C Function Library

Christopher Kern, 201 I St SW, Apt V-839
Washington DC 20024

One of the most-used functions in the standard library for the C programming environment is printf, the formatting print function. Printf accepts character, string, and numeric values as arguments and sends them to the standard output (normally the user's console) according to a specified format. It is used both as the main way to provide a program's output to the console and as a way of testing variable values during debugging. Its control-format string may specify that numerical values be represented in hexadecimal, octal, or decimal notation, that right or left justification be employed, and that arguments be printed in a given field width or restricted to a limited precision.

Although present versions of the BDS C compiler for the 8080 CP/M operating system have the standard printf function, earlier versions had a more primitive version of printf. If you have a version that *cannot* print numerical data in octal, does not permit precision to be specified to limit the length of a string, and only left justifies, the program shown in listing 1 will add all the standard features and a few new ones.

Except for the features that apply only to floating-point and long numerical data, this program conforms to the specifications for printf in Kernighan and Ritchie's *The C Programming Language* (Prentice-Hall, 1978). It is simple to adapt printf to other languages, so long as they permit functions, procedures, and subroutines with a variable number of arguments.

Functions compiled with the BDS C compiler find their arguments along an array of vectors stored at location BASE + 0x3f7, where BASE is the base address of the CP/M operating system for the particular machine being used (and "0x3f7" is C's idiosyncratic notation for hexadecimal 3F7). Up to twenty-four arguments are allowed. Because printf doesn't know in advance how many arguments will be needed as interpretation of the control format proceeds, and because the same function-argument vector will be used by subordinate functions called by printf, all the arguments are collected at the outset and stored in local argument array, "localarg[]." This is the one feature of the function that is specific to the BDS compiler. Note that because the control format is passed to printf as a formal parameter, the processing of the remaining arguments begins at FARGV + 2.

Listing 2 shows a sample run and a demonstration program that exercises printf by printing a series of integers in various notations and by printing a string in various

Text continued on page 434

Listing 1: *This is a program for adding a full-featured printf function to some early versions of C compilers. These earlier versions did not allow the printing of numerical data in octal, and did not permit precision to be specified to limit the length of a string; they allowed only left justification. Two new functions which are called by printf have been added: "Nbase" converts a binary integer into a digit string in the requested radix; "Nspoct" does the same for split octal.*

```
#define BASE            0x4200  /* CP/M base address */
#define FARGV           0x3f7   /* BDS C compiler argument vector */

printf(control)
char *control;
{
        char c, *ps, rjustify, s[17], zerofill;
        int *args, k, localargs[23], prcisn, slen, width;

        /* copy arguments from function argument vector */
        for (k = 0, args = BASE + FARGV + 2; k < 23; ++k, ++args)
                localargs[k] = *args;
        args = localargs;

        while (c = *control++)

                /* check for conversion specification */
                if (c == '%') {

                        /* check for various options */

                        if ((c = *control) == '-') {
                                rjustify = 0;
                                c = *control++;
                        }
                        else
                                rjustify = 1;

                        if (c == '0')
                                zerofill = 1;
                        else
                                zerofill = 0;

                        width = 0;
                        while (isdigit(c = tolower(*control++)))
                                width = 10*width + c - '0';

                        if (c == '.') {
                                prcisn = 0;
                                while (isdigit(c = tolower(*control++)))
                                        prcisn = 10*prcisn + c - '0';
                        }
                        else
                                prcisn = 32767;

                        /* process conversion characters */
                        switch (c) {
                        case 'b':
                                ps = nbase(*args++, 2, s);
                                break;
                        case 'o':
                                ps = nbase(*args++, 8, s);
```

Listing 1 continued on page 432

Listing 1 continued:

```
                        break;
                case 'd':
                        if (*args < 0) {
                                ps = nbase(-*args++, 10, s);
                                *--ps = '-';
                        }
                        else
                                ps = nbase(*args++, 10, s);
                        break;
                case 'u':
                        ps = nbase(*args++, 10, s);
                        break;
                case 'x':
                        ps = nbase(*args++, 16, s);
                        break;
                case 'o':
                        ps = nspoct(*args++, s);
                        break;
                case 's':
                        ps = *args++;
                        break;
                case 'c':
                        c = *args++;
                default:
                        *(ps = s) = c;
                        s[1] = '\0';
                }

                k = strlen(ps);
                slen = k > prcisn ? prcisn : k;

                if (rjustify)
                        while (width-- > slen)
                                if (zerofill)
                                        putchar('0');
                                else
                                        putchar(' ');

                for (k = 1; *ps && k <= prcisn; ++k)
                        putchar(*ps++);

                if (!rjustify)
                        while (width-- > slen)
                                putchar(' ');
        }
        else
                putchar(c);
nbase(n, base, s)
unsigned n, base;
char *s;
{
        int d;

        *(s += 16) = '\0';
        if (n == 0)
```

Listing 1 continued on page 433

Listing 1 continued:

```
                *--s = '0';
        else
                while (n > 0) {
                        *--s = (d = n%base) + (d < 10 ? '0' : 55);
                        n /= base;
                }
        return s;
}



nspoct(n, s)
unsigned n;
char s[];
{
        int d; d = 16384;
        char *ps; ps = s;

        while (d > 0) {
                *ps++ = n/d + '0';
                n %= d;
                if (d == 256) {
                        d = 64;
                        *ps++ = '.';
                }
                else
                        d /= 8;
        }
        *ps = '\0';
        return s;
}
```

Listing 2: *Listing and sample run of a demonstration program which exercises the printf function.*

```
A>TYPE PRINTX.C

main()
{
        unsigned i;
        char *string; string = "hello, world";

        for (i = 1; i <= 16384; i *= 2) {
                printf("dec: %5d  oct: %6o  sploct: %q   ", i, i, i);
                printf("hex: %4x  bin: %016b\n", i, i);
        }

        printf("\n");
        printf(":%10s:\n", string);
        printf(":%-10s:\n", string);
        printf(":%20s:\n", string);
        printf(":%-20s:\n", string);
        printf(":%20.10s:\n", string);
```

Listing 2 continued on page 434

Listing 2 continued:

```
printf(":%-20.10s:\n", string);
printf(":%.10s:\n", string);

}

A>PRINTX

dec:     1  oct:      1  sploct: 000.001  hex:    1  bin: 0000000000000001
dec:     2  oct:      2  sploct: 000.002  hex:    2  bin: 0000000000000010
dec:     4  oct:      4  sploct: 000.004  hex:    4  bin: 0000000000000100
dec:     8  oct:     10  sploct: 000.010  hex:    8  bin: 0000000000001000
dec:    16  oct:     20  sploct: 000.020  hex:   10  bin: 0000000000010000
dec:    32  oct:     40  sploct: 000.040  hex:   20  bin: 0000000000100000
dec:    64  oct:    100  sploct: 000.100  hex:   40  bin: 0000000001000000
dec:   128  oct:    200  sploct: 000.200  hex:   80  bin: 0000000010000000
dec:   256  oct:    400  sploct: 001.000  hex:  100  bin: 0000000100000000
dec:   512  oct:   1000  sploct: 002.000  hex:  200  bin: 0000001000000000
dec:  1024  oct:   2000  sploct: 004.000  hex:  400  bin: 0000010000000000
dec:  2048  oct:   4000  sploct: 010.000  hex:  800  bin: 0000100000000000
dec:  4096  oct:  10000  sploct: 020.000  hex: 1000  bin: 0001000000000000
dec:  8192  oct:  20000  sploct: 040.000  hex: 2000  bin: 0010000000000000
dec: 16384  oct:  40000  sploct: 100.000  hex: 4000  bin: 0100000000000000

:hello, world:
:hello, world:
:        hello, world:
:hello, world        :
:          hello, wor:
:hello, wor          :
:hello, wor:

A>
```

Text continued from page 430:

combinations of justification, field width, and precision (the ":" serves to delimit the field). Calls to printf take the form:

printf(control, argument 1, argument 2, ...)

where "control" is a format string composed of text interspersed with conversion specifications—one for each argument.

Each conversion specification begins with the "%" character and ends with a conversion character indicating the format to be used in printing the corresponding argument (character, string, or number). The standard conversion characters "d" (decimal notation), "u" (unsigned decimal), "o" (octal), "x" (hexadecimal), "c" (character), and "s" (string), are supported. I have added two others not specified in Kernighan and Ritchie's book: "b" (binary notation), which is especially useful for debugging programs that use bitwise logical operators, and "q" (split octal), because the front panel of my Heath H-8 computer has a split-octal display.

A number of options may be specified between the "%" character, which introduces the conversion specification, and the conversion character. A minus sign (−) indicates that left justification (instead of the default right justification) is requested. A digit string indicates the field width; a number that fails to fill the width will be padded on the left or right, as necessary. If the field width is specified with a leading zero, a right-justified number will be padded with zeros instead of blanks, so an 8-bit binary number can be printed as 00100101 instead of 100101. A period followed by another digit string indicates the precision, the maximum field width in which an argument is to be printed; this is primarily useful for truncating strings that exceed the permissible line length.

This version of printf uses four other standard C library functions: "tolower(character)," which converts its argument to lowercase if it isn't lowercase already; "isdigit(character)," which returns true (not zero) if its argument is a digit and false (zero) otherwise; "putchar (character)," which outputs a character to the console; and "strlen(pointer to string)," which returns the length of the string its argument points to.

Two other functions, called by printf and independently useful additions to the standard library, are also included (see listing 1). "Nbase(number, base, pointer to array in which to store result)" converts a binary integer to a digit string of the requested number base. "Nspoct (number, string pointer)" does the same (with leading zeros, and a "." separating the 2 bytes) for the special case of split octal.■

Numerical Methods in Data Analysis

Toan C Nguyen
818 Gaviota Ave
Long Beach CA 90813

In engineering research and design work, it is often necessary to determine analytically from a given set of n pairs of discrete data a function which best represents the dependence of one parameter (X) upon the other (Y). Moreover, other characteristics of the obtained function represent this dependence, such as information about its stationary (maximum or minimum) point and its roots, that is, values of X which make Y equal to zero.

Calling on our mathematical background, we know that most continuous functions with defined derivatives may be expressed in a form of a polynomial:

$$Y = a_0 + a_1X + a_2X^2 + a_3X^3 + \dots + a_mX^m$$

where m is the degree of the polynomial and $a_0, a_1, \dots, a_m$ are the coefficients.

For a given set of n pairs of data, there is usually a polynomial of degree m with corresponding coefficients $a_0, a_1, \dots, a_m$ which will approximately describe the general continuous relationship between the two parameters X and Y. The error incurred in obtaining this polynomial will usually be minimal when m is sufficiently large and useful values of Xs and Ys are in the neighborhood of the range $[(X_1, Y_1), (X_n, Y_n)]$ where $X_1 < X_2 < \dots < X_n$.

By definition, the stationary point of a function is the point at which the dependent parameter Y attains a local maximum or minimum value. This stationary value of the variable X may be obtained by solving the equation $Y' = 0$, or:

$$a_1 + 2a_2X + 3a_3X^2 + \dots + ma_mX^{m-1} = 0$$

The determination of function $Y = f(X)$ may be done by curve fitting, which requires solving a large set of simultaneous linear equations. The Gauss-Jordan elimination method may be utilized to solve these simultaneous equations. Once the function $f(X)$ is obtained, the values of quantity X for which $f(X)$ equals zero may be calculated by the Newton-Raphson method, which is one of the various numerical methods for obtaining the roots of a continuous differentiable function.

Because many calculations will be performed repetitively, these tasks will be conveniently handled by a digital computer utilizing its ability for high-speed calculations. A scientific high-level language, such as FORTRAN IV, is a suitable language for the development of a computer program for use in this application.

This article will briefly review the principle of curve fitting, the Gauss-Jordan elimination technique, and the Newton-Raphson method. Included is a computer program written in FORTRAN IV with corresponding flowchart and explanations. Examples of practical engineering problems in different fields are also presented.

About the Author

Toan C Nguyen is a registered professional engineer in the state of California and a member of the American Society of Mechanical Engineers. He has a master's degree in mechanical engineering from the University of Southern California.

Mr Nguyen has devoted much of his time to the application of computer programming in solving engineering problems. He is presently a senior engineer with the Pipe Hanger Division of ITT Grinnell Corporation.

Curve Fitting: Method of Least Squares

In fitting a curve through the points representing $(X_1, Y_1), \dots, (X_n, Y_n)$, we employ a mathematical principle that yields a *best-fit curve*: the method of least squares. This method utilizes the laws of probability in obtaining the most probable values for a given set of observations of independent and dependent parameters. According to this method, the coefficients $a_0, a_1, \dots, a_m$ of a polynomial of degree m may be determined from the following $m+1$ simultaneous equations:

$$\begin{array}{l} c_{11}a_0 + c_{12}a_1 + c_{13}a_2 + \dots + c_{1[m+1]}a_m = b_1 \\ c_{21}a_0 + c_{22}a_1 + c_{23}a_2 + \dots + c_{2[m+1]}\, a_m = b_2 \\ \quad\vdots \qquad\qquad\qquad\qquad\qquad\qquad \vdots \quad \vdots \\ c_{[m+1]1}a_0 + c_{[m+1]2}a_1 + \dots \quad + c_{[m+1][m+1]}a_m = b_{[m+1]} \end{array} \tag{1}$$

where:

$$b_i = \sum^{n} x^{i-1}y$$

$$c_{ij} = \sum^{n} x^{i+j-2}$$

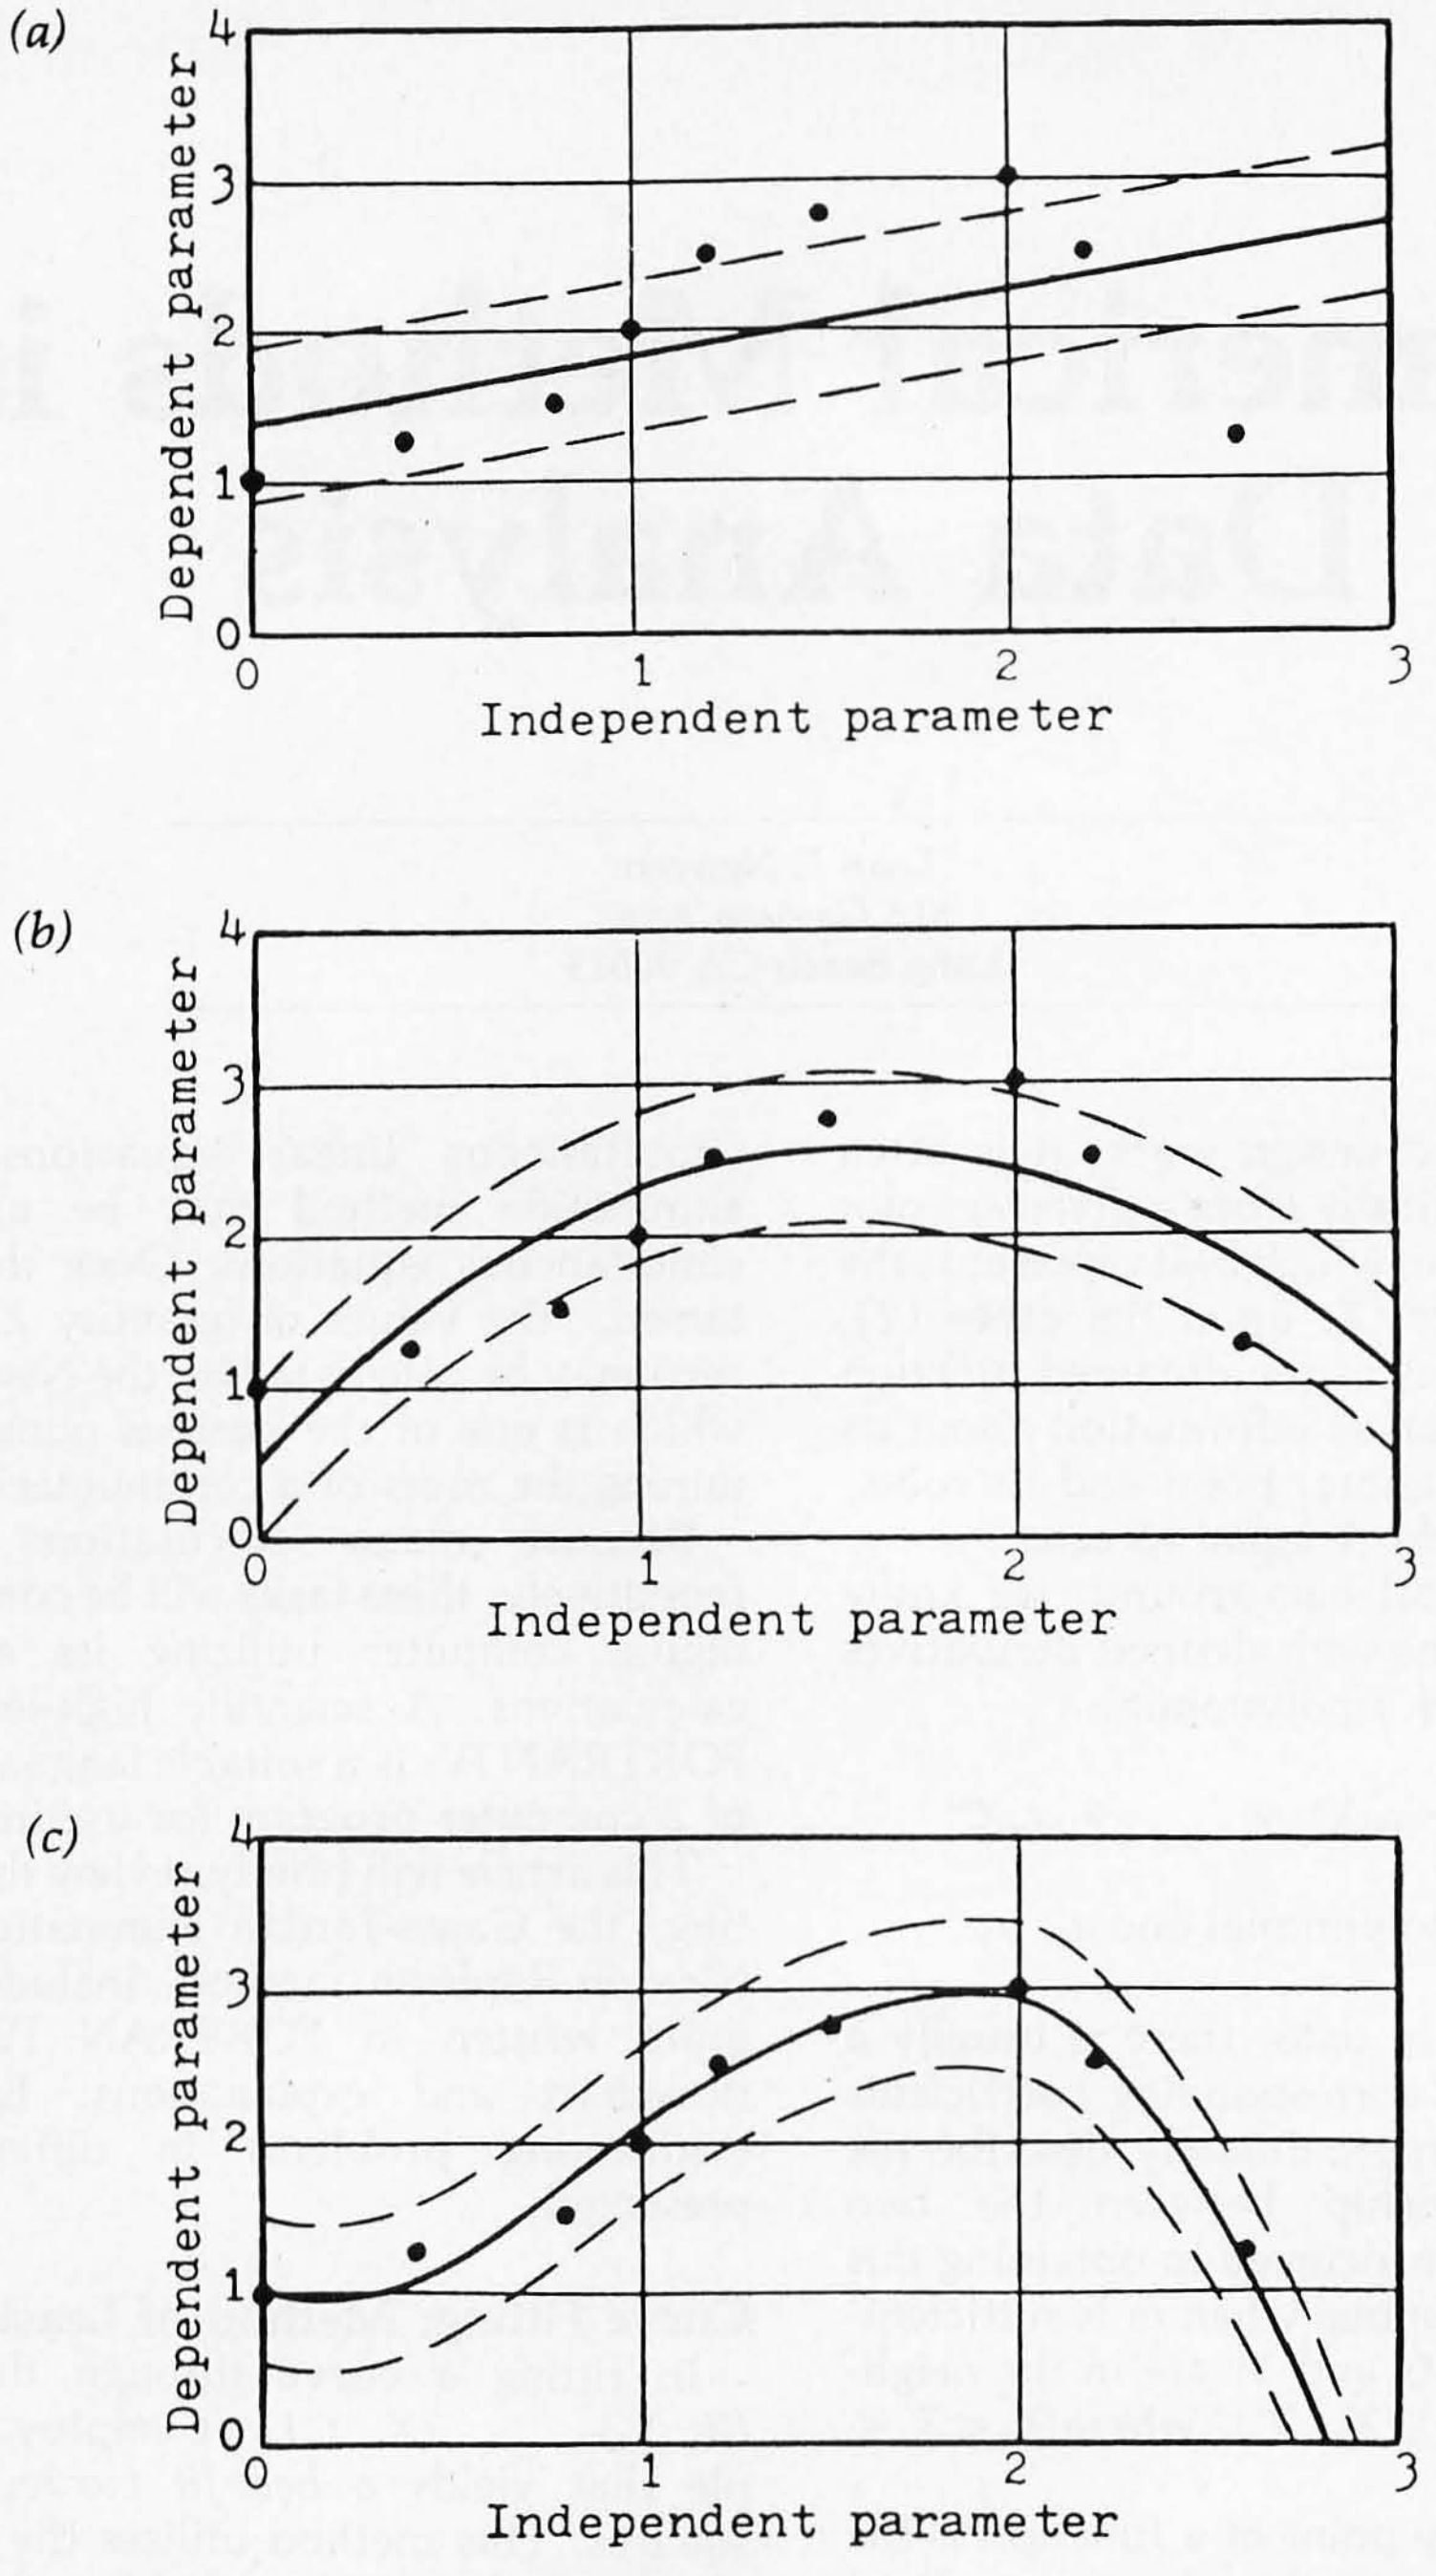

Figure 1: *A representation of the least-squares curve-fitting method. In (a) we see the first-degree curve, which is not acceptable because the uncertainty envelope does not contain all the data points. The figure in (b) shows the second-degree curve, which is not acceptable for the same reason as (a). The third-degree curve is illustrated in figure (c). Here we can observe that the uncertainty envelope does contain all the data points and is, therefore, the desired degree of the least-squares polynomial.*

and the summations $\overset{n}{\Sigma}$ are performed from 1 to n, the number of pairs of data.

Most engineering data is taken with an uncertainty margin. This margin may be expressed as an absolute deviation or as a relative deviation, such as 50 ± 0.5 inches and 50 inches ±1%, respectively. Therefore, when the uncertainty envelope has the most probable least-squares curve as its center line, it also has to cover all the given data points. This condition is illustrated in figure 1.

We usually start with a least-squares equation of relatively low degree and then check to see if all data points fall inside the uncertainty envelope before proceeding to the next higher degree least-squares equation. The process will continue until the uncertainty requirements are satisfied.

Gauss-Jordan Elimination Method

After all the summations of the set of simultaneous equations in equation (1) are calculated, our next step is to solve the set of simultaneous equations for $a_0, a_1, \ldots, a_m$. Although there are numerous techniques to handle this task, the method presented here is the Gauss-Jordan elimination method. The reason for using this method in-

Variable Definitions

FORTRAN Variable	Definition
A (M)	a_m, the mth coefficient of a least-squares polynomial
C (I,J)	c_{ij}, element at ith row and jth column of the augmented matrix of the set of $m+1$ simultaneous equations to be solved for $a_0, \ldots, a_m$
ERR	$\lvert f(X_n)/f'(X_n) \rvert$, absolute value of the nth incurring error in the determination of X for which $f(X)=0$ by Newton-Raphson method
ERROR	ϵ, general term for allowable error (at the beginning of the iteration process) or resulting error (at the end of the process) in the determination of $X_{Y=0}$ and X_{STA}, used in subroutine NEWRAP
ERT	$\epsilon_{Y=0}$, allowable error in the determination of $X_{Y=0}$
EROOT	Error in the determination of $X_{Y=0}$ (before calling subroutine NEWRAP: allowable error; after: resulting error)
ESTN	ϵ_{STA}, allowable error in the determination of X_{STA}
ESTATN	Error in the determination of X_{STA} (before calling subroutine NEWRAP: allowable error; after: resulting error)
I	DO loop index
ICHANG	String input specifying the name of the particular variable of which the value is to be changed
ICONTI	String input (YES or NO) to continue or to stop the process of changing values of some variables
IROOT	Code indicating whether the calculation of $X_{Y=0}$ is needed or not (0: No, 1: Yes)
ISTATN	Code indicating whether the calculation of X_{STA} is needed or not (0: No, 1: Yes)
IUNCER	Code indicating whether the uncertainty is entered as absolute or relative value (0: absolute, 1: relative)
J	DO loop index
K	DO loop index
KPLUS	$K+1$
LROOT	ROOT, string variable for printout purpose
LSTAT	STATN, string variable for printout purpose
M	DO loop index
MDEG	m, degree of the least-squares polynomial to be fitted through the given set of data, used as the first trial
MDEGRE	Incrementing m, starting from MDEG to a maximum of 10
MMINUS	$M-1$
MPLUS1	MDEGRE+1
MPLUS2	MDEGRE+2
N	DO loop index for loop which calculates root of $f(X)=0$
NCODE	Code used before subroutine NEWRAP is called to indicate whether the calculation will be for $X_{Y=0}$ or X_{STA} (1: for $X_{Y=0}$, 2: for X_{STA})
NEWTON	Code used in subroutine NEWRAP having the same function as NCODE; its value is transmitted from main program
NITERA	Before the iteration process: maximum allowable number of iterations, transmitted from main program; after the iteration process: actual number of iterations used to obtain the required accuracy ϵ (this new value will be returned to main program)
NMINUS	$N-1$
NPAIRS	Number of pairs of data
NPLUS	$N+1$
NRERUN	Code to direct the calculation flow to the beginning of the program (NRERUN=1) or only to the portion computing $X_{Y=0}$ and X_{STA} (NRERUN=0)
NROOT	Similar to NITERA, except that it is in main program and is used primarily for calculating $X_{Y=0}$
NSTATN	Similar to NITERA, except that it is in main program and is used primarily for calculating X_{STA}
SUM	Σs, summations representing b_i or c_{ij}
UNCERT	Uncertainty margin, may be entered as absolute or relative value
UNMARG	Uncertainty margin, calculated from the given UNCERT and IUNCER, and is converted into an absolute value
X(N)	Xs, data entered as independent parameters
X0	Before the iteration process: initial approximation of X_n, transmitted from main program; after the iteration process: obtained value of X_n which satisfies the required accuracy (this new value will be returned to main program)
XS(N)	X_n, nth value of iterated X in Newton-Raphson formula
XRT1	Similar to X0, except that it is in main program and is used primarily for calculating $X_{Y=0}$
XSTN1	Similar to X0, except that it is in main program and is used primarily for calculating X_{STA}
Y(N)	Ys, data entered as dependent parameters
YDEN	$f'(X_n)$, denominator value in Newton-Raphson formula
YNUM	$f(X_n)$, numerator value in Newton-Raphson formula
YOFX	$Y(X)$, value of Y corresponding to a given value of X

Listing 1: *FORTRAN listing of the program CURFIT that solves the least-squares polynomial for the entered pairs of data X(n) and Y(n). Some language features used here differ from standard FORTRAN.*

```
00100 PROGRAM CURFIT (INPUT,OUTPUT)
00110 DIMENSION X(100),Y(100),A(11),C(11,12)
00120 COMMON/BLOCK/A,MPLUS1,MPLUS2
00130*****
00140***** DATA STATEMENTS
00150*****
00160 DATA NPAIRS,MDEG,IUNCER,UNCERT,IROOT,XRT1,ERT,ISTATN,XSTN1,ESTN/
00170+10,1,0,.1,1,-1.,.001,1,0.,.001
00180+/,X/
00190+-2.,-1.5,-1.,0.,1.,2.,2.5,3.,4.,5.
00200+/,Y/
00210+-25.1,-6.9,3.1,5.,-6.9,-21.,-25.,-25.1,-7.,45.
00220+/
00230*****
00240***** FORMAT STATEMENTS
00250*****
00260 10 FORMAT (//2X,12HTHE DESIRED ,I2,47H-TH DEGREE LEAST-SQUARES EQUATION HA
00270+S A FORM OF ,/5X,14HY(X) = SUM OF ,I2,19H-TERMS OF A(I)*X**I,5X,12HI = 0,1
00280+,..., ,I2,//20X,1HI,5X,4HA(I),/19X,3H---,2X,8H--------,/)
00290 20 FORMAT (19X,I2,3X,F8.3)
00300 30 FORMAT (//2X,6HAFTER ,I2,35H ITERATIONS, THE OBTAINED VALUE OF ,A6,3H I
00310+S ,F8.3,7H GIVING,/12HAN ERROR OF ,F8.5,2X,33HIF YOU WANT TO TRY NEW VALUE
00320+S OF ,A6,11H AND ERROR,,/45HENTER THEM IN THAT ORDER; IF NOT, ENTER 0.,0.)
00330 40 FORMAT (/2X,6HAFTER ,I2,35H ITERATIONS, THE OBTAINED VALUE OF ,A6,4H IS
00340+ ,F8.3)
00350 50 FORMAT (//2X,*DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, E
00360+RT, ESTN,*,/1X,*XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)*)
00370 60 FORMAT (/2X,*ENTER THE VARIABLE TO BE CHANGED (HIT RETURN), AND THEN IT
00380+S NEW VALUE*)
00390 70 FORMAT (/2X,*ANY MORE VARIABLES TO BE CHANGED ?*)
00400 80 FORMAT (//2X,*ALTHOUGH A *,I2,*-TH DEGREE LEAST SQUARES CURVE HAS BEEN
00410+FITTED THROUGH THE*,/1X,*GIVEN SET OF DATA, THE SPECIFIED UNCERTAINTY MARG
00420+IN IS NOT YET SATISFIED*)
00430 90 FORMAT (2X,*THE CORRESPONDING VALUE OF Y(XSTATN) IS *,F8.3)
00440 100 FORMAT (//2X,*THE SPECIFIED DEGREE OF THE LEAST SQUARES EQUATION IS =>
00450+ THE NUMBER*,/1X,*OF PAIRS OF DATA. REENTER MDEG (< NPAIRS )*)
00460*****
00470***** DEFINITIONS OF SOME VARIABLES
00480*****
00490 LROOT=5HXROOT
00500 LSTAT=6HXSTATN
00510 110 MDEGRE=MDEG
00520 112 EROOT=ERT
00530 ESTATN=ESTN
00540 115 IF (MDEGRE.LT.NPAIRS) GO TO 120
00550 PRINT 100
00560 READ,MDEG
00570 GO TO 110
00580 120 NROOT=NSTATN=20
00590 MPLUS1=MDEGRE+1
00600 MPLUS2=MDEGRE+2
00610*****
00620***** DETERMINATION OF ALL SUMMATIONS IN THE SET OF M+1 SIMULTANEOUS EQNS.
00630*****
00640 DO 210 I=1,MPLUS1
00650 DO 200 J=1,MPLUS2
00660 SUM=0.
00670 DO 220  N=1,NPAIRS
00680 IF (J.NE.MPLUS2) SUM=SUM+X(N)**(I+J-2)
00690 IF (J.EQ.MPLUS2) SUM=SUM+Y(N)*X(N)**(I-1)
00700 220 CONTINUE
00710 C(I,J)=SUM
00720 200 CONTINUE
00730 210 CONTINUE
00740*****
00750***** DETERMINATION OF COEF. A0,...,AM OF THE M-TH DEGREE LEAST-SQUARES
00760*****    POLYNOMIAL BY GAUSS-JORDAN ELIMINATION METHOD
00770*****
00780 DO 330 K=1,MPLUS1
00790 KPLUS=K+1
00800 DO 300 J=KPLUS,MPLUS2
00810 C(K,J)=C(K,J)/C(K,K)
00820 300 CONTINUE
00830 DO 320 I=1,MPLUS1
00840 IF (I.EQ.K) GO TO 320
00850 DO 310 J=KPLUS,MPLUS2
00860 C(I,J)=C(I,J)-C(I,K)*C(K,J)
00870 310 CONTINUE
00880 320 CONTINUE
00890 330 CONTINUE
00900*****
00910***** CHECK FOR UNCERTAINTY REQUIREMENTS
00920*****
00930 DO 410 N=1,NPAIRS
00940 YOFX=0.
00950 DO 400 M=1,MPLUS1
00960 A(M)=C(M,MPLUS2)
00970 YOFX=YOFX+A(M)*X(N)**(M-1)
00980 400 CONTINUE
00990 IF (IUNCER.NE.1) UNMARG = UNCERT
01000 IF (IUNCER.EQ.1) UNMARG = ABS(UNCERT*YOFX)
01010 IF (ABS(Y(N)-YOFX).LE.UNMARG) GO TO 410
01020 MDEGRE=MDEGRE+1
01030 IF (MDEGRE.LT.NPAIRS.AND.MDEGRE.LE.10) GO TO 112
01040 MDEGRE=MDEGRE-1
01050 PRINT 80,MDEGRE
01060 GO TO 700
01070 410 CONTINUE
01080*****
01090***** PRINT-OUT OF COEF. A0,...,AM OF THE OBTAINED M-TH DEGREE
01100*****    LEAST SQUARES EQUATION
01110*****
01120 PRINT 10,MDEGRE,MPLUS1,MDEGRE
01130 DO 500 M=1,MPLUS1
01140 MMINUS=M-1
01150 PRINT 20,MMINUS,A(M)
01160 500 CONTINUE
01170*****
01180***** CALCULATION OF VALUES OF XROOT OR XSTA
01190*****
01200 IF (MDEGRE.EQ.1) IROOT=0
01210 550 IF (IROOT.NE.1.AND.ISTATN.NE.1) GO TO 700
01220 IF (IROOT.NE.1) GO TO 620
01230 600 NCODE = 1
01240 CALL NEWRAP (XRT1,EROOT,NROOT,NCODE)
01250 IF (NROOT.LT.20) GO TO 610
01260 PRINT 30,NROOT,LROOT,XRT1,EROOT,LROOT
01270 READ,XRT1,ERT
01280 EROOT=ERT
01290 IF (XRT1.EQ.0..AND.EROOT.EQ.0.) GO TO 620
01300 GO TO 600
01310 610 PRINT 40,NROOT,LROOT,XRT1
01320 620 IF (ISTATN.NE.1) GO TO 700
01330 630 NCODE = 2
01340 CALL NEWRAP (XSTN1,ESTATN,NSTATN,NCODE)
01350 IF (NSTATN.LT.20) GO TO 640
01360 PRINT 30,NSTATN,LSTAT,XSTN1,ESTATN,LSTAT
01370 READ,XSTN1,ESTN
01380 ESTATN=ESTN
01390 IF (XSTN1.EQ.0..AND.ESTATN.EQ.0.) GO TO 700
01400 GO TO 630
01410 640 PRINT 40,NSTATN,LSTAT,XSTN1
01420 YOFX=0.
01430 DO 650 M=1,MPLUS1
01440 YOFX=YOFX+C(M,MPLUS2)*XSTN1**(M-1)
01450 650 CONTINUE
01460 PRINT 90,YOFX
01470*****
01480***** CHANGING VALUES OF SOME VARIABLES
01490*****
01500 700 PRINT 50
01510 READ,ICONTI
01520 IF (ICONTI.EQ.2HNO) GO TO 800
01530 NRERUN=0
01540 710 PRINT 60
01550 READ,ICHANG
01560 IF (ICHANG.EQ.4HMDEG) READ,MDEG
01570 IF (ICHANG.EQ.6HUNCERT) READ,UNCERT
01580 IF (ICHANG.EQ.3HERT) READ,ERT
01590 IF (ICHANG.EQ.4HESTN) READ,ESTN
01600 IF (ICHANG.EQ.4HXRT1) READ,XRT1
01610 IF (ICHANG.EQ.5HXSTN1) READ,XSTN1
01620 IF (ICHANG.EQ.6HIUNCER) READ,IUNCER
01630 IF (ICHANG.EQ.5HIROOT) READ,IROOT
01640 IF (ICHANG.EQ.6HISTATN) READ,ISTATN
01650 NROOT=NSTATN=20
01660 EROOT=ERT
01670 ESTATN=ESTN
01680 IF (ICHANG.EQ.4HMDEG.OR.ICHANG.EQ.6HUNCERT.OR.ICHANG.EQ.IUNCER) NRERUN=1
01690 PRINT 70
01700 READ,ICONTI
01710 IF (ICONTI.EQ.3HYES) GO TO 710
01720 IF (NRERUN.EQ.1) GO TO 110
01730 GO TO 550
01740 800 STOP
01750 END
01760*****
01770***** CALCULATION OF ROOT OF F(X)=0., AT THE NEIGHBORHOOD OF X=X0.
01780*****     BY NEWTON-RAPHSON METHOD
01790*****
01800 SUBROUTINE NEWRAP (X0,ERROR,NITERA,NEWTON)
01810 DIMENSION XS(21),A(11)
01820 COMMON/BLOCK/A,MPLUS1,MPLUS2
01830 XS(1)=X0
01840 IF (X0.EQ.0.) XS(1)=X0=.0001
01850 DO 950 N=1,NITERA
01860 NPLUS=N+1
01870 NMINUS=N-1
01880 910 YNUM=YDEN=0.
01890 DO 930 I=1,MPLUS1
01900 IF (NEWTON.EQ.2) GO TO 920
01910 YNUM=YNUM+A(I)*XS(N)**(I-1)
01920 YDEN=YDEN+(I-1)*A(I)*XS(N)**(I-2)
01930 GO TO 930
01940 920 YNUM=YNUM+(I-1)*A(I)*XS(N)**(I-2)
01950 YDEN=YDEN+(I-1)*(I-2)*A(I)*XS(N)**(I-3)
01960 930 CONTINUE
01970 IF (YDEN.NE.0.) GO TO 940
01980 XS(N)=(XS(N)+XS(NMINUS))/2.
01990 GO TO 910
02000 940 ERR=ABS(YNUM/YDEN)
02010 IF (ERR.LE.ERROR) GO TO 960
02020 XS(NPLUS)=XS(N)-YNUM/YDEN
02030 950 CONTINUE
02040 X0=XS(NPLUS)
02050 GO TO 970
02060 960 X0=XS(N)-YNUM/YDEN
02070 970 ERROR=ERR
02080 NITERA=N
02090 RETURN
02100 END
READY.
```

stead of Cramer's rule is that it proves to be a simpler and a less time-consuming procedure, especially when the system to be solved has more than three simultaneous linear equations.

This method is a combination of the Gaussian forward and backward eliminations. The forward elimination consists of the following steps:

- Elimination of a_0 from the second and succeeding equations by dividing the first equation by c_{11}; multiplying the modified equation respectively by $c_{21}, c_{31}, \ldots, c_{[m+1]1}$; and then subtracting the obtained equations respectively from the second, third, . . . , $(m+1)$th equations. The resulting set of equations is of the form:

$$\begin{array}{lr} a_0 + c'_{12}a_1 + c'_{13}a_2 + \ldots + c'_{1[m+1]}\, a_m = b'_1 & \\ \qquad c'_{22}a_1 + c'_{23}a_2 + \ldots + c'_{2[m+1]}\, a_m = b'_2 & \\ \qquad \cdot \qquad\qquad\qquad\qquad \cdot \qquad\quad \cdot & (2) \\ \qquad \cdot \qquad\qquad\qquad\qquad \cdot \qquad\quad \cdot & \\ \qquad \cdot \qquad\qquad\qquad\qquad \cdot \qquad\quad \cdot & \\ \qquad c'_{[m+1]2}a_1 \quad + \ldots + c'_{[m+1]\;[m+1]}a_m = b'_{[m+1]} & \end{array}$$

- Elimination of a_1 from the third and succeeding equations by dividing the second equation in the set of equations in (2) by c'_{22}; multiplying the modified equation respectively by $c'_{32}, c'_{42}, \dots, c'_{[m+1]2}$; and then subtracting the obtained equations respectively from the third, fourth, . . . , $(m+1)$th equations.
- The elimination process continues until the system is of the form:

$$\begin{aligned} a_0 + c'_{12}a_1 + c'_{13}a_2 + \dots + c'_{1[m+1]}a_m &= b'_1 \\ a_1 + c''_{23}a_2 + \dots + c''_{2[m+1]}a_m &= b''_2 \\ &\ \vdots \\ c^{(m+1)}_{[m+1]\,[m+1]}a_m &= b^{(m+1)}_{[m+1]} \end{aligned} \qquad (3)$$

The backward substitution process may now be used to find the values for all a_i in the reverse order. The value of a_m is calculated from the last equation in equation set (3) and is substituted in the next-to-last equation to solve for a_{m-1}, etc.

In the Gauss-Jordan elimination method, the last procedure (backward substitution process) is replaced by the elimination of a_i, starting from the second step, not only from the $(i+2)$th and succeeding equations, as previously mentioned, but also from all preceding equations, (from the first to the ith equation). Thus, at the end of the process, the final set of equations is of the form:

$$\begin{aligned} a_0 &= b'_1 \\ a_1 &= b''_2 \\ &\ \vdots \\ a_m &= b^{(m+1)}_{[m+1]} \end{aligned} \qquad (4)$$

As we notice, the values of $a_0, a_1, \dots, a_m$ are obtained directly from equation set (4) as $b'_1, b''_2, \dots, b^{(m+1)}_{[m+1]}$.

One remark about this method is that the values c_{11}, c'_{22}, . . . must be different from zero to make all divisions meaningful. If this is not the case for some equations, these equations may be rearranged with others which have nonzero values of c.

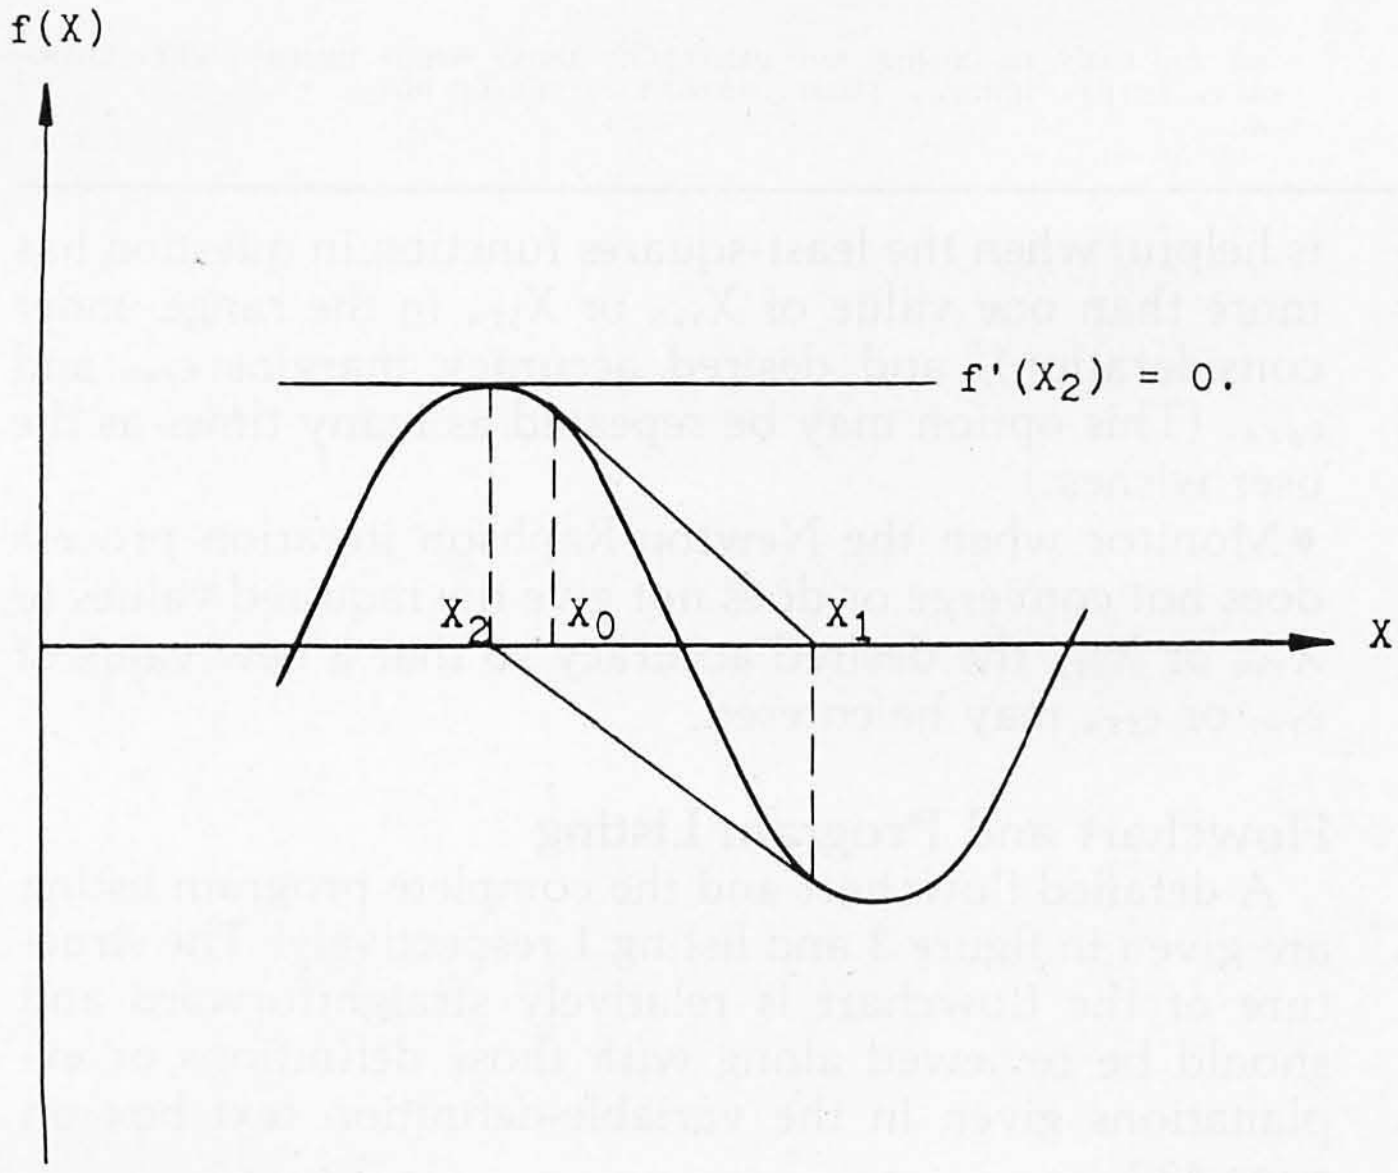

Figure 2: *An example of a function f(X) that is not monotonically increasing or decreasing. This is clearly an undesirable situation for application of the Newton-Raphson method as the successive approximations diverge rather than converge on the desired root of the equation.*

Newton-Raphson Method

So far, utilizing the preceding techniques, we are able to determine for a given set of n pairs of data, a best-fit curve which is represented by the polynomial:

$$Y = a_0 + a_1X + a_2X^2 + \dots + a_mX^m$$

The roots of $Y(X)=0$ and the X-coordinates of the stationary points (referred to as X_{sta}) are determined by the following equations:

$$\begin{aligned} Y &= a_0 + a_1X + a_2X^2 + \dots + a_mX^m = 0 \\ Y' &= a_1 + 2a_2X + 3a_3X^2 + \dots + ma_mX^{m-1} = 0 \end{aligned}$$

As long as $Y(X)$ has first and second defined derivatives and the equations $Y(X) = 0$ and $Y'(X) = 0$ are solvable, the values of $X_{Y=0}$ and X_{STA} may be calculated by using the well-known Newton-Raphson method.

This is an iteration process in which successive approximations are made in accordance with the formula

$$X_{n+1} = X_n - \frac{f(X_n)}{f'(X_n)} \qquad n = 1,2, \dots$$

For rapid convergence, the initial approximation X_0 should be in the neighborhood of the desired root of the equation $f(X)$ and such that $f'(X) \neq 0$. This value of X_0 may be obtained with the aid of a rough sketch or tabulation of $f(X)$ versus X.

The iteration process continues with converging X_{n+1} until the required accuracy ϵ is obtained, that is

$$|\, X_{n+1} - X_n \,| \le \epsilon \ \text{or}\ |\, f(X_n)/f'(X_n) \,| \le \epsilon$$

When $f(X)$ is not a monotonically increasing or decreasing function, or when there is a point of inflection in the interval $[X_1, X_2]$, the Newton-Raphson method may cause difficulties. In this case, X_{n+1} may tend to diverge or $f'(X_n)$ may happen to be very small or equal to zero, as illustrated in figure 2. A new value of X_n should be reassigned to avoid additional unnecessary iterations or to make $f'(X_n) \neq 0$. This may be accomplished by taking the average of that particular X_n and the previous value X_{n-1} (that is, $(X_n)_{new} = (X_n + X_{n-1})/2$).

Application of this method to our problem yields:

$$(X_{Y=0})_{n+1} = (X_{Y=0})_n - \frac{Y[(X_{Y=0})_n]}{Y'[(X_{Y=0})_n]}, \quad \left| \frac{Y[(X_{Y=0})_n]}{Y'[(X_{Y=0})_n]} \right| \le \epsilon_{Y=0}$$

$$(X_{STA})_{n+1} = (X_{STA})_n - \frac{Y'[(X_{STA})_n]}{Y''[(X_{STA})_n]}, \quad \left| \frac{Y'[(X_{STA})_n]}{Y''[(X_{STA})_n]} \right| \le \epsilon_{STA}$$

Computer Program

The program is written in an interactive manner for use with a timesharing system. To provide flexibility and ease of execution, some of the variables of the program

Listing 2: *Sample execution of the program CURFIT.*

```
00170+10,1,0,.1,1,-1.,.001,1,0.,.001
00190+-2.,-1.5,-1.,0.,1.,2.,2.5,3.,4.,5.
00210+-25.1,-6.9,3.1,5.,-6.9,-21.,-25.,-25.1,-7.,45.

RUN


PROGRAM    CURFIT



  THE DESIRED  3-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  4-TERMS OF A(I)*X**I        I = 0,1,..., 3

                      I      A(I)
                     ---   --------

                      0       5.090
                      1      -7.010
                      2      -7.028
                      3       2.005

  AFTER  4 ITERATIONS, THE OBTAINED VALUE OF XROOT  IS   -1.195

  AFTER  4 ITERATIONS, THE OBTAINED VALUE OF XSTATN IS    -.422
  THE CORRESPONDING VALUE OF Y(XSTATN) IS     6.646


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? YES

  ENTER THE VARIABLE TO BE CHANGED (HIT RETURN), AND THEN ITS NEW VALUE
? XRT1
? 0.

  ANY MORE VARIABLES TO BE CHANGED ?
? YES

  ENTER THE VARIABLE TO BE CHANGED (HIT RETURN), AND THEN ITS NEW VALUE
? XSTN1
? 2.5

  ANY MORE VARIABLES TO BE CHANGED ?
? NO

  AFTER  4 ITERATIONS, THE OBTAINED VALUE OF XROOT  IS     .506

  AFTER  3 ITERATIONS, THE OBTAINED VALUE OF XSTATN IS    2.759
  THE CORRESPONDING VALUE OF Y(XSTATN) IS  -25.629


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? YES

  ENTER THE VARIABLE TO BE CHANGED (HIT RETURN), AND THEN ITS NEW VALUE
? XRT1
? 4.

  ANY MORE VARIABLES TO BE CHANGED ?
? NO

  AFTER  3 ITERATIONS, THE OBTAINED VALUE OF XROOT  IS    4.194

  AFTER  1 ITERATIONS, THE OBTAINED VALUE OF XSTATN IS    2.759
  THE CORRESPONDING VALUE OF Y(XSTATN) IS  -25.629


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? NO
    STOP
```

Listing 3: *Application of the program CURFIT to a chemical engineering problem.*

```
00170+6,2,1,.005,0,0.,0.,0,0.,0.
00190+5.,10.,20.,30.,40.,45.
00210+18.24,18.56,19.03,19.42,19.74,19.89
RUN


PROGRAM    CURFIT



  THE DESIRED  2-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  3-TERMS OF A(I)*X**I        I = 0,1,..., 2

                      I      A(I)
                     ---   --------

                      0      17.960
                      1        .062
                      2       -.000


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? YES

  ENTER THE VARIABLE TO BE CHANGED (HIT RETURN), AND THEN ITS NEW VALUE
? UNCERT
? .002

  ANY MORE VARIABLES TO BE CHANGED ?
? NO


  THE DESIRED  2-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  3-TERMS OF A(I)*X**I        I = 0,1,..., 2

                      I      A(I)
                     ---   --------

                      0      17.960
                      1        .062
                      2       -.000


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? YES

  ENTER THE VARIABLE TO BE CHANGED (HIT RETURN), AND THEN ITS NEW VALUE
? UNCERT
? .001

  ANY MORE VARIABLES TO BE CHANGED ?
? NO


  THE DESIRED  3-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  4-TERMS OF A(I)*X**I        I = 0,1,..., 3

                      I      A(I)
                     ---   --------

                      0      17.894
                      1        .076
                      2       -.001
                      3        .000


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT. ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? NO
    STOP
```

may be modified directly at the terminal in response to those questions printed by the program (see listing 2).

General Features

The program allows the user to:

- Enter up to 100 pairs of data.
- Enter the uncertainty margin as an absolute or relative value.
- Specify the magnitudes of the accuracy margins $\epsilon_{Y=0}$ and ϵ_{STA} required in the calculation of $X_{Y=0}$ and X_{STA}.
- Determine the least-squares polynomial and the values of $X_{Y=0}$ and X_{STA}.
- Initialize the iteration for finding the least-squares polynomial with any degree which, in the user's opinion, may be the desired one. This option eliminates unnecessary calculations resulting from the choice of the first degree as the initial trial.
- Modify information or values of variables after the completion of the first run. These variables include the lowest desired degree of the least-squares polynomial *m*, the uncertainty margin, the initially guessed values of $X_{Y=0}$ and of the abscissa of the stationary point X_{STA} (this is helpful when the least-squares function in question has more than one value of $X_{Y=0}$ or X_{STA} in the range under consideration), and desired accuracy margins $\epsilon_{Y=0}$ and ϵ_{STA}. (This option may be repeated as many times as the user wishes.)
- Monitor when the Newton-Raphson iteration process does not converge or does not give the required values of $X_{Y=0}$ or X_{STA} the desired accuracy so that a new value of $\epsilon_{Y=0}$ or ϵ_{STA} may be entered.

Flowchart and Program Listing

A detailed flowchart and the complete program listing are given in figure 3 and listing 1 respectively. The structure of the flowchart is relatively straightforward and should be reviewed along with those definitions or explanations given in the variable-definition text box on page 437.

- Input: the input data is arranged in three groups of DATA statements in the program listing. The first group contains the values for NPAIRS, MDEG, IUNCER, UNCERT, IROOT, XRT1, ERT, ISTATN, XSTN1, and

Figure 3: *Detailed flowchart of the program CURFIT.*

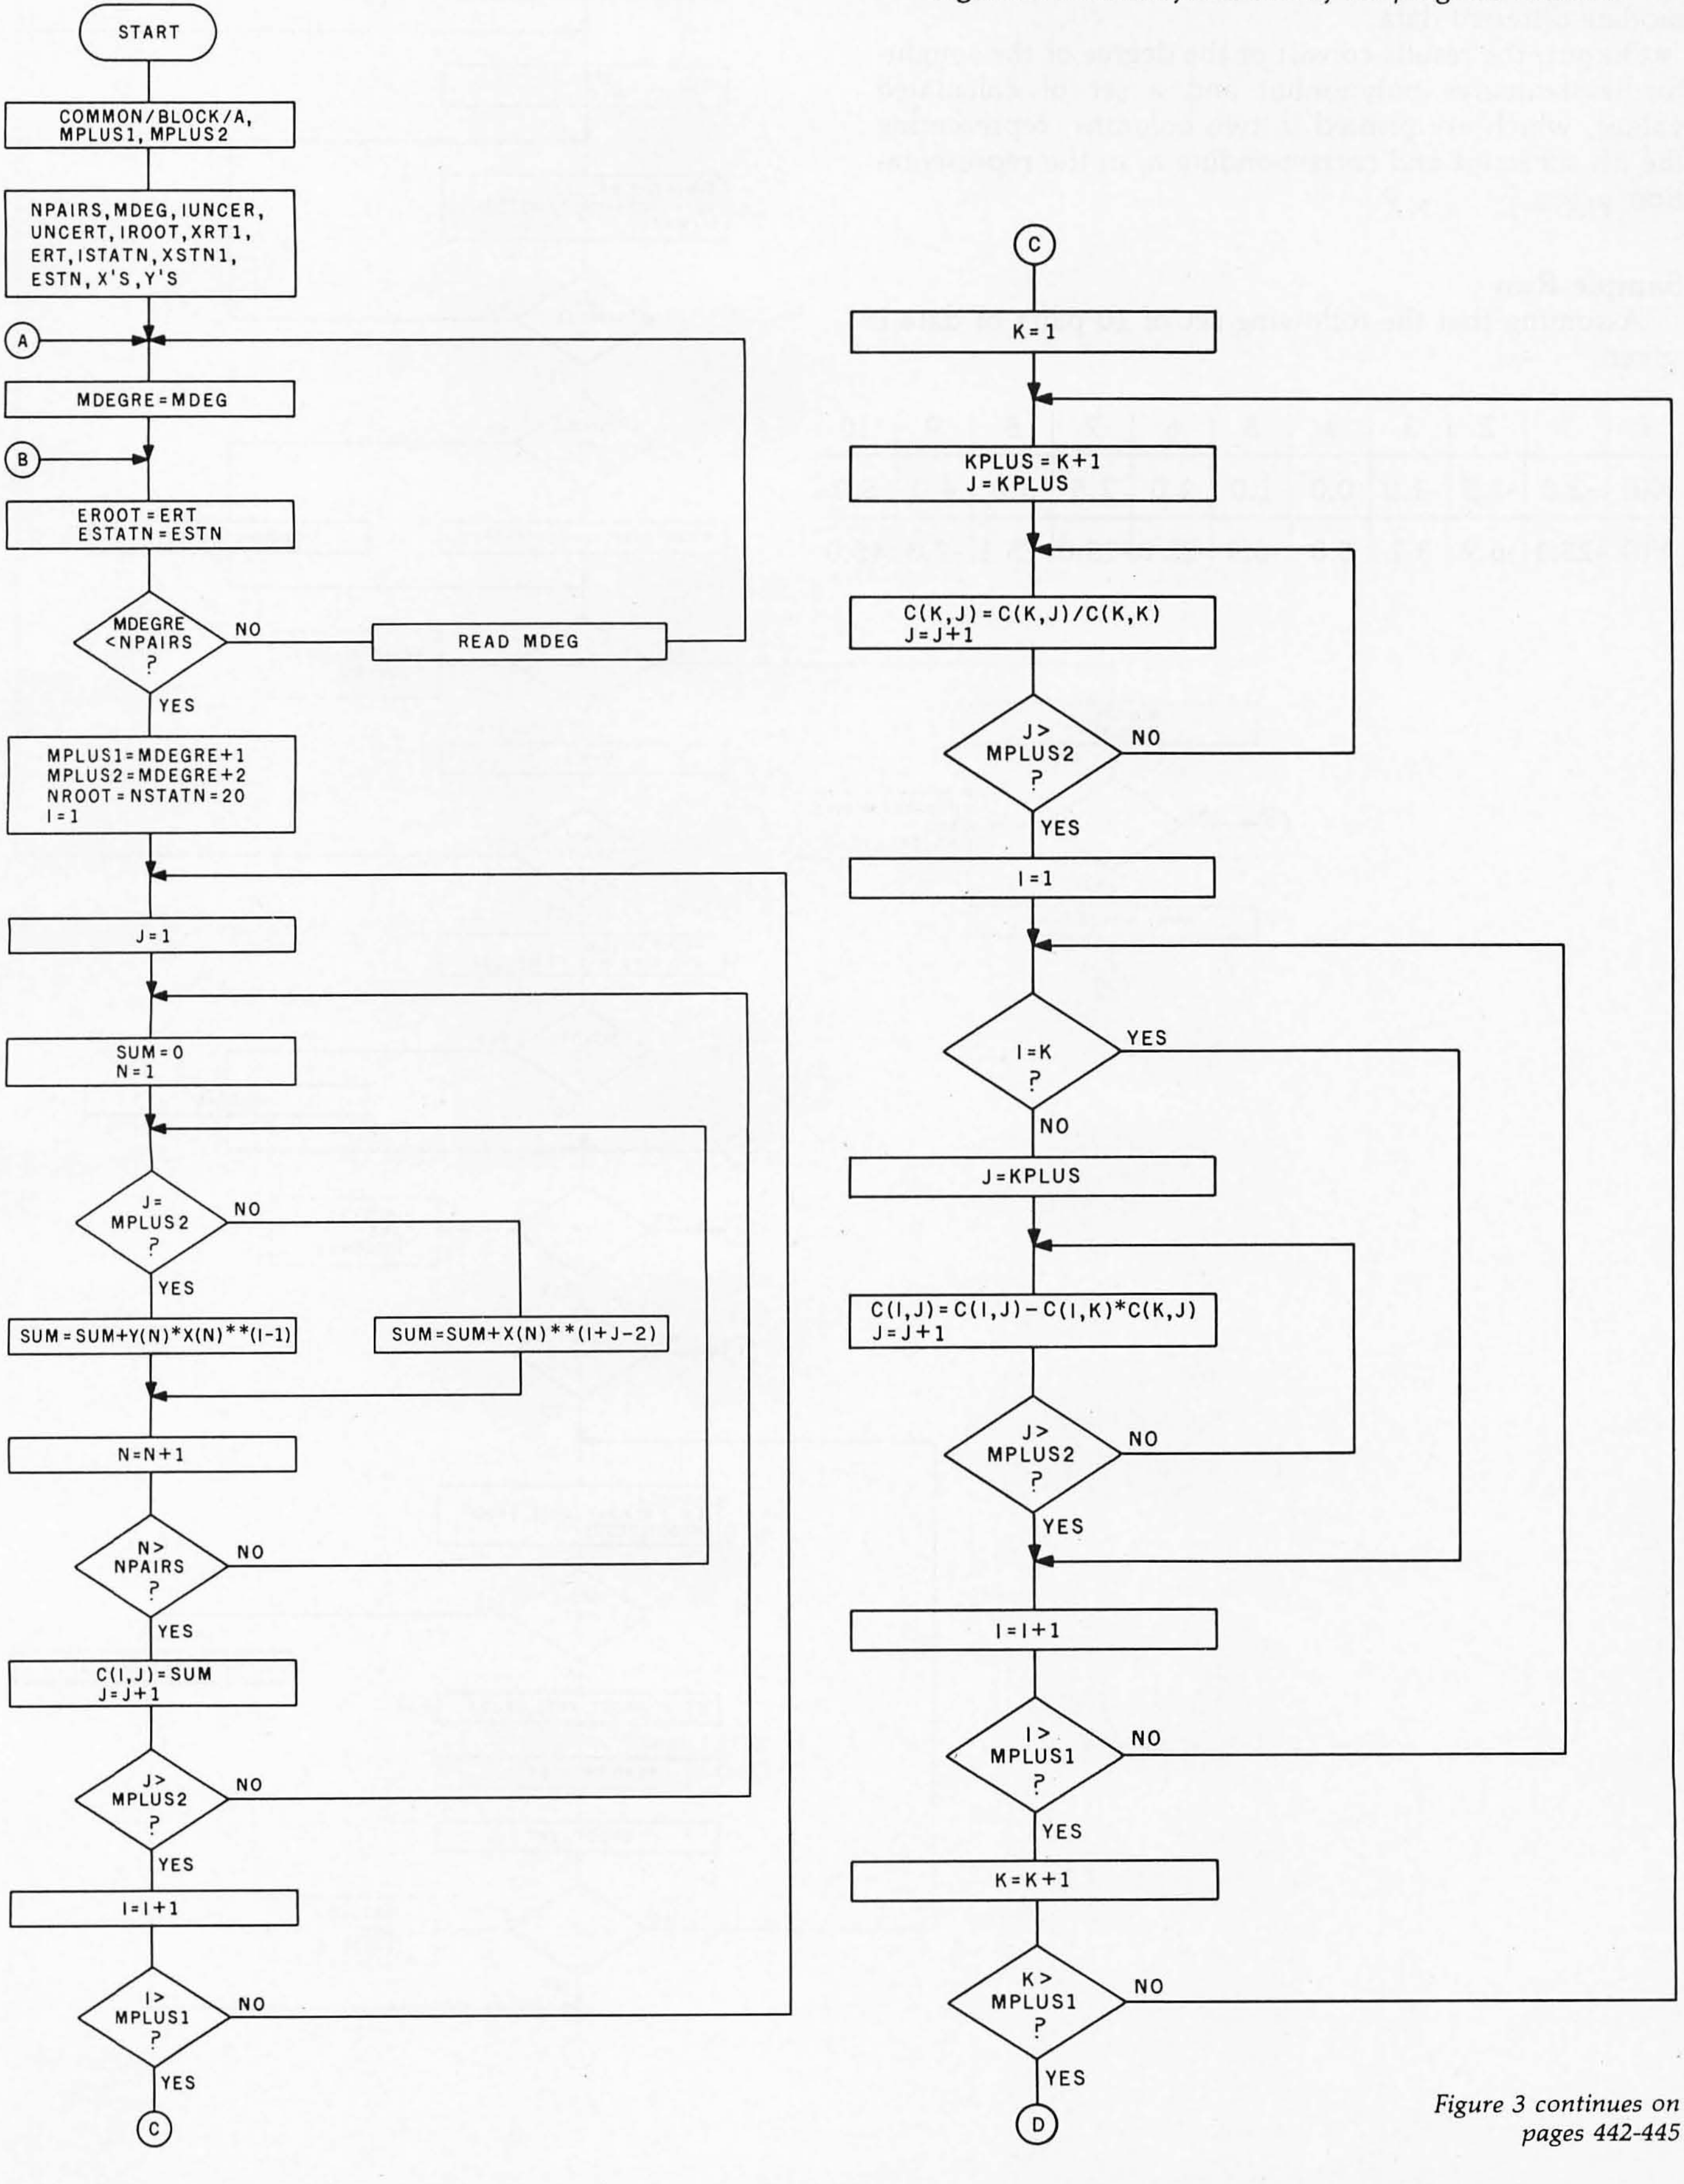

Figure 3 continues on pages 442-445

ESTN. The second group contains the n values for the independent points X_n, or X (NPAIRS). The third group contains the n values for the dependent points Y_n, or Y(NPAIRS). These statements are modified to accommodate different data.

- Output: the results consist of the degree of the sought-for least-squares polynomial and a set of calculated values, which are printed in two columns, representing the ith subscript and corresponding a_i in the representation $Y(X)=\sum_{0}^{m} a_i \times X^i$.

Sample Run

Assuming that the following set of 10 pairs of data is given:

i	1	2	3	4	5	6	7	8	9	10
X(*i*)	-2.0	-1.5	-1.0	0.0	1.0	2.0	2.5	3.0	4.0	5.0
Y(*i*)	-25.1	-6.9	3.1	5.0	-6.9	-21.0	-25.0	-25.1	-7.0	45.0

Figure 3 continued:

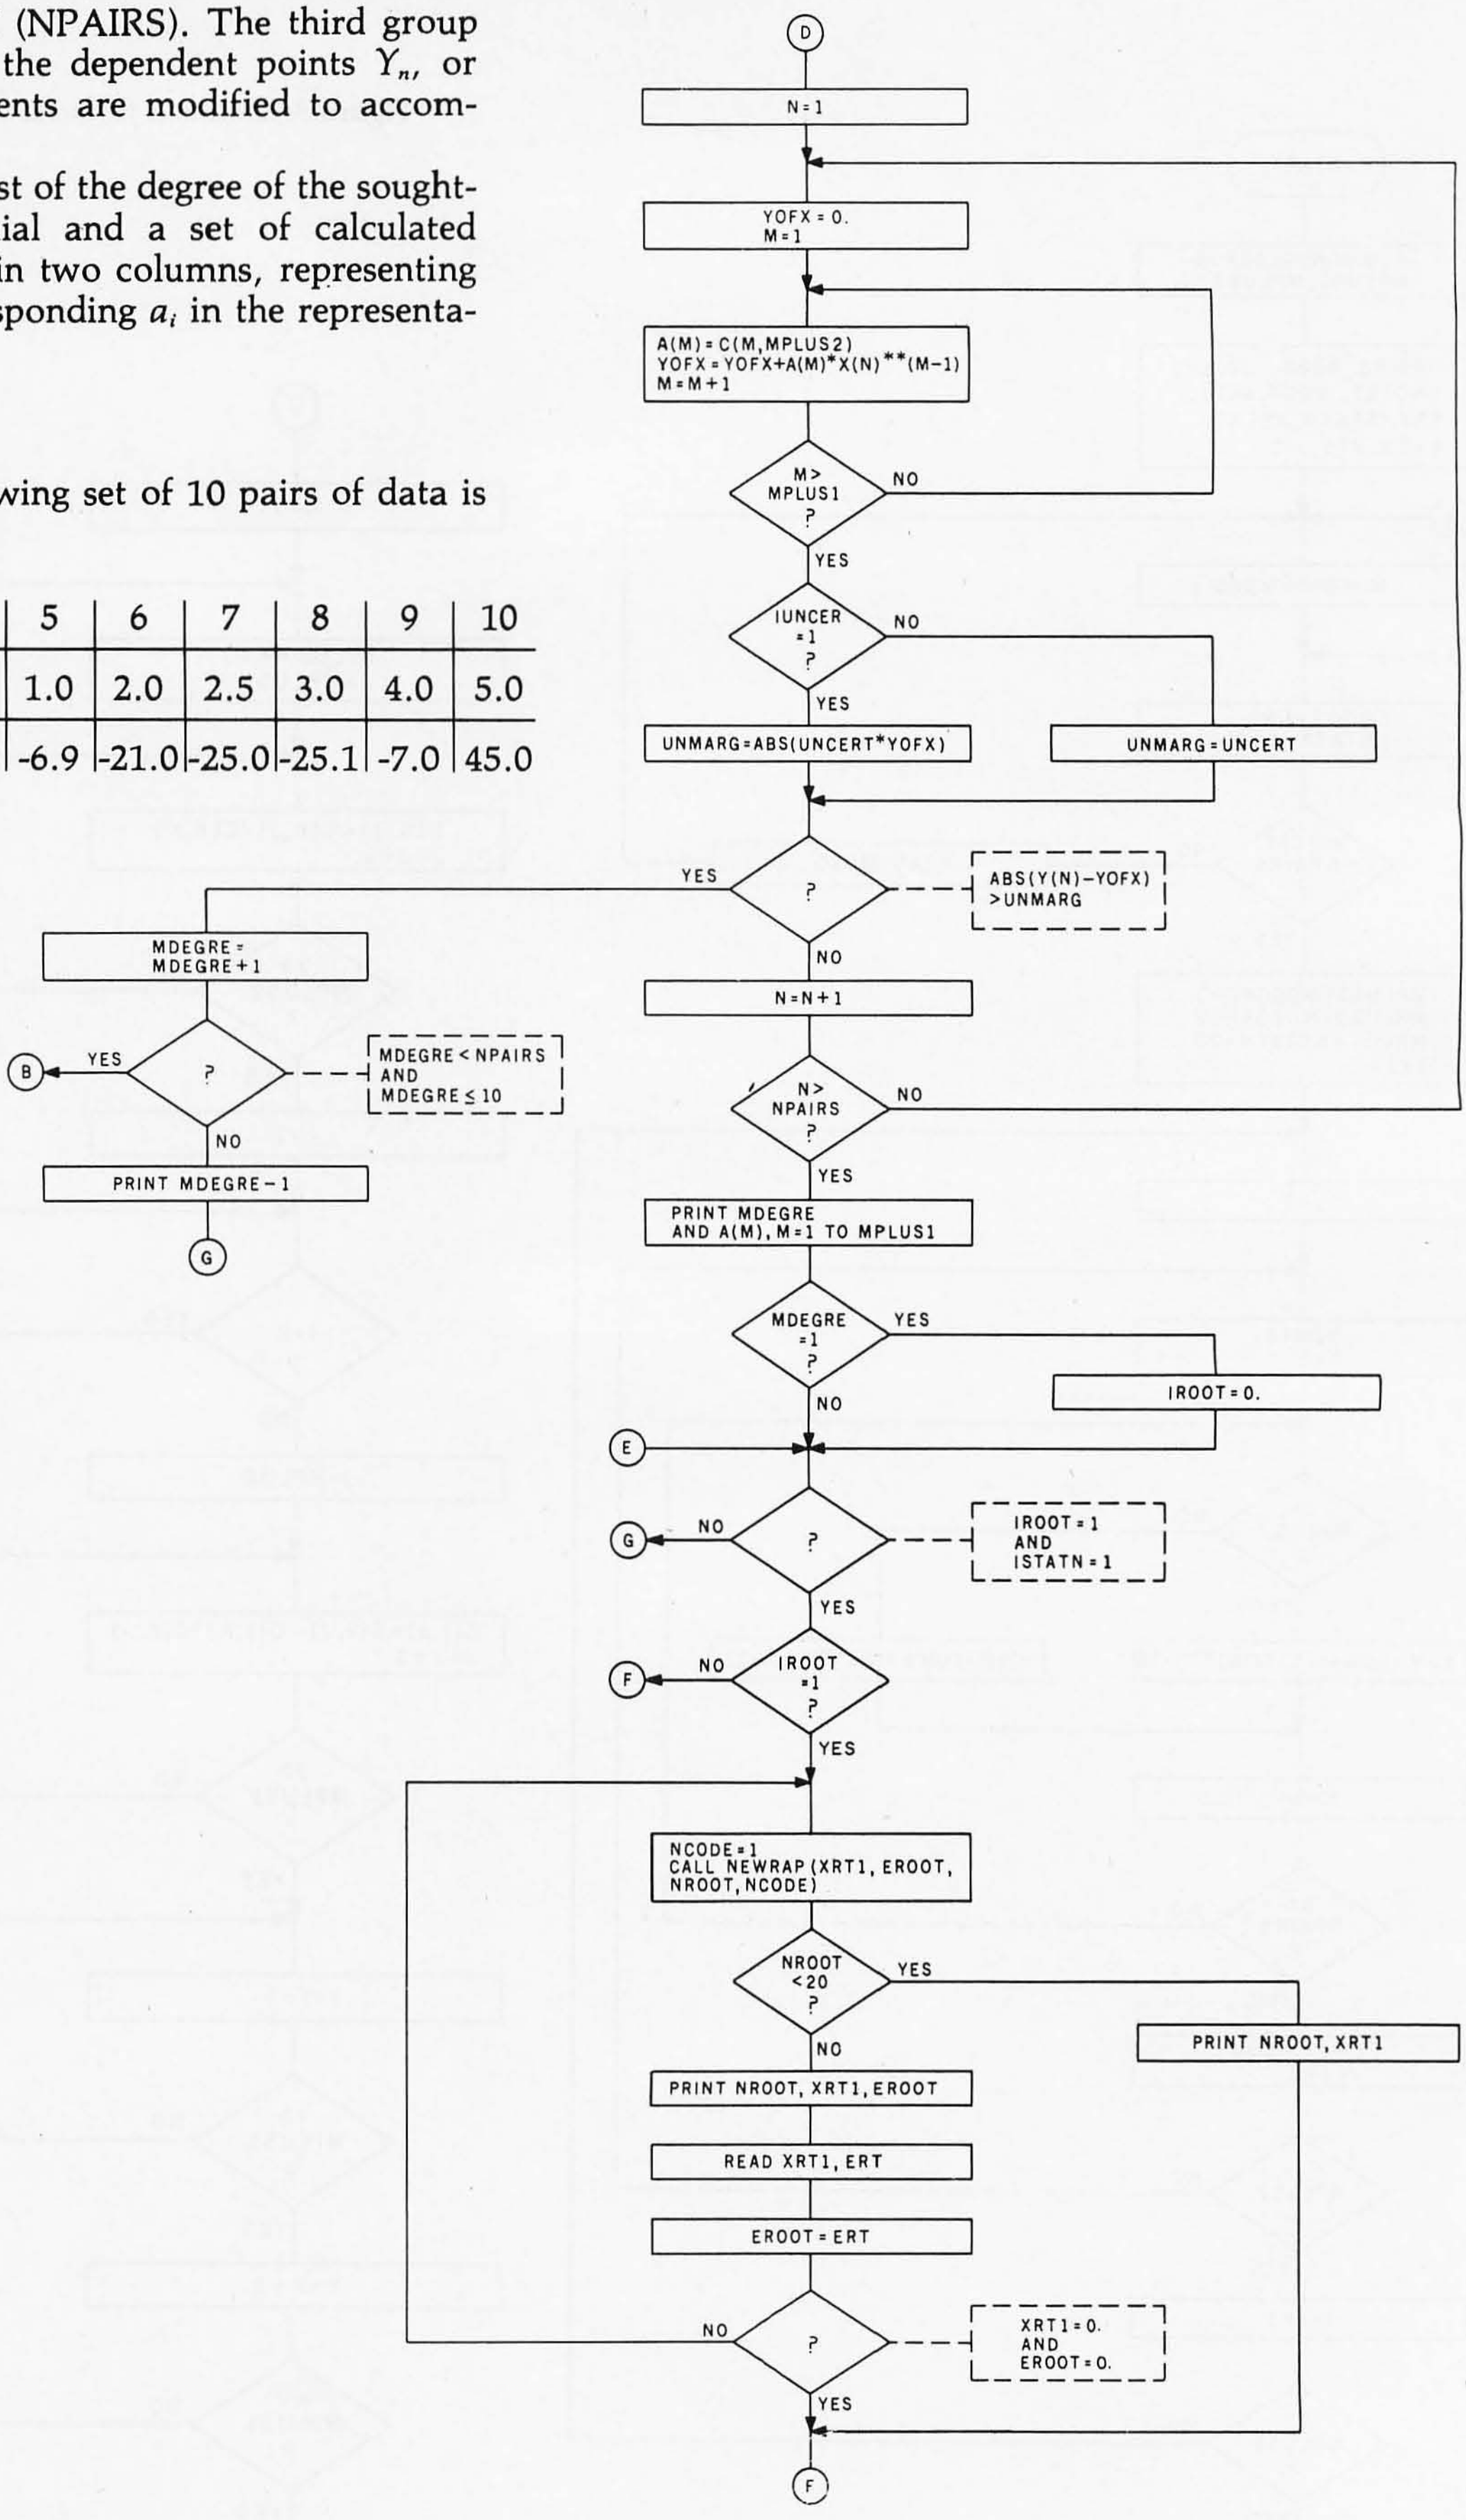

Figure 3 continued:

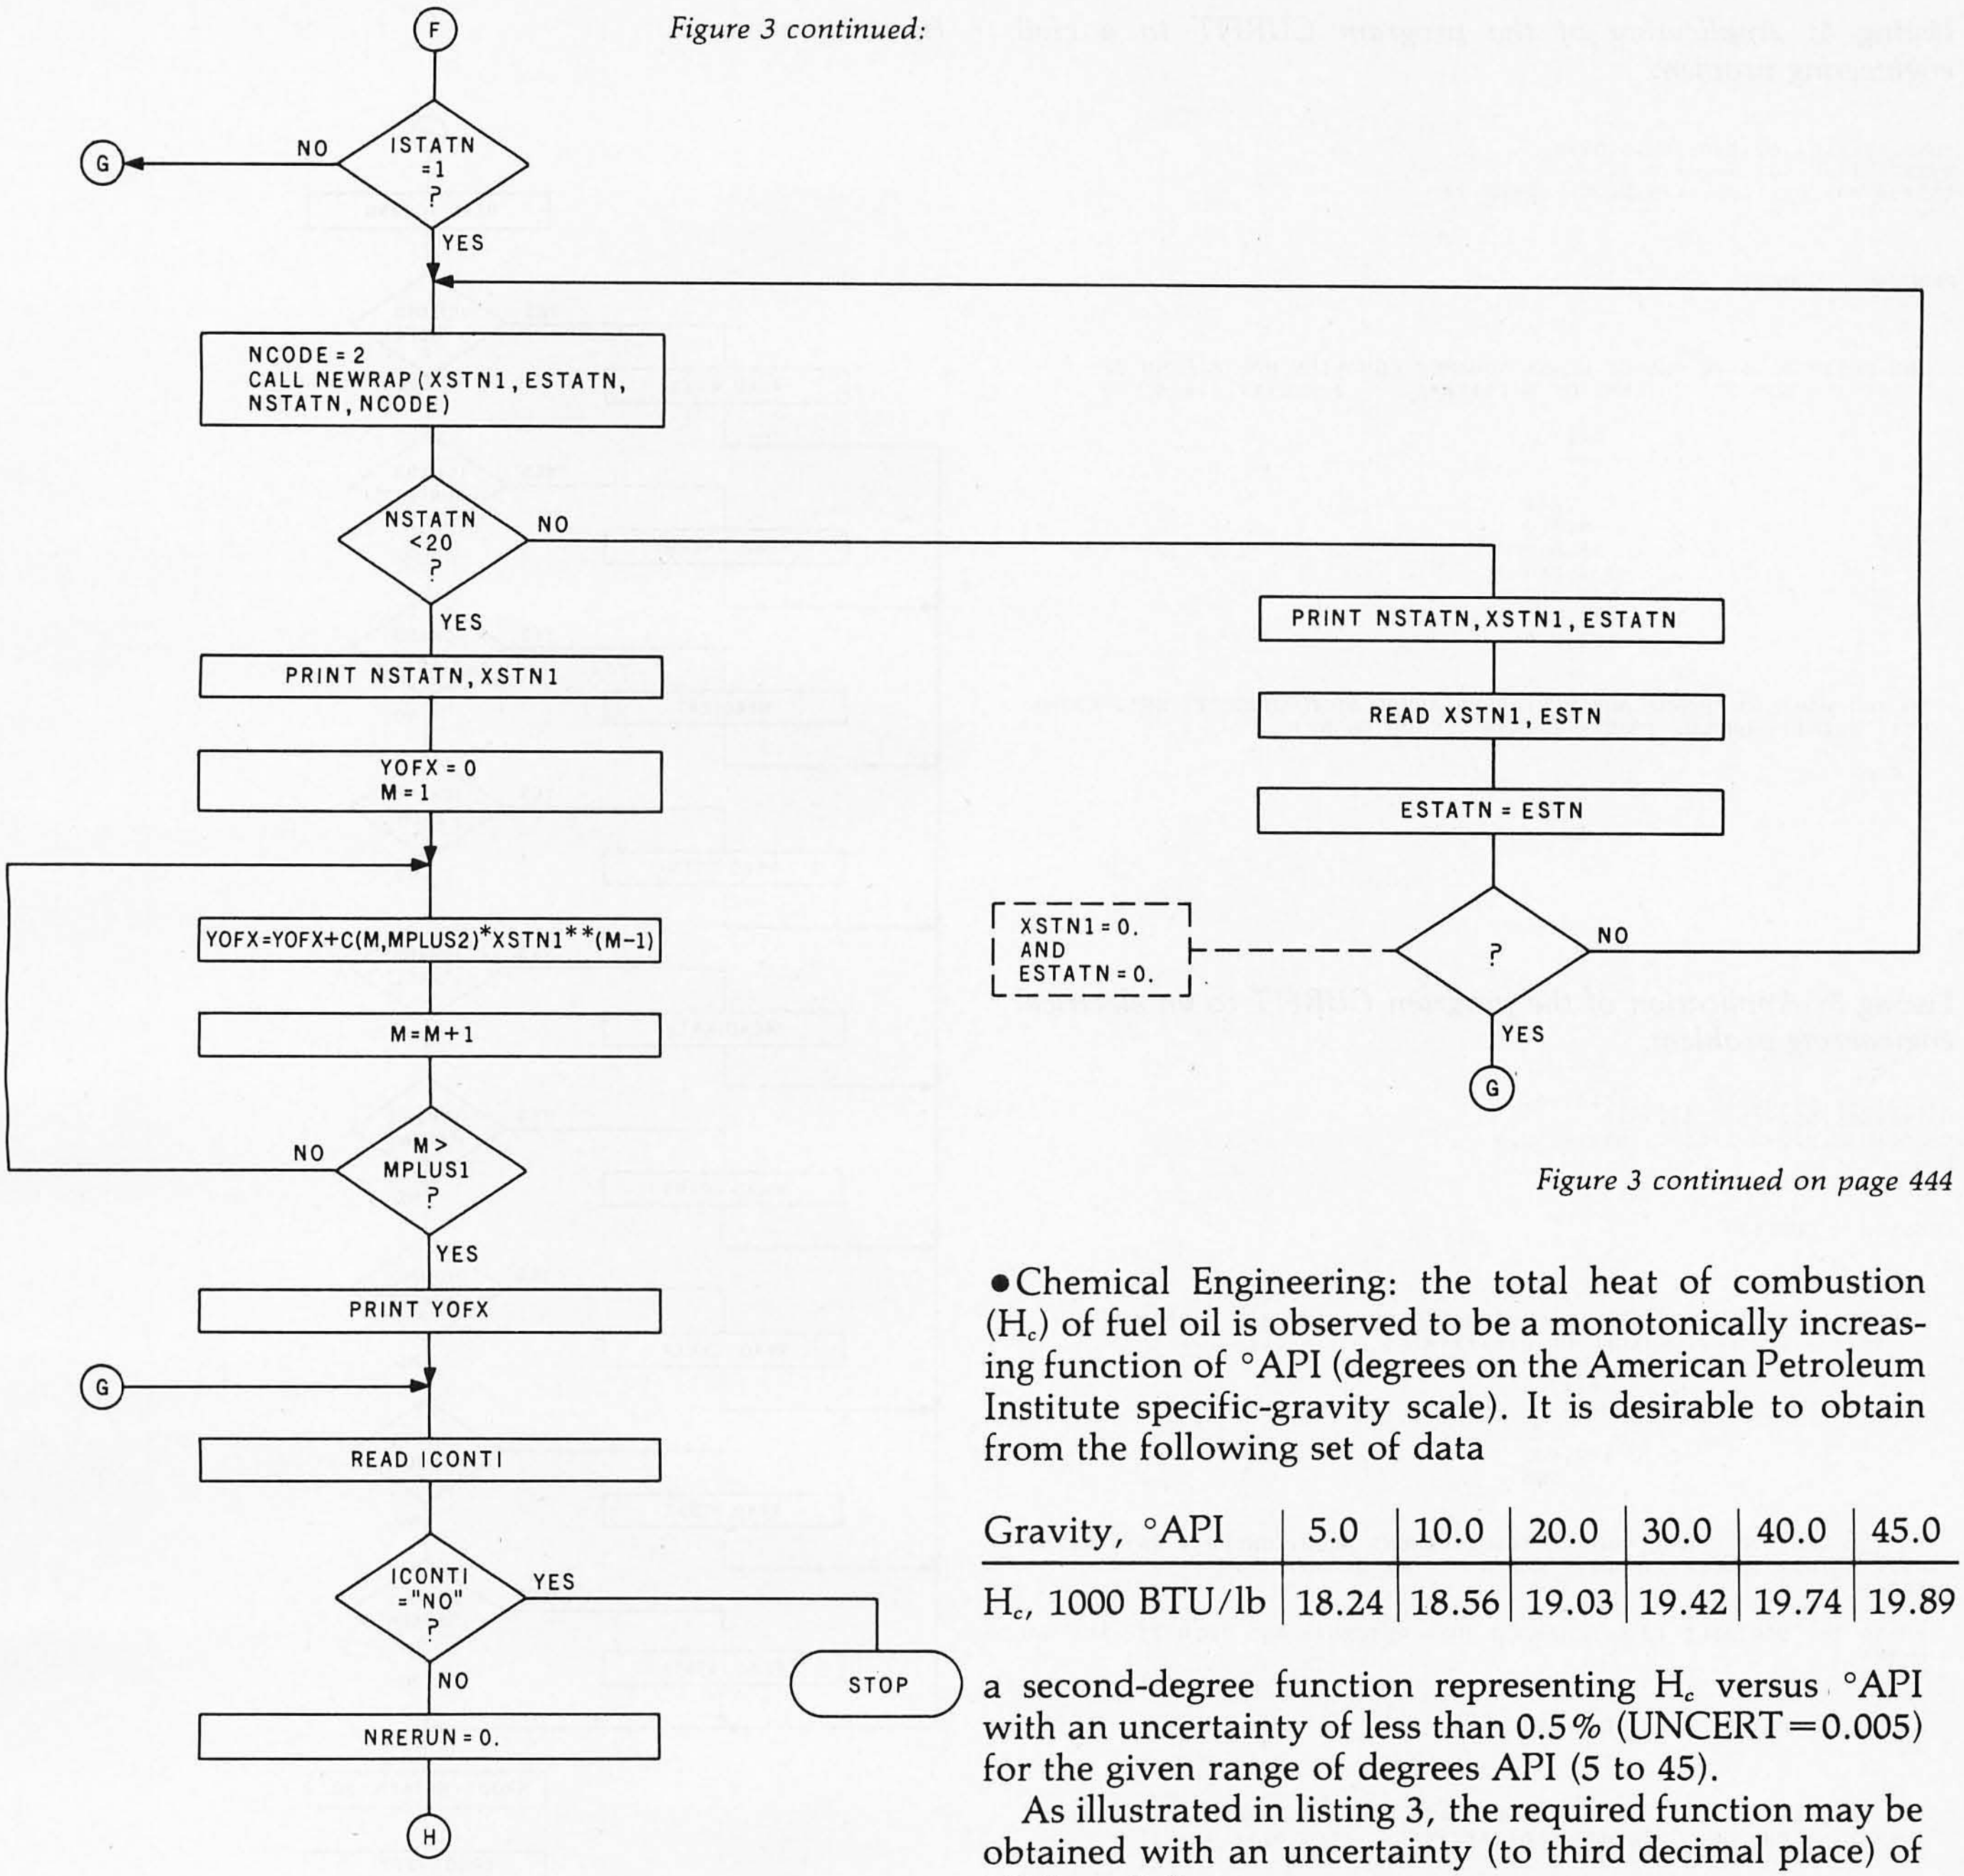

Figure 3 continued on page 444

We are going to use the program CURFIT to determine the continuous relationship between quantities *X* and *Y* as well as all values of $X_{Y=0}$ and X_{STA}. A quick look at the foregoing tabulation reveals that, in the specified range of *Xs* (-2.0 to 5.0), there are:

- three distinct values of $X_{Y=0}$ between *[X(2),X(3)]*, *[X(4),X(5)]*, and *[X(9),X(10)]* due to the change in signs of corresponding pairs of *Y(i)*s
- two stationary points of which the maximum one is in the neighborhood of pair number 4 and the minimum near pair number 8.

Listing 2 illustrates some possible inputs and outputs for this particular example.

Application to Some Engineering Problems

The applications of the program CURFIT to engineering problems are innumerable. Here are a few simple examples of these applications:

- Chemical Engineering: the total heat of combustion (H_c) of fuel oil is observed to be a monotonically increasing function of °API (degrees on the American Petroleum Institute specific-gravity scale). It is desirable to obtain from the following set of data

Gravity, °API	5.0	10.0	20.0	30.0	40.0	45.0
H_c, 1000 BTU/lb	18.24	18.56	19.03	19.42	19.74	19.89

a second-degree function representing H_c versus °API with an uncertainty of less than 0.5% (UNCERT=0.005) for the given range of degrees API (5 to 45).

As illustrated in listing 3, the required function may be obtained with an uncertainty (to third decimal place) of 0.2% as follows:

$$H_c = 17.960 + .062(°\text{API}) - \text{negligible term } (°\text{API})^2, \pm 0.2\%$$

To obtain an uncertainty of 0.1%, a third-degree function will be required, as shown in the last portion of the listing.

- Civil Engineering: in an experiment determining the compressive stress-strain diagram of a concrete mix of cement, sand, and gravel (mix proportion by volume is 1, 2, and 4, respectively), the following data is observed (a kip is a 1000-pound load):

unit strain ϵ (10^{-3} inch/inch)	0.1	0.2	0.3	0.5	0.6	0.8	1.0
unit stress σ (kips /inch^2)	0.44	0.82	1.21	1.78	2.08	2.54	2.83

Listing 4: *Application of the program CURFIT to a civil engineering problem.*

```
00170+7,2,0,.02,0,0.,0.,0,0.,0.
00190+.1,.2,.3,.5,.6,.8,1.
00210+.44,.82,1.21,1.78,2.08,2.54,2.83
RUN


PROGRAM   CURFIT


  THE DESIRED  6-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  7-TERMS OF A(I)*X**I      I = 0,1,..., 6

                    I     A(I)
                   ---  --------

                    0       .641
                    1     -8.762
                    2     95.608
                    3   -333.314
                    4    573.012
                    5   -477.630
                    6    153.274


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? NO
    STOP
```

Listing 5: *Application of the program CURFIT to an electrical engineering problem.*

```
00170+5,1,1,.001,0,0.,0.,0,0.,0.
00190+50.,55.,60.,70.,75.
00210+239.2,243.1,247.,254.9,258.8
RUN


PROGRAM   CURFIT


  THE DESIRED  1-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  2-TERMS OF A(I)*X**I      I = 0,1,..., 1

                    I     A(I)
                   ---  --------

                    0    199.937
                    1       .785


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? YES

  ENTER THE VARIABLE TO BE CHANGED (HIT RETURN), AND THEN ITS NEW VALUE
? UNCERT
? .0005

  ANY MORE VARIABLES TO BE CHANGED ?
? NO


  THE DESIRED  1-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  2-TERMS OF A(I)*X**I      I = 0,1,..., 1

                    I     A(I)
                   ---  --------

                    0    199.937
                    1       .785


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? YES

  ENTER THE VARIABLE TO BE CHANGED (HIT RETURN), AND THEN ITS NEW VALUE
? UNCERT
? .0001

  ANY MORE VARIABLES TO BE CHANGED ?
? NO


  THE DESIRED  3-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  4-TERMS OF A(I)*X**I      I = 0,1,..., 3

                    I     A(I)
                   ---  --------

                    0    207.832
                    1       .405
                    2       .006
                    3     -.000


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? NO
    STOP
```

Figure 3 continued:

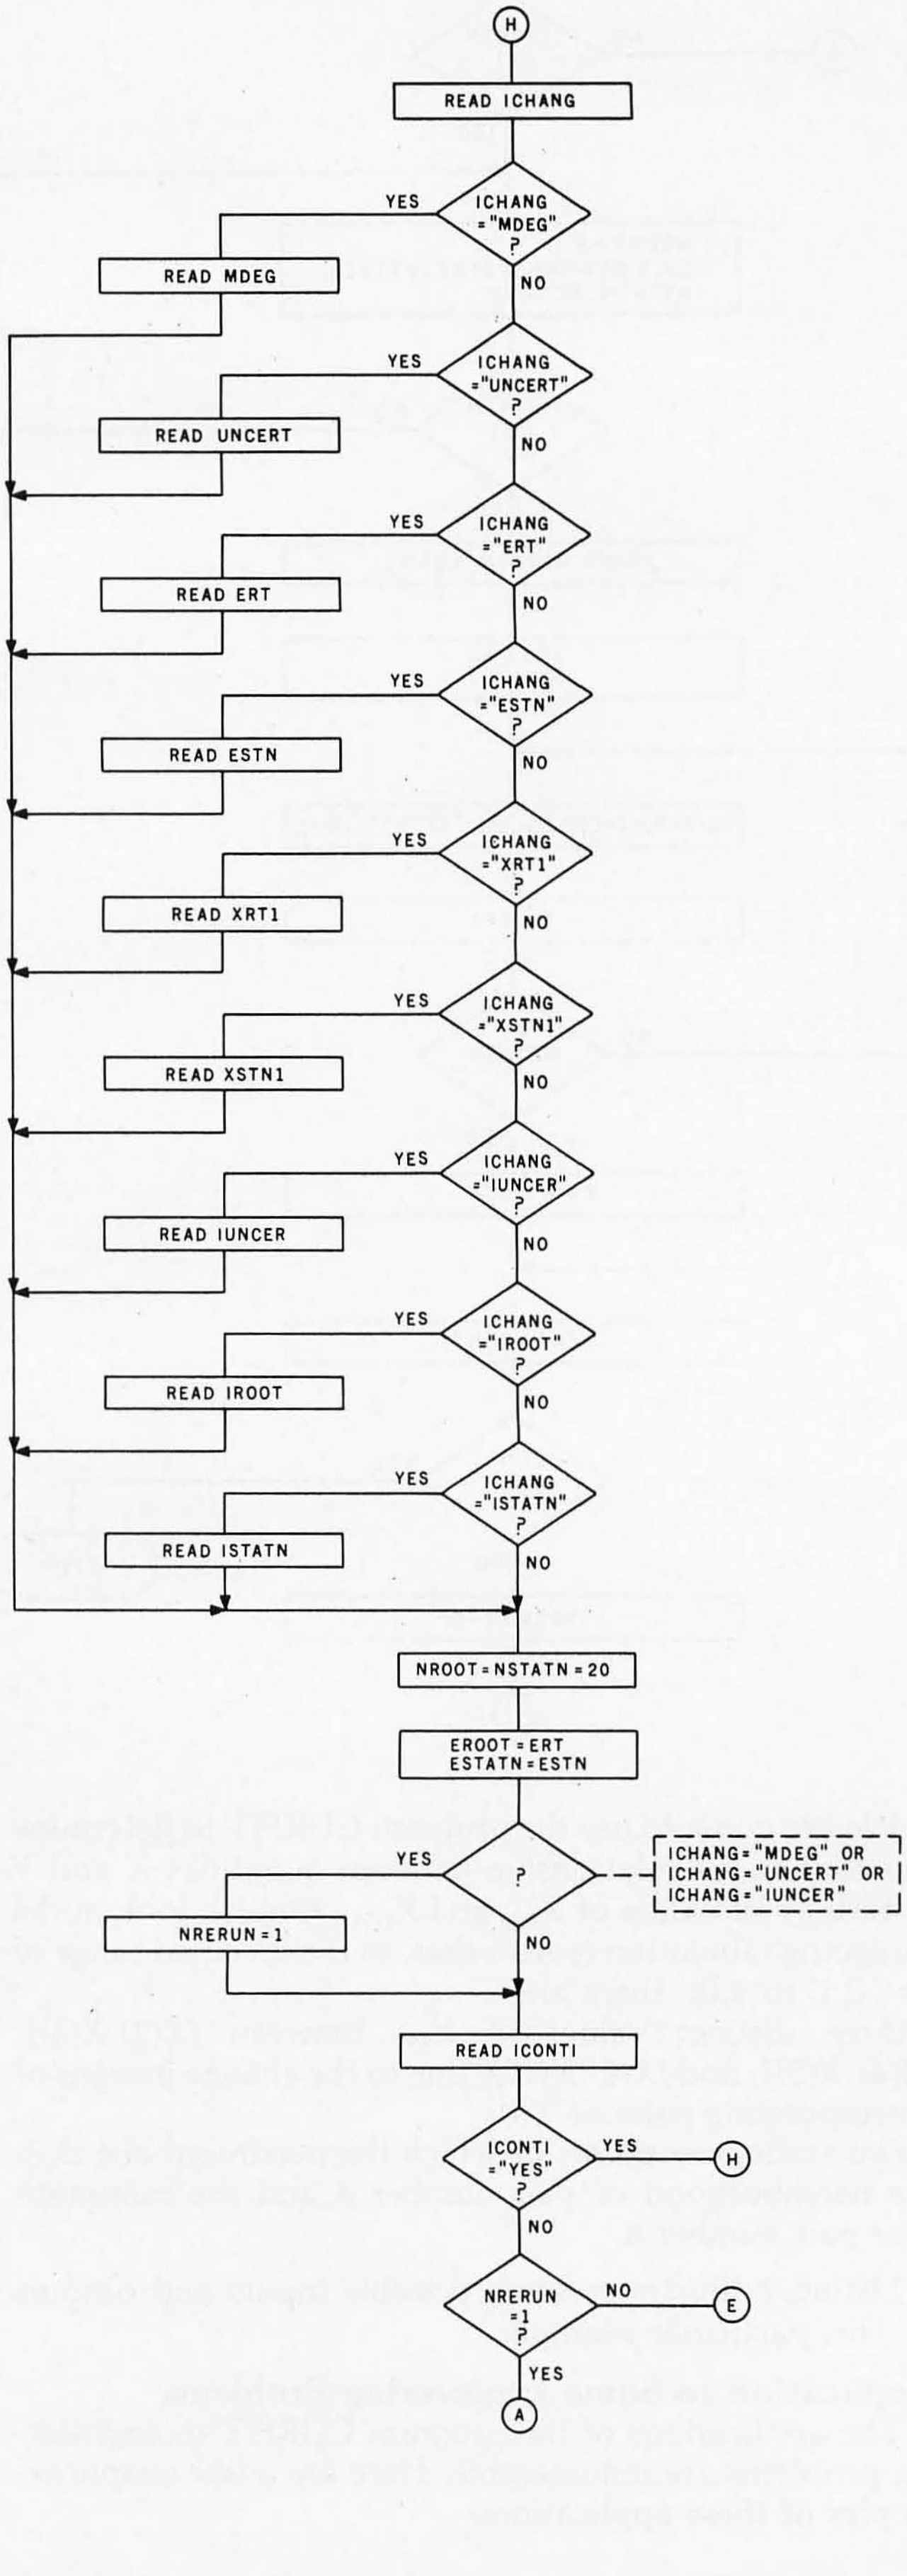

Figure 3 continued:

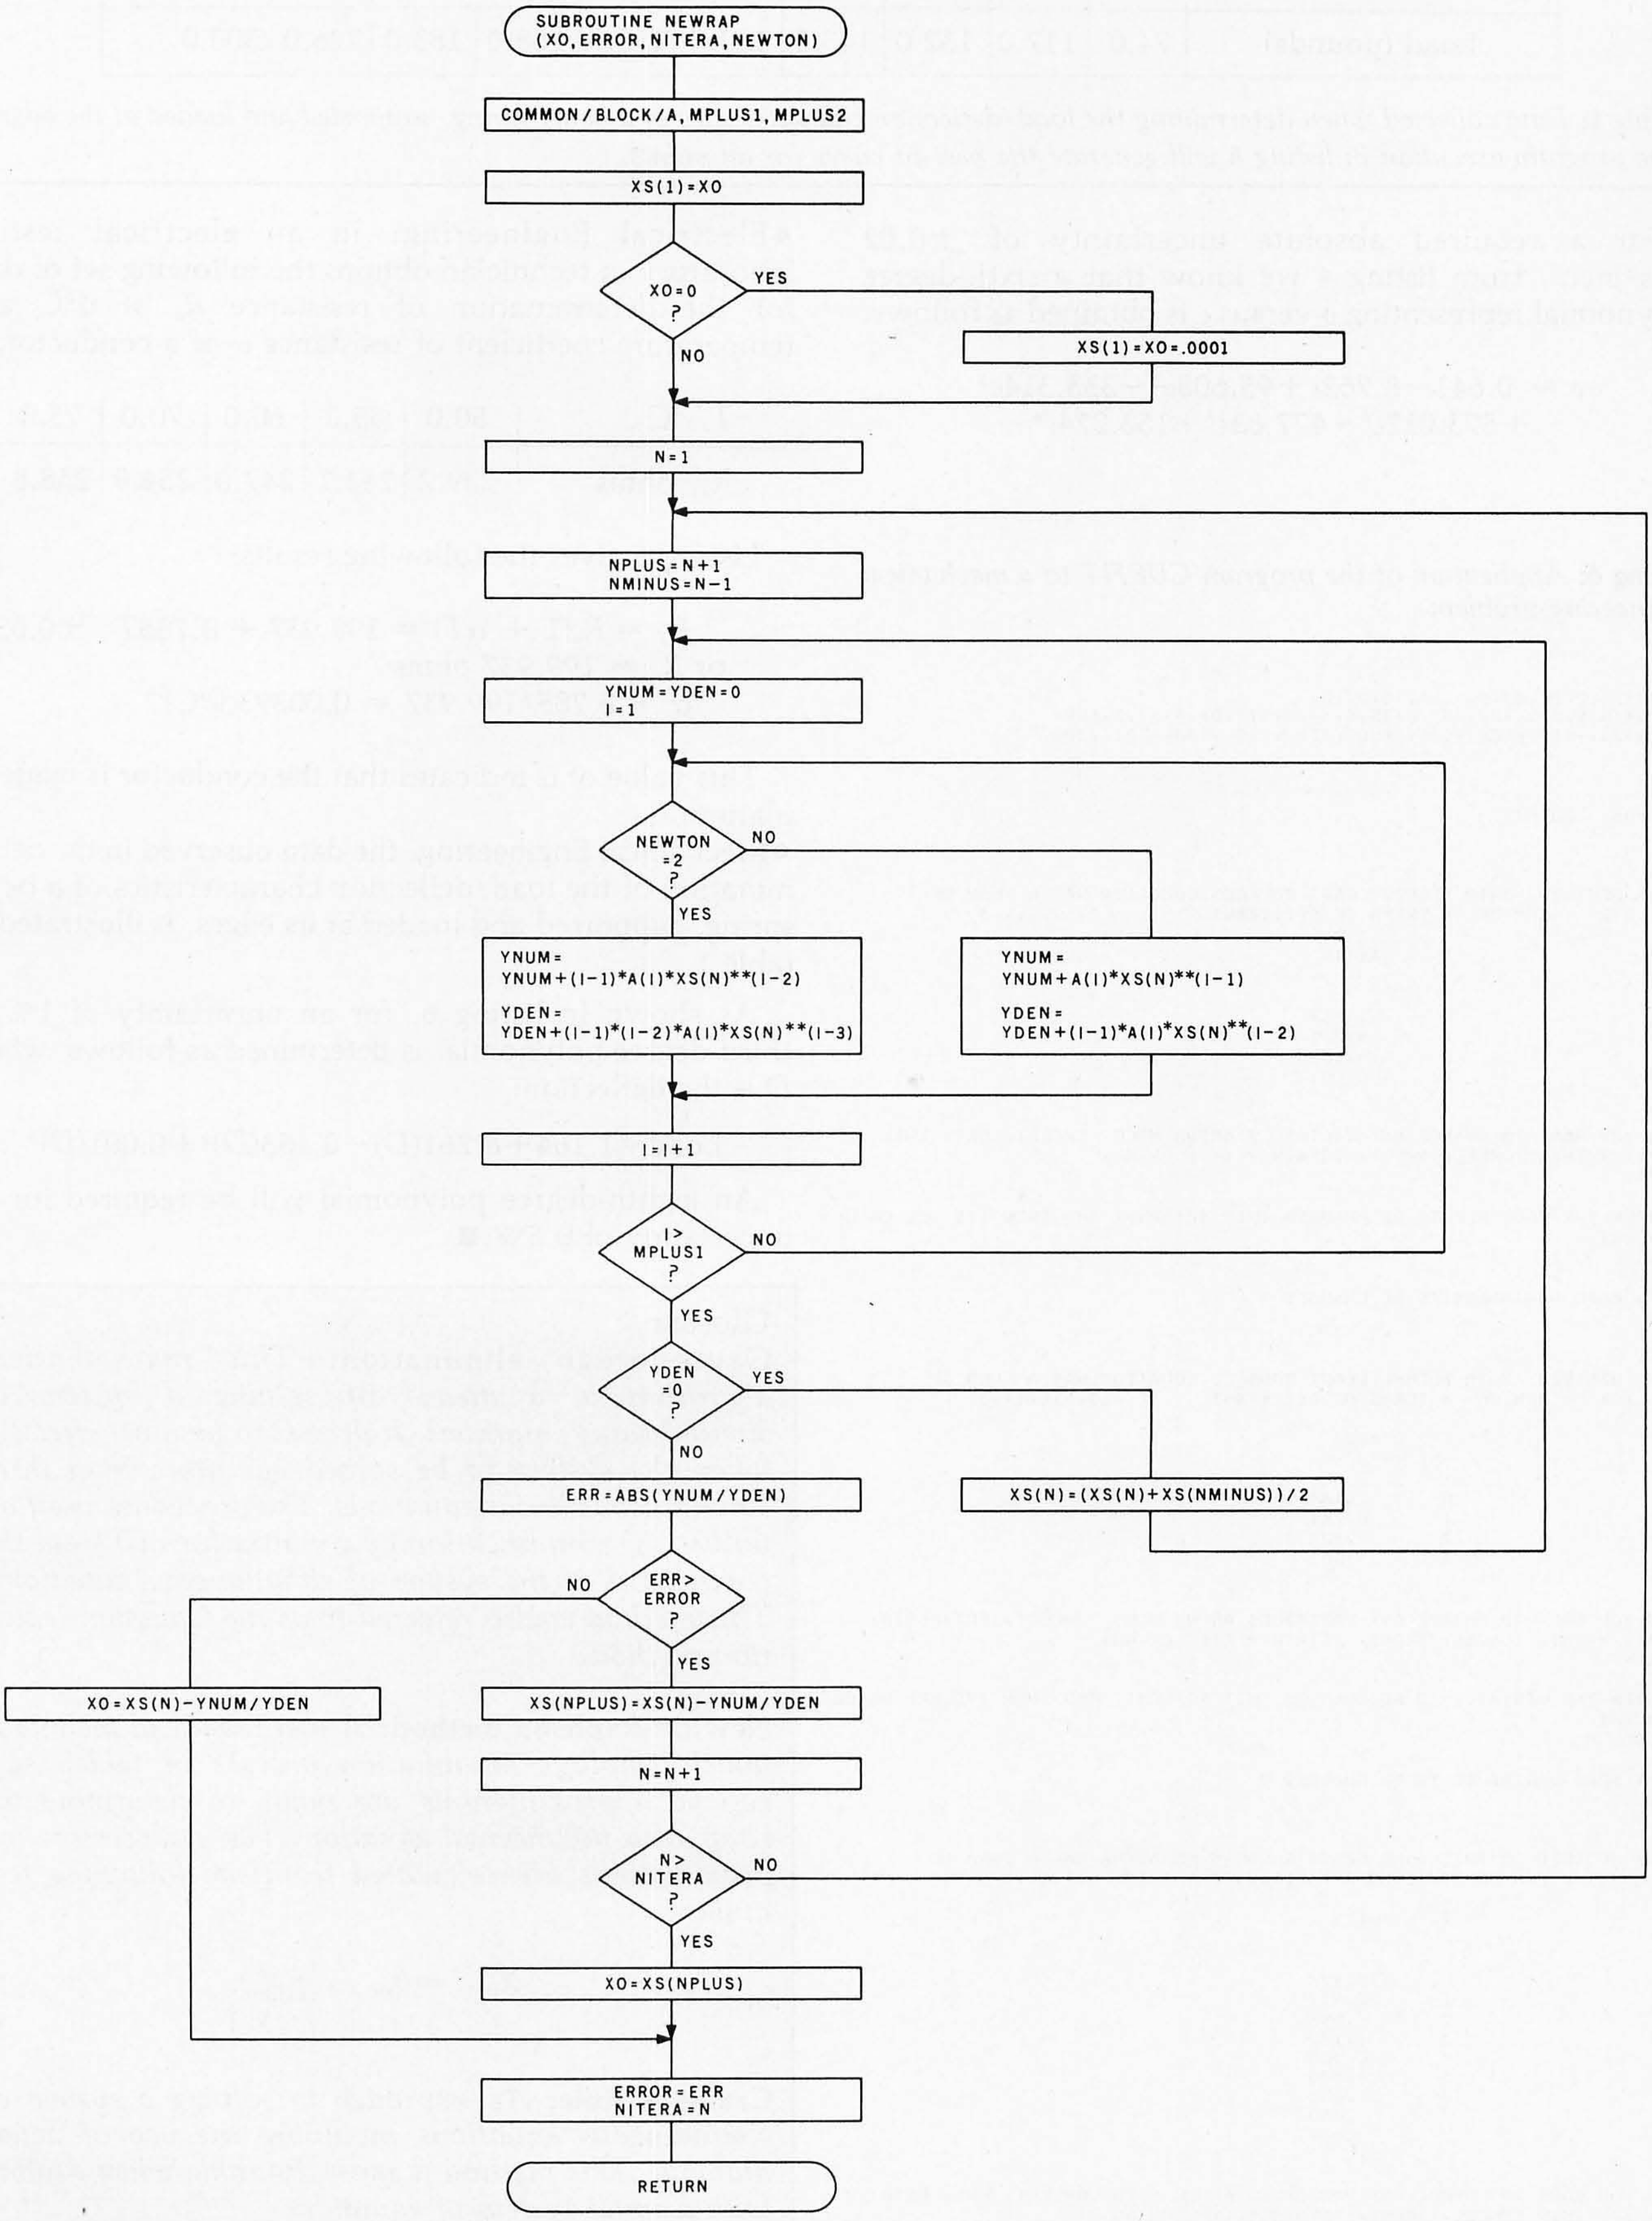

Deflection (inches)	10.8	21.6	27.0	37.8	48.6	64.8	81.0	86.4	97.2	108.0
Load (pounds)	74.0	117.0	132.0	145.0	150.0	152.0	168.0	183.0	226.0	300.0

Table 1: *Data collected when determining the load/deflection characteristics of a bevel spring, supported and loaded at the edges. The program execution in listing 6 will generate the best-fit curve for all points.*

For a required absolute uncertainty of ±0.02 kips/inch², from listing 4 we know that a sixth-degree polynomial representing σ versus ϵ is obtained as follows:

$$\sigma = 0.641 - 8.762\epsilon + 95.608\epsilon^2 - 333.314\epsilon^3 + 573.012\epsilon^4 - 477.63\epsilon^5 + 153.274\epsilon^6$$

Listing 6: *Application of the program CURFIT to a mechanical engineering problem.*

```
00170+10,2,1,.03,0,0.,0.,0,0.,0.
00190+10.8,21.6,27.,37.8,48.6,64.8,81.,86.4,97.2,108.
00210+74.,117.,132.,145.,150.,152.,168.,183.,226.,300.
RUN


PROGRAM   CURFIT


  THE DESIRED  3-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  4-TERMS OF A(I)*X**I      I = 0,1,..., 3

                     I     A(I)
                    ---  --------

                     0      1.164
                     1      8.261
                     2      -.153
                     3       .001


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? YES

  ENTER THE VARIABLE TO BE CHANGED (HIT RETURN), AND THEN ITS NEW VALUE
? UNCERT
? .01

  ANY MORE VARIABLES TO BE CHANGED ?
? NO


  THE DESIRED  3-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  4-TERMS OF A(I)*X**I      I = 0,1,..., 3

                     I     A(I)
                    ---  --------

                     0      1.164
                     1      8.261
                     2      -.153
                     3       .001


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? YES

  ENTER THE VARIABLE TO BE CHANGED (HIT RETURN), AND THEN ITS NEW VALUE
? UNCERT
? .005

  ANY MORE VARIABLES TO BE CHANGED ?
? NO


  THE DESIRED  8-TH DEGREE LEAST-SQUARES EQUATION HAS A FORM OF
     Y(X) = SUM OF  9-TERMS OF A(I)*X**I      I = 0,1,..., 8

                     I     A(I)
                    ---  --------

                     0    178.423
                     1    -32.937
                     2      3.555
                     3      -.172
                     4       .005
                     5      -.000
                     6       .000
                     7      -.000
                     8       .000


  DO YOU WANT TO CHANGE ANY VARIABLES AMONG MDEG, UNCERT, ERT, ESTN,
 XRT1, XSTN1, IUNCER, IROOT, ISTATN ? (YES OR NO)
? NO
    STOP
```

- Electrical Engineering: in an electrical testing laboratory, a technician obtains the following set of data for the determination of resistance R_o at 0°C and temperature coefficient of resistance α of a conductor.

T, °C	50.0	55.0	60.0	70.0	75.0
R_T, ohms	239.2	243.1	247.0	254.9	258.8

Listing 5 gives the following results:

$$R_T = R_o(1 + \alpha T) = 199.937 + 0.785T, \ \pm 0.05\%$$
$$\text{or } R_o = 199.937 \text{ ohms}$$
$$\alpha = 0.785/199.937 = 0.00393 \ (°\text{C})^{-1}$$

This value of α indicates that the conductor is made of platinum.

- Mechanical Engineering: the data observed in the determination of the load/deflection characteristics of a bevel spring, supported and loaded at its edges, is illustrated in table 1.

As shown in listing 6, for an uncertainty of 1%, a third-degree polynomial is determined as follows, where D is the deflection:

$$\text{Load} = 1.164 + 8.261(D) - 0.153(D)^2 + 0.001(D)^3$$

An eighth-degree polynomial will be required for an uncertainty of 0.5%.■

Glossary

Gauss-Jordan elimination: *This mathematical algorithm is a means of solving a system of simultaneous equations. It proves to be most effective when the system to be solved has more than three simultaneous linear equations. The procedure itself involves the simplification of a matrix formed from the coefficients of the system of simultaneous equations. This method is also referred to as the Gaussian reduction method.*

Newton-Raphson method: *A mathematical technique which employs an iteration process in which successive approximations are made to determine the roots of a polynomial equation. These successive approximations are calculated from the following formula:*

$$X_{n+1} = X_n - \frac{f(X_n)}{f'(X_n)}$$

Cramer's Rule: *An approach to solving a system of simultaneous equations involving the use of determinants. This method is most desirable when dealing with a small system of equations.*

Event Queue

May 1981

May-June
Data-Processing Courses, the Hartford Graduate Center, Hartford CT. For information on these courses, contact the Hartford Graduate Center, Attn: Don Florek, 275 Windsor St, Hartford CT 06120, (203) 549-3600, ext 252.

May-June
Workshops from the National Institute for Management Research, various cities throughout the US. Wordprocessing implementation and supervision and automated office implementation workshops are to be held. The weekend courses are $395 and $495, with discounts available for attendance at two or three workshops. Contact Department C—Wordprocessingfeb2, NIMR Seminars, POB 3727, Santa Monica CA 90403, (213) 450-0500.

May-July
Courses from Integrated Computer Systems Inc, various cites throughout the US. Courses on computer network design and protocols, multiple micro- and minicomputer systems, and fiber-optics communications systems are to be held. The fees for these 3- to 4-day courses range from $695 to $795. Contact Integrated Computer Systems Inc, 3304 Pico Blvd, POB 5339, Santa Monica CA 90405, (213) 450-2060.

May-July
Courses from Zilog, various cities throughout the US. An introduction to microprocessors; the Z80, Z8, and Z8000 family of components; PLZ/SYS programming; development systems; and other topics concerning Zilog products are covered in these courses. Fees range from $150 to $595. For a schedule of times and places, contact Zilog, 10340 Bubb Rd, Cupertino CA 95014, (408) 446-4666, ext 5586.

May 1-2
The Third Annual Computers in Education Conference, Seattle Pacific University, Seattle WA. This conference will feature panel discussions, workshops, and exhibits. Special emphasis will be placed on the use of microcomputers in elementary and high schools. Contact Jerry Johnson, Seattle Pacific University, Seattle WA 98119.

May 4-7
National Computer Conference, McCormick Pl, Chicago IL. Approximately 90,000 people are expected to attend this year's National Computer Conference (NCC). The use of robots and artificial intelligence will be among the program sessions at the Personal Computing Festival during the NCC. This will be the first time that personal-computing exhibits

In order to gain optimal coverage of your organization's computer conferences, seminars, workshops, courses, etc, notice should reach our office at least three months in advance of the date of the event. Entries should be sent to: Event Queue, BYTE Publications, 70 Main St, Peterborough NH 03458. Each month we publish the current contents of the queue for the month of the cover date and the two following calendar months. Thus a given event may appear as many as three times in this section if it is sent to us far enough in advance.

have joined the rest of the conference in the main exhibit area. Over thirty technical sessions will be held. All major companies will be represented. Contact the American Federation of Information Processing Societies Inc, POB 9658, 1815 N Lynn St, Arlington VA 22209, (703) 558-3617.

May 5-8

INTELCOM 81/Paris, Paris, France. INTELCOM (International Telecommunications and Computer Conference and Exhibition) 81/Paris is part of a program to promote an international dialog on vital subjects in the telecommunications field. This conference attempts to guide the evolution of the computer and its technology by combining the efforts of private companies, government, and equipment users.

For information about attending, presenting a paper, or exhibiting at INTELCOM 81/Paris, contact the Conference Affairs Group, Horizon House, 610 Washington St, Dedham MA 02026, (800) 225-9977; in Massachusetts (617) 326-8220.

May 7-8

The Eighth Annual Computer Show, Valley Plaza Midland, Midland MI. This show is being sponsored by the Saginaw Valley Chapter of the Data Processing Management Association. It will feature data processing software and hardware, computer peripherals and equipment, forms, supplies, graphics equipment, and educational services. Contact Don Seidel, DPMA, Saginaw Valley Chapter, University Center MI 48710, (517) 790-4220.

May 11-13

Custom Integrated Circuits Conference, CICC'81, Americana Hotel, Rochester NY. The CICC aims to bring together designers, producers, and users of custom integrated circuits to discuss recent developments and future directions in the field. Papers will be read on applications, algorithm-implementing integrated circuits, fabrication techniques, interfaces and interconnects, computer-aided design, and testing and qualification. Contact Dr Rajinder Khosla, General Chairman, Research Laboratories, B-81, Eastman Kodak Company, Rochester NY 14650, (716) 722-2525.

May 11-13

Fourth Annual Rosen Research Personal-Computer Forum, Playboy Resort, Lake Geneva WI. This forum features guest speakers from all the major personal-computer hardware and software companies. The Rosen Forum is one of the most prestigious and important seminars in the industry. The registration fee for this 3-day session is $295. For further details, contact Rosen Research Inc, 200 Park Ave, New York NY 10166, (212) 586-3530.

May 11-13

The Thirty-First Electronic Components Conference,

Colony Square Hotel, Atlanta GA. Papers will be read on semiconductor-processing technology, optoelectronic devices, manufacturing technology, materials, hybrid microcircuits, discrete components, interconnections, reliability, and connectors. Contact T G Grau, Bell Laboratories, Whippany Rd, Rm 3B-312, Whippany NJ 07981; or Electronic Industries Association, 2001 Eye St NW, Washington DC 20006.

May 14-16
The Tenth ASIS Mid-Year Meeting, Fort Lewis College, Durango CO. The American Society for Information Science's (ASIS's) theme for this year's meeting is "Using Information." Among the topics to be addressed are user studies, decision making, organizational change, government, education, management, access to information, and designing information systems for use. For information, contact ASIS, 1010 16th St NW, Washington DC 20036, (202) 659-3644.

May 16
Introduction to Pascal, Princeton NJ. The Princeton, New Jersey, chapter of the ACM (Association for Computing Machinery) is sponsoring this seminar. Contact Ronald Orcutt, EDUCOM, POB 364, Princeton NJ 08540; or Bill Hafstad, (201) 457-4055.

May 17-20
Expo '81, Loew's Anatole Hotel, Dallas TX. Expo '81 is a combination of exhibits and technical sessions. The exhibits cover everything from graphics systems to industrial computer-control systems. The technical sessions range from tool design, design engineering, and robotics to numerical control. For more information, contact Numerical Control Society, 519 Zenith Dr, Glenview IL 60025, (312) 297-5010.

May 20-22
Joint Conference on Easier and More Productive Use of Computing Systems, University of Michigan, Ann Arbor MI. This conference intends to combine the insights of the social sciences, humanities, computer science, and human-factors engineering. Contact Gregory A Marks, 4258 Institute for Social Research, University of Michigan, Ann Arbor MI 48106, (313) 763-3482.

May 20-22
Videotex '81, Royal York Hotel, Toronto, Ontario, Canada. Videotext information systems allow users to call up information, make reservations, pay bills, exchange electronic mail, read an electronic newspaper, shop, and play video games. This conference will review videotext developments in Europe, Japan, and North and South America. Demonstrations of videotext systems will be given. Seminars on standards, legal aspects, and economic issues will be featured. Contact Videotex '81, 316 Lonsdale Rd, Suite 3, Toronto, Ontario, M4V 1X4, Canada, (416) 598-1981.

* * * TELETYPE MODEL 43 INVENTORY SALE * * *

TELETYPE
Model 4320 AAA .... $ 885.
220V. model with transformer installed inside cabinet .... $ 985.
Model 43ASR, 8 level, 1" tape . $2,595.
Limited supply of Model 45 available.

TELEBUFFER 43 ASR .... $945.
Circuit card designed for internal installation in the Model 43 Teletype. Changes the 43 into a buffered send/receive device, enabling it to function as a Telex without paper tape. Provides from 4K to 16K bytes of internal memory for storage of message. Contents of memory may be edited and manipulated in preparation for transmission. Options include forms control and answer back.

IBM 3101 CRT Model 10 ..... $1,195.
Model 20 ..... $1,395.
Selectric-like, detached keyboard. 9x16 dot matrix. Maintenance contract from IBM only $70 per year

ITHACA INTERSYSTEMS
Full S-100 IEEE Compatibility! Full 24 address bits. DMA disk controller. SYSTEM 2A includes 20 slot mainframe with front panel, 64K Dynamic RAM. Z80 CPU, 4 MHZ, extended addressing capability. 4 parallel, 2 serial I/O floppy controller. Our discounted price, $3,415.

MARINCHIP SYSTEMS M9900
Elegant 16 bit CPU, S-100 compatible, multi user, multi processor operating system. BASIC, FORTH, META, PASCAL, Word processor, text editor.
CPU kit and software package . $ 550.
Assembled .... $ 700.
Complete system, 64KB, two drives .... $4,995.

MICROANGELO .... $2,280.
High resolution graphics system. 15", 22MHZ, green phospher screen, 72 key keyboard; includes complete cabling and software. From SCION.
S-100 Graphics card .... $ 960.

GRAPHICS SOFTWARE
On line, real time, for the M9900 to drive the Microangelo. For use in design of PC board masks, IC masks and other applications................. $1,000.

CORVUS HARD DRIVES
We are the S-100 CORVUS dealer in the New York area.
MODEL 11, Hard Disk System. $4,820.
Mirror Backup System .... $ 715.

TARBELL
Double density controller .... $420.
Cables .... $ 40.
Complete TARBELL Product Line Available.

UPGRADE DEC LA 35/36.... $750.
Increases baud rate to 1200. Microprocessor controlled. Many options available. Enthusiastic user response. Long-term reliability. From **DataSouth.**

Communications Software from from Hawkeye Grafix
Enables communications from a micro to a terminal or to another micro, mini or maxi computer.
Object Code $75. Source Code $250.

3M SCOTCH® Diskettes

	1 BOX of ten	5 BOXES Price per box
Model 740, 8" single sided, single density	$29.00	$26.50
Model 741, 8" single sided, double density	38.00	35.00
Model 743, 8" double sided double density	46.50	42.50
Model 744, 5¼" soft sectored single sided, single density	29.00	26.50

CAT from NOVATION
Originate/Answer back .... $175.
CAT-D .... $185.
Connects directly to telephone line with a plug-in jack. Eliminates need for acoustic coupler.
AUTO-CAT .... $240.

WE OFFER A FULL RANGE OF EXPERT CONSULTING SERVICES

JOHN D. OWENS
Associates, Inc.
SEE OUR AD ON FACING PAGE

May 21-23

Annual Conference of the Educational Computing Organization of Ontario, Sheraton Centre and the Ontario Institute for Studies in Education, Toronto, Ontario, Canada. Exhibits on the use of computers in schools and discussions on how to locate suitable educational materials will be featured. Contact the Conference Office, OISE, 252 Bloor St W, Toronto, Ontario, M5S 1V6, Canada.

May 22-24

National TRS-80 Microcomputer Show, Statler Exposition Center, New York NY. Exhibits from over 100 manufacturers, distributors, and retailers of equipment for the TRS-80 Models I, II, and III, and Color and Pocket computers, will be featured. Seminars and talks will be held at the show. Contact Kengore Corporation, 3001 Rt 27, Franklin Park NJ 08823, (201) 297-6918.

May 26-29

Office Korea 81, Korea Exhibition Center, Seoul, South Korea. Exhibitors will come from the United States, Japan, the United Kingdom, and South Korea. Computers, copiers, facsimile systems, and office equipment and supplies will be presented. Further information may be obtained from Clapp & Poliak International, 7315 Wisconsin Ave, Washington DC 20014, (301) 657-3090.

May 30

Amateur Fair, Minnesota State Fairgrounds, St Paul MN. Exhibits, prizes, and booths are featured at this swapfest for computer hobbyists. Contact the Amateur Fair, POB 30054, St Paul MN 55175.

June 1981

June 6-9

Atlanta Small Computer Show, Atlanta Hilton, Atlanta GA. Producers of small computers, peripherals, supplies, and services will be exhibiting at this show. Business owners, corporate and government executives, data-processing managers, doctors, lawyers, and other professionals are expected to attend. Obtain additional information from The Atlanta Small Computer Show, 4060 Janice Dr, Suite C-1, East Point GA 30344, (404) 767-9798.

June 9-11

Understanding and Using Computer Graphics, Chicago IL. This seminar covers the latest in graphic-system technology, including hardware, software, and applications. Contact Bob Sanzo, Frost & Sullivan Inc, 106 Fulton St, New York NY 10038, (212) 233-1080.

June 14-18

The Second National Conference of the National Computer Graphics Association, Baltimore Convention Center, Baltimore MD. Computer-graphics demonstrations, exhibits, and workshops will be held. Contact the National Computer Graphics Association Inc, 2033 M Street NW, Suite 330, Washington DC 20036, (202) 466-5895.

June 16-18

NEPCON East '81, New York Coliseum, New York NY. This exposition is aimed at

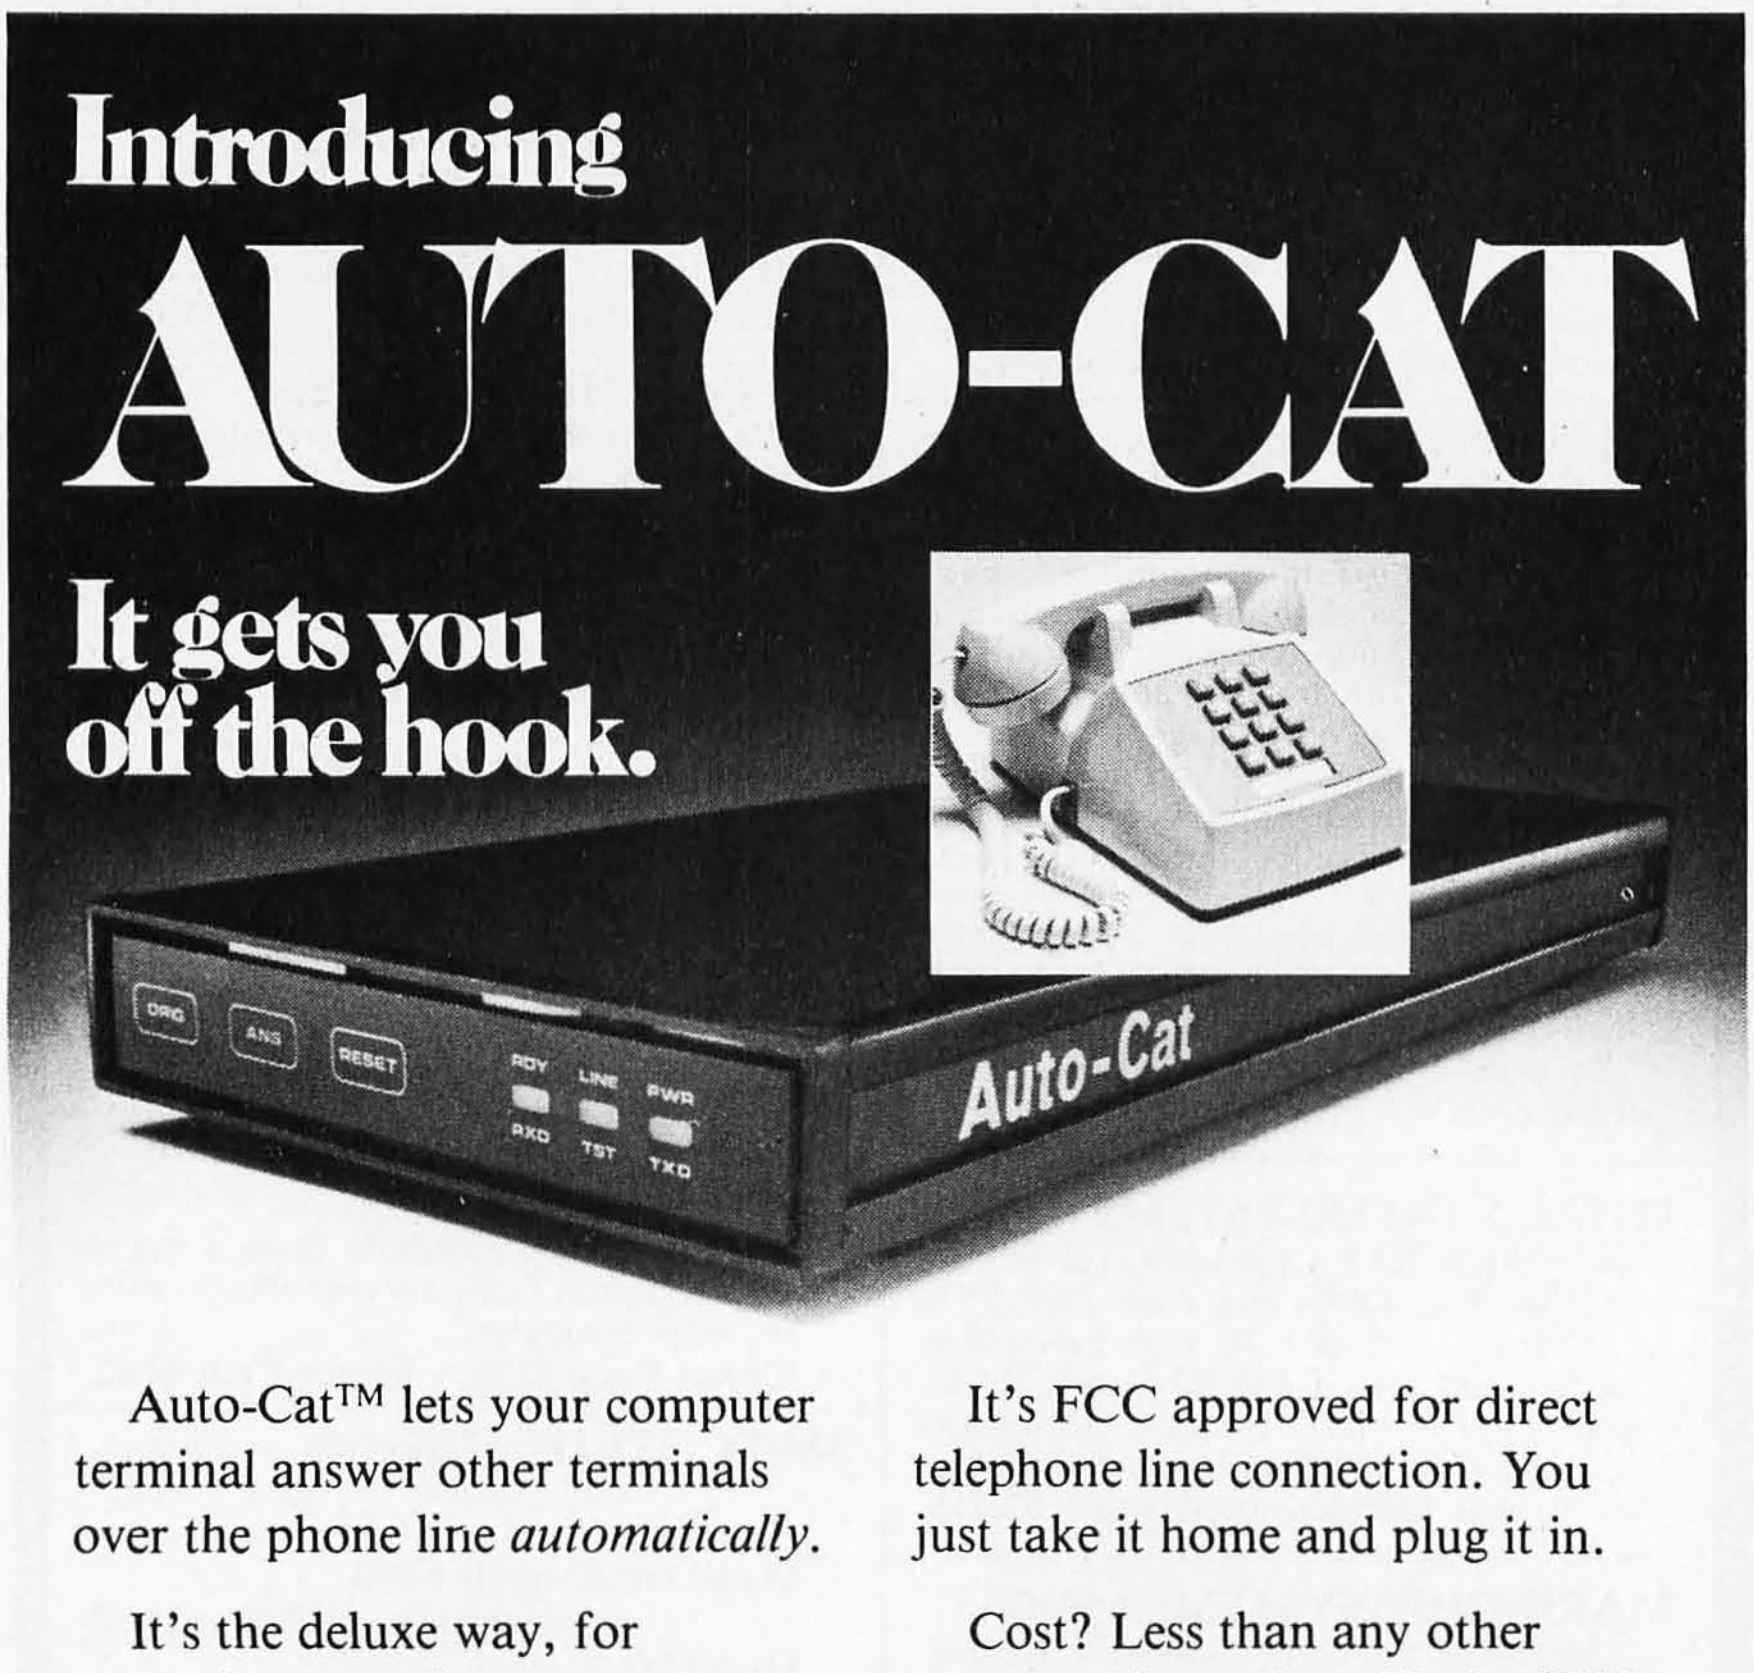

engineers, prototype developers, production specialists, and testing personnel. Technical programs will be presented. Contact Industrial & Scientific Conference Management Inc, 222 W Adams St, Chicago IL 60606, (312) 263-4866.

June 17-19

National Educational Computing Conference, North Texas State University, Denton TX. This conference will provide a forum for individuals and institutions interested in educational computing. Computer literacy, computer education for teachers, and computers in education are some of the topics to be covered. Contact Dr Jim Poirot, NECC-81 General Chairman, Computer Sciences Department, North Texas State University, Denton TX 76203.

May 29-31

The Sixth Annual Computerfest, Franklin University, Columbus OH. Talks on robots and calculators will be featured. Microcomputers and small-business systems will be presented. This show is being sponsored by the Midwest Affiliation of Computer Clubs and Franklin University. Contact Computerfest '81, Paul Pittenger, 215 Delhi Ave, Apt J, Columbus OH 43202, (614) 224-6237.

June 23-25

Comdex/Spring, Madison Square Garden and the New York Statler Hotel, New York NY. Computer and computer-related manufacturers, systems houses, computer retailers, dealers, distributors, manufacturers' representatives, commercial OEMs (original equipment manufacturers), and other related businesses will be exhibiting. Contact The Interface Group, 160 Speen St, Framingham MA 01701, (800) 225-4620; in Massachusetts, (617) 879-4502.

June 29-July 1

The Nineteenth Annual Meeting of the Association for Computational Linguistics, Stanford University, Stanford CA. Syntax, parsing, and sentence generation, computational semantics, discourse analysis and speech acts, speech analysis and synthesis, machine and machine-aided translation, and mathematical foundations of computational linguistics are some of the topics that will be discussed. Contact Don Walker, Artificial Intelligence Center, SRI International, Menlo Park CA 94025, (415) 326-6200, ext 3071.

July 1981

July 29-31

The 1981 Microcomputer Show, Wembley Conference Centre, London, England. Seminars on microcomputer applications in business, production, and education will be presented. Topics for conference sessions include hardware availability, software packages and development, automatic test equipment, robotics, and process control. Exhibits from major European and American manufacturers will be featured. Contact TMAC, 680 Beach St, Suite 428, San Francisco CA 94109, (800) 227-3477; in California, (415) 474-3000.■

Technical Forum

Build a Noise-Based Random Number Generator

Terry Mayhugh, 11632 Midhurst Dr, Concord TN 37922

At some time, nearly every programmer finds it necessary to generate random numbers. If a card dealer is being simulated, or a Klingon scanner display is being created, the RND function available in most versions of BASIC may be adequate. However, the pseudorandom sequence generated by RND can bomb in critical applications where a truly random number sequence is needed. Truly random numbers are extremely difficult to generate, especially within a nonrandom machine such as a computer.

The best that can be accomplished purely by software is the generation of finite-length sequences that appear to be random. However, the actual members may be related to specific calculations recently completed by the computer. Such complications will contaminate the results of signal-recovery simulations or digital-filter problems. Even a computer card game may be biased by a previous bet. Ideally, the actual random number generation should be done outside the computer.

Figure 1 is a block diagram of a simple generator capable of producing *truly random* sequences of any length. A free-running oscillator, running asynchronous

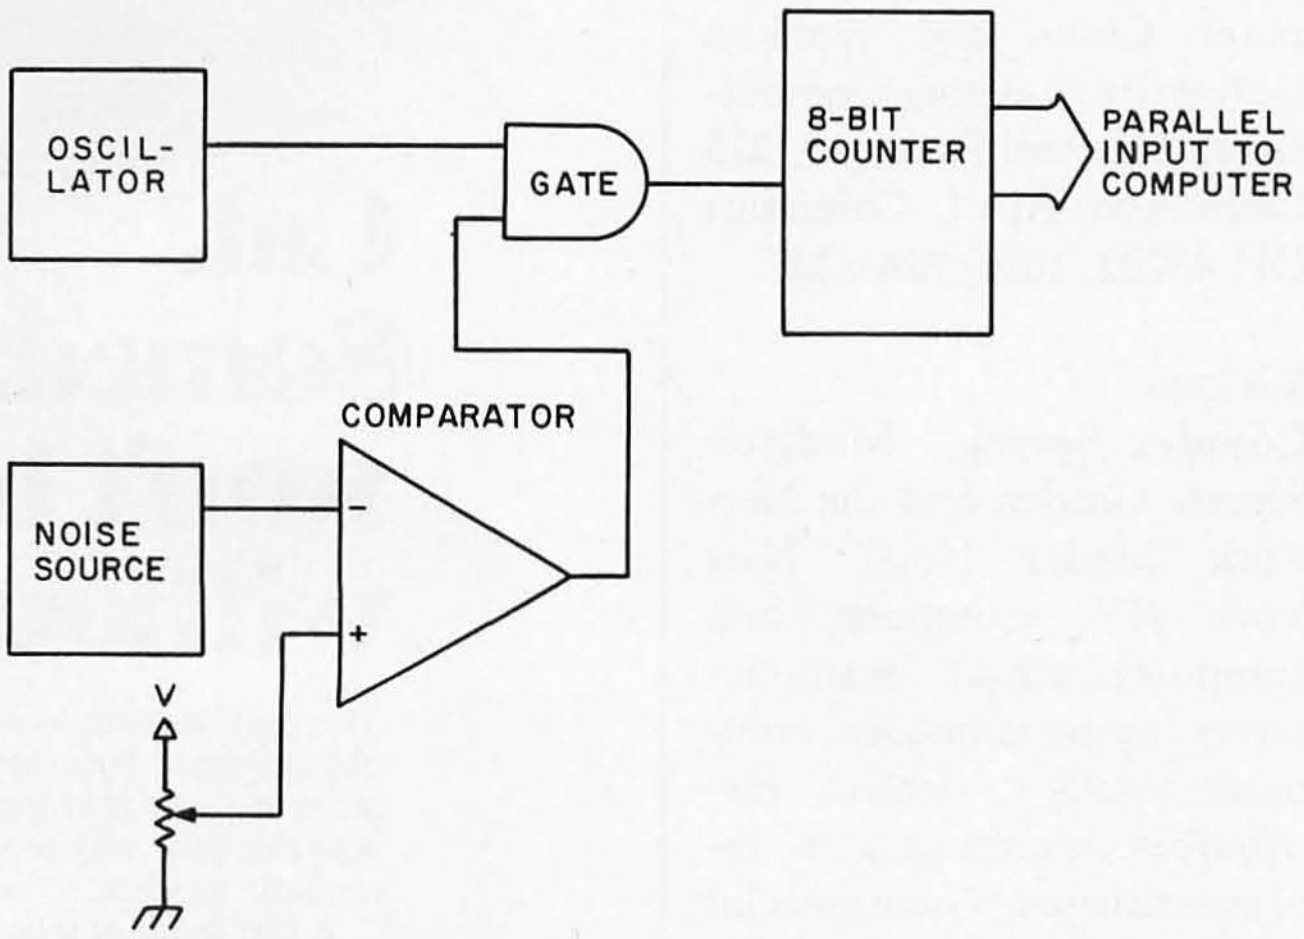

Figure 1: *Block diagram of a generator that produces true random numbers. Through pulses created by the random-noise source, the free-running oscillator is gated to the 8-bit binary counter. Since the instantaneous amplitude of the voltage from the noise source is unpredictable, the width and arrival of the gate pulse generated by the comparator are also random. Therefore, the 8 bits available from the counter are truly random.*

MAGIC WAND™
$325

This powerful word processor is in stock for most CP/M compatible systems, including Radio Shack, North Star, Vector Graphics, Cromemco and APPLE (with Z-80 card @ $295 and Videx 80 column board @ $295). We will custom configure your diskette if you will specify: CPU, terminal, printer.

Our fully interactive

MAIL MAGIC™

mail management software, with 14 user defined fields and full merge and sort capability is available for $149.

We will also quote on all specific hardware and software for APPLE, PET and Vector Graphics.

Computer City
P.O. Box 60284 B
Houston TX 77205
(713) 821-2702

VISA

master charge

Magic Wand is a registered trademark of Small Business Applications
Mail Magic is a registered trademark of Computer City

Circle 78 on inquiry card.

* * * * * * * * * * * * * * * * * * * *

COMPUTER SURPLUS

* * * * * * * * * * * * * * * * * * * *

Used micro computer systems 100% functional, $600 to $1500. Video terminals & keyboards, $50 to $700. Stringy floppy units-brand new, $300. All the above with documentation. Computer cabinets, 19" rack, $50 to $100. Power supplies, capacitors, ribbon cable, cooling fans, misc. components & hardware. We buy used microcomputer systems —all types. Also deal in IBM, Univac, Data General and Data Point.

CALL **VIC CLOUGH** at
(216) 473-0866

DATA HARDWARE
701 Beta Dr. #4
Cleveland Ohio 44143

* *

DEALERS WELCOME

Circle 112 on inquiry card.



Scotch®
DISKETTES

SAVE 40% **Write for our complete list.**

5¼" Sgl. Dens. 26.70/10
Specify soft, 10 or 16 hard sectors

8" Sgl. Dens. 27.30/10
8" Dbl. Dens. 35.80/10
Specify soft or 32 hole hard

Add $2.00 shipping - Michigan add 4% tax

LYBEN COMPUTER SYSTEMS
27204 Harper Ave.
St. Clair Shores, MI 48081

Authorized Distributor
Information Processing Products **3M**

Circle 224 on inquiry card.

IPEX NEW!

Interface Converts Your Typewriter into Printer



- Finest print quality
- Easy installation
- Low cost
- Quick delivery
- Fits IBM SELECTRIC® typewriter with **no modification.**
- For TRS-80®, Apple®, or any parallel or RS232 port.
- Write or phone for more information, today!

— U.S. and worldwide sales—

IPEX INTERNATIONAL INC.
16140 Valerio St.
Van Nuys, CA 91406 USA
TEL: 213/781-0020 TLX/TWX: 910-495-1767

Circle 205 on inquiry card.

Fine Software Tools in C

The Toolbox

list	prints that missing source listing.
xref	cross reference C programs.
sort	alphabetize by all or part of text line.
col	arrange text in columns on page.
print	paginates text for hard copy.
and more	

All programs are in portable Whitesmith C. **xref** and **list** are compatible with the compiler's error listing. Title lines on **list** and **print** output includes the date on RT-11 systems. Source code on 8" floppy and manual available immediately for $45 (tax and shipping included). Specify **RT-11** or **CP/M** format.

The Toolsmith
Dept. BYTE
P. O. Box 22511
San Francisco, CA 94122

RT-11 is a trademark of Digital Equipment Corp.
CP/M is a trademark of Digital Research.

Circle 413 on inquiry card.

wabash®

When it comes to Flexible Disks, nobody does it better than Wabash.

MasterCard, Visa Accepted.
Call Free: (800) 235-4137



PACIFIC EXCHANGES
100 Foothill Blvd
San Luis Obispo, CA
93401 (In Cal call
(805) 543-1037)

Circle 312 on inquiry card.

ATARI® OWNERS
SCREEN PRINT INTERFACE

Obtain hardcopy of any screen image (graphics and / or text) on either a **TRENDCOM 200** or **IDS 440** Paper Tiger printer. Simply attach the supplied parallel printer cable and load the software from cassette (may be transferred to Disk). Obtain a "picture" of the screen on your printer under direct (CTRL?) or program (XIO) control. Works in all graphics / text modes as well as LPRINT and LIST "P:"

Only **$139**

Parallel Printer Interface for the ATARI 400 / 800

Connects to controller jacks 3&4 works with BASIC / DOS / ASSEMBLER **Three printer connectors available:**

	ATARI 400 / 800	
TRENDCOM 100 / 200	A4P-1	A8P-1
CENTRONICS 730 / 737	A4P-2	A8P-2
CENTRONICS 36 PIN*	A4P-3	A8P-3

CA sales add 6% tax
MC / VISA accepted. **$69.95**

*Fits all other parallel Centronics plus Anadex, Base 2, Epson, Comprint and Microtek. Order by part number.
ATARI is a recognized trademark of ATARI, Inc.

MACROTRONICS, inc. ®
1125 N. Golden State Blvd. / Suite G
Turlock, CA 95380 (A) (209) 667-2888 / 634-8888

Circle 225 on inquiry card.

CONVERT ANY TV
TO A HIGH QUALITY MONITOR



- **Hot Chassis or Transformer sets**
- **64-80 characters per line**
- **By-passes tuner & I.F.**
- **Normal viewing unaffected**
- **Safe—Easy kit installation**

ACVM Hi-resolution $34.95 ppd.

V. A. M. P. INC.
Box 29315, Los Angeles, CA 90029

Calif. Residents add 6% Sales Tax

Circle 422 on inquiry card.

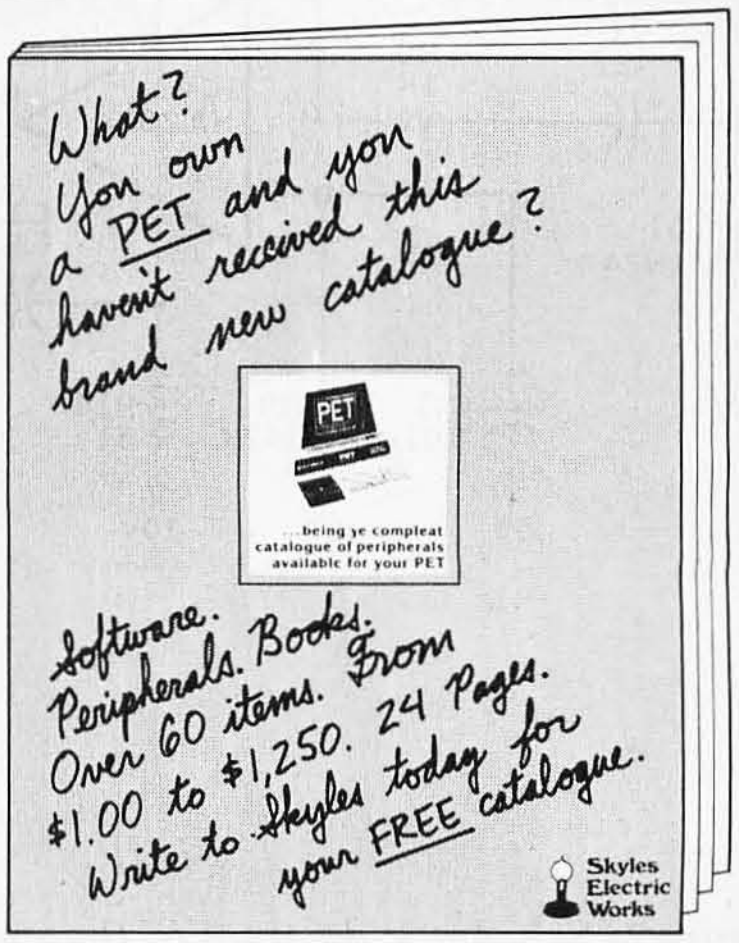

What?
You own
a PET and you
haven't received this
brand new catalogue?

...being ye compleat catalogue of peripherals available for your PET

Software.
Peripherals. Books.
Over 60 items. From
$1.00 to $1,250. 24 Pages.
Write to Skyles today for
your FREE catalogue.

Skyles Electric Works

Skyles Electric Works
231 E South Whisman Road
Mountain View, CA 94041

Circle 368 on inquiry card.

to the microprocessor clock in the computer is gated to an 8-bit binary counter through pulses created by a random-noise source. Since the instantaneous amplitude of the voltage from the noise source is not predictable, the width and the time of arrival of the gate pulse generated by the comparator are unpredictable. The sequence of numbers available from the counter is truly random (if you do not try to sample them at an excessively high rate). For the component values shown in figure 2, there should be no problem in any microprocessor application.

The numbers generated by this technique are uniformly distributed; any number in the set of all possible numbers (0 thru 255) has the same probability of occurring. The mean or expected value of the distribution lies at the center of the set of all possible numbers.

Circuit Description

The noise of zener diode D1 is amplified by IC4 and IC5, which are configured as high-gain wideband amplifiers. The amplified noise from IC5 is compared with the DC wiper voltage of R18 at the input of comparator IC6. A logic level is generated at the comparator output and is used to gate on and off a TTL (transistor-transistor logic) oscillator (IC2), which runs free at about 3 MHz. A cascaded dual 4-bit binary counter (IC3) is clocked by this oscillator.

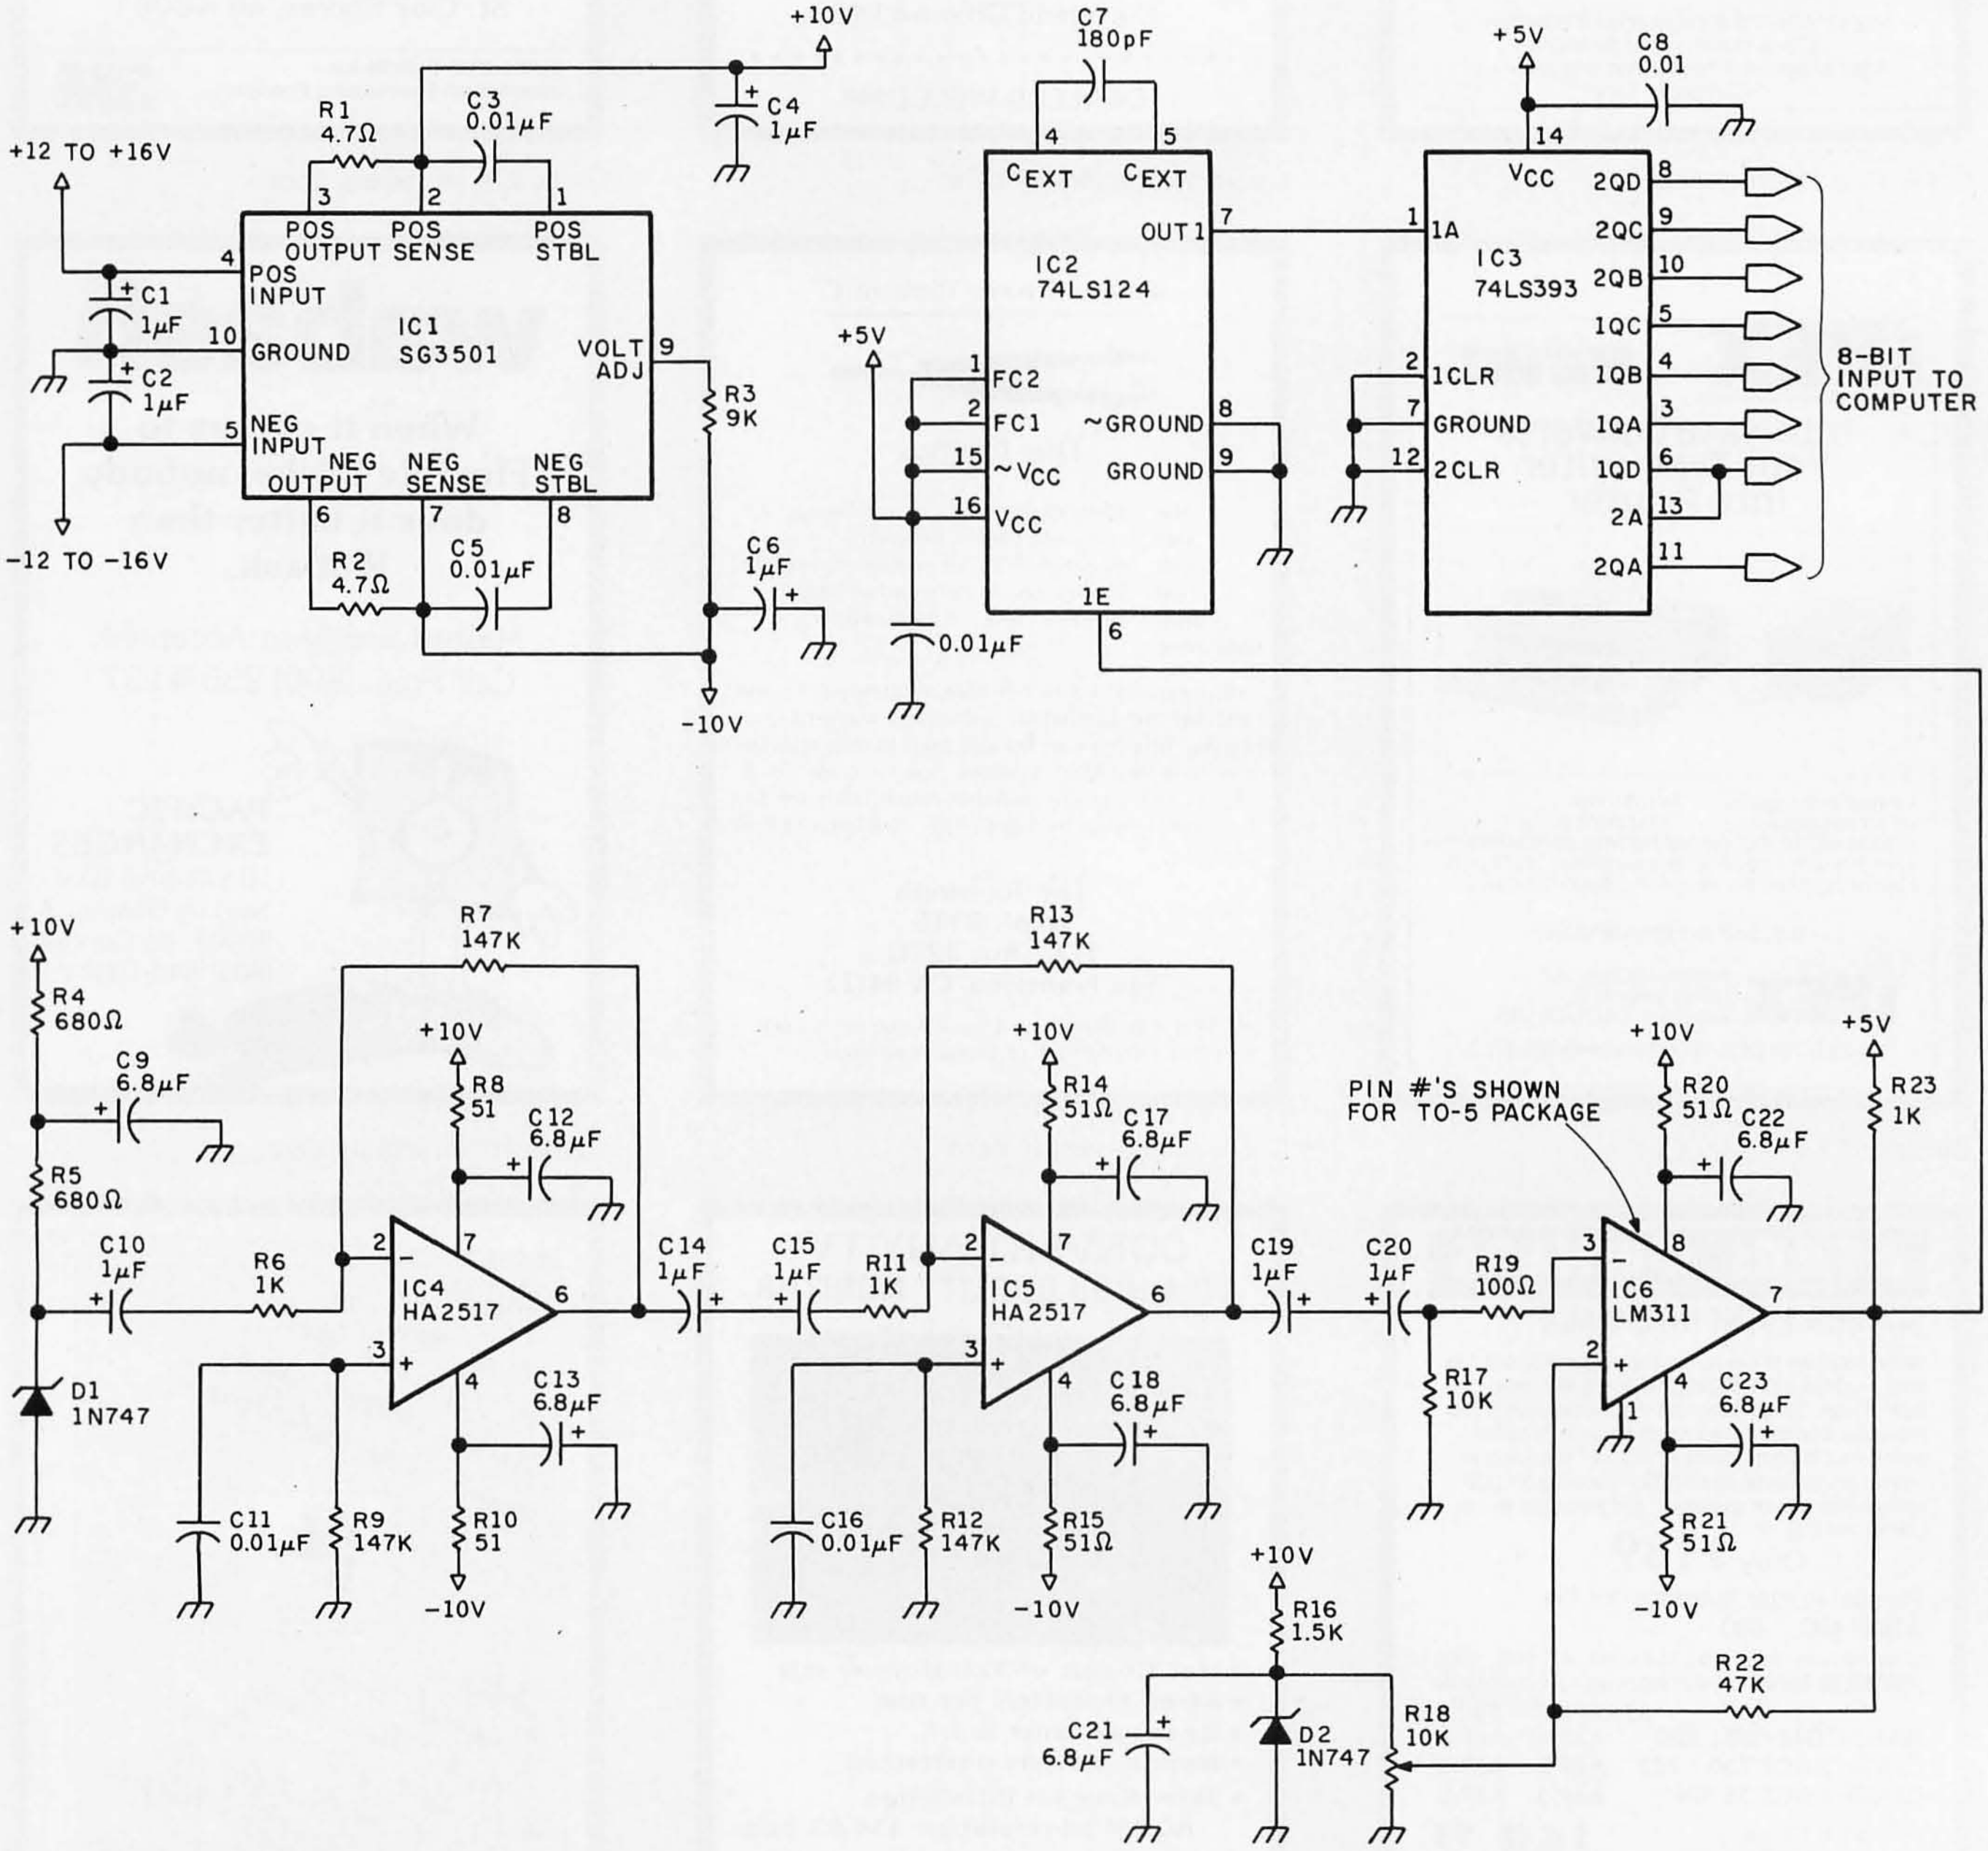

Figure 2: *Schematic diagram of the random number generator described in this article. The noise of D1 is amplified by IC4 and IC5. The amplified noise from IC5 is compared with the DC wiper voltage of R18 at the comparator input of IC6. The level generated at the comparator input gates IC2 (running at about 3 MHz). The oscillator is clocked by IC3 (a cascaded 4-bit binary counter). The circuit should be shielded. Pin numbers shown for IC1 (Silicon General 3501) are those for a TO-5 package.*

!! REAL TIME !!

The TIME MACHINE from ALPHA OMEGA COMPUTER SYSTEMS isn't just another digital clock chip surrounded by interface circuitry. It's an intelligent microcomputer based peripheral device.

The TIME MACHINE communicates with your computer via a serial I/O port at a user selectable data rate between 300 and 2400 baud. RS-232, RS-422, or current loop communication may be used.

Battery protection against power loss is included. The TIME MACHINE automatically computes day of the week and leap year. Buffered output pulses at one second, one minute, and one hour intervals are provided.

Dimensions are 2.5 x 4.75 x 7.5 inches. Batteries, power supply, and communication cable are included.

Price is only $450 single lot and quantity discounts are available. Dealer inquiries invited. Off the shelf delivery.

ALPHA OMEGA COMPUTER SYSTEMS, INC.
P.O. Box 727 / Corvallis, Oregon 97330
Industrial Computer and Control Systems
(503) 754-1911

Circle 52 on inquiry card.

EDUCATIONAL COURSEWARE

3 Nappa Lane, Westport, CT 06880

APPLE DISKS

Each Containing Multiple Programs

BASIC TUTOR SERIES — V 101-107

A series of seven disks with 67 studies designed for novice programmers. Teaches how to program your APPLE, in APPLE soft basic.

$10/Doc and Demo Disk, or $190/Series and Doc.

Tutor I — Intro to programming commands	$32
Tutor II — **Graphic** commands - Hi-res & Lo-res ...	32
Tutor III — Studies in **text files** and word processing	32
Tutor IV — How to create **music** programs	32
Tutor V — Novice program sample studies	32
Tutor VI — Programming techniques	32
Tutor VII — **Utilities** for study and use	32

Q/A Series V 120-140

Subject matter studies. Each disk has 6+ pgms within the subject. All use Question/Answer format. Great for **discussions.** $10/Doc and Demo, or $32/Disk and Doc.

- Q/A — **American History:** Presidents, Wars, etc.
- Q/A — **Human Biology:** Bones, Organs, Diet, etc.
- Q/A — **Inorganic Chemistry:** Elements, Ions, etc.
- Q/A — **Elementary Astronomy:** Stars, Constellations, etc.
- Q/A — **World History:** European, Ancient, Asian, etc.
- Q/A — **General Biology:** Plants, Animals, etc.

Basic Aid — V 108

Useful routines and utilities to aid the novice programmer. Increases speed and efficiency when you transplant these routines into your programs. $10/Doc - $39/Disk and Doc.

Astronomy I - $32 **Physics** - $32 **Testform** - $39 **Pot-Pourri** - $24 **Ed Demo** - $24 **Populations** - $24 - Others in Catalog. **Inventory** - $50 **Accounts** - $50 - $10/Doc. each.

All orders pre-paid or P.O.'S. Send for free catalog.

Add $2.00/mail each order - Guaranteed disk runs.

Circle 144 on inquiry card.

---

9 TRACK TAPE DRIVES



34 MEGABYTES
800 BPI
45 IPS
BRAND NEW
$4850 VALUE

$2400
NEW IN ORIGINAL BOXES

PERTEC Model 8840A-9-45
INDUSTRY STANDARD INTERFACE
CAPABLE OF IND. STD. ANSI-IBM DATA FORMAT

- **READ/WRITE DATA IN STANDARD ANSI-IBM COMPATIBLE FORMAT**
- **DUMP WINCHESTERS AND HARD DISKS; 10 inch reels hold up to 3600' of tape = 34.56 Megabytes unblocked.**
- **EXCHANGE DATA & PROGRAMS WITH LARGE MAIN FRAMES AT SCHOOL, WORK, SERVICE BUREAUS ETC.**
- **BARGAIN PRICED MINI-COMPUTER UPGRADE. OEM List $4850+**

A large OEM overstock makes these industry standard drives available at a fraction of their current list price. Fully optioned drives handle up to 10.5 inch reels of standard inexpensive ½ inch mag tape. Standard 19" rack mount or use right out of the box on steel shipping frame which easily supports drive in any position.

SPECIFICATION SUMMARY: 800 BPI, ANSI industry standard IBM compatible data format, dual head (read after write) 45 IPS read/write, 200 IPS rewind, BOT/EOT sensing, 95-250 VAC/48-400 Hz (set up for 110 VAC/60Hz), solid state, approx. 1 year old, all I/O signals TTL and DTL compatible, tension arm tape buffering, full control panel.

FULL SPECIFICATIONS: Call or write for full set of spec sheets.

TERMS: Guaranteed brand new drives $2400 FOB Morris Plains. Price includes full Pertec "Operating and Service Manual." Manual alone $30, deductable from order.

ELECTROVALUE INDUSTRIAL INC.
P.O. BOX 157-B
MORRIS PLAINS, NJ 07950
Formerly Electravalue Industrial

Phone reservations and questions are welcome.
201/267-1117

MAGIC WAND* AS DATA BASE MANAGER

Application Notes: For easy screen prompted (interactive) data entry, data validation and update; record selection and report writing. Comprehensive help messages to screen. Change format of records in a disk file. Mailing List: create and display list; find, browse through, change, add to, delete entry; multiple code lines, up to 128 user-defined lines per record; selects (but does not sort); prints merged letters, labels and reports. Application Notes will help get your tough applications going quickly and easily by showing you the full application power of this fantastic, versatile software. $35, with purchase of Magic Wand* **only $10.**

MAGIC WAND* (1.1) **THE BEST word processing package - there's nothing as powerful, useful, or as easy to use.** Requires 32K CP/M*, MP/M*, CDOS* or Oasis* and CRT terminal with addressable cursor. 8" soft-sectored or 5" NorthStar*, Vector Graphic*-Micropolis*, SuperBrain* disks. **Apple*** II & II-Plus w/ Microsoft Z80, specify SupRterm or Videoterm board, 13 or 16 sectors. **TRS 80*** Mod II, specify your CP/M version. **Delivered ready to run** - custom configured to your CPU, terminal, printer and disk; includes lesson files on disk, fully illustrated Users' Manual and a Reference Card. **$299.**

10,000 WORDS PROOFREAD IN 1 MINUTE

SPELLGUARD* THE BEST, most useful spelling package available. Requires 32K CP/M*, MP/M* or CDOS*. Works with any console device. Compatible with Magic Wand*, WordStar*, Electric Pencil* and many more. Fully tested. Ready to run 8" soft-sectored or 5" DD NorthStar*, Micropolis*, SuperBrain* disk. **$269.**

Spellguard* and **Magic Wand***, only **$510.**

We rigorously select, use and support the software we sell. Orders promptly acknowledged. Checks must clear before shipment. Our low prices reflect full cash discount while maintaining quality customer service. Export orders welcome. * = trademark.

PELICAN PROGRAMS
49 Pelican Court, Syosset, NY 11791
(516) 921 - 3083

Circle 446 on inquiry card.

INTERFACE EXPANSION BOARD

*For the TRS 80**

MD
MICRO-DESIGN

The Interface Expansion Board gives your computer these features:

- *Phone Modem*
- *2K E-PROM OPTION*
- *32 K Memory*
- *Real-Time Clock*
- *Parallel Port*
- *RS-232 Port*
- *Dual Cassette Line*
- *Floppy Disk Controller**
- *On Board Supply*
- *Silk Screen*
- *Solder Mask*
- *Expansion Port*
- *Manual*

In Stock Now
PC Board & user manual

MDX-1
64.95

MDX-2*
74.95

Add 5.00 for shipping & handling. Texas residents add 5% sales tax.

MANUALS $7.95

FREE PAMPHLET AVAILABLE
Call or write

MICRO-DESIGN
P.O. Box 18054
Austin, Texas 78760
1-512-458-2937

*TRS 80 is a Trademark of Tandy Corp.

Circle 244 on inquiry card.

Close-Out!!

Desk Top Computer

This unit is a computerized Electronic Secretary. It keeps time, date, calendar, message, and meeting files. Originally sold thru a major mail order house for over $450.

Technically, it's a 6507 MICRO, ROM, RAM, Panaplex Alpha Display, Ni-Cad battery, Power Supply, Keyboard, Wood and Aluminum Case with Schematic and operating instructions.

Most of these Computers are warranty returns. We are offering Refurbished, like new, units for **$99.95** and AS IS (most have minor problems) units for **$44.95.** Add **$4.95** for shipping and handling. All units are complete as described. All sales are final. California Residents add 6.5% sales tax.

Send Payment with order or call our Order Line 408-272-2320 and use your **MC** or **VISA** card.

Solid State Surplus
P.O. Box 32418/San Jose, CA 95152

Circle 378 on inquiry card.

SURPLUS ELECTRONICS

ASCII  **ASCII**

TRS-80* COMPATIBLE, IBM SELECTRIC® -BASED I/O TERMINAL
with ASCII conversion installed: $645.00

Many Other Items Available: Tape Drives; Cable; Cassette Drives; Wire; Power Supplies (5 volt 35 amp, others); Displays; Cabinets; Transformers; Heat Sinks; Printers; Components.

Send for Free Catalog
WORLDWIDE ELECTRONICS, INC.
130 Northeastern Blvd.
Nashua, N.H. 03062
Phone orders accepted using VISA or MC
Toll Free 1-800-258-1036
in NH 603-889-7661

*TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

Circle 438 on inquiry card.

SOFTWARE DESIGN ENGINEER

BSEE/BSCS, minimum 3 years programming experience. Real-time systems programming and software development for electronic switches is a plus. Experience with PASCAL or C or Assembly language required. Call collect or send resume to Kenneth W. Cooper, Harris Corporation, RF Communications Division, 1680 University Avenue, Rochester, NY 14610, (716) 244-5830, EXT 3356.

HARRIS
COMMUNICATION AND INFORMATION PROCESSING

An Equal Opportunity Employer M/F

Circle 175 on inquiry card.

ATARI® GAME OWNERS

YOU ALREADY OWN A POWERFUL HOBBY COMPUTER

Realize its capabilities by plugging our MagiCard module into your unaltered Video Computer System$^{T.M.}$ console. If you have ever wanted to program a computer or learn about microprocessors, our MagiCard and detailed instruction manual are an unmatched educational value. If you have ever wanted to understand and use the video and audio capabilities of your ATARI game, our MagiCard will unlock its mysteries. Features include 1K bytes of RAM and a 2K byte ROM monitor. Using your keyboard controllers, you will soon be creating your own 6502 machine language programs. To receive your MagiCard and manual (including sample programs and instructions for building a cassette interface), send check or money order for $49.88 (in Illinois, add 6% tax) to **Computer Magic, Inc., Box 3383A, Fox Valley Center, Aurora, Illinois 60505.**

ATARI and Video Computer System are trademarks of ATARI Inc.

Parts List

IC1	Silicon General SG3501 dual regulator
IC2	74LS124 oscillator
IC3	74LS393 dual 4-bit counter
IC4, IC5	Harris HA2517 op-amp
IC6	LM311 comparator
R1, R2	4.7 ohm 1/4 W 5% CC (carbon composition)
R4, R5	680 ohm 1/4 W 5% CC
R8,R10,R14,R15,R20,R21	51 ohm 1/4 W 5% CC
R17	10 k-ohm 1/4 W 5% CC
R19	100 ohm 1/4 W 5% CC
R22	47 k-ohm 1/4 W 5% CC
R23	1 k-ohm 1/4 W 5% CC
R16	1.5 k-ohm 1/4 W 5% CC
R3	9.00 k-ohm 1/8 W 1% mF
R6, R11	1.00 k-ohm 1/8 W 1% mF
R7,R9,R12,R13	147 k-ohm 1/8 W mF
R18	10 k-ohm miniature 10-turn potentiometer
C1,C2,C4,C6,C10,C14,C15,C19,C20	1 μF 25 V tantalum
C9,C12,C13,C17,C18,C21,C22,C23	6.8 μF 25 V tantalum
C3,C5,C8,C11,C16	0.01 μF disc ceramic
C7	180 pF disc ceramic
D1, D2	IN747 zener diode

Table 1: *Parts list for the circuit shown in figure 2.*

A great deal of power-supply decoupling and isolation is used in the analog section of the generator. This is necessary to avoid picking up the 60 Hz power signal or any other periodic power-supply noise that could destroy the randomness of this circuit.

The circuit should be constructed within a shielded enclosure to avoid RF (radio frequency) or other interference that could cause a periodic output from IC6. The ±12 V supply in my SwTPC 6800/2 (actually ±14 V) has an unacceptable amount of 60 Hz ripple for this application, so a dual IC regulator (IC1) regulates this voltage to a clean ±10 V for the analog electronics.

Alignment of the generator is relatively simple if an oscilloscope is available. R18 is adjusted while viewing the waveform at pin 7 of IC2. This potentiometer should be adjusted until the waveform at pin 7 spends an equal amount of time in its high and low status. That is, the brightness of the scope trace should be adjusted for uniform brightness at its top and bottom edges. If no scope is available, set the potentiometer for 50 to 100 mV at the wiper.

The eight counter bits may be connected in any order to the eight lines of the parallel port of the computer. In my particular application the port is read with a load-accumulator instruction when a number is needed. No strobe or handshaking is used.

A Gaussian, or normal, distribution can also be created using this uniform generator. Using what statisticians call the Central Limit Theorem, a normal distribution can be created by averaging several random numbers of any other type distribution. I have found that a convenient and sufficient number of samples in most cases is 64. Averaging multiples of 2 maintains maximum speed because the division in the averaging process can be done with simple accumulator shifts. Of course, speed is sacrificed with this method because only one normally distributed number is created for every 64 uniform numbers generated. ■

POLY PAKS

FREE!

1981
DISCOUNT
ELECTRONICS
CATALOG·

JOIN THE PAK!

Send for our Free catalog and become a member of our exclusive Pak. Our members receive Poly Paks' exciting catalog several times a year. We offer: Penny Sales, Free Premiums and Low, Low Prices on a wide variety of Electronic Products such as Computer Peripherals, Integrated Circuits, Speakers, Audio Equipment, Rechargeable Batteries, Solar Products, Semiconductors, and much, much more! Take advantage of our 25 years as America's foremost Supplier of discount electronics.

Over 4.5 Million Satisfied Customers

POLY PAKS, INC.
P.O. BOX 942, BT5
S. LYNNFIELD, MA. 01940
(617) 245-3828

Circle 329 on inquiry card.

OSBG™

OFFICIAL SOFTWARE BUYERS GUIDE

AN EXTENSIVE GUIDE
TO ALL
MAJOR SOFTWARE FOR
MAJOR HARDWARE
SYSTEMS



- * Over 1000 Programs
- * Major Business Applications
- * Vertical Software
- * BIG FIVE
- * Operating Systems

Send $8.95 plus $1.00 Postage and Handling to:

OFFICIAL SOFTWARE BUYERS GUIDE
P.O. Box 18278, Reno, Nevada 89511

Please allow 3 weeks for delivery.
DEALER INQUIRIES INVITED

Circle 289 on inquiry card.

$ $ $ $ $ $ $

STOCK MARKET

Software Package

$ $ $ $ $

GIVES YOU THE SAME EDGE BIG BROKERAGE HOUSES AND LARGE INVESTMENT FIRMS HAVE HAD FOR YEARS. KNOW JUST WHEN TO BUY AND SELL. **BIG PROFITS** IN VERY SHORT TIME WITH **NO** PREVIOUS STOCK EXPERIENCE ALL PROGRAMS **NOW** IN "BASIC" TO RUN ON YOUR PERSONAL COMPUTER SYSTEM.

ENCLUDES: 1)THE STOCK ANALYZER
2)NET GAIN & TAX LIABILITY
3)PERSONAL FINANCE MANAGER

ORDER YOUR COMPLETE MONEY MAKING STOCK MARKET PACKAGE TODAY. ONLY $29.95 PLEASE SPICIFY COMPUTER MAKE. Comes with written moneyback garentee.

C.P.A. *Software*
Suite 335
820 16TH STREET
DENVER, CO. 80202

Circle 238 on inquiry card.

$ GET YOUR SHARE $

Join the thousands of winners who have built on their computer interest to create a successful data processing-based business, and:

SHARE IN THE MINI/MICROPROCESSING BOOM

Read this exciting new book:

MAKING IT IN DATA PROCESSING – ON YOUR OWN IN THE EIGHTIES

Written by experts in the computer business, this book contains all you need to get started, including:

- How to locate manufacturers who will help finance your new venture.
- What types of business are available and are best for you.
- Actual sources of Venture Capital looking for new businesses.
- Complete guides to pricing, sales promotion, advertising, publicity, and marketing.
- Dozens of sources of information to help you build your business.

To order, just clip this ad and send with only $19.95 to:

THE SEABIRD PRESS
PO Box 461, Lexington, MA 02173

Full 30 day money back guarantee

Circle 362 on inquiry card.

TRS – 80*

Owners

Interface your level II computer to your temperature sensors, wind sensors, joysticks, etc. Control your heating/cooling systems, solar collectors, wind generators, etc. The uses for this interface are limited only by your imagination.

- 8 analog inputs (8 bit A/D)
- 8 on/off outputs (TTL drive)
- Connects directly to TRS-80*
- Price $149.00
- Visa, Master Card, C.O.D.

W.S. ELECTRONICS
P.O. Box 203
Meadville, Pa. 16335

**Trademark of* Tandy Corporation.

Circle 432 on inquiry card.

RS-232 PROBLEMS?



LET THE RS-232 TESTER HELP YOU SOLVE YOUR COMPUTER INTERFACE PROBLEMS. DESIGNED TO CONNECT IN SERIES WITH ANY RS-232 INTERFACE, IT DISPLAYS THE STATUS OF SEVEN OF THE MOST IMPORTANT LINES: TRANSMIT DATA, RECEIVE DATA, REQUEST TO SEND, CLEAR TO SEND, DATA SET READY, CARRIER DETECT, AND DATA TERMINAL READY. THE RS-232 TESTER REQUIRES NO POWER AND MAY BE LEFT IN THE LINE PERMANENTLY.

$39.95 POST PAID

B & B ELECTRONICS

BOX 475/MENDOTA, IL 61342

Circle 43 on inquiry card.

HEATH/ZENITH 89 USERS

16K Memory expansion card to make H/Z89 a 64K machine
Assembled and Tested .... $ 100

REMEX Intelligent 8'' Floppy drives DS DD
Master 1.2MByte $1715
Slave 1.2 MByte .... $ 995

Master & Slave in a box
2.4MByte with power supply $2990

ANADEX Printer DP-9500
added 2k buffer $1475

Shipping Not Included
25% Down on All Orders

SECURED
COMPUTER
SYSTEMS
12011 Aclare St.
Cerritos, Ca 90701
(213) 924-6741

Circle 364 on inquiry card.

IJCAI·81

7TH INTERNATIONAL JOINT CONFERENCE ON ARTIFICIAL INTELLIGENCE

24-28 AUGUST 1981

UNIVERSITY OF BRITISH COLUMBIA
VANCOUVER, B.C., CANADA

The major international artificial intelligence conference

All-day Tutorial Program, August 24

Week-long A.I. Research & Development Exhibit Program

Conference Information:
Richard Rosenberg.
Dept. of Computer Science
University of British Columbia.
Vancouver. B.C., Canada V6T 1W5
(604)228-3061

Tutorial and R&D Exhibit Programs Information:
Louis G. Robinson.
American Association for Artificial Intelligence.
Stanford University.
Box 3036.
Stanford. CA 94305. U.S.A.
(415)495-8825

Circle 189 on inquiry card.

★OHIO SCIENTIFIC★ OWNERS

Starstruck Software

★ANNOUNCES★

Star-FORTH V2.0
A FORTH-79 Standard System

NOW Available For All Systems

79.95 Disk Systems
59.95 Cassette Systems (8K and up)

PLACE YOUR ORDERS NOW!
SPECIFY SYSTEM

Starstruck Software
4515 Whisper Lake Dr. #8
Florissant, MO. 63033

(314) 355-2396
(314) 837-4495

DEALERSHIPS AVAILABLE

Circle 386 on inquiry card.

Technical Forum

Fast Fourier Comes Back

Alastair Roxburgh, 50 Maitland St, Dunedin, New Zealand

The program "Fast Fourier for the M6800," by Richard H Lord (February 1979 BYTE, page 108), contains an overflow bug that I discovered while testing a version of the program written for the 8080 processor. (See listing 1.) After the exact nature of the fault was ascertained, a theoretical explanation for it was easy to find. The problem concerns the maximum two's-complement value allowed before scaling commences. The 6800 program requires that any data point outside the range of $-64 <$ data < 64 be scaled down before the next pass. Scaling divides all data values by 2. However, during passes 2 thru 8 it is quite possible for the results of arithmetic operations to exceed the 8-bit two's-complement-number range of $-128 \le$ data < 127. The reason for this can be seen by referring to lines 205 and 215 in the original program. These lines yield:

$$RM' = RM + RN*COS(X) + IN*SIN(X)$$

Letting RM=RN=IN=M, the maximum data value, then:

$$RM' = M*(1 + COS(X) + SIN(X)).$$

The maximum value of RM' is then M times the maximum value of 1 + COS(X) + SIN(X). This maximum value occurs at an angle of 45°, given by TAN(X) = 1.

Thus, the maximum value of RM' is M(1 + $\sqrt{2}$) or approximately (2.414)M. Letting RM' = 127 (the maximum positive 8-bit two's-complement-data value), then M = INT(127/(1 + $\sqrt{2}$)) = 52.

Thus, the data should be scaled before *each* pass if any point exceeds the range $-52 \le$ data ≤ 52. It makes little difference to the spectra whether the relational operators here are greater-than-or-equal or merely just greater-than. The 6800 program should be amended accordingly:

```
00268     CMP A          # $CC     (-52)
00270     CMP A          # $34      (52)
```

The test program that uncovered the overflow error used program-generated square waves with a period of six data points (equivalent to 10.667 Hz using a sampling rate of 64 Hz). Every amplitude from 128 ± 127 down to 128 ± 1 was tested and the power spectra, as well as SCLFCT, were printed out (requiring approximately three hours at 110 bits per second).

Each transform in the 8080 program takes 3.6 seconds to compute with a 2 MHz processor clock. The power calculation is fast, because a lookup table is used.

When FFTs (fast Fourier transforms) are computed on a minicomputer that has sophisticated error-trapping hardware, the usual practice is not to perform any prescaling, but instead to allow arithmetic overflow to occur, do a software interrupt to a scaling routine, and return. This way, fewer scalings of all the data are required, yielding results with the maximum possible numerical precision. The 6800 can detect two's-complement overflows and can efficiently perform (two's complement) arithmetic shifts to scale the data, but it does not have an automatic overflow trap. The advantage of slightly better numerical results would be outweighed by the time required to call an overflow-checking subroutine after most arithmetic operations. The 8080 is even worse off; it has neither a two's-complement-overflow indicator nor a single-instruction equivalent of the 6800's ASR.

Text continued on page 460

Listing 1: *The 8080 version of the fast Fourier transform program originally written for the 6800 processor by Richard Lord. In this version, Mr Roxburgh has corrected an overflow problem that he discovered and diagnosed in the original version.*

```
0000           0010 ;; F A S T   F O U R I E R   T R A N S F O R M.
0000           0020 ;; = = = =   = = = = = = =   = = = = = = = = =
0000           0030 ;;ORIGINAL:- M6800 FFT BYTE FEB 1979.
0000           0040 ;;8080 VERSION BY:- ALASTAIR ROXBURGH.
0000           0050 ;;DATE:- 4 OCT 1979.
0000           0060 ;;256 POINT IN-PLACE COMPLEX FOURIER TRANSFORM.
0000           0070 ;;INPUT DATA UNSIGNED WITH ZERO = 80H.
0000           0080 ;;COMPLEX OUTPUT SIGNED (2'S COMP.).
0000           0090 ;;REAL OUTPUT (POWER OR AMPLITUDE) UNSIGNED.
0000           0100 ;;
0000           0110 ;
0000           0120 SQADR EQU  9F00H  ;2'S COMP. SQU. TABLE.
0000           0130 STADR EQU  9F00H  ;2'S COMP. SINE TABLE.
0000           0140 ;
0000           0150        ORG  8300H
8300           0160 RLPT1  DS  2        ;REAL PTR 1.
8302           0170 RLPT2  DS  2        ;REAL PTR 2.
8304           0180 IMPT1  DS  2        ;IMAG. PTR 1.
8306           0190 IMPT2  DS  2        ;IMAG. PTR 2.
8308           0200 SINPT  DS  2        ;SINE TABLE PTR.
830A           0210 CELCT  DS  1        ;CELL CTR.
830B           0220 CELNUM DS  1        ;NO. OF CELLS.
830C           0230 PAIRNM DS  1        ;PAIRS PER CELL.
830D           0240 CELDIS DS  1        ;SPAN BETWEEN PAIRS.
830E           0250 DELTA  DS  1        ;ANGLE INCREMENT.
830F           0260 SCLFCT DS  1        ;MULTIPLY OUTPUT AMPLITUDE
8310           0270                     ; BY 2↑SCLFCT.
8310           0280 SINE   DS  1
8311           0290 COSINE DS  1
8312           0300 TREAL  DS  1
8313           0310 TIMAG  DS  1
8314           0320 ;
8314           0330        ORG  8400H
8400           0350 INPD   DS  256      ;INPUT DATA BUFF.
8500           0360 REAL   DS  256      ;"REAL" BUFF.
8600           0370 IMAG   DS  256      ;"IMAG" BUFF.
8700           0380 ;
8700           0384        ORG  877FH
877F           0385 PABUF DS   129      ;POWER/AMPLITUDE SPECTRUM.
8800           0386 ;
8800           0390        ORG  8000H
8000           0400 ;;
8000           0410 ;;TEST FFT PROGRAM.
8000           0420 ;;
8000 CD D5 81  0430        CALL WAVE    ;GET TEST SIGNAL.
8003 CD 0C 80  0460        CALL FFT     ;FORM COMPLEX SPECTRUM.
8006 CD AE 81  0470        CALL POWER   ;CONVERT COMPLEX SPECTRUM
8009           0480                     ; TO 128 PT POWER SPECTRUM.
8009           0490       ;CALL MAGNI   ;CONVERT COMPLEX SPECTRUM
8009           0500                     ; TO 128 PT AMPLITUDE SPECTRUM
8009 C3 F4 AF  0540        JMP  0AFF4H  ;RETURN TO BMCOS.
800C           0550 ;
800C           0560 ;;
800C           0570 ;;INITIALISE DATA AREAS.
800C           0580 ;;
800C 3E 00     0590 FFT:   MVI  A,0
800E 32 0F 83  0600        STA  SCLFCT
8011           0610 ;
8011           0620 ;CLEAR IMAG. ARRAY.
8011 21 00 86  0630 CLEAR:LXI  H,IMAG
8014 36 00     0640 CLR1:  MVI  M,0
8016 2C        0650        INR  L
8017 C2 14 80  0660        JNZ  CLR1
801A           0670 ;
801A           0680 ;MOVE INPUT DATA INTO REAL ARRAY.
801A           0690 ;DE=SOURCE, HL=DEST.
801A 11 00 84  0700 MOVE:  LXI  D,INPD
801D 21 00 85  0710        LXI  H,REAL
8020 1A        0720 MOV1:  LDAX D
8021 D6 80     0730        SUI  80H     ;CONVERT TO 2'S COMPLEMENT.
8023 77        0740        MOV  M,A
8024 1C        0750        INR  E
8025 2C        0760        INR  L
8026 C2 20 80  0770        JNZ  MOV1
8029           0780 ;;
8029           0790 ;;PRE-TRANSFORM BIT SWAP.
8029           0800 ;;
8029 11 00 85  0810        LXI  D,REAL
802C 21 00 85  0820        LXI  H,REAL
802F 06 08     0830 BITREV:MVI  B,8     ;SET BIT CTR.
8031 7D        0840        MOV  A,L     ;LOW-ORDER BITS OF RLPT1.
8032 1F        0850 BRV1:  RAR          ;MOVE LS BIT OF RLPT1
8033 4F        0860        MOV  C,A     ; INTO CY & SHIFT
8034 7B        0870        MOV  A,E
8035 17        0880        RAL          ; IN REVERSE ORDER BACK
8036 5F        0890        MOV  E,A     ; INTO RLPT2.
8037 79        0900        MOV  A,C
8038 05        0910        DCR  B
8039 C2 32 80  0920        JNZ  BRV1
803C 7D        0930        MOV  A,L
803D BB        0940        CMP  E       ;COMPARE VALS, & IF
803E DA 46 80  0950        JC   SWP1    ; SAME, DON'T SWAP.
8041 4E        0960 SWAP:  MOV  C,M     ;GET VAL 1 INTO C.
8042 1A        0970        LDAX D       ;GET VAL 2 INTO A.
8043 77        0980        MOV  M,A     ;STORE IN SWAPPED ORDER.
8044 79        0990        MOV  A,C
8045 12        1000        STAX D
8046 2C        1010 SWP1:  INR  L
8047 C2 2F 80  1020        JNZ  BITREV
804A           1030 ;;
804A           1040 ;;FFT FIRST PASS.
804A           1050 ;;
804A CD 4B 81  1060 PASS1:CALL SCALE   ;SCALE IF DATA OVER-RANGE.
804D 21 00 85  1070        LXI  H,REAL
8050 7E        1080 PA1:   MOV  A,M     ;GET RM.
8051 4F        1090        MOV  C,A     ;SAVE RM.
8052 2C        1100        INR  L
8053 46        1110        MOV  B,M     ;GET RN TOO.
8054 2D        1120        DCR  L
8055 80        1130        ADD  B       ;RM' = RM+RN.
8056 77        1140        MOV  M,A     ;STORE NEW RM'.
8057 79        1150        MOV  A,C     ;RETRIEVE RM.
8058 90        1160        SUB  B       ;RN' = RM-RN.
8059 2C        1170        INR  L
805A 77        1180        MOV  M,A     ;STORE RN'.
805B 2C        1190        INR  L       ;NEW PAIR.
805C C2 50 80  1200        JNZ  PA1
805F           1210 ;;
805F           1220 ;;COMPUTATION OF FFT. PASS 2 THRU N.
805F           1230 ;;
805F 3E 40     1240 FPASS:MVI  A,64    ;SET UP PARAMETERS
8061 32 0B 83  1250        STA  CELNUM ; FOR NO. OF CELLS,
8064 32 0E 83  1260        STA  DELTA  ; ANGLE,
8067 3E 02     1270        MVI  A,2    ; & FOR
8069 32 0C 83  1280        STA  PAIRNM ; PAIRS/CELL.
806C 32 0D 83  1290        STA  CELDIS ;SPAN BETWEEN PAIRS.
806F CD 4B 81  1300 NPASS:CALL SCALE  ;KEEP DATA IN RANGE.
8072 3A 0B 83  1310        LDA  CELNUM ;GET NO. OF CELLS &
8075 32 0A 83  1320        STA  CELCT  ; PUT INTO CELL CTR.
8078 21 00 85  1330        LXI  H,REAL
807B 22 00 83  1340        SHLD RLPT1
807E 22 02 83  1350        SHLD RLPT2
8081 21 00 86  1360        LXI  H,IMAG
8084 22 04 83  1370        SHLD IMPT1
8087 22 06 83  1380        SHLD IMPT2
808A 21 00 9F  1390 NCELL:LXI  H,STADR
808D 22 08 83  1400        SHLD SINPT
8090 3A 0C 83  1410        LDA  PAIRNM ;GET PAIRS/CELL CTR.
8093 47        1420        MOV  B,A
8094 21 0D 83  1430 NC1:   LXI  H,CELDIS
8097 3A 00 83  1440        LDA  RLPT1  ;PTR 1 LSBY.
809A 86        1450        ADD  M      ;ADD PAIR OFFSET.
809B 32 02 83  1460        STA  RLPT2  ;SET UP BOTH
809E 32 06 83  1470        STA  IMPT2  ; 2ND PTRS.
80A1 C5        1480        PUSH B      ;SAVE PAIR CTR.
80A2 2A 08 83  1490        LHLD SINPT
80A5 7E        1500        MOV  A,M    ;GET SINE OF ANGLE
80A6 32 10 83  1510        STA  SINE   ; & SAVE.
80A9 3E 40     1520        MVI  A,64   ;ADD COSINE OFFSET
80AB 85        1530        ADD  L      ; MODULO 256.
80AC 6F        1540        MOV  L,A
80AD 7E        1550        MOV  A,M    ;GET COSINE OF ANGLE
80AE 32 11 83  1560        STA  COSINE ; & SAVE.
80B1 2A 02 83  1570        LHLD RLPT2  ;GET REAL PTR 2.
80B4 4E        1580        MOV  C,M    ;GET RN.
80B5 C5        1590        PUSH B      ;SAVE RN.
80B6 3A 11 83  1600        LDA  COSINE ;GET COSINE.
80B9 CD 7B 81  1610        CALL MPY    ;A = RN*COS(Z).
80BC 32 12 83  1620        STA  TREAL  ;SAVE PRODUCT.
80BF C1        1630        POP  B      ;GET RN.
80C0 3A 10 83  1640        LDA  SINE
80C3 CD 7B 81  1650        CALL MPY    ;A = RN*SIN(Z).
80C6 32 13 83  1660        STA  TIMAG  ;SAVE PRODUCT.
80C9 2A 06 83  1670        LHLD IMPT2
80CC 4E        1680        MOV  C,M    ;GET IN.
80CD C5        1690        PUSH B      ;SAVE IN.
80CE 3A 10 83  1700        LDA  SINE
80D1 CD 7B 81  1710        CALL MPY    ;A = IN*SIN(Z).
80D4 21 12 83  1720        LXI  H,TREAL
80D7 86        1730        ADD  M
80D8 77        1740        MOV  M,A    ;TR = RN*COS + IN*SIN.
80D9 C1        1750        POP  B      ;GET IN.
80DA 3A 11 83  1760        LDA  COSINE
80DD CD 7B 81  1770        CALL MPY    ;A = IN*COS(Z).
80E0 21 13 83  1780        LXI  H,TIMAG
80E3 96        1790        SUB  M
80E4 77        1800        MOV  M,A    ;TI = IN*COS - RN*SIN.
80E5           1810 ;
80E5 2A 00 83  1820        LHLD RLPT1
80E8 7E        1830        MOV  A,M    ;GET RM.
80E9 4F        1840        MOV  C,A    ;SAVE RM.
80EA 3A 12 83  1850        LDA  TREAL
80ED 81        1860        ADD  C
80EE 77        1870        MOV  M,A    ;RM' = RM+TR.
80EF 79        1880        MOV  A,C    ;GET RM.
80F0 21 12 83  1890        LXI  H,TREAL
80F3 96        1900        SUB  M
80F4 2A 02 83  1910        LHLD RLPT2
80F7 77        1920        MOV  M,A    ;RN' = RM-TR.
80F8           1930 ;
80F8 2A 04 83  1940        LHLD IMPT1
80FB 7E        1950        MOV  A,M    ;GET IM
80FC 4F        1960        MOV  C,A    ;SAVE IM.
80FD 3A 13 83  1970        LDA  TIMAG
8100 81        1980        ADD  C
8101 77        1990        MOV  M,A    ;IM' = IM+TI.
8102 79        2000        MOV  A,C    ;GET IM.
8103 21 13 83  2010        LXI  H,TIMAG
8106 96        2020        SUB  M
8107 2A 06 83  2030        LHLD IMPT2
810A 77        2040        MOV  M,A    ;IN' = IM-TI.
810B           2050 ;
810B 21 08 83  2060        LXI  H,SINPT
810E 3A 0E 83  2070        LDA  DELTA
8111 86        2080        ADD  M      ;INCR. PTR ANGLE BY DELTA.
8112 77        2090        MOV  M,A
8113 21 00 83  2100        LXI  H,RLPT1
8116 34        2110        INR  M
8117 21 04 83  2120        LXI  H,IMPT1
811A 34        2130        INR  M
811B C1        2140        POP  B
811C 05        2150        DCR  B      ;DECREMENT PAIR CTR.
811D C2 94 80  2160        JNZ  NC1
8120           2170 ;;;;
8120 21 00 83  2180        LXI  H,RLPT1 ;GET PTRS &
8123 3A 0D 83  2190        LDA  CELDIS
8126 86        2200        ADD  M      ; ADD CELL OFFSET.
8127 77        2210        MOV  M,A
8128 32 04 83  2220        STA  IMPT1
812B 21 0A 83  2230        LXI  H,CELCT
812E 35        2240        DCR  M      ;DECR. CELL CTR.
812F C2 8A 80  2250        JNZ  NCELL
8132           2260 ;;
8132           2270 ;;CHANGE PARAMETERS FOR NEXT PASS.
8132           2280 ;;
8132 21 0B 83  2290 NP1:   LXI  H,CELNUM
```

Listing 1 continued on page 460

Listing 1 continued:

```
8135 7E          2300        MOV  A,M      ;CLEAR CY & SHIFT
8136 A7          2310        ANA  A        ;CLEAR CY & SHIFT
8137 1F          2320        RAR           ; RIGHT TO HALVE NO. CELLS.
8138 B7          2330        ORA  A        ;SET FLAGS.
8139 77          2340        MOV  M,A
813A C8          2350        RZ            ;OUT OF CELLS -> ***FINISH***.
813B 23          2360        INX  H        ;PAIRNM.
813C 7E          2370        MOV  A,M
813D 87          2380        ADD  A        ;TWICE AS MANY PAIRS.
813E 77          2390        MOV  M,A
813F 23          2400        INX  H        ;CELDIS.
8140 7E          2410        MOV  A,M
8141 87          2420        ADD  A        ;TWICE AS FAR APART.
8142 77          2430        MOV  M,A
8143 23          2440        INX  H        ;DELTA.
8144 7E          2450        MOV  A,M
8145 A7          2460        ANA  A        ;CLEAR CY & SHIFT
8146 1F          2470        RAR           ; RIGHT TO HALVE THE ANGLE.
8147 77          2480        MOV  M,A
8148 C3 6F 80    2490        JMP  NPASS
814B             2500 ;;
814B             2510 ;;SCALE OVER-RANGE DATA.
814B             2520 ;;
814B             2530 ;SCALE REAL & IMAG IF -52 > ANY DATA >= 52.
814B             2540 ;NO REGISTERS PRESERVED.
814B 01 00 85    2550 SCALE:LXI  B,REAL ;SET UP TABLE PTR.
814E 11 FF FF    2560        LXI  D,-1
8151 21 FF 01    2570        LXI  H,512-1 ;NO. OF PTS - 1.
8154 0A          2580 SCL2: LDAX B        ;GET DATA.
8155 03          2590        INX  B        ;BUMP PTR.
8156 FE CC       2600        CPI  -52      ;TEST LOWER LIMIT.
8158 D2 60 81    2610        JNC  SCL3     ;SKIP TO NEXT PT.
815B FE 34       2620        CPI  52       ;TEST UPPER LIMIT.
815D D2 65 81    2630        JNC  SCL4     ;SCALE ALL IF OUT OF RANGE.
8160 19          2640 SCL3:  DAD  D        ;TEST NEXT PT.
8161 DA 54 81    2650        JC   SCL2
8164 C9          2660        RET           ;DONE TESTING.
8165 21 0F 83    2670 SCL4:  LXI  H,SCLFCT
8168 34          2680        INR  M        ;BUMP SCALE FACTOR COUNT.
8169 01 00 85    2690        LXI  B,REAL ;SET UP TABLE PTR.
816C 21 FF 01    2700        LXI  H,512-1 ;NO. OF PTS - 1.
816F 0A          2710 SCL6:  LDAX B        ;GET DATA,
8170 FE 80       2720        CPI  80H      ; TEST SIGN &
8172 3F          2730        CMC           ; EXTEND IT TO CY.
8173 1F          2740        RAR           ;DIVIDE BY 2.
8174 02          2750        STAX B        ;RETURN DATA TO TABLE.
8175 03          2760        INX  B        ;BUMP PTR.
8176 19          2770        DAD  D        ;NEXT PT.
8177 DA 6F 81    2780        JC   SCL6
817A C9          2790        RET           ;DONE SCALING.
817B             2800 ;;
817B             2810 ;;SIGNED MULTIPLY ROUTINE.
817B             2820 ;;
817B             2830 ;EXTERNAL REG. USAGE:-  A <- (C*A)/128.
817B             2840 ;INTERNAL REG. USAGE:-.
817B             2850 ; HL = PRODUCT       (MSBY,LSBY).
817B             2860 ; DE = MULTIPLICAND.
817B             2870 ; BC = MULTIPLIER.
817B             2880 ;NO REGISTERS PRESERVED.
817B 5F          2890 MPY:   MOV  E,A      ;PUT ARG1 INTO MULTIPLICAND.
817C             2900                      ;ARG2 ALREADY IN MULTIPLIER.
817C AF          2910        XRA  A
817D 47          2920        MOV  B,A      ;CLEAR MSBY'S.
817E 57          2930        MOV  D,A
817F 67          2940        MOV  H,A      ;CLEAR PRODUCT.
8180 6F          2950        MOV  L,A
8181 7B          2960        MOV  A,E      ;GET LSBY OF MULTIPLICAND.
8182 FE 00       2970        CPI  0
8184 F2 8A 81    2980        JP   MPY1     ;NEGATIVE MULTIPLICAND?
8187 7A          2990        MOV  A,D
8188 2F          3000        CMA           ;EXTEND SIGN TO MSBY.
8189 57          3010        MOV  D,A
818A 79          3020 MPY1:  MOV  A,C      ;GET LSBY OF MULTIPLIER.
818B FE 00       3030        CPI  0
818D F2 93 81    3040        JP   MPY2     ;NEGATIVE MULTIPLIER?
8190 78          3050        MOV  A,B
8191 2F          3060        CMA           ;EXTEND NEG TO MSBY.
8192 47          3070        MOV  B,A
8193 3E 0F       3080 MPY2:  MVI  A,15     ;SET ITERATION CTR
8195 F5          3090 MPY3:  PUSH PSW      ; & SAVE.
8196             3100        ;ARITH. SHIFT MULTIPLIER RIGHT (BC).
8196 78          3110        MOV  A,B
8197 FE 80       3120        CPI  80H
8199 3F          3130        CMC           ;MAKE CY = MSBIT.
819A 1F          3140        RAR
819B 47          3150        MOV  B,A
819C 79          3160        MOV  A,C
819D 1F          3170        RAR           ;LSBIT->CY.
819E 4F          3180        MOV  C,A
819F             3190        ;TEST MULTIPLIER LSBIT & IF SET,
819F             3200        ; ADD MULTIPLICAND TO PARTIAL PRODUCT.
819F D2 A3 81    3210        JNC  MPY4
81A2 19          3220        DAD  D
81A3             3230        ;ARITH. SHIFT MULTIPLICAND LEFT (DE).
81A3 EB          3240 MPY4:  XCHG          ;SWAP MULTIPLIER & PROD.
81A4 29          3250        DAD  H        ;SHIFT LEFT.
81A5 EB          3260        XCHG          ;RESTORE REGS.
81A6             3270        ;CHECK LOOP CTR.
81A6 F1          3280        POP  PSW
81A7 3D          3290        DCR  A        ;DECREMENT COUNT.
81A8 C2 95 81    3300        JNZ  MPY3
81AB             3310        ;DIVIDE 16-BIT PRODUCT BY 128 SO THAT
81AB             3320        ; SINE & COSINE AMPLITUDE = UNITY.
81AB 29          3330        DAD  H        ;SHIFT-IN MSBIT OF
81AC 7C          3340        MOV  A,H      ; LSBYTE & RETURN IN A.
81AD C9          3350        RET
81AE             3360 ;;
81AE             3370 ;;POWER CALCULATION.
81AE             3380 ;;
81AE             3390 ;NO REGISTERS PRESERVED.
81AE 06 9E       3400 POWER:MVI  B,>SQADR
81B0 21 00 85    3410        LXI  H,REAL
81B3 11 7F 87    3420        LXI  D,PABUF
81B6 4E          3430 PWR1:  MOV  C,M      ;C=REAL.
81B7 0A          3440        LDAX B        ;A=(REAL↑2)/64.
81B8 12          3450        STAX D        ;STORE.
81B9 2C          3460        INR  L
81BA 1C          3470        INR  E
81BB C2 B6 81    3480        JNZ  PWR1
81BE 21 00 86    3490        LXI  H,IMAG ;RESET PTRS.
81C1 11 7F 87    3500        LXI  D,PABUF
81C4 4E          3510 PWR2:  MOV  C,M      ;C=IMAG.
81C5 0A          3520        LDAX B        ;A=(IMAG↑2)/64.
81C6 EB          3530        XCHG
81C7 86          3540        ADD  M        ;A=(REAL↑2 + IMAG↑2)/64.
81C8 D2 CD 81    3550        JNC  $+2
81CB 3E FF       3560        MVI  A,0FFH ;A SATURATES AT 0FFH.
81CD 77          3570        MOV  M,A      ;STORE POWER.
81CE EB          3580        XCHG
81CF 2C          3590        INR  L
81D0 1C          3600        INR  E
81D1 C2 C4 81    3610        JNZ  PWR2
81D4 C9          3620        RET
81D5             3630 ;;
81D5             3640 ;;FILL INPD WITH 10.666 HZ SQUARE WAVE.
81D5             3650 ;;
81D5 21 00 84    3660 WAVE:  LXI  H,INPD
81D8 0E 2B       3670        MVI  C,43
81DA CD EA 81    3680 WAVE2:CALL LO
81DD CD E5 81    3690        CALL HI
81E0 0D          3700        DCR  C
81E1 C2 DA 81    3710        JNZ  WAVE2
81E4 C9          3720        RET
81E5             3730        ;
81E5             3740 ABC    EQU  117
81E5             3750 MID    EQU  128
81E5 3E F5       3760 HI:    MVI  A,MID+ABC
81E7 C3 EC 81    3770        JMP  $+2
81EA 3E 0B       3780 LO:    MVI  A,MID-ABC
81EC 06 03       3790        MVI  B,3
81EE 77          3800 WAVE3:MOV  M,A
81EF 23          3810        INX  H
81F0 05          3820        DCR  B
81F1 C2 EE 81    3830        JNZ  WAVE3
81F4 C9          3840        RET
81F5             3850        ;
```

```
ABC     0075     3740  3760  3780
BITRE   802F     0830  1020
BRV1    8032     0850  0920
CELCT   830A     0210  1320  2230
CELDI   830D     0240  1290  1430  2190
CELNU   830B     0220  1250  1310  2290
CLEAR   8011     0630
CLR1    8014     0640  0660
COSIN   8311     0290  1560  1600  1760
DELTA   830E     0250  1260  2070
FFT     800C     0460  0590
FPASS   805F     1240
HI      81E5     3690  3760
IMAG    8600     0370  0630  1360  3490
IMPT1   8304     0180  1370  1940  2120  2220
IMPT2   8306     0190  1380  1470  1670  2030
INPD    8400     0350  0700  3660
LO      81EA     3680  3780
MID     0080     3750  3760  3780
MOV1    8020     0720  0770
MOVE    801A     0700
MPY     817B     1610  1650  1710  1770  2890
MPY1    818A     2980  3020
MPY2    8193     3040  3080
MPY3    8195     3090  3300
MPY4    81A3     3210  3240
NC1     8094     1430  2160
NCELL   808A     1390  2250
NP1     8132     2290
NPASS   806F     1300  2490
PA1     8050     1080  1200
PABUF   877F     0385  3420  3500
PAIRN   830C     0230  1280  1410
PASS1   804A     1060
POWER   81AE     0470  3400
PWR1    81B6     3430  3480
PWR2    81C4     3510  3610
REAL    8500     0360  0710  0810  0820  1070  1330  2550  2690  3410
RLPT1   8300     0160  1340  1440  1820  2100  2180
RLPT2   8302     0170  1350  1460  1570  1910
SCALE   814B     1060  1300  2550
SCL2    8154     2580  2650
SCL3    8160     2610  2640
SCL4    8165     2630  2670
SCL6    816F     2710  2780
SCLFC   830F     0260  0600  2670
SINE    8310     0280  1510  1640  1700
SINPT   8308     0200  1400  1490  2060
SQADR   9E00     0120  3400
STADR   9F00     0130  1390
SWAP    8041     0960
SWP1    8046     0950  1010
TIMAG   8313     0310  1660  1780  1970  2010
TREAL   8312     0300  1620  1720  1850  1890
WAVE    81D5     0430  3660
WAVE2   81DA     3680  3710
WAVE3   81EE     3800  3830
```

Text continued from page 458:

I intend to write a subroutine to compute amplitude spectra following the method pointed out by Bob Leedom. (See "Approximation Makes a Magnitude of Difference," June 1979 BYTE, page 188.) This routine does not appear in listing 1, except as a comment.

Pass 1 of the FFT requires a trivial amount of computer arithmetic. Pass 2 is fairly trivial too, since sine and cosine have only the values −1, 0, and 1. Therefore, a simple way to increase the speed of the program would be to largely duplicate the coding of passes 2 thru *N* (inserting constants instead of variables and using a new sine/cosine table {0,1,0,−1,0 }, etc). A special multiply subroutine could be used for this: a subroutine that can multiply only by 0, 1, or −1, but do it very quickly. This could shave up to one second off the transform time.

Listing 2: *Object-code listing in hexadecimal format of the assembly-language program given in listing 1. The /BC at the end of this listing is a checksum of the whole code.*

```
8000 CD D5 81 CD 0C 80 CD AE 81 C3 E4 AF 3E 00 32 0F
8010 83 21 00 86 36 00 2C C2 14 80 11 00 84 21 00 85
8020 1A D6 80 77 1C 2C C2 20 80 11 00 85 21 00 85 06
8030 08 7D 1F 4F 7B 17 5F 79 05 C2 32 80 7D BB DA 46
8040 80 4E 1A 77 79 12 2C C2 2F 80 CD 4B 81 21 00 85
8050 7E 4F 2C 46 2D 80 77 79 90 2C 77 2C C2 50 80 3E
8060 40 32 0B 83 32 0E 83 3E 02 32 0C 83 32 0D 83 CD
8070 4B 81 3A 0B 83 32 0A 83 21 00 85 22 00 83 22 02
8080 83 21 00 86 22 04 83 22 06 83 21 00 9F 22 08 83
8090 3A 0C 83 47 21 0D 83 3A 00 83 86 32 02 83 32 06
80A0 83 C5 2A 08 83 7E 32 10 83 3E 40 85 6F 7E 32 11
80B0 83 2A 02 83 4E C5 3A 11 83 CD 7B 81 32 12 83 C1
80C0 3A 10 83 CD 7B 81 32 13 83 2A 06 83 4E C5 3A 10
80D0 83 CD 7B 81 21 12 83 86 77 C1 3A 11 83 CD 7B 81
80E0 21 13 83 96 77 2A 00 83 7E 4F 3A 12 83 81 77 79
80F0 21 12 83 96 2A 02 83 77 2A 04 83 7E 4F 3A 13 83
8100 81 77 79 21 13 83 96 2A 06 83 77 21 08 83 3A 0E
8110 83 86 77 21 00 83 34 21 04 83 34 C1 05 C2 94 80
8120 21 00 83 3A 0D 83 86 77 32 04 83 21 0A 83 35 C2
8130 8A 80 21 0B 83 7E A7 1F B7 77 C8 23 7E 87 77 23
8140 7E 87 77 23 7E A7 1F 77 C3 6F 80 01 00 85 11 FF
8150 FF 21 FF 01 0A 03 FE CC D2 60 81 FE 34 D2 65 81
8160 19 DA 54 81 C9 21 0F 83 34 01 00 85 21 FF 01 0A
8170 FE 80 3F 1F 02 03 19 DA 6F 81 C9 5F AF 47 57 67
8180 6F 7B FE 00 F2 8A 81 7A 2F 57 79 FE 00 F2 93 81
8190 78 2F 47 3E 0F F5 78 FE 80 3F 1F 47 79 1F 4F D2
81A0 A3 81 19 EB 29 EB F1 3D C2 95 81 29 7C C9 06 9E
81B0 21 00 85 11 7F 87 4E 0A 12 2C 1C C2 B6 81 21 00
81C0 86 11 7F 87 4F 0A EB 86 D2 CD 81 3E FF 77 EB 2C
81D0 1C C2 C4 81 C9 21 00 84 0E 2B CD EA 81 CD E5 81
81E0 0D C2 DA 81 C9 3E F5 C3 EC 81 3E 0B 06 03 77 23
81F0 05 C2 EE 81 C9 /BC
```

Listing 3: *Listing in hexadecimal format of the two's-complement square table and sine table used by the FFT program.*

```
9E00 00 00 00 00 00 00 01 01 01 01 02 02 02 03 03 04
9E10 04 05 05 06 06 07 08 08 09 0A 0B 0B 0C 0D 0E 0F
9E20 10 11 12 13 14 15 17 18 19 1A 1C 1D 1F 20 21 23
9E30 24 26 27 29 2A 2C 2E 2F 31 33 35 36 38 3A 3C 3E
9E40 40 42 44 46 48 4A 4D 4F 51 53 56 58 5A 5D 5F 62
9E50 64 67 69 6C 6E 71 74 76 79 7C 7F 81 84 87 8A 8D
9E60 90 93 96 99 9C 9F A3 A6 A9 AC B0 B3 B6 BA BD C1
9E70 C4 C8 CB CF D2 D6 DA DD E1 E5 E9 EC F0 F4 F8 FC
9E80 FF FC F8 F4 F0 EC E9 E5 E1 DD DA D6 D2 CF CB C8
9E90 C4 C1 BD BA B6 B3 B0 AC A9 A6 A3 9F 9C 99 96 93
9EA0 90 8D 8A 87 84 81 7F 7C 79 76 74 71 6E 6C 69 67
9EB0 64 62 5F 5D 5A 58 56 53 51 4F 4D 4A 48 46 44 42
9EC0 40 3E 3C 3A 38 36 35 33 31 2F 2E 2C 2A 29 27 26
9ED0 24 23 21 20 1E 1D 1C 1A 19 18 17 15 14 13 12 11
9EE0 10 0F 0E 0D 0C 0B 0B 0A 09 08 08 07 06 06 05 05
9EF0 04 04 03 03 02 02 02 01 01 01 01 00 00 00 00 00
9F00 00 03 06 09 0C 10 13 16 19 1C 1F 22 25 28 2B 2E
9F10 31 33 36 39 3C 3F 41 44 47 49 4C 4E 51 53 55 58
9F20 5A 5C 5E 60 62 64 66 68 6A 6B 6D 6F 70 71 73 74
9F30 75 76 78 79 7A 7A 7B 7C 7D 7D 7E 7E 7F 7F 7F 7F
9F40 7F 7F 7F 7F 7E 7E 7E 7D 7D 7C 7B 7A 7A 79 78 76
9F50 75 74 73 71 70 6F 6D 6B 6A 68 66 64 62 60 5E 5C
9F60 5A 58 55 53 51 4E 4C 49 47 44 41 3F 3C 39 36 33
9F70 31 2E 2B 28 25 22 1F 1C 19 16 13 10 0C 09 06 03
9F80 00 FD FA F7 F4 F0 ED EA E7 E4 E1 DE DB D8 D5 D2
9F90 CF CD CA C7 C4 C1 BF BC B9 B7 B4 B2 AF AD AB A8
9FA0 A6 A4 A2 A0 9E 9C 9A 98 96 95 93 91 90 8F 8D 8C
9FB0 8B 8A 88 87 86 86 85 84 83 83 82 82 82 81 81 81
9FC0 81 81 81 81 82 82 82 83 83 84 85 86 86 87 88 8A
9FD0 8B 8C 8D 8F 90 91 93 95 96 98 9A 9C 9E A0 A2 A4
9FE0 A6 A8 AB AD AF B2 B4 B7 B9 BC BF C1 C4 C7 CA CD
9FF0 CF D2 D5 D8 DB DE E1 E4 E7 EA ED F0 F4 F7 FA FD
/5F
```

The 8080 program in listing 1 has been dumped out in hexadecimal format with checksum and appears in listing 2. The sine and square tables appear in listing 3. The equations used to define the tables are:

Two's-complement square table:

- Table entries are unsigned 0 thru 255
- Table index I = 0 thru 127 (two's complement 0 thru 127)
  Table (I) = INT (((I ↑ 2)/64) +0.5)
- Table index 129 thru 255 (two's complement −127 thru −1)
  Table (I) = INT ((((256 −I) ↑ 2)/64) + 0.5)
- Table index 128 ('two's-complement−128)
  Table (128) = 255 (not exact value of 256)

Two's-complement sine table:

- Table index I runs from 0 thru 255
- Table (I) = INT(0.5 + 127*SIN((I)*2*PI/256))
  where PI = 3.1416

An optimization of the 6800 FFT would be to replace lines 285 thru 287 inclusive by the single instruction ASR A. This has been incorporated into the 8080 program, but it makes a negligible difference because there is no single 8080 instruction equivalent of the 6800 ASR A instruction (arithmetic shift right, A accumulator). The test power spectrum produced by the 8080 FFT program is printed out in listing 4.

Listing 4: *Test power spectrum produced by the 8080 FFT program in listing 1. The waveform is a square wave with a period of six data points. The first byte is 0 frequency.*

```
877F 01 01 01 01 00 01 00 00 00 00 00 01 00 01 00 00
878F 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
879F 00 00 00 00 00 00 01 01 02 03 10 3C 03 01 01 00
87AF 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
87BF 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
87CF 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
87DF 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
87EF 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
87FF 13 /72
```

Richard Lord Replies

Mr Roxburgh is indeed correct about the possibility of overflow with my scaling routine. I tried slowly increasing the amplitude of a square-wave input and discovered that for amplitude pairs of ± hexadecimal 1B, 1F; 33, 3F; and 6A, 6E the algorithm produces overflow artifacts. This did not show up in initial testing because integral binary amplitudes (10, 20, 40) were used. The scaling routine immediately fixes these values before overflow has a chance to occur. For sampled audio, this overflow has undoubtedly introduced errors. Insertion of new limits, as Mr Roxburgh proposed, fixed the overflow problem so that the FFT yields correct results at all amplitudes. My thanks to Mr Roxburgh for pointing this out. I hope that this has not created too many difficulties for anyone who has been using the FFT previous to this discovery.

*Many letters have come to me in response to this article and the response has been very gratifying. Most of the letters have been requests for the 6502 verison which I never got around to writing. (At this time I'd be more inclined to try a 6809 version.) Quite a few readers suggested great improvements to the "sum of absolute values" method, and one letter pointed out that the SIN table is actually a −1*SIN yielding inverted imaginary terms. All these improvements are greatly appreciated.* ■

META TECHNOLOGIES

26111 Brush Avenue, Euclid Ohio 44132
CALL TOLL FREE 1-800-321-3552 TO ORDER
IN OHIO, call (216) 289-7500 (COLLECT)

FILE BOX

DISKETTE STORAGE SYSTEM

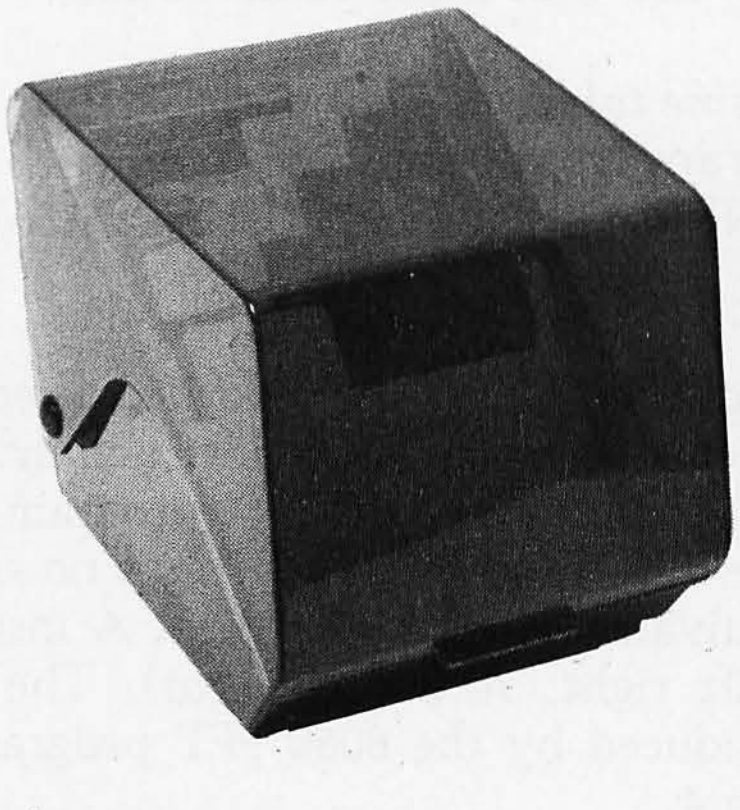

$24.95 for 5¼" disks

$29.95 . . . for 8" disks

MTC brings you the ULTIMATE diskette storage system, at an affordable price. Storing 50 to 60 diskettes, this durable, smoke-colored acrylic unit provides easy access through the use of index dividers and adjustable tabs. Unique lid design provides dust-free protection and doubles as a carrying handle.

'RINGS' & THINGS

Help prevent data loss and media damage due to improper diskette centering and rotation with the FLOPPY SAVER™ reinforcing hub ring kit. 7-mil mylar rings install in seconds. Kit is complete with centering tool, pressure ring, 25 adhesive backed hub rings and instructions.

HUB RING KIT for 5¼" disks	$10.95
HUB RING KIT for 8" disks	$12.95
REFILLS (50 Hub Rings)	$ 5.95

Protect your expensive disk drives and your valuable diskettes with our diskette drive head cleaning kit. The kit, consisting of a pair of special "diskettes", cleaning solution and instructions, can be used for 52 cleanings. Removes contamination from recording surfaces in seconds without harming drives.

CLEANING KIT for 5¼" drives	$24.95

PLASTIC LIBRARY CASES

(not shown)

An economical form of storage for 10 to 15 diskettes, and is suitable for your bookshelf! Case opens into a vertical holder for easy access.

5¼-inch diskette case	$3.50
8-inch diskette case	$3.95

Single Sided, Soft-Sectored 5¼-inch,
(for TRS-80™) Mini-floppy

DISKETTES

$21.95 box of 10

These are factory fresh, absolutely first quality (no seconds!) mini-floppies. They are complete with envelopes, labels and write-protect tabs in a shrink-wrapped box.

PLAIN JANE™

DISKETTES

The Beautiful Floppy
with the Magnetic Personality™

Thousands of people have switched to this low-cost alternative. These quality diskettes are packaged in a plain white box . . . no fancy printing, fancy names or fancy labels, not even our own (labels cost money). Trust us.

PLAIN JANE™ Diskettes	$21.95
10 boxes of 10 (each box)	$21.50

PLAIN JANE™ *Gold*

Introducing MTC's premium generic diskette. Single-Sided, Soft-Sectored, DOUBLE-DENSITY, 5¼-inch diskettes with reinforcing HUB-RINGS. Individually 100% ERROR-FREE certified. Invest in GOLD!

PLAIN JANE™ *Gold*	$25.95

VERBATIM'S PREMIUM DISKETTES AT AFFORDABLE PRICES

DATALIFE™

Seven data-shielding improvements mean greater durability and longer data life. These individually, 100% error-free certified diskettes feature thicker oxide coating, longer-lasting lubricant, improved liner, superior polishing and more! Meets or exceeds IBM, Shugart, ANSI, ECMA and ISO standards. Reinforcing HUB RINGS help prevent data loss and media damage, reducing errors.

Buy the best . . . buy DATALIFE™

VERBATIM DATALIFE™ DISKETTES

5¼-inch (box of 10)	
MD525-01	$26.95
10 boxes of 10 (each box)	$25.95
8-inch FLOPPIES	
Double-Density, FD34-8000	$43.95

MICROPARAPHERNALIA

DISKETTES (box of ten)

5¼" PLAIN JANE™	$21.95
PLAIN JANE™ *Gold*	$25.95
5¼" DATALIFE™ MD 525-01	$26.95
8" DATALIFE™ FD34-8000	$43.95

NEWDOS by APPARAT

NEWDOS/80 ★SPECIAL★	$129.95
NEWDOS+ to NEWDOS/80 UPGRADE	CALL
NEWDOS+ with ALL UTILITIES	
35-track	$69.95
40-track	$79.95

BOOKS

TRS-80™ DISK AND OTHER MYSTERIES	$19.95
MICROSOFT™ BASIC DECODED	$29.95
1001 THINGS TO DO WITH YOUR PERSONAL COMPUTER	$ 7.95

Let Your TRS-80™ Test Itself With

THE FLOPPY DOCTOR & MEMORY DIAGNOSTIC

by THE MICRO CLINIC

A complete checkup for your Model I. THE FLOPPY DOCTOR completely checks every sector of 35- or 40-track disk drives. Tests motor speed, head positioning, controller functions, status bits and provides complete error logging. THE MEMORY DIAGNOSTIC checks for proper write/read, refresh, executability and exclusivity of all address locations. Includes both diagnostics and complete instruction manual.

SYSTEM DIAGNOSTICS	$19.95

An improved version of the SYSTEM DIAGNOSTICS above. Designed for single or double density, 35-, 40-, 77-, or 80-track disk drives. Includes new and modified tests. Features THE FLOPPY DOCTOR, Version 3.0.

SYSTEM DIAGNOSTICS-V3	$24.95

CALL FOR INFORMATION ON OTHER PRODUCTS

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation. DATALIFE is a trademark of VERBATIM. PLAIN JANE, AIDS-I, AIDS-III, CALCS-III, CALCS-IV, MERGE-III are trademarks of MTC.

MOST ORDERS SHIPPED WITHIN ONE BUSINESS DAY

Products damaged in transit will be exchanged.

PRICES IN EFFECT
May 1, 1981 THRU
May 31, 1981,
Prices, Specifications, and Offerings subject to change without notice.
8105

WE ACCEPT
- VISA
- MASTER CHARGE
- CHECKS
- MONEY ORDERS
- C.O.D.

- Add $3.00 for shipping & handling
- $3.00 EXTRA for C.O.D.
- Ohio residents add 6½% sales tax.

Circle 236 on inquiry card.

What's New?

SYSTEMS

Handy Pocket Computer Uses BASIC

Sharp Corporation will announce the introduction of its PC-1211 Pocket Computer into the American market at this month's National Computer Conference (NCC). Measuring only 17.5 by 7 by 1.5 cm ($6\frac{7}{8}$ by $2\frac{3}{4}$ by $1\frac{9}{32}$ inches), the battery-powered PC-1211 contains BASIC in ROM (read-only memory). A 24-character LCD (liquid-crystal display) can be used to show program lines, prompt the user for input from the keyboard, or display results. The unit's typewriter-like keyboard includes a calculator-type keypad. The PC-1211's memory can hold up to 1424 program steps and 26 data variables, or program memory can be used for data (eight steps are equivalent to one variable). Information in memory is retained even when the power is off due to a memory safeguard circuit.

The PC-1211 uses a reservable key system, making it possible to assign a key for a frequently used function or command. Reserved keys provide one-key recall during both manual calculation and programming. In addition, a definable key system fixes 18 programs for each key, allowing the user to recall and run each program at the touch of the proper key. Transparent templates that fit over the keyboard portion of the unit are included to allow labeling of reserved and defined keys.

The BASIC interpreter has the more common BASIC commands and functions, as well as DEBUG, PRINT USING, BEEP, ASN (arcsine), ACN (arccosine), EXP (e^x), and more. Editing functions allow left and right cursor shifting, insertions and deletions, and scrolling up or down. Subroutines and FOR...NEXT loops can be stacked to four levels, and 15 levels of parentheses can be maintained. An 80-character input buffer and multiple statements per line allow easy program entry. A ten-digit mantissa and two-digit exponent are used in all calculations. Four mercury batteries provide approximately 300 hours of operation, thanks to the automatic power-off feature. An applications manual containing 134 programs in ten application areas such as math, statistics, civil engineering, and electrical is included. Each program is accompanied by a description of how it works and a complete list of variable assignments. A beginner's BASIC book is also included in the package.

Also being introduced at NCC are two peripherals for the PC-1211. The CE-121 Cassette Interface allows programs, key assignments, and data to be saved or loaded to or from a cassette-tape recorder. For hard-copy output, Sharp has the CE-122 Printer/Cassette Interface. In addition to the cassette-interface functions, the CE-122 features a 16-character dot-matrix printer capable of printing one line per second. The unit is powered by a rechargeable nickel-cadmium battery and includes a battery indicator that flashes when the battery becomes low.

The PC-1211 will have a suggested retail price of $249. The CE-121 and the CE-122 will have suggested retail prices of $49 and $149, respectively.

The PC-1211 has been previously sold by Radio Shack as the TRS-80 Pocket Computer.

For more information on the PC-1211 Pocket Computer, the CE-121 Cassette Interface, or the CE-122 Printer/Cassette Interface, contact Sharp Electronics Corporation, 10 Keystone Pl, Paramus NJ 07652, (201) 265-5600.

Circle 500 on inquiry card.

Master Controller Board

The Master Controller Board is a Z80-based single-board computer that can be customized for each application. Customization is accomplished by inserting various ROMs (read-only memories), programmable memories, and control integrated circuits as needed. All the I/O (input/output) circuits are mapped into both memory and I/O address space. The board provides three ROM/EPROM (erasable programmable ROM) sockets for up to 12 K bytes of mixed ROM/EPROM. Also included are 2 K bytes of programmable memory, provision for up to 72 lines of parallel I/O, a keyboard controller, and an integrated circuit that provides two serial I/O ports. Two counter/timers and an arithmetic circuit can be added. The Master Controller Board costs $49.95 for a bare board, $99.95 for the minimum kit, and $199.95 assembled. Other options are available. Contact R W Electronics, 3165 N Clybourn, Chicago IL 60618, (312) 248-2480.

Circle 501 on inquiry card.

What's New?

PERIPHERALS

Video and Audio on One Board

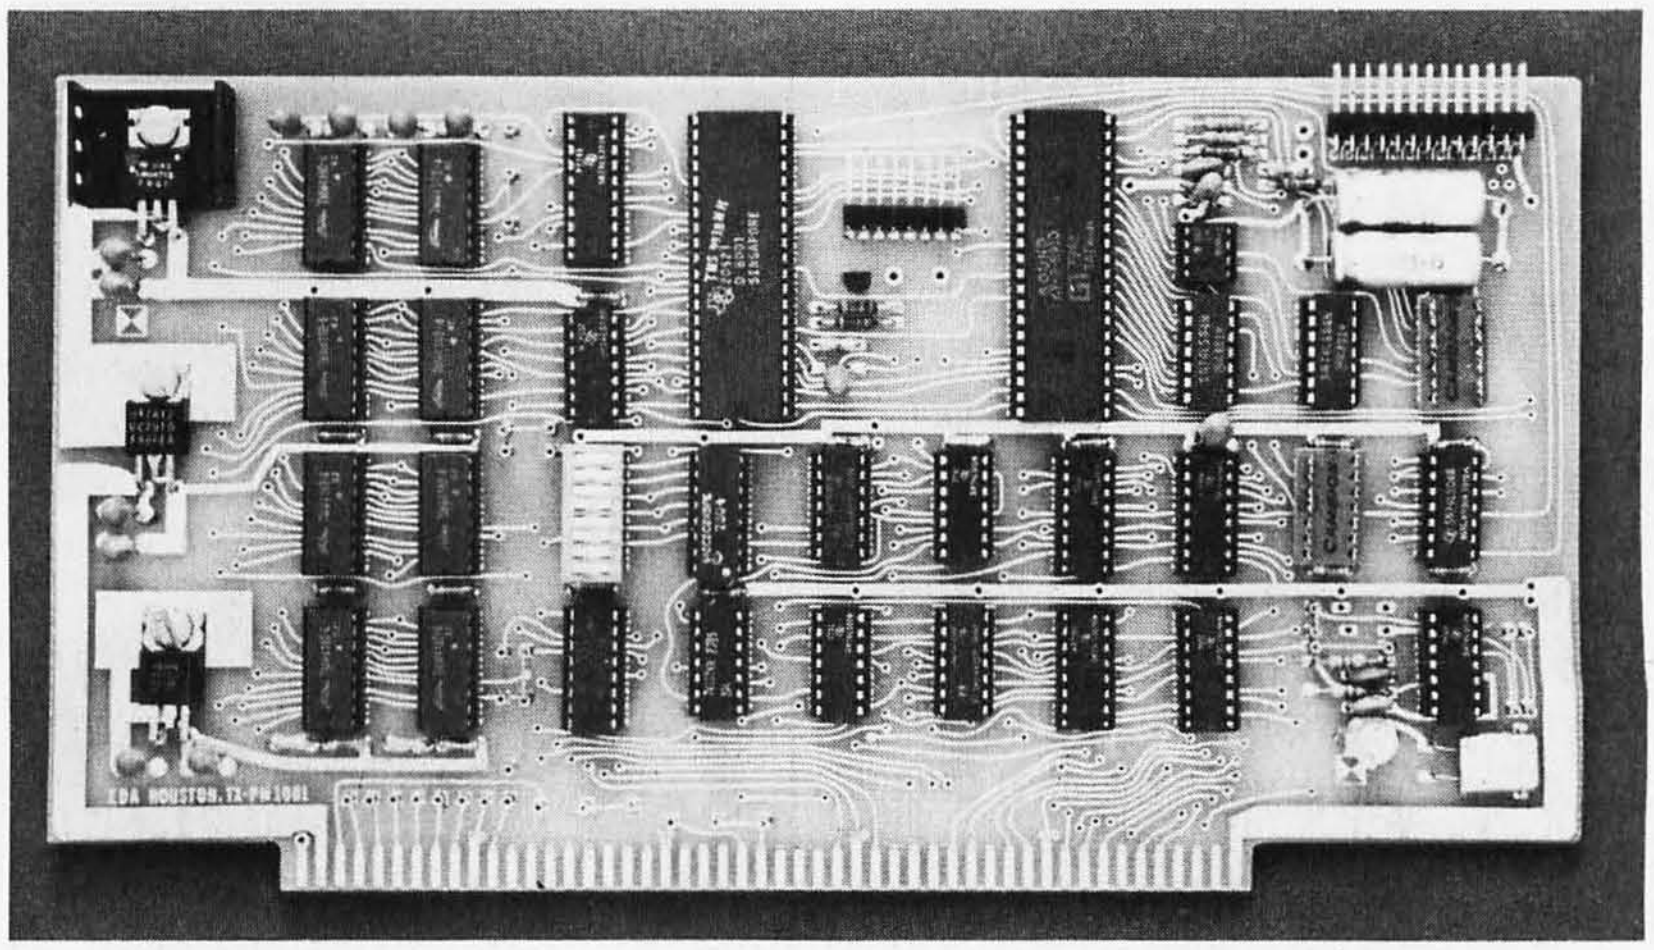

The Color Video Processor and Programmable Sound Generator board can create color graphics and sound. It contains 16 K bytes of I/O- (input/output) mapped video memory and allows graphics or text to be superimposed over an external video input. Using 16 colors with 35 display planes, a three-dimensional effect can be obtained. In addition, the board has three programmable square-wave tone generators and two 8-bit programmable I/O ports. The graphics mode features 256 by 192 dot resolution. The board also allows real-time interrupts. The tone generators feature envelope generation over a range of 12 octaves. The single-board color video and sound generator uses the Texas Instruments TMS9918A Video Display Processor and the General Instrument AY-3-8910 Programmable Sound Generator, and is compatible with Z80, 8085, and 8080 microprocessors on S-100 bus systems. Documentation includes programming examples and test routines. It is available for $475 assembled and tested or $375 in kit form. Contact Electronic Design Associates, POB 94055, Houston TX 77018, (713) 999-2255.

Circle 502 on inquiry card.

Q2000—Family of Hard-Disk Drives

The Q2000 series of 8-inch fixed-hard-disk drives are compatible with Shugart's SA1000 disk drives, but offer 10-, 20-, and 30-megabyte unformatted capacities. This is achieved by using a special head-positioning technique. The Q2000 family features a 4.34-megabit-per-second transfer rate, an average latency of 10 ms, and access times of 15 ms track-to-track, 100 ms maximum, and 50 to 60 ms average. Maximum recording density is 6600 bits per inch, and track density is 345 tracks per inch. Rotational speed is 3000 rpm (revolutions per minute). Soft-sectoring is offered.

In OEM (original equipment manufacturer) quantities of 500 per year, pricing is $1200 for the 10-megabyte Q2010, $1500 for the 20-megabyte Q2020, and $1800 for the 30-megabyte Q2030. For more information, contact Quantum Corporation, 2150 Bering Dr, San Jose CA 95131, (408) 262-1100.

Circle 503 on inquiry card.

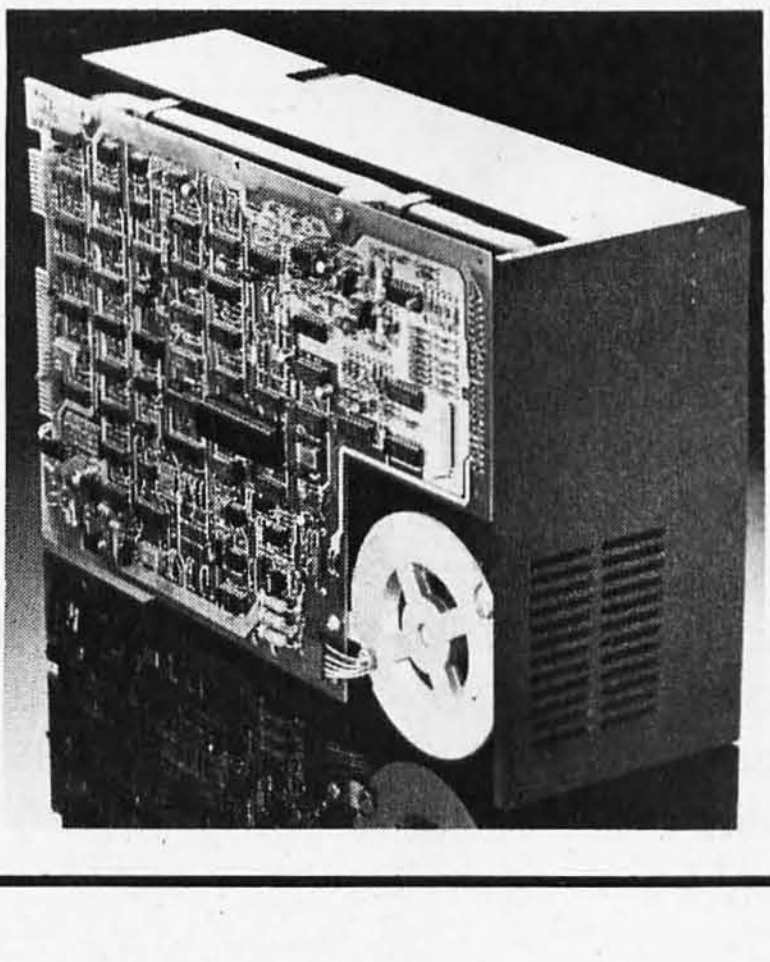

What's New?

PUBLICATIONS

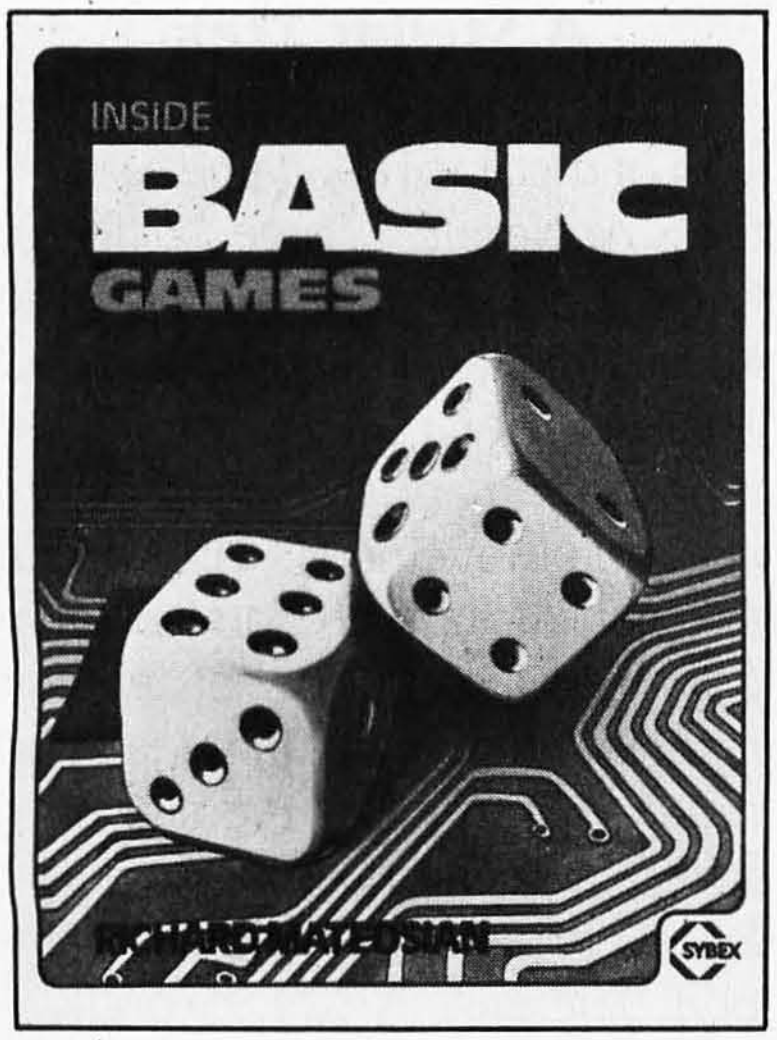

Inside BASIC Games

Inside BASIC Games, by Richard Mateosian, uses games as a framework for teaching BASIC programming. Eight games, ranging from simple arithmetic to complex matching games, are described and analyzed so that readers can learn how to design their own programs, as well as play the game. The games are written for most microcomputers. **Inside BASIC Games** is a Sybex publication, and it costs $13.95. Contact Sybex Inc, 2344 6th St, Berkeley CA 94710, (415) 848-8233.

Circle 504 on inquiry card.

Microcomputer Software Catalog

Creative Discount Software has released its **Winter-Spring Software Catalog** for the TRS-80, TI-99/4, and the Apple II and the Apple II Plus microcomputers. The catalog features professional, educational, and business software at discounts of up to 30%. Medical and dental office-management systems are also available. For your free copy, request catalog number 47B, from Creative Discount Software, 256 S Robertson, Suite 2156, Beverly Hills CA 90211, (800) 824-7888; in Alaska and Hawaii, (800) 824-7919; in California, (800) 852-7777. Ask for operator 831.

Circle 505 on inquiry card.

Solutions from Serendipity

Serendipity Software Solutions features commercial-application software packages designed for Z80 and 8080/8085-based microcomputers operating under CP/M. Among the products featured in the catalog are general-ledger accounting, commercial accounts receivable and payable, payroll, inventory control for retailers and manufacturers, and professional client billing. There is a $1 handling charge for the catalog. Contact Serendipity Systems Inc, 225 Elmira Rd, Ithaca NY 14850, (607) 277-4889.

Circle 506 on inquiry card.

Supercap Series Catalog

NEC Electron's **Supercap** catalog includes specifications, dimensions, applications, discharge characteristics, and lists of features for high-capacitance Supercap memory-backup devices. The Supercaps supply capacitances of up to 1 F **[yes, one farad...RSS]**. They feature a slow rate of discharge and can provide very low currents for approximately one week. The catalog is free from the Product Marketing Manager for Capacitors, NEC Electron Inc, 252 Humboldt Ct, Sunnyvale CA 94086, (408) 745-6520.

Circle 507 on inquiry card.

Optoelectronics and Fiber-Optics Manual

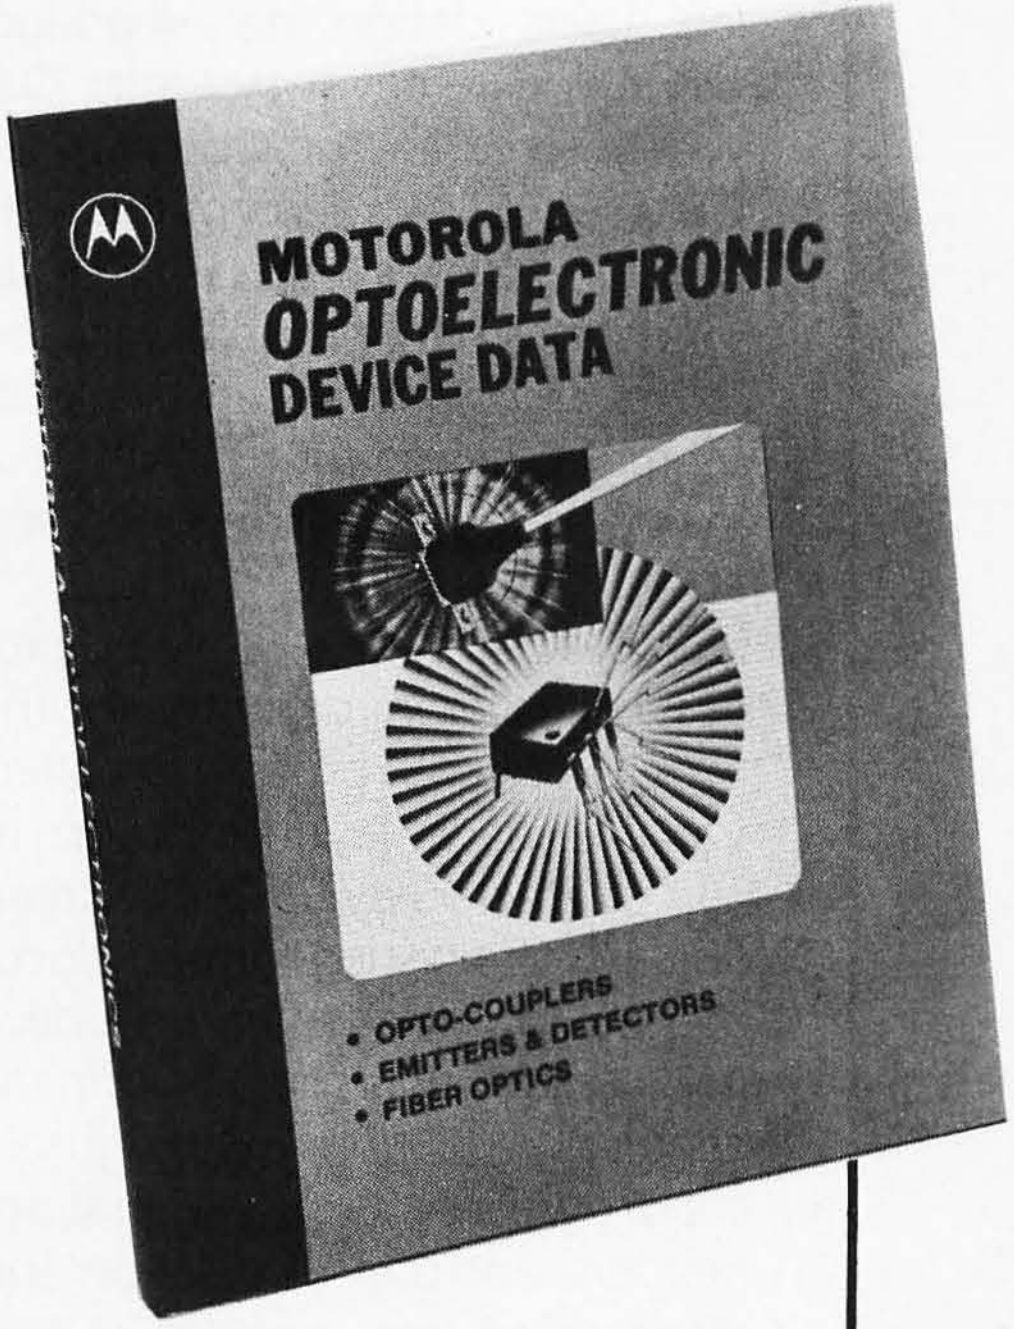

A 286-page optoelectronics and fiber-optics data manual has been published by Motorola Semiconductor Products Inc. The manual provides device data sheets, selector guides, cross-references, and applications information. The manual includes gallium-arsenide infrared emitters, silicon detectors, opto-coupler/isolators, the family of opto-triac drivers, and Motorola's SCR (silicon-controlled rectifier) couplers.

The manual's fiber-optic section is intended principally to address fiber-optic communications systems in the computer, industrial controls, medical electronics, consumer, and automotive applications.

The data book, **Mototola Optoelectronics Device Data**, costs $3.25. It is available from Motorola Semiconductor Products Inc, POB 20912, Phoenix AZ 85036, (602) 244-4306.

Circle 508 on inquiry card.

What's New?

SOFTWARE

Two New Products from Commodore

Ozz—The Information Wizard lets users design data-management and retrieval systems. Ozz was created for the Commodore CBM 8032 microcomputer. The program allows users to set up formats, store information, perform calculations and global searches, design forms and documents, analyze information, and access files.

Wordcraft 80 is a word-processing program designed for the 8032 system. Wordcraft 80 offers variable page layouts of up to 117 characters by 98 lines; screen display of finished-format documents; tabs, indentations, decimal tabs, columns; automatic centering and right-margin justification; automatic pagination, headers, and trailers; deletion and insertion of text; transfer of text from one page to another; merging of form letters with name/address files; handling of single sheets or continuous-form paper; sub- and superscripts; and automatic underlining and emboldening of text.

For more information on both products, contact Commodore Business Machines Inc, 950 Rittenhouse Rd, Norristown PA 19403, (215) 666-7950.

Circle 509 on inquiry card.

Atari Graphic Editor

Plot & Draw is a cassette-based graphics-generation and editing package that creates graphics in three colors plus a background. Video drawings can be created and saved on cassette. It requires an Atari computer with 8 K bytes of programmble memory and a joystick. The price is $18 from Mosaic Electronics, POB 748, Oregon City OR 97045.

Circle 510 on inquiry card.

The Voice

The Voice gives the Apple II or the Apple II Plus the power of speech. The Voice's built-in vocabulary allows expression of many combinations of phrases, or the user can enter his own vocabulary and make the 48 K-byte Apple say anything. Floppy disks store up to 80 words or phrases that can later be sorted for quick reference. The Voice allows any BASIC program to speak by using PRINT statements. The price is $39.95, from Muse Software, 330 N Charles St, Baltimore MD 21201, (301) 659-7212.

Circle 511 on inquiry card.

FORTH-79 for the Apple

MicroMotion's FORTH-79 conforms to the International FORTH-79 standard. It is suited for data acquisition, process control, animation, and video games.

FORTH-79 comes with a screen editor and macroassembler, and vocabularies for strings, double-precision integers, low-resolution graphics, and modem communications. The operating system allows for multiple disk drives and is 13- or 16-sector disk compatible. It runs on a 48 K-byte Apple II or Apple II Plus. FORTH-79 can be obtained for $89.95 from MicroMotion 12077 Wilshire Blvd, Suite 506, Los Angeles CA 90025, (213) 821-4340.

Circle 512 on inquiry card.

A Stellar Trek

This high-resolution color version of the Star Trek game runs on the Apple II. Three different Klingon opponents and the Romulan Star Empire are pitted against the user. Users have many command prerogatives, including movement throughout the galaxy, use of starship weaponry, maintenance of energy reserves, repair of damage, and more. A Stellar Trek requires 48 K bytes of memory and Applesoft BASIC in ROM (read-only memory). The price is $24.95 on floppy disk. Contact Rainbow Computing, 9719 Reseda Blvd, Northridge CA 91324, (213) 349-5560.

Circle 513 on inquiry card.

Combine Hard Disks and the TRS-80

HDOS-2 is a hard-disk operating system designed to be used with TRSDOS 1.2 on the TRS-80 Model II. The advantage of this software is that it allows a Corvus hard-disk drive to be interfaced with existing software with only minor changes to the programs. HDOS-2 requires 1 K bytes of memory and allows use of multiple drives. The system costs $125. Contact Computer Program Associates, 15076 Beltway Dr, Dallas TX 75234, (214) 233-2039.

Circle 514 on inquiry card.

TFORTH

TFORTH is a fig- (FORTH Interest Group) standard version of FORTH, extended for the TRS-80. It contains an operating system, assembler, text editor, floating-point mathematics package, I/O (input/output) package, graphics links into TRS-80 BASIC, and a phoneme assembler to support voice synthesizers. TFORTH is supplied on 5-inch floppy disks for $130. Contact Advanced Technology Corporation, 1617 Euclid Ave, Knoxville TN 37921, (615) 525-1632.

Circle 515 on inquiry card.

INCREDIBLE? BELIEVE IT!

PRINTERS


Qantex 6000

150 cps bidirectional-9x9 dot matrix, quietized case, 136 col, vertical form control and many other functions **$1195**

We feel this printer offers the best price/performance ratio available. RS-232 serial to 19,200 baud supporting X-ON, X-OFF or Current Loop — add $40

Teletype 40, 300 LPM-typewriter quality, RS-232 interface. This quality printer is available in many configurations including forms access, quietized case, etc. **Only** from **$2495**

Teletype 43	from **$995**
NEC Spinwriter-55 cps, bidirectional, letter quality R.O./tractors **$2540** KSR/tractors	**$2795**
DIABLO 630-40 cps, bidirectional, daisy wheel, plot/graph	**$2270**
C. ITOH Starwriter, 25 cps, daisy wheel	**$1575**
C. ITOH Starwriter, 45 cps, daisy wheel	**$1849**
EPSON MX-80, 80 cps, 9x9 dot matrix	**$545**
ANADEX 9500/9501, up to 200 cps, high resolution dot	**$1349**
OKIDATA Microline 80, 80 cps, 9x7 dot matrix	**$525**
Microline 82, bidirectional, friction/pin feed	**$625**
Microline 83, bidirectional, 120 cps, uses 15" paper	**$995**
TI-810, 150 cps, Basic	**$1695**
Package-Compressed print, vertical form control	**$1830**
CENTRONICS 704-9,180 cps, 9x9 dot matrix, 132 col, RS-232	**$1595**
704-11,180 cps, 9x9 dot matrix, 132 col, parallel	**$1695**
730,100 cps, 7x7 dot matrix, same as R.S. LPII	**$660**
737,80 cps, nx9 dot matrix, same as R.S. LPIV proportional spacing	**$849**
DEC LA-34	**$1085**

S-100 SPECIALTIES

California Computer Systems

These high quality, reliable products have made CCS defacto industry standard for S-100 products Assembled and tested:

		list	only
2200	H.D. Mainframe, 20 a. P.S., 12 slot MB	**$434**	**$399**
2065C	64K dynamic RAM/Bank Select	**$720**	**$580**
2810A	Z-80 CPU, serial port, ROM monitor	**$310**	**$259**
2422A	Floppy Cont, CP/M 2.2, ROM monitor	**$425**	**$345**
SSM	**CB2 Z-80 CPU**	**$344**	**$295**
	2P + 2S I/O interface	**$290**	**$249**

We can supply the full S-100 and Apple lines of CCS, SSM, NNC, MORROW DELTA, NORTHSTAR and GODBOUT at similar savings.

TERMINALS

TELEVIDEO 912 C	**$950**	**$725**
920 C	**$1030**	**$789**
950		**$call**
SOROC IQ 120	**$995**	**$729**
IQ 140	**$1395**	**$1149**
INTERTUBE III or **EMULATOR** (multi-terminal)		**$call**
DEC VT-100	**$2050**	**$1575**

Similar savings for our HAZELTINE and LEAR SIEGLER lines

5¼" DISK DRIVE SALE

MPI B-51 40 track, 102K Byte drives. These drives come complete with enclosure and power supply. They can be mixed with each other and Radio Shack® drives on the same cable. 90 day warranty. **ONLY $314**

8" DISK DRIVE SALE

8" SHUGART SA801R	**$425**
Premium double sided drives: **8" SHUGART SA851R**	**$625**
	2 for **$1190**
QUME DATATRACK 8	**$650**
	2 for **$1250**
Enclosure, power supply for 2 8" drives (horizontal) A&T	**$299**
NNC industrial grade enclosure for 2 drives with P.S.	**$415**
POWER 1, power supply for 2 8" drives	**$135**
MORROW Discus 2D + CP/M®	**$963**
Discus 2+2+CP/M®	**$1259**

HARD DISK SPECIALS

	List	only
CORVUS 10MB and controller	**$5350**	**$call**
20MB and controller		**$call**
Constellation Network Multiplexer	**$750**	**$call**
Mirror Video Tape Disk Backup	**$790**	**$call**
MORROW 29MB+controller+CP/M 2.2®	**$4995**	**$3995**
CAMEO cartridge drive controller	**$1500**	**$1275**
controller, CDC Hawk Drive (5 fix, 5 rem)	**$6995**	**$5995**
controller, Western Dynex (5 fix, 5 rem)	**$5995**	**$5099**

We carry the full line of KONAN disk and tape controllers and subsystems.

FULLY CONFIGURED BUSINESS SYSTEMS

The following are some examples of the fully assembled and tested business and scientific computer systems which we offer. All include CP/M 2.2, 64K bytes dynamic RAM, Z-80A 4mh CPU. We offer a full line of quality, tested software.

CCS 2210A w/floppy controller, 1 serial port	**$1849**
CCS 300-1A w/1.2MB floppy drives, 2 serial, 2 parallel ports	**$4849**
CCS 400-1A w/10MB hard disc, 2 serial, 2 parallel ports	**$6999**
Optional CP/M for CCS 300, 400 (OASIS available)	**$150**
NNC 80 w/1MB floppy drives, 2 serial, 3 parallel ports	**$3799**
NNC 80W w/.5MB floppy, 8.4MB hard disc, (OASIS optional)	**$6693**
ALTOS single and multi-user systems	**$call**
MORROW Decision 1, MICROSOFT basic, UNIX	**$call**

PERSONAL COMPUTERS

APF Imagination Machine, basic, color, sound, tape, etc.	**$399**
ATARI 400	**$512**
800 with 16K RAM	**$895**

LOOK HERE!

NNC 2 board set Z-80A CPU, CP/M 2.2, floppy disc controller **2 serial, 3 parallel ports**, PROM, I/O cable	**$765**
SUPERBRAIN	**$call**
OSBORNE book-keeping programs (unaltered, require C-BASIC 2) includes comprehensive documentation General Ledger, Payroll, Account Rec./Payable each	**$99**
all three	**$250**
TCS business software G/L, Payroll, A/R, A/P each	**$150**
all four	**$500**

ALL OF OUR PERIPHERALS CAN BE CONFIGURED FOR RADIO SHACK® MODEL II

DEALER and INTERNATIONAL INQUIRIES WELCOME

WASHINGTON COMPUTER SERVICES

an affiliate of WASHINGTON ELECTRIC COMPANY INCORPORATED est. 1912

CUSTOM COMPUTER ROOM WIRING SINCE 1960
97 Spring Street
New York, N.Y. 10012
Hours: 8AM-5:30PM (EST) Mon.-Fri.

TO ORDER: CALL OPERATOR FOR OUR NEW TOLL-FREE NUMBER. In N.Y. State and for technical information call 1-(212) 226-2121

For fast delivery, send certified checks, money order or call to arrange direct bank wire transfers. Personal or company checks require two to three weeks to clear. All prices are mail order only. Prices subject to change without notice; call for latest prices. Prices include 2% cash discount. N.Y. residents add sales tax.

Radio Shack® is a trademark of the Tandy Corp.
CP/M® is a trademark of Digital Research

VISA MasterCard

SOFTWARE

Link the TRS-80 with Other Systems

The Super-Host program allows any type of system to communicate with the TRS-80 Model I microcomputer. The program will configure itself to run under TRSDOS, NEWDOS 2.1, or NEWDOS-80. It keeps track of the date and time, even after reboot or system resets. One function of the program protects the user's own and any foreign system from unwanted control codes. Another feature allows users to customize transmissions to conform to other systems' standards and block out characters that might affect those systems.

Super-Host is a menu-driven program, so users can set up all system parameters. Other features are its lowercase driver, uppercase lock for incoming data, and independent uppercase lock on outgoing data. It has user-programmable nulls and line feed. TRS-80 computers with a printer can be programmed to maintain a printed record of callers who have accessed the system.

Super-Host is available for $29.95 from Programs Unlimited, POB 265, Jericho NY 11753, (516) 997-8668.

Circle 516 on inquiry card.

FORTH for Atari

This FORTH system for the Atari 400 and 800 computers requires a minimum of 16 K bytes of programmable memory. The disk-based system has a screen editor and the capability to review and modify disk contents. Included with the program package is dictionary documentation and a customization guide. The system costs $50. For further information, contact Pink Noise Studios, 1411 Center St, Oakland CA 94607, (415) 465-1212.

Circle 517 on inquiry card.

Softstuff Software from Heath

Heath's utility and applications programs in the Softstuff line include the General Ledger II on a floppy disk for use with the HDOS operating system or Heath's version of the CP/M operating system. The price for the program is $124.95. The Small Business Inventory program for HDOS systems is $69.95. The CBASIC language, a disk-based, noninteractive language with pseudocode compiler and run-time interpreter for CP/M systems is priced at $110. The BDS C compiler includes a linking loader, a library containing file I/O (input/output) and floating-point functions, and a library manager. The C compiler runs on CP/M systems and is priced at $119.95.

The Softstuff product line also offers the Microsoft MACRO-80 package, a full-screen editor, a sort program, and a network system. For more information on Softstuff programs, contact Heath Company, Department 350-670, Benton Harbor MI 49022, (616) 982-3210.

Circle 518 on inquiry card.

Software for Law Offices

Law-1 is a time-management and billing system for the legal professional. It features system and program security, client/matter and attorney reporting, accounts-receivable ledgers, ageing analysis, pre-billing worksheets, invoicing, and automatic file backup, and it performs other-than-standard inquiries.

Law-1 is written in CBASIC for CP/M-based systems. It comprises 38 applications packages. The system is parameter driven and can support floppy- and hard-disk configurations. Different terminals are supported. A demonstration package is available for $75, and the single-user package price is $800. For further information, contact Microcon Inc, POB 805, Amherst NH 03031, (603) 673-0230.

Circle 519 on inquiry card.

Learn Trigonometry on the Compucolor II

Using a circular functions approach to trigonometry, these teaching programs provide experiences with radian measure, sine function development, graphing the sums of functions, drill with identities, and polar graphs. All programs encourage the user to explore functions under computer guidance, to recognize identities, and to notice patterns. Program listings are included, so users can create additional variations and drills. This disk for the Compucolor or Intecolor computers requires a 64- by 32-character screen with 127 by 127 color blocks in low- and high-resolution graphics. It is available for $29.95 from Metra Instruments Inc, 2056 Bering Dr, San Jose CA 95131, (408) 297-8530.

Circle 520 on inquiry card.

COMPUTER STOP

2545 W. 237 St. Torrance, CA. 90505

ORDER BY PHONE
MON.—SAT.
10-6

(213) 539-7670 PST
TELEX: 678401 TAB IRIN

LOWEST PRICES IN THE WEST,NORTH, SOUTH & EAST

apple computer
Sales and Service

APPLE /// OPTION A:	3850
APPLE /// 96K Information Analyst Package 12″ B/W Monitor	
APPLE /// OPTION B:	4350
SAME AS OPTION A PLUS: DISK II for APPLE ///	
APPLE /// OPTION C:	4800
SAME AS OPTION A PLUS: DISK II FOR APPLE /// SILENTYPE Thermal Printer	

APPLE HARDWARE

Parallel Printer Interface Card	160
Communications Card	195
High Speed Serial Interface	175
Pascal Language System	425
Centronics Printer Interface	185
Applesoft Firmware Card	160
Integer Firmware Card	160
Disk][with Controller DOS 3.3	529
Disk][only	475
Graphics Tablet	625

OTHER HARDWARE

Alf Music Synthesizer (3 Voice)	245
9 voice	175
ABT Numeric Keypad	119
Micromodem][	295
Apple Clock	245
Rom Plus with Keyboard Filter	175
Introl/X-10 System	250
Romwriter	150
DoubleVision 80 x 24 Video Interface	295
CCS Arithmetic Processor	399
CCS Parallel Interface	119
16K Ram Card	195
Microworks DS-65 Digisector	339
SVA 8 inch Disk Controller	335
Sup-R-Mod	30
CCS Synchronous Serial Interface	159
CCS Asynchronous Serial Interface	159
Corvus 10 Meg. Hard Disk	4395
Corvus Constellation	595

MISCELLANEOUS/SUPPLIES

16K RAM (200-250 NS)	49
Verbatium Datalife Diskette (Box of 10)	30
Dysan Diskettes (Box of 5)	22
Apple Diskettes (Box of 10)	45
Verbatim Diskette Boxes (Holds 50 Disks)	18
Silentype Paper (Box of 10 rolls)	40

APPLE][Plus
16K.......$1075
48K.......$1193
Disk][Drive..$529
with Controller & Dos. 3.3
PASCAL SYSTEM
$425
Z-80 Softcard
$299

MONITORS/DISPLAYS

Leedex Video 100 12″	140
Sanyo 9″ Monitor	195
KG-12C Green Phos. Monitor	275
Sanyo 12″ Green Phosphor. Monitor	275
NEC 12″ Green Phosphor. Monitor	275
Sanyo 12″ B/W Monitor	250

PRINTERS

Apple Silentype with interface	525
IDS 445 (Paper Tiger) with Graphics	795
IDS 460 with Graphics	1199
IDS 560 with Graphics 10)	1695
Centronics 737	895
NEC Spinwriter (RO, Serial)	2650

SOFTWARE

The Controller	525
Apple Post (Mailing List Program)	40
Easywriter Professional System	195
Apple Pie 2.0	95
DB Master Data Management	150
The Cashier	210
Apple Writer	65
Visicalc	125
CCA Data Management System	90
Full Screen Mapping for CCA DMS	59
Pascal Interactive Terminal Software (PITS)	29
Basic Interactive Terminal Software (BITS)	29
Data Capture	29
Data Factory DMS	95
Apple Plot	55
Apple Pilot	120
Magic Wand Word Processor (Needs Z-80 Softcard)	345
Dow Jones Portfolio Evaluator	45
Fortran	140

ORDERING INFORMATION: Phone orders invited using VISA, MASTERCARD or bank wire transfers. VISA & MC credit card service charge of 2%. AE credit card service charge of 5%. Mail order may send charge card number (include expiration date), cashier's check, money order or personal check (allow 10 business days to clear.) Please include a telephone number with all orders. Foreign orders (excluding Military PO's) add 10% for shipping. All funds must be in U.S. dollars (letters of credit permitted). Shipping, Handling and insurance in U.S. add 3% (minimum $4.00). California residents add 6% sales tax. Our low margins prohibit us to send COD or on purchase orders or open account (please send for written quotation). All equipment is subject to price change and availability. Equipment is new and complete with the manufacturer warranty. We do not guarantee merchantability of products sold. All returned equipment is subject to a 15% restocking fee. We ship most orders within 2 days.

WE ARE A MEMBER OF THE CHAMBER OF COMMERCE. **RETAIL STORE PRICES MAY DIFFER FROM MAIL ORDER PRICES.**

PLEASE SEND ORDERS TO:
COMPUTER STOP, 2545 W. 237 St., TORRANCE, CA 90505

Circle 89 on inquiry card.

What's New?

SYSTEMS

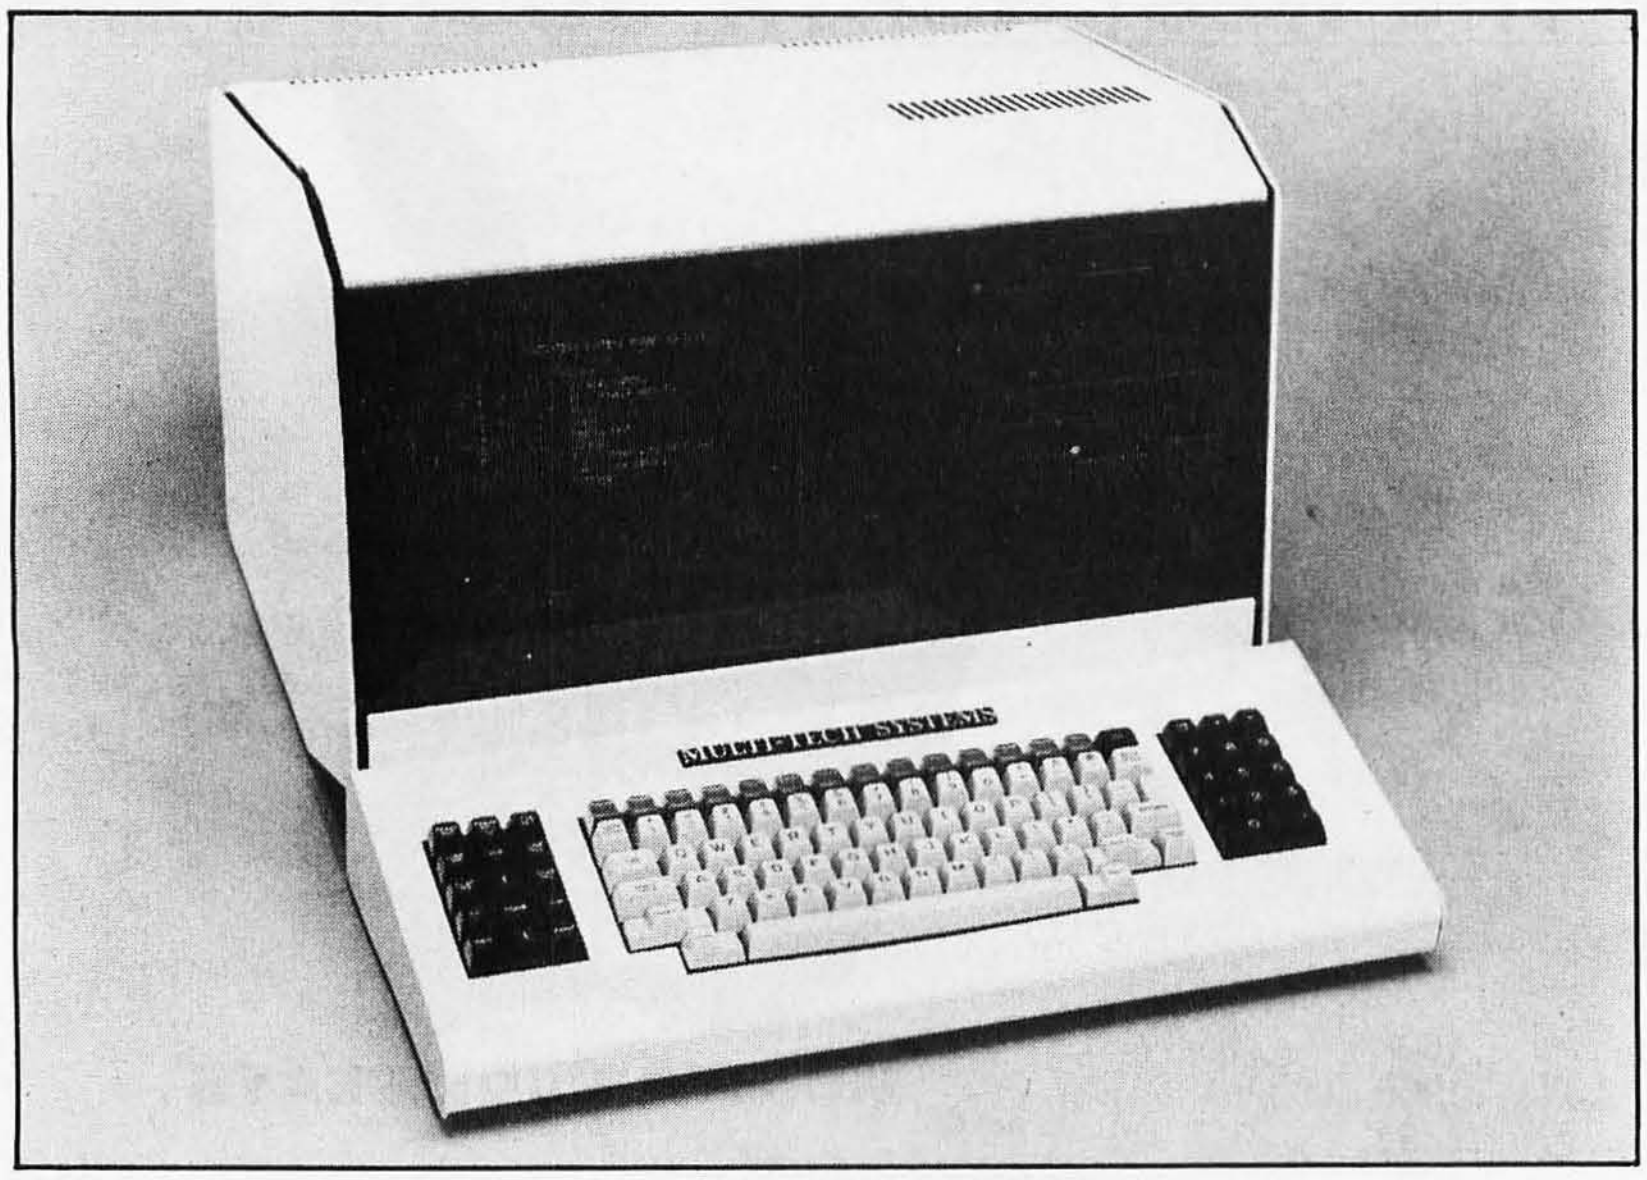

MT500 System

The MT500 microcomputer provides data- and word-processing capabilities for business and scientific applications. The MT500 features a video display, a Z80A microprocessor, the CP/M operating system, 64 K bytes of programmable memory, two 500 K-byte 5-inch floppy-disk drives, and a keyboard. Printers and modems can be attached. The MT500 has a suggested price of less than $6000. For details, contact Maatra Corporation, 1835 W Shryer Ave, Roseville MN 55113, (612) 631-3555.

Circle 521 on inquiry card.

Memory-Mapped S-100 Video Board

The VB3 is a memory-mapped board with a video-display system for S-100 computers. The display can be programmed for up to forty-eight 80-character lines featuring upper- and lowercase letters with true descenders. The VB3 features user-programmable fonts, low intensity, reverse and inverted video, and added print functions such as underscore, strike-through, thin line, or dot graphics. While the VB3 is memory mapped, it occupies memory-address space only when activated.

Software for the VB3 includes a CP/M-compatible driver routine and a terminal-simulator routine. Software controller timing, top and bottom margins, horizontal position, one level of gray, blinking and blank-out character and cursor features are offered. The VB3 video board costs $654.

For further information, contact SSM Microcomputer Products Inc, 2190 Paragon Dr, San Jose CA 95131, (408) 946-7400.

Circle 522 on inquiry card.

HP-83 from Hewlett-Packard

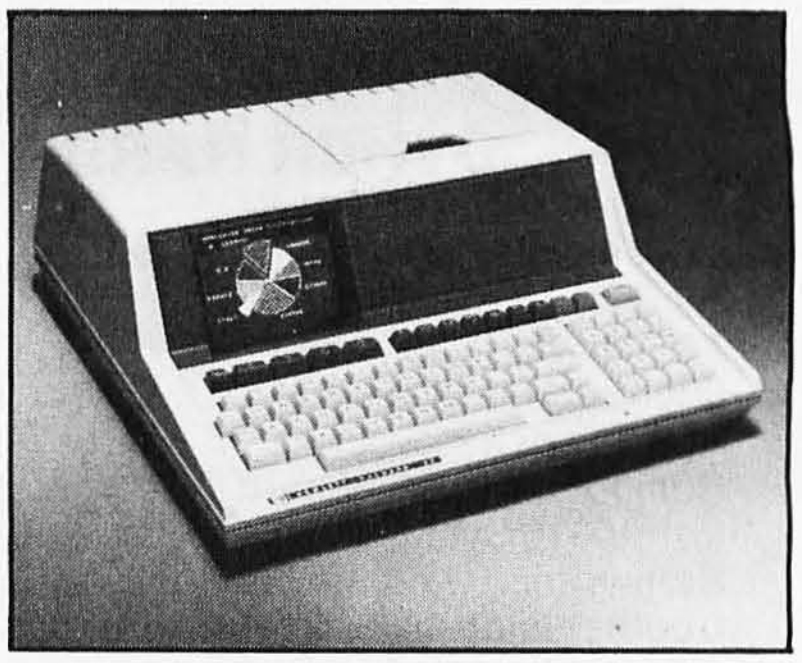

The HP-83 microcomputer is designed for business and technical professionals. The HP-83 is identical to Hewlett-Packard's HP-85 except that it does not have a built-in tape-cartridge drive and thermal printer. The HP-83 has a high-resolution video display, keyboard, enhanced BASIC, and graphics capabilities. Floppy-disk drives and printers can be interfaced to the unit. A data-base system, graphics software, a communications program, and a graphics digitizing tablet are some of the software and peripheral packages developed for the machine. The HP-83 has a list price of $2250. For more information, contact Inquiries Manager, Hewlett-Packard Company, 1507 Page Mill Rd, Palo Alto CA 94304, (415) 857-1501.

Circle 523 on inquiry card.

Where Do New Products Items Come From?

The information printed in the new products pages of BYTE is obtained from "new product" or "press release" copy sent by the promoters of new products. If in our judgment the information might be of interest to the personal computing experimenters and homebrewers who read BYTE, we print it in some form. We openly solicit releases and photos from manufacturers and suppliers to this marketplace. The information is printed more or less as a first-in first-out queue, subject to occasional priority modifications. While we would not knowingly print untrue or inaccurate data, or data from unreliable companies, our capacity to evaluate the products and companies appearing in the "What's New?" feature is necessarily limited. We therefore cannot be responsible for product quality or company performance.

WE WILL NOT BE UNDERSOLD

DISK DRIVES



FOR TRS-80* Model I

CCI-100 TEAC	5¼", 40 Track (102K)	**$314**
CCI-100 MPI	5¼", 40 Track (102K)	**$319**
CCI-280	5¼", 80 Track (204K)	**$429**

ADD-ON DRIVES FOR ZENITH Z-89

CCI-189	5¼", 40 Track (102K)	**$394**
CCI-289	5¼", 80 Track (204K)	**$499**
Z-87	Dual 5¼" system	**$995**

External card edge and power supply included. 90 day warranty/one year on power supply.

RAW DRIVES 8" SHUGART 801R		**$425**
5¼" MPI, TEAC or TANDOM **$ CALL**	POWER SUPPLIES	**$ CALL**

MORROW DESIGNS/THINKER TOYS™

DISCUS 2D	1 DRIVE	**$ 938**	2 DRIVE	**$1635**
DISCUS 2 + 2	1 DRIVE	**$1259**	2 DRIVE	**$2245**
DISCUS Hard Disk	M26	**$3990**	M10	**$2999**

DEI CARTRIDGE TAPE BACK-UP

For your hard disk. With either S-100 control card or piggy back board for single board Z-80 computers. **$2995**

DISKETTES — Box of 10 **with plastic library case**

5¼"	**Scotch**	**$35**	**Maxell**	**$40**	**BASF/Verbatim**	**$27.95**
8"	**Scotch**	**$50**	**Maxell**	**$55**	**BASF/Verbatim**	**$36.00**

PLASTIC CASE-Holds 50 5¼" diskettes			**$19.00**
SCOTCH HEAD CLEANING DISKETTE			**$25.00**
FLOPPY SAVER	**$11.95**	RINGS	**$6.95**

COMPLETE SYSTEMS

ARCHIVES	64K, 2-Drives, 77 Track			**$5495**
ALTOS	ACS8000 Series			**$ CALL**
TRS-80*	II-64K **$3499**		III-16K	**$ 899**
TRS-80*	Expansion Interface			**$ 299**
ZENITH	48K, all-in-one computer			**$2200**
ZENITH	Z-19			**$ 735**
TELEVIDEO	920C	**$ 748**	950	**$1049**
IBM	3101 Display Terminal			**$1189**
ATARI	400	**$ 479**	800	**$ 795**
MATTEL	INTELLIVISION			**$ 229**
APPLE PERIPHERALS				**$ CALL**

MONITORS

APF	9" B & W TVM-10			**$120**
BELL & HOWELL	9" B & W BHD911			**$220**
LEEDEX	12" B & W	**$129**	13" Color	**$369**
SANYO	9" B & W VM4509			**$155**
SANYO	12" B & W DM5012			**$226**
SANYO	12" Green Screen DM5112			**$238**
SANYO	13" Color DMC6013			**$416**
ZENITH	13" Color			**$349**

TELECOMMUNICATIONS

LIVERMORE STAR MODEM 2-year guarantee	**$125**
UNIVERSAL DATA SYSTEMS UDS-103	**$179**
D-CAT HARD WIRED DIRECT MODEM	**$189**
AUTO-CAT Auto Answer, Direct Connect Modem	**$229**
D.C. HAYES MICRO-MODEM	**$329**

PRINTERS



NEC Spinwriter

Letter Quality High Speed Printer

R.O.	**$2395**
R.O. with tractor feed	**$2595**
KSR with tractor feed	**$2895**

C.ITOH	Starwriter	**$1695**	Starwriter II	**$1895**
EPSON	MX-80	**$479**	MX-70	**$ 399**
PAPER TIGER				
IDS 445	Graphics & 2K buffer			**$ 699**
IDS 460	Graphics & 2k buffer			**$1050**
IDS 560	Graphics			**$1450**
ANADEX	DP-8000	**$849**	DP-9500/01	**$1345**
OKIDATA				
Microline 80	Friction & pin feed			**$ 420**
Microline 80	Friction, and pin & tractor feed			**$ 520**
Microline 82	Friction & pin feed feed			**$ 620**
Microline 83	120 cps, uses up to 15" paper			**$ 849**
CENTRONICS	730 **$ 595**	737 **$ 749**	779	**$ 969**
TI-810				
TRS-80* software, compressed print & vert. form control				**$1865**

16K RAM KITS **2 for $56** **$30**

200 ns for TRS-80*, Apple II, (specify): **Jumpers $2.50**

S-100 CALIFORNIA COMPUTER SYSTEMS





MAINFRAME	Model 2200A	**$349**
Z80 CPU	Model 2810	**$269**
MOTHER BOARD	Model 2501	**$106**
16K STATIC RAM, 200ns	Model 2116C	**$309**
32K STATIC RAM, 200ns	Model 2032C	**$619**
64K DYNAMIC RAM	Model 2065C	**$599**
FLOPPY DISC CONTROLLER	Model 2422A	**$359**
EXTENDER BOARD	Model 2520K	**$ 52**
2P + 2S I/O	Model 2718A	**$309**

APPLE ACCESSORIES AND SOFTWARE

VISICALC	**$120.00**
DB MASTER	**$159.00**
Z-80 SOFTCARD	**$269.00**
VIDEX BOARD	**$259.00**
16K CARD	**$169.00**
APPLE JOYSTICK	**$ 49.00**
SUPERMOD	**$ 29.00**
CCS CARDS	**$ CALL**
GALAXIAN	**$ 22.95**
SPACE ALBUM	**$ 35.00**
ASTEROIDS	**$ 17.95**
FLIGHT SIMULATOR	**$ 29.00**
WIZARD & PRINCESS	**$ 28.00**
SARGON 2	**$ 29.00**
HI-RES FOOTBALL	**$ 35.00**
MYSTERY HOUSE	**$ 21.00**

For fast delivery, send certified checks, money orders or call to arrange direct bank wire transfers. Personal or company checks require two to three weeks to clear. All prices are **mail order only** and are subject to change without notice. **Call for shipping charges.**

DEALER (NATIONAL/INTERNATIONAL) INQUIRIES INVITED **Send for FREE Catalogue**

The CPU SHOP

TO ORDER CALL TOLL FREE 1-800-343-6522

TWX: 710-348-1796 Massachusetts Residents call 617/242-3361

5 Dexter Row, Dept. B05M
Charlestown, Massachusetts 02129
Hours 10AM-6PM (EST) Mon.-Fri. (Sat. till 5)
Circle 104 on inquiry card.

Technical Information call 617/242-3361
Massachusetts Residents add 5% Sales Tax
Tandy Corporation Trademark/®Digital Research

master charge THE INTERBANK CARD

VISA®

Circle 316 on inquiry card.

LOWEST PRICES ON THE TRS-80 Computers

For Business, Learning and Entertainment

Pan American Electronics

INCORPORATED

a Radio Shack AUTHORIZED SALES CENTER

For More Information Call

TOLL FREE ORDER NUMBER
800-531-7466
Texas & Principal NUMBER
512-581-2765
Telex Number 767339
Dept. B, 1117 Conway
Mission, Texas 78572

CALIFORNIA COMPUTER SYSTEMS

32K RAM BOARD A&T. 450 NSEC	$579.95
200 NSEC	$629.95
16K RAM A&T. 450 NSEC	$255.95
200 NSEC	$285.95
64K DYNAMIC A&T. 200 NSEC	$548.95
Z80 PROCESSOR A&T.	$259.00
DISC CONTROLLER	$339.95
APPLE IEEE INSTRUMENTATION INTERFACE KIT 7490. A & T	$275.00
ARITHMETIC PROCESSOR FOR APPLE 7811A. A & T	$342.80
APPLE ASYNCHRONOUS SERIAL INTERFACE 7710A. A & T	$137.10
APPLE SYNCHRONOUS SERIAL INTERFACE 7712A. A & T	$153.95

ALL OTHER CCS PRODUCTS AVAILABLE

SSM

PB-1 2708 & 2716 Programming Board with provisions for 4K or 8K EPROM. No external supplies required. Textool sockets. Kit	$143.00
CB-1A 8080 Processor Board. 2K of PROM 256 BYTE RAM power on/rest Vector Jump Parallel port with status. Kit	$146.00
PCBD	$31.95
VB-3 80x24 VIDEO BOARD. Graphics included. 4MHZ. Kit	$379.95
IO-4 Two serial I/O ports with full handshaking 20/60 ma current loop: Two parallel I/O ports. Kit	$168.00
PCBD	$31.95
VB-IC 64 x 16 video board, upper lower case Greek composite and parallel video with software, S-100. Kit	$143.00
CB-2 Z80 CPU BOARD. Kit	$199.95
AIO APPLE SERIAL/PARALLEL Kit	$144.95

ALL OTHER SSM PRODUCTS AVAILABLE

WMC inc. WAMECO INC.

MEM-3 32K STATIC RAM 2114 24 bit addressing	$36.95
FDC-1 FLOPPY CONTROLLER BOARD will drive shugart, pertek, remic 5" & 8" drives up to 8 drives, on board PROM with power boot up, will operate with CPM™ (not included). PCBD	$43.95
FPB-1 Front Panel. IMSAI size, hex displays. Byte, or instruction single step. PCBD	$48.50
QM-12 MOTHER BOARD, 13 slot, terminated, S-100 board only	$39.95
CPU-1 8080A Processor board S-100 with 8 level vector interrupt. PCBD	$28.95
RTC-1 Realtime clock board. Two independent interrupts. Software programmable. PCBD	$25.95
EPM-2 2708/2716 16K/32K EPROM CARD. PCBD	$28.95
QM-9 MOTHER BOARD. Short Version of QM-12. 9 Slots. PCBD	$33.95
MEM-1 8K x 8 RAM 2102. Buffered PCBD	$31.95
PTB-1 POWER SUPPLY AND TERMINATOR BOARD. PCBD	$28.95
IOB-1 SERIAL AND PARALLEL INTERFACE. 2 parallel, one serial and cassette. PCBD	$28.95

2708	$7.50	2114L 450 NSEC	$4.99
2716	$25.95	2114L 200 NSEC	$5.99

MIKOS

(415) 728-9121
P. O. Box 955 • El Granada, CA 94018
Please send for IC, Xistor and Computer parts list

MAY SPECIAL SALE ON PREPAID ORDERS

(Charge cards not included on this offer)

WAMECO CPU-2. PCBD	$29.95
Z80 PROCESSOR WITH MIKOS PARTS	$119.95

WAMECO PCBD

IOB-1, CPU-1	$24.95 EA.
PTB-1, RTC-1	$22.95 EA.

MIKOS PARTS ASSORTMENT WITH WAMECO AND CYBERCOM PCBDS

MEM-3 less RAM	$ 95.95
With 2114L-4	$350.00
With 2114L-2	$390.00
CPU-1 with MIKOS #2 8080A CPU	$99.95
QM-12 with MIKOS #4 13 slot mother board	$110.95
RTC-1 with MIKOS #5 real time clock	$65.95
EPM-2 with MIKOS #11 16-32K EPROMS less EPROMS	$65.95
QM-9 with MIKOS #12 9 slot mother board	$99.95
FPB-1 with MIKOS #14 all parts for front panel	$144.95

MIKOS PARTS ASSORTMENTS ARE ALL FACTORY MARKED PARTS. KITS INCLUDE ALL PARTS LISTED AS REQUIRED FOR THE COMPLETE KIT LESS PARTS LISTED. ALL SOCKETS INCLUDED.

LARGE SELECTION OF LS TTL AVAILABLE
PURCHASE $50.00 WORTH OF LS TTL AND GET 10% CREDIT TOWARD ADDITIONAL PURCHASES.
PREPAID ORDERS ONLY.

VISA or MASTERCHARGE. Send account number, interbank number, expiration date and sign your order. Approx. postage will be added. Check or money order will be sent post paid in U.S. If you are not a regular customer, please use charge, cashier's check or postal money order. Otherwise there will be a two-week delay for checks to clear. Calif. residents add 6% tax. Money back 30-day guarantee. We cannot accept returned IC's that have been soldered to. Prices subject to change without notice. **$10 minimum order. $1.50 service charge on orders less than $10.00.**

Circle 265 on inquiry card.

THE STAR MODEM

From Livermore Data Systems

RS232 MODEM	**SALE $135**
IEEE 488 MODEM	**SALE $245**
RS232 CCITT	**$170**
IEEE 488 CCITT	**$280**

STAR Modem is the price performance leader with a full 2 YEAR FACTORY WARRANTY.

MIPLOT Intelligent Plotter
by Watanabe Instruments (Digiplot)

SPECIAL $1145



Has all intelligent functions for producing graphs and drawings including 8 vector and 4 character commands. Solid and broken lines can be specified. Character generator for alpha, numeric, and symbols. Characters can be rotated in 4 orientations, and can be 16 sizes. Coordinate axes drawn by specifying graduation interval and number of repetitions. Parallel ASCII interface, 11 x 17 paper.

WE CARRY THE BLACK APPLE

BELL & HOWELL
MADE EXCLUSIVELY FOR BELL & HOWELL BY
apple computer inc.



SPECIALS

EPSON MX-80 Printer	**Call**
EPSON MX-70 Printer	**Call**
STARWRITER Daisy Wheel Printer	$1500
Centronics 737 Printer	790
NEC Spinwriter	2500
XYMEC HI-Q 1000 Intelligent Daisy Wheel	2150
Leedex Video 100 12" Monitor	129
ZENITH DATA SYSTEMS	
Z19 Video Terminal (factory assem.)	735
Z89 with 48K (factory assem.)	2150
SYM-1	209
SYM BAS-1 BASIC or RAE-1/2 Assembler	85
KTM-2/80 Synertek Video Board	349
Seawell Motherboard - 4K RAM	195
Seawell 16K Static RAM - KIM, SYM, AIM	320

EBS Business System for PET/CBM
Extremely comprehensive package for small business. Fully integrated inventory and accounts receivable system including invoices, packing slips, mail labels, statements, bank deposit slips, and 17 reports.

Paper-Mate Word Processor $29.95
PET/CBM full featured 60 command system by Michael Riley. Uses either tape or disk and any printer. Includes in-text commands, floating cursor, scrolling, etc.

FLEX-FILE Data Base for CBM/PET $60
Random file handling system with Report Writer and Mail Label Handler. By Michael Riley

KMMM Pascal for PET $75
Subset of standard Pascal with true machine language translator for faster execution. 16K with tape or disk.

EARL for PET (disk file based) $65
Editor, Assembler, Relocater, Linker to generate relocatable object code.

fullFORTH+ for PET/CBM $65
A full-featured FORTH with extensions conforming to Forth Interest Group standards. Includes assembler, string processing capabilities, disk virtual memory multiple dimensioned arrays, floating point and integer processing.

6502	7.45	10/6.95	50/6.55	100/6.15
6502A	8.40	10/7.95	50/7.35	100/6.90
6520 PIA	5.15	10/4.90	50/4.45	100/4.15
6522 VIA	6.45	10/6.10	50/5.75	100/5.45
6532	7.90	10/7.40	50/7.00	100/6.60
2114-L200 ns RAM		3.75	20/3.50	100/3.25
2716 EPROM (5 volt)		9.90	5/9.45	10/8.90
TMS 2532 EPROM				23.50
4116-200 ns RAM				**8 for 29.00**
S-100 Wire Wrap				2.65

CASSETTES – AGFA PE-611 PREMIUM
High output, low noise, 5 screw housing, labels.

C-10	10/5.65	50/25.00	100/48.00
C-30	10/7.30	50/34.00	100/66.00

All other lengths available. Write for price list.

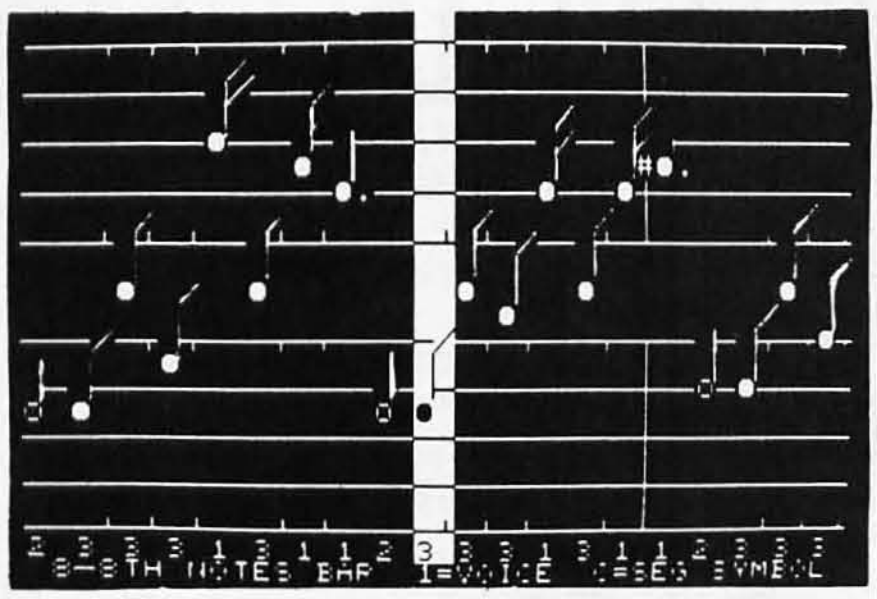

4 PART HARMONY MUSIC SYSTEM for PET
Allows you to easily enter, display, edit, and play 4 part harmony music. Includes whole notes thru 64ths (with dotted and triplets), tempo change, key signature, transpose, etc. The KL-4M unit includes D to A converter and amplifier (add your own speaker).

KL-4M Music Board with VMM Program	**$59.90**

commodore

CBM-PET SPECIALS

FREE Up to $235 FREE merchandise with purchase of one of following CBM-PET items!

		FREE
8032 32K - 80 column CRT	$1795	**235**
8050 Dual Disk Drive - 1 megabyte	1795	**235**
8N Full size graphics keyboard	795	**75**
16K Business or Graphic Keyboard	995	**150**
32K Business or Graphic Keyboard	1295	**205**
2040/4040 Dual Disk Drive - 340K	1295	**205**
2022 Tractor Feed Printer	795	**100**
C2N External Cassette Deck	95	**12**
CBM Voice Synthesizer	395	**50**
Used CBM/PET Computers		**CALL**

WRITE FOR SYSTEM PRICES

*****EDUCATIONAL DISCOUNTS*****
Buy 2 PET/CBM Computers, receive 1 FREE

WordPro 3+ 32K, disk, printer	250
WordPro 4+ 8032, disk, printer	385
OZZ Data Base System for CBM 8032	335
VISICALC for PET, ATARI	170
BPI General Ledger, A/P, A/R for PET/CBM	270
EPROM Programmer for PET	**72.00**
Programmers Toolkit - PET ROM Utilities	34.90
2 Meter IEEE to IEEE Cable	43.00
PET Spacemaker Switch	24.90
Dust Cover for PET	6.90
IEEE-Parallel Printer Interface for PET	110.00
IEEE-RS232 Printer Interface for PET	120.00
The PET Revealed	17.00
Library of PET Subroutines	17.00
Source Hookup over 1000 programs/services	**88**

DISK SPECIALS

SCOTCH (3M) 5¼"	10/2.90	50/2.80	100/2.70
SCOTCH (3M) 8"	10/2.95	50/2.85	100/2.75
Verbatim 5¼"	10/2.45	50/2.40	100/2.35
(add 1.00 for 5¼" Verbatim plastic storage box)			
Verbatim 8" Dbl. Dens.	10/3.45	50/3.35	100/3.25
BASF 5¼" soft	10/2.60	20/2.50	100/2.40
BASF 8" soft	10/2.65	20/2.55	100/2.45

Maxell Disks in stock - write for prices

Diskette Storage Pages		10 for 3.95
Disk Library Cases	8" - 2.85	5" - 2.15

ATARI 800 $777
All Atari Modules 20% OFF

ATARI EDUCATIONAL PLAN **Write for details.**

A P Products 15% OFF
A P Hobby-Blox 15% OFF

ALL BOOK and SOFTWARE PRICES DISCOUNTED

The 8086 Book (Osborne)	14.00
Z8000 Assembly Language Programming	16.90
PET Personal Computer Guide (Osborne)	12.75
PET and the IEEE-488 Bus (Osborne)	13.60
6502 Assembly Language (Osborne)	14.45
Programming the 6502 (Zaks)	10.45
6502 Applications Book (Zaks)	10.45
6502 Software Cookbook (Scelbi)	9.45
CP/M Handbook (w/ MP/M) Zaks	11.85
Practical BASIC Programs (Osborne)	13.60
Some Common BASIC Programs (Osborne)	12.75

115 E. Stump Road
Montgomeryville, PA 18936

215-699-5826 **A B Computers**

WRITE FOR CATALOG.
Add $1.25 per order for shipping. We pay balance of UPS surface charges on all prepaid orders. Prices listed are on cash discount basis. Regular prices slightly higher

Circle 1 on inquiry card.

Circle 439 on inquiry card.

component supply, inc.

1771 Junction Avenue
San Jose, California 95112
(408) 295-7247
(408) 295-7171

Yes! We supply IMSAI® compatible products...

NOTE: "Original" IMSAI parts were purchased at the closing business sale of IMSAI Manufacturing Corp. WW Components also distributes S-100 buss IMSAI compatible parts and boards. As supplies of "original" parts are exhausted, WW reserves the right to supply equivalent compatible parts not made by IMSAI. All items listed as "Assembled & Tested" have been assembled by WW Components and carry a 1 year warranty.

I-8080 S-100 ENCLOSURE Sheet Metal Kit	THE ORIGINAL IMSAI: Mainframe with blue cover, cardguides and hardware spaced for PS-28D Power Supply, up to 22 slot motherboard.	
	Kit of all metal parts and hardware w/docs	**$115.00**
	Thinker Toys WunderBuss20 for above w/o conn.	**$79.00**
MPU-B SBC 8085 CPU	Complete 8085 based CPU including: serial RS-232 port, parallel I/O port 3 MHz operation, 256 bytes memory, ROM monitor, 3 timers, and more. *Assembled & Tested*	**$250.00**
PS-28D Power Supply Parts Kit:	Mounts in the I-8080 enclosure, supplies +8V @ 28A, +/- 16V @ 3A, kit includes board, transformer, documentation, and all components. KIT	**$95.50**
I-8015 Complete System w/MPU-B	The complete 8085 system, includes MPU-B, RAM III, 10 slot terminated motherboard, PS-28D, and jump start front panel. A complete 64K system! *Assembled & Tested*	**$1250.00**
CP/M® 2.2 for IMSAI	NOW AVAILABLE - CP/M for the IMSAI floppy disk system. Version 2.2 is available for the DIO-C 8" controller. Others on request. Docs. incl. *8" Diskette & Manuals*	**$175.00**

Ask about documentation, repair service, firmware and software for your system.

TERMS: (1) PREPAID Send check or M.O. for merchandise amount only - we pay the shipping in USA only.
(2) UPS COD or bankcard orders by phone or mail - shipping charges added.
California Residents add 6.5% Sales Tax.

HICKOK DIGITAL MULTIMETERS

DMM +Vari-Pitch +Logi-Trax MX-333 $\$210.$

Model LX303 $\$69^{50}$

Model LX304 $\$79^{50}$

VIZ Tech DMM 3½-Digit LCD Readout
Model WD 747 $\$79^{95}$

Beckman DIGITAL MULTIMETERS

Model TECH 300 $\$109^{95}$
Model TECH 310 $\$140^{00}$
Model TECH 330 $\$199^{95}$

Simpson® DIGITAL MULTIMETERS

Model 462 $\$199^{95}$
Model 463 $\$169^{95}$

260 Meter
Model 260-7
$\$96.$ Complete with nickel-cadmium batteries, AC charger/adapter, test leads

B+K PRECISION 15 MHz Miniscope

- Rise time 11.7 nS or less
- Built-in signal delay line
- Flat response

Model 1420

Dual Trace 5" 30 MHz Triggered Scope
Model 1479A

Autoranging DMM
Model 2845

Digital Pulsar Probe Model DP-100

50 MHz Pulsar Probe Model DP-50

BSR X-10 Remote Control for Lights & Appliances

PK 400 4 Pc Standard Starter Kit ■ One (1) Standard Command Console ■ Two (2) Lamp Modules ■ One (1) Appliance Module $\$74^{99}$

PK500 5 Pc Ultrasonic Starter Kit ■ One (1) Deluxe Ultrasonic Command Console ■ One (1) Hand Held Remote Unit ■ Two (2) Lamp Modules ■ One (1) Appliance Unit $\$99^{95}$

LM501	Lamp Module	$13.95
AM601	Appliance Module	$13.95
WS701	Wall Switch Module	$13.95
WS711	Wall Switch Module with independent On-Off power buttons	$15.95

The Timer $\$59^{95}$
Model TC201

CSC 3½-Digit 0.1% Digital Capacitance Meter
Model 3001 $\$233^{75}$

Function Generator
Model 2001 $\$157^{95}$

Proto Boards
Model PB-104
Fully assembled
$\$59^{95}$

Logic Monitor
- Automatically displays static and dynamic logic
- Works with DTL, HTL, TTL, and CMOS

Model LM-1 $\$59^{95}$

NLS Touch/Test 20 Multimeter
Model TT20
A portable/bench-type meter

15 MHz Dual Trace Triggered Miniscope
Model MS-215

30 MHz Dual Trace Triggered Miniscope Model MS-230

YOU NAME IT....WE GOT IT. AND AT DISCOUNT PRICES.

SEND FOR FREE 180 PAGE CATALOG.

Miniature High Fidelity 3-Way Stereo Speakers
$\$59^{95}$
Model HF-9

MURAPHONE Cordless Telephone System
Model 300 $\$110.$

In-Dash Car Stereos

8-Track AM/FM $\$52^{50}$
Model JCS 420

Cassette AM/FM $\$57^{50}$
Model JCS 505

Digital Cassette AM/FM with Clock Model JCS 607 $\$89^{95}$

Graphic Equalizer
Model GE 5000 $\$39^{95}$

6x9 3-Way Speakers $\$12^{95}$ ea.
- 20 oz. magnet

Model BP2000-69 TRD

LUXO Magnifier Lamp
Precision ground and polished magnification lens
Model LFM-1A $\$65.$

Casio Calculator-Calendar Watch
Model C-80
$\$42^{50}$

FIDELITY Chess Challenger 7
$\$79^{95}$
Model BBC

Sensory Chess Challenger $\$110.$

Voice Sensory Challenger
$\$249^{95}$

WAHL® Cordless Soldering Iron
$\$29^{95}$
Model 7800

Thermal-Spot Circuit Tester
Finds faulty components quickly and easily
$\$29^{95}$
Model 5800

Weller® WTCPN Controlled Output Soldering Station
Model WTCPN
$\$57^{50}$

Soldering Station
Model EC 2000
$\$109^{50}$

Service Master Tool Kit
$\$49^{95}$
Model 99-SM

VACO Super Case
Model 70260
$\$249^{95}$

FORDHAM

855 Conklin St. Farmingdale, N.Y. 11735

- Master Charge
- BankAmericard
- VISA
- COD
- Money Order
- Check

N.Y. State residents add appropriate sales tax

ADD FOR SHIPPING AND INSURANCE

to $ 250.00	$ 3.50
$251.00 to 500.00	5.00
501.00 to 750.00	7.50
751.00 to 1000.00	10.00
over 1000.00	12.50

COD's extra

TOLL FREE (800)645-9518
in N.Y. State call (516) 752-0050

Circle 163 on inquiry card.

MICROPROCESSOR SUPPORT I.C.'S

WE GUARANTEE FACTORY PRIME PARTS

We are going to become the largest supplier of prime microprocessor support I.C.'S. We guarantee that our I.C.'S are purchased from manufacturer authorized distributors. This is the only way to deliver prime parts at the lowest possible prices. Our committment is to offer the best price and the fastest delivery to our customer. We give many thanks to our valued customers who have helped us grow.

NEC 16Kx1 DYNAMIC RAM 200 N.S.

These are prime 4116's from one of the best MOS RAM manufacturers in the world.

4116	**200ns**
8 for $25.00	**32 for 96.00**

Only prepaid orders on this special.

8080A	CPU	4.95	2708	EPROM 1Kx8	4.95
8085A	CPU	8.95	2716	EPROM 2Kx8	8.95
8086	CPU	99.95	2732	EPROM 4Kx8	21.00
8088	CPU	44.95	4118	STATIC 1Kx8	15.00
Z-80	CPU	10.50	4164	200ns 64Kx1	Call
Z-80A	CPU	12.95	Z80B	CPU	21.00

NEC 1Kx4 STATIC RAM 250 N.S.

These are prime low power static ram's NEC for the finest in MOS MEMORY.

2114L	**250ns**
8 for $25.00	**32 for $96.00**

Only prepaid orders on this special.

Z80-P10	7.75	8289	49.95	4050	.69	4531	.99	74C925	6.95	74LS107	.45	74LS244	1.95
Z80A-P10	9.75	4000	.35	4051	1.10	4532	1.25	74LS00	.35	74LS109	.45	74LS245	4.95
Z80-CTC	7.75	4001	.35	4052	1.10	4539	.99	74LS01	.28	74LS112	.49	74LS247	1.10
Z80ACTC	9.75	4002	.35	4053	1.10	4543	1.99	74LS02	.28	74LS122	.55	74LS248	1.10
Z80-DMA	22.25	4006	1.39	4055	3.95	4553	3.50	74LS03	.28	74LS123	1.19	74LS249	1.69
Z80A-DMA	27.75	4007	.29	4056	2.95	4555	.75	74LS04	.39	74LS125	1.35	74LS251	1.79
Z80-S10/0	24.95	4008	1.39	4059	9.95	4556	.75	74LS05	.28	74LS126	.89	74LS253	.98
Z80A-S10/0	29.95	4009	.49	4060	1.39	4581	1.99	74LS08	.39	74LS132	.79	74LS257	.98
Z80-S10/1	24.95	4010	.49	4066	.75	4582	1.01	74LS09	.39	74LS136	.59	74LS258	.98
Z80A-S10/1	29.95	4011	.35	4068	.35	4584	.55	74LS10	.28	74LS138	.89	74LS259	2.95
Z80-S10/2	24.95	4012	.29	4069	.35	4585	.99	74LS11	.39	74LS139	.89	74LS260	.69
Z80A-S10/2	29.95	4013	.49	4070	.49	4702	9.95	74LS12	.39	74LS145	1.25	74LS261	2.49
3205	3.45	4014	1.39	4071	.35	74C00	.39	74LS13	.47	74LS148	1.49	74LS266	.59
3242	10.00	4015	1.15	4072	.35	74C02	.39	74LS14	1.25	74LS151	.79	74LS273	1.75
8155	11.25	4016	.59	4073	.35	74C04	.39	74LS15	.39	74LS153	.79	74LS275	4.40
8185	29.95	4017	1.19	4075	.35	74C08	.49	74LS20	.26	74LS155	1.19	74LS279	.59
8185-2	39.95	4018	.99	4076	1.29	74C10	.49	74LS21	.38	74LS156	.99	74LS283	1.10
8202	45.00	4019	.49	4078	.35	74C14	1.65	74LS22	.38	74LS157	.99	74LS290	1.29
8205	3.45	4020	1.19	4081	.35	74C20	.39	74LS26	.39	74LS158	.75	74LS293	1.95
8212	2.00	4021	1.19	4082	.35	74C30	.39	74LS27	.39	74LS160	.98	74LS295	1.10
8214	3.95	4022	1.15	4085	1.95	74C32	.99	74LS28	.39	74LS161	1.15	74LS298	1.29
8216	1.85	4023	.38	4086	.79	74C42	1.85	74LS30	.26	74LS162	.98	74LS324	1.75
8224	2.65	4024	.79	4093	.99	74C48	2.39	74LS32	.39	74LS163	.98	74LS347	1.95
8226	1.85	4025	.38	4099	2.25	74C73	.85	74LS37	.79	74LS164	1.19	74LS348	1.95
8228	5.00	4026	2.50	4104	1.99	74C74	.85	74LS38	.39	74LS165	.89	74LS352	1.65
8238	5.45	4027	.65	4501	.39	74C85	2.49	74LS42	.79	74LS166	2.49	74LS353	1.65
8243	4.65	4028	.85	4502	1.65	74C89	4.95	74LS47	.79	74LS170	1.99	74LS363	1.49
8251A	5.55	4029	1.29	4503	.69	74C90	1.85	74LS48	.79	74LS173	.89	74LS365	.99
8253	9.85	4030	.45	4505	8.95	74C93	1.85	74LS51	.26	74LS174	.99	74LS366	.99
8255A	5.40	4031	3.25	4506	.75	74C95	1.85	74LS54	.35	74LS175	.99	74LS367	.73
8255A-5	5.40	4032	2.15	4507	.95	74C107	1.19	74LS55	.35	74LS181	2.20	74LS368	.73
8257	9.25	4033	2.15	4508	3.95	74C151	2.49	74LS73	.45	74LS190	1.15	74LS373	2.75
8257-5	9.25	4034	3.25	4510	1.39	74C154	3.50	74LS74	.59	74LS191	1.15	74LS374	2.75
8259A	7.30	4035	.95	4511	1.39	74C157	2.10	74LS75	.68	74LS192	.98	74LS375	.69
8271	60.00	4037	1.95	4512	1.39	74C160	2.39	74LS76	.45	74LS193	.98	74LS377	1.95
8275	32.95	4040	1.29	4514	3.95	74C161	2.30	74LS78	.65	74LS194	1.15	74LS385	1.95
8279	10.80	4041	1.25	4515	3.95	74163	2.39	74LS83	.99	74LS195	.95	74LS386	.65
8279-5	10.80	4042	.95	4516	1.69	74164	2.39	74LS85	1.19	74LS196	.89	74LS390	1.95
8282	6.70	4043	.85	4519	.99	74173	2.59	74LS86	.45	74LS197	.89	74LS393	1.95
8283	6.70	4044	.85	4520	1.39	74174	2.75	74LS90	.75	74LS221	1.49	74LS395	1.70
8284	5.85	4046	1.75	4522	.99	74C175	2.75	74LS92	.75	74LS240	1.95	74LS399	2.95
8286	6.70	4047	1.25	4526	1.15	74C192	2.39	74LS93	.75	74LS241	1.90	74LS424	2.95
8287	6.70	4048	.99	4527	1.75	74C193	2.39	74LS95	.88	74LS242	1.95	74LS668	1.75
8288	25.40	4049	.69	4528	.99	74C195	2.39	74LS96	.98	74LS243	1.95	74LS670	2.29

MAIL ORDERS SHOULD BE SENT TO:
P.O. Box 21432 Seattle, Washington 98111
Telephone Orders & Inquiries (206) 453-0792
Minimum Order $10.00 Add $3.00 Shipping

HANLEY ENGINEERING
RETAIL STORE
1644 116th NORTHEAST
BELLEVUE, WASHINGTON 98005

FOR THE FINEST IN MICROPROCESSOR SUPPORT I.C.'S

Circle 174 on inquiry card.

Circle 255 on inquiry card.

MICROCOMPEQUIP

DISCOUNTS & DEALER OVERSTOCKS

ALL ITEMS BELOW SOLD AS IS — NO RETURNS / NO REPAIRS

CALL FOR AVAILABILITY: LIMITED QUANTITIES

	Sell For	List Price
A.I. Cybernetics Speechboard	260.00	380.00
Anadex 40 Column Printer	641.00	855.00
Base 2 8K Memory Board Assembled	211.00	282.00
Commodore 2001-8 8K PET	550.00	795.00
Craig M-100 Translater	122.00	199.95
Dajen Cassette Interface	88.00	120.00
Dynabyte Naked Terminal	245.00	350.00
Digital Systems Dual 8" Single Density	2293.00	2732.00
Dutronics Poly Z-80 Upgrade Kit	123.00	169.95
Dutronics Imsai Z-80 Upgrade Kit	116.00	159.95
Eclectic Corp. Superchip for Apple II	75.00	95.00
Fidelity Electronics Ltd.		
Level 1 Chess Challenger	120.00	75.00
Level 4 Checker Challenger	100.00	115.00
Level 2 Checker Challenger	40.00	40.00
George Risk Inc. Pet Keyboard	176.00	250.00
Imsai CPU Board	125.00	175.00
Icom Micro Peripherals 5" Disk Drive	821.00	1095.00
Intertec Data Intertube Terminal	595.00	874.00
Kent Moore 8K RAM 450NS	148.00	197.50
Kent Moore Alpha Display Module	80.25	107.00
Mountain Hardware		
AC Control Apple	132.00	189.00
AC Remote	95.00	149.00
S-100 AC Control Kit	104.00	149.00
AC Remote Kit	67.00	99.00
AC Control- Apple Kit	104.00	145.00
Micromation Dual Memorex 8" disk drive	1467.00	1990.00
Micromation Dual Density disk controller Card	310.00	500.00
MS Corp. Apple PR-40 Interface	87.00	87.00
National Multiplex Digital Cassette Recorder	150.00	200.00
Novation 1200 Baud Modem (4202T)	274.00	375.00
Radio Shack TRS-80 Disk Drive	399.00	499.00
TRS-80 16K Computer	479.00	599.00
TRS-80 Expansion Interface	239.00	299.00
Polymorphic Systems		
8K Assembled	289.00	385.00
8K Memory Board	225.00	300.00
Poly KBD	169.00	225.00
8813	2880.00	3250.00
System 0	378.00	525.00
88-System 2	529.00	735.00
System 12 Kit	846.00	1128.00
System 6	1134.00	1575.00
Video Card	210.00	280.00
Processor Tech		
Cuts BD Assembled	139.00	199.00
8K Dynamic Ram	175.00	250.00
16K Dynamic Ram	300.00	429.00
64K Dynamic Ram	878.00	1350.00
Extended Basic Cassette	21.00	45.00
SOL 20 W/O Memory	1270.00	1895.00
System II Kit	1262.00	1905.00
Panasonic Monitor	143.00	210.00
SD Sales 32K Dynamic Ram Board Kit	332.00	475.00
Solid State Music 16K Static Ram Board Kit	300.00	325.00
Southwest Technical (SWTPC)		
MF-68 Dual 5" Floppy	796.00	995.00
Graphics Terminal	79.00	98.50
Technical Design Labs (TDL-Xitan)		
I/O board - SMB-II	257.00	395.00
32L Series K Memory Board	559.00	799.00
Fortran IV Ser.37	279.00	349.00
Fortran IV Ser.41	279.00	349.00
Xitan Alpha 1.5	823.00	1138.00
Xitan Alpha 1	576.00	769.00
Xitan Alpha 3	854.00	1181.00
Xitan Alpha 1.5	571.00	868.00
Video Board	277.00	369.00
Technico Super Starter Assembled	293.00	300.00
Technico Super Starter Kit	199.00	299.00
Trace Elec. 32K RAM Board Assem	599.00	999.00

NEW EQUIPMENT

CALL FOR OUR LOW PRICES FOR THE FOLLOWING MANUFACTURERS:

APPLE
ATARI
CROMEMCO
VECTOR GRAPHIC

MICROCOMPEQUIP
PO BOX 195
CROWNSVILLE, MD 21032

VISA / MC / CHECK

PHONE ORDERS:
(301) 261-1859



64K BYTE EXPANDABLE RAM

DYNAMIC RAM WITH ON BOARD TRANSPARENT REFRESH GUARANTEED TO OPERATE IN NORTHSTAR, CROMEMCO, VECTOR GRAPHICS, SOL, AND OTHER 8080 OR Z-80 BASED S100 SYSTEMS ★ 4MHZ Z-80 WITH NO WAIT STATES.

- ★ SELECTABLE AND DESELECTABLE IN 4K INCREMENTS ON 4K ADDRESS BOUNDARIES.
- ★ LOW POWER—8 WATTS MAXIMUM.
- ★ 200NSEC 4116 RAMS.
- ★ FULL DOCUMENTATION.
- ★ ASSEMBLED AND TESTED BOARDS ARE GUARANTEED FOR ONE YEAR AND PURCHASE PRICE IS FULLY REFUNDABLE IF BOARD IS RETURNED UNDAMAGED WITHIN 14 DAYS.

	ASSEMBLED / TESTED
64KRAM	$595.00
48K RAM	$529.00
32K RAM	$459.00
16K RAM	$389.00



S100 MAINFRAME AND CARD CAGE

★ W/ SOLID FRONT PANEL	$239.00
★ W/ CUTOUTS FOR 2 MINI—FLOPPIES	$239.00
★ 30 AMP POWER SUPPLY	$119.00
★ 8 SLOT MOTHERBOARD	$149.00
★ 19 SLOT MOTHERBOARD	$199.00

16K MEMORY EXPANSION KIT

ONLY $58

FOR APPLE, TRS-80 KEYBOARD, **EXIDY**, AND ALL OTHER 16K DYNAMIC SYSTEMS USING **MK4116-3** OR EQUIVALENT DEVICES.

- ★ 200 NSEC ACCESS, 375 NSEC CYCLE
- ★ BURNED-IN AND FULLY TESTED
- ★ 1 YR. PARTS REPLACEMENT GUARANTEE
- ★ QTY. DISCOUNTS AVAILABLE

VISTA V-200 MINI-FLOPPY SYSTEM

- ★ S100 DOUBLE DENSITY CONTROLLER
- ★ 204 KBYTE CAPACITY FLOPPY DISK DRIVE WITH CASE & POWER SUPPLY
- ★ MODIFIED CPM OPERATING SYSTEM WITH EXTENDED BASIC

$695.00

BETA COMPUTER DEVICES

1230 W. COLLINS AVE.
ORANGE, CA 92668
(714) 633-7280

Calif. residents please add 6% sales tax. Mastercharge & Visa accepted. Please allow 14 days for checks to clear bank. Phone orders welcome. Shipping charges will be added to all shipments.

32K BYTE MEMORY
RELIABLE/COST EFFECTIVE EXPANDABLE RAM FOR 6502 AND 6800 SYSTEM—AIM 65-*KIM*SYM*PET*S44-BUS

- ★ PLUG COMPATIBLE WITH THE AIM-65/SYM EXPANSION CONNECTOR BY USING A RIGHT ANGLE CONNECTOR (SUPPLIED) MOUNTED ON THE BACK OF THE MEMORY BOARD.
- ★ MEMORY BOARD EDGE CONNECTOR PLUGS INTO THE 6800 S 44 BUS.
- ★ CONNECTS TO PET OR KIM USING AN ADAPTOR CABLE.
- ★ RELIABLE—DYNAMIC RAM WITH ON BOARD INVISIBLE REFRESH—LOOKS LIKE STATIC MEMORY BUT AT LOWER COST AND A FRACTION OF THE POWER REQUIRED FOR STATIC BOARDS.
- ★ USES +5V ONLY, SUPPLIED FROM HOST COMPUTER.
- ★ FULL DOCUMENTATION. ASSEMBLED AND TESTED BOARDS ARE GUARANTEED FOR ONE YEAR AND PURCHASE PRICE IS FULLY REFUNDABLE IF BOARD IS RETURNED UNDAMAGED WITHIN 14 DAYS.

ASSEMBLED & TESTED	WITH 32K RAM	$395.00
	WITH 16K RAM	$339.00
	WITHOUT RAM CHIPS	$279.00

HARD TO GET PARTS (NO RAM CHIPS) WITH BOARD AND MANUAL	$109.00
BARE BOARD & MANUAL	$49.00



PET INTERFACE KIT—CONNECTS THE 32K RAM BOARD TO A 4K OR 8K PET. CONTAINS: INTERFACE CABLE, BOARD STANDOFFS, POWER SUPPLY MODIFICATION KIT AND COMPLETE INSTRUCTIONS. **$49.00**

U.S. PRICES ONLY

ALL SALES ARE MADE SUBJECT TO THE TERMS OF OUR 90 DAY LIMITED WARRANTY. A COPY OF THIS WARRANTY IS AVAILABLE FREE, ON REQUEST.

DIGITAL RESEARCH COMPUTERS

(214) 271-3538

32K S-100 EPROM CARD

NEW!



$74.95
KIT

USES 2716's

Blank PC Board - $34

ASSEMBLED & TESTED
ADD $30

SPECIAL: 2716 EPROM's (450 NS) Are $11.95 EA. With Above Kit.

KIT FEATURES:

1. Uses +5V only 2716 (2Kx8) EPROM's.
2. Allows up to 32K of software on line!
3. IEEE S-100 Compatible.
4. Addressable as two independent 16K blocks.
5. Cromemco extended or Northstar bank select.
6. On board wait state circuitry if needed.
7. Any or all EPROM locations can be disabled.
8. Double sided PC board, solder-masked, silk-screened.
9. Gold plated contact fingers.
10. Unselected EPROM's automatically powered down for low power.
11. Fully buffered and bypassed.
12. Easy and quick to assemble.

32K SS-50 RAM

$379

$379.00 KIT

For 2MHZ
Add $10

Blank PC Board
$50

For SWTPC
6800 - 6809 Buss

Support IC's
and Caps
$19.95

Complete Socket Set
$21.00

Fully Assembled,
Tested, Burned In
Add $30

NEW!

At Last! An affordable 32K Static RAM with full 6809 Capability.

FEATURES:

1. **Uses proven low power 2114 Static RAMS.**
2. **Supports SS50C - EXTENDED ADDRESSING.**
3. **All parts and sockets included.**
4. **Dip Switch address select as a 32K block.**
5. **Extended addressing can be disabled.**
6. **Works with all existing 6800 SS50 systems.**
7. **Fully bypassed. PC Board is double sided, plated thru, with silk screen.**

16K STATIC RAM KIT-S 100 BUSS

PRICE CUT!

$199.95
KIT

FOR 4MHZ
ADD $10

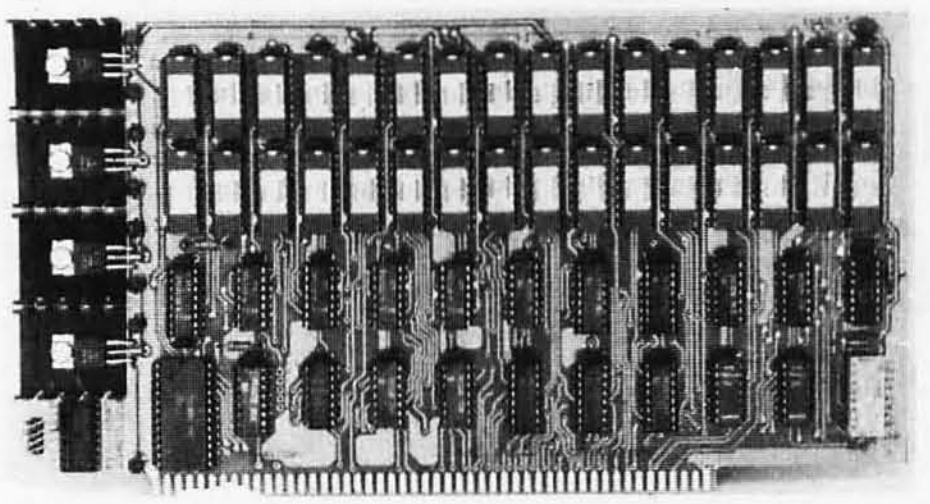

KIT FEATURES:

1. Addressable as four separate 4K Blocks.
2. ON BOARD BANK SELECT circuitry. (Cromemco Standard!). Allows up to 512K on line!
3. Uses 2114 (450NS) 4K Static Rams.
4. ON BOARD SELECTABLE WAIT STATES.
5. Double sided PC Board, with solder mask and silk screened layout. Gold plated contact fingers
6. All address and data lines fully buffered.
7. Kit includes ALL parts and sockets.
8. PHANTOM is jumpered to PIN 67.
9. LOW POWER: under 1.5 amps TYPICAL from the +8 Volt Buss.
10. Blank PC Board can be populated as any multiple of 4K.

BLANK PC BOARD W/DATA-**$33**

LOW PROFILE SOCKET SET-**$12**

SUPPORT IC'S & CAPS-**$19.95**

ASSEMBLED & TESTED-**ADD $35**

OUR #1 SELLING
RAM BOARD!

16K STATIC RAM SS-50 BUSS

PRICE CUT!

$195 KIT

FULLY STATIC!

FOR 2MHZ
ADD $10



FOR SWTPC
6800 BUSS!

ASSEMBLED AND
TESTED - $35

KIT FEATURES:

1. Addressable on 16K Boundaries
2. Uses 2114 Static Ram
3. Fully Bypassed
4. Double sided PC Board. Solder mask and silk screened layout
5. All Parts and Sockets included
6. Low Power: Under 1.5 Amps Typical

BLANK PC BOARD—**$35** COMPLETE SOCKET SET—**$12**
SUPPORT IC'S AND CAPS—**$19.95**

NEW! **STEREO!** NEW!

S-100 SOUND COMPUTER BOARD

At last, an S-100 Board that unleashes the full power of two unbelievable General Instruments AY3-8910 NMOS computer sound IC's. Allows you under total computer control to generate an infinite number of special sound effects for games or any other program. Sounds can be called in BASIC, ASSEMBLY LANGUAGE, etc.

KIT FEATURES:

- ★ TWO GI SOUND COMPUTER IC'S.
- ★ FOUR PARALLEL I/O PORTS ON BOARD.
- ★ USES ON BOARD AUDIO AMPS OR YOUR STEREO.
- ★ ON BOARD PROTO TYPING AREA.
- ★ ALL SOCKETS, PARTS AND HARDWARE ARE INCLUDED.
- ★ PC BOARD IS SOLDERMASKED, SILK SCREENED, WITH GOLD CONTACTS.
- ★ EASY, QUICK, AND FUN TO BUILD. WITH FULL INSTRUCTIONS.
- ★ USES PROGRAMMED I/O FOR MAXIMUM SYSTEM FLEXIBILITY.

Both Basic and Assembly Language Programming examples are included.

COMPLETE KIT!
$84.95
(WITH DATA MANUAL)

BLANK PC
BOARD W/DATA
$31

SOFTWARE:

SCL™ is now available! Our Sound Command Language makes writing Sound Effects programs a SNAP! SCL™ also includes routines for Register-Examine-Modify, Memory-Examine-Modify, and Play-Memory. SCL™ is available on CP/M* compatible diskette or 2708 or 2716. Diskette - **$24.95** 2708 - **$19.95** 2716 - **$29.95.** Diskette includes the source. EPROM'S are ORG at E000H.

4K DYNAMIC RAM BLOWOUT!
SAME AS INTEL 2107B!
4K RAMS AT AN UNBELIEVABLE 50¢ EACH!!!

Prime, new, National Semi., 1979 date coded, full spec. parts. N.S. #MM5280-5N. Same as INTEL 2107B-4, T.I. TMS4060, NEC uPD411, etc. We bought a HUGE QTY. from a West Coast Distributor at truly DISTRESS PRICES! One of the most popular and reliable RAM's ever made. These parts have been used by almost all Major Computer Main Frame Mfg. the world over! Arranged as 4K x 1, 270 NS Access Time, 22 Pin Dip. These units DO NOT use multiplexed addressing, thus making REFRESH and other timing very simple. See INTEL MEMORY DESIGN HANDBOOK for full application notes. The NAT. SEMI. MEMORY DATA BOOK is available at most Radio Shack Stores. Prime units in original factory tubes!

(With Pin Out Data)

#5280-5N 4096 BITS x 1 270 NS ACCESS

8 FOR $4.95 32 FOR $16

FACTORY CASE (450 PCS) — $180

Sockets Special: 22 Pin Low Profile (With Purchase of 5280's) 8 FOR $1.

COMPUTER PARTS SPECIALS

74LS175 - **.99**	8035 Intel Single Chip CPU **6.95**
74LS240 - **1.19**	Signetics 2901 4 Bit Slice - **6.95**
74LS241 - **1.19**	AMD 2903 4 Bit Super Slice - **12.50**
74LS244 - **1.19**	AMD 29705 Dual Port RAM - **8.95**
74LS373 - **1.29**	Intel 2716-1 (350 NS) - **12.95**

NEW! G.I. COMPUTER SOUND CHIP

AY3-8910. As featured in July, 1979 BYTE! A fantastically powerful Sound & Music Generator. Perfect for use with any 8 Bit Microprocessor. Contains: 3 Tone Channels, Noise Generator, 3 Channels of Amplitude Control, 16 bit Envelope Period Control, 2-8 Bit Parallel I/O, 3 D to A Converters, plus much more! All in one 40 Pin DIP. Super easy interface to the S-100 or other busses. **$11.95** **PRICE CUT!**

SPECIAL OFFER: ~~**$14.95**~~ **each** Add $3 for 60 page Data Manual.

Digital Research Computers
(OF TEXAS)

P.O. BOX 401565 • GARLAND, TEXAS 75040 • (214) 271-3538

TERMS: Add $2.00 postage. We pay balance. Orders under $15 add 75¢ handling. No C.O.D. We accept Visa and MasterCharge. Tex. Res. add 5% Tax. Foreign orders (except Canada) add 20% P & H. Orders over $50, add 85¢ for insurance.

***TRADEMARK OF DIGITAL RESEARCH.** **WE ARE NOT ASSOCIATED WITH DIGITAL RESEARCH OF CALIFORNIA, THE SUPPLIERS OF CPM SOFTWARE.**

Circle 151 on inquiry card.

ELECTRONICS CENTER

CALL TOLL FREE

1-800-228-4097



Call Toll Free For
"Unbelievable"
Low Low
Prices On These
Lines:

APPLE — ATARI — BASE 2
CENTRONICS
COMMODORE — DC HAYES
HAZELTINE — LEEDEX
MACROTRONICS — MAXELL
MOUNTAIN HARDWARE
NORTH STAR — PANASONIC
SANYO — SYNCOM



TR-930 9" Desk-Top Monitor



YOUR ELECTRONICS PLAYGROUND

master charge THE INTERBANK CARD

1840 "O" Street Lincoln, Nebraska 68508
In Nebraska Call (402) 476-7331

VISA

LOBO Add-On Disk Drive Subsystems For Apple, TRS-80, S-100 Based Computers

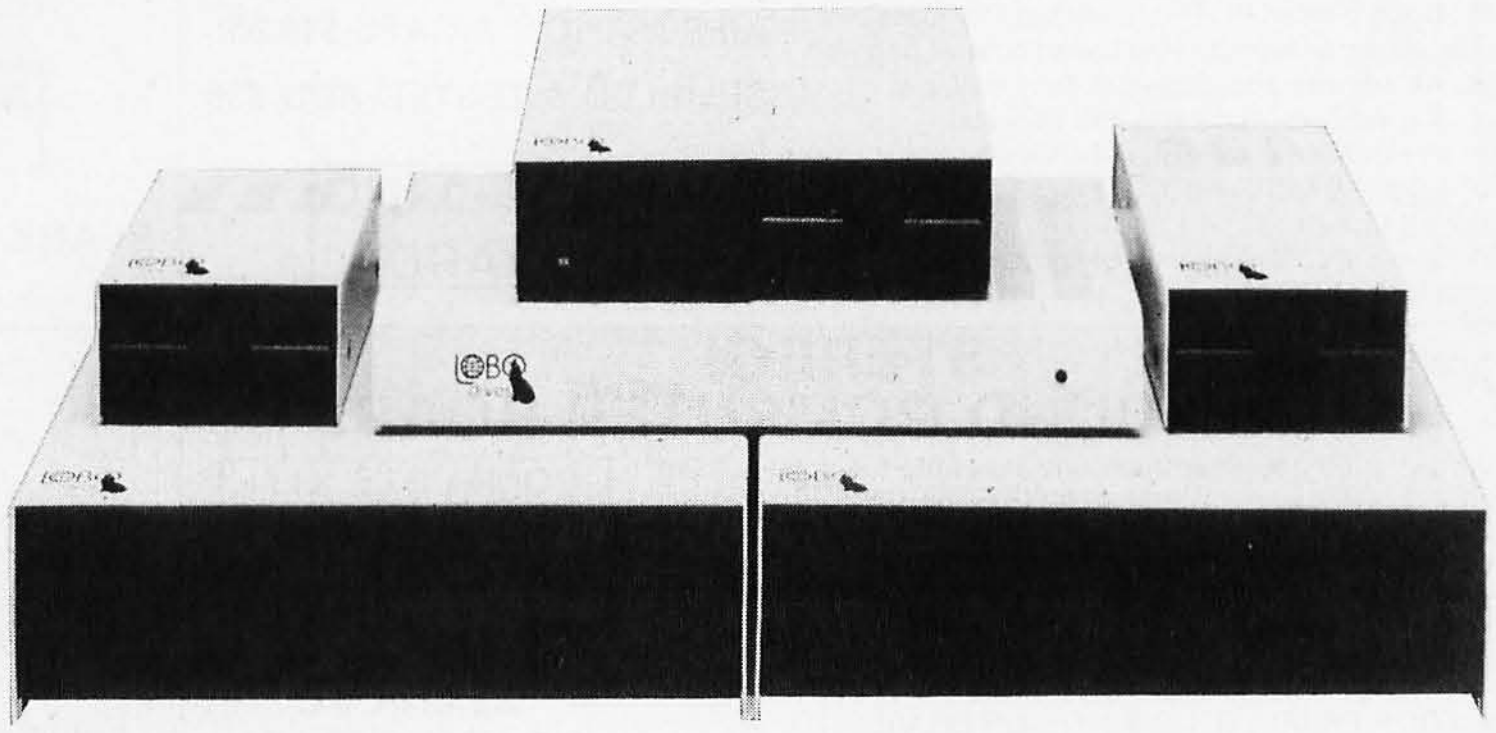

Expansion and **enhanced capabilities** are key words in achieving full utilization of your computer system. Our complete line of LOBO disk drive subsystems are the ideal, cost-effective way to provide the expansion capabilities you need to meet your system growth requirements. All of our subsystems are complete, thoroughly-tested, 100% burned-in, and feature a 1 year 100% parts/labor warranty.

APPLE

*Double Density Controller

3101	Minifloppy, $399 3101I Minifloppy w/interface card $489
8101CA	One SA800 in cabinet w/power, DDC* Controller, cable and manual $1449
8202CA	Two SA800 in cabinet w/power, DDC* Controller, cable and manual $1889
5101CA	One SA850 in cabinet w/power, DDC* Controller, cable and manual $1759
5202CA	Two SA850 in cabinet w/power, DDC* Controller, cable and manual $2364
LCA-22	Double Density Controller only $599

S-100 BASED COMPUTERS

MODEL NO.	DESCRIPTION
4101C	SA400 in cabinet w/power $369
8212C	Two SA801 in cabinet w/power $1329
5212C	Two SA851 in cabinet w/power $1799

GENERAL

MODEL NO.	DESCRIPTION
8212C	Two SA801 in cabinet w/power $1329
5212C	Two SA851 in cabinet w/power $1799

TRS80

MODEL NO.	DESCRIPTION
4101C	SA400 in cabinet w/power $369
8101C II	One SA800 in cabinet w/power for Mod. II $909
8202C II	Two SA800 in cabinet w/power for Mod. II $1349
LX80	Double-density expansion interface $641
RS232	Dual Serial Port Option $75

master charge THE INTERBANK CARD

VISA®

JR
INVENTORY CO.,
P.O. Box 185, Santa Ynez, Ca., 93460
(805) 688-8781

Circle 210 on inquiry card.

Quest ELECTRONICS

P.O. Box 4430X
Santa Clara, CA 95054
Will calls: 2322 Walsh Ave.
(408) 988-1640 TWX 910-338-2139

Same day shipment. First line parts only. Factory tested. Guaranteed money back. Quality IC's and other components at factory prices.

INTEGRATED CIRCUITS

7400TTL	
7400N	.19
7402N	.20
7404N	.25
7409N	.27
7410N	.25
7414N	.70
7420N	.25
7422N	.39
7430N	.25
7442N	.58
7445N	.82
7447N	.63
7448N	.77
7450N	.25
7474N	.35
7475N	.49
7485N	.88
7489N	1.70
7490N	.43
7492N	.43
7493N	.43
7495N	.69
74100N	1.35
74107N	.35
74121N	.34
74123N	.59
74125N	.45
74145N	.77
74150N	1.20
74151N	.69
74154N	1.25
74157N	.69
74161N	.87
74162N	.85
74163N	.87
74174N	.96
74175N	.85
74190N	1.15
74192N	.87
74193N	.85
74221N	1.25
74298N	1.65
74365N	.75
74366N	.75
74367N	.75

74LS00 TTL	
74LS00N	.29
74LS02N	.29
74LS04N	.35
74LS05N	.25
74LS08N	.35
74LS10N	.35
74LS13N	.55
74LS14N	1.00
74LS20N	.35
74LS22N	.35
74LS28N	.35
74LS30N	.35
74LS33N	.60
74LS38N	.50
74LS74N	.45
74LS75N	.65
74LS90N	.60
74LS93N	.75
74LS95N	1.00
74LS107N	.45
74LS112N	.45
74LS113N	.45
74LS132N	.89
74LS136N	.50
74LS151N	.75
74LS155N	.79
74LS157N	1.10
74LS162N	1.10
74LS163N	1.10
74LS174N	1.15
74LS190N	1.25
74LS221N	1.25
74LS258N	1.00
74LS367N	.89

LINEAR	
CA3045	.90
CA3046	1.10
CA3081	1.80
CA3082	1.90
CA3089	3.40
LM301AN/AH	.35
LM305H	.87
LM307N	.35
LM308N	1.00
LM309K	1.25
LM311H/N	.90
LM317T	1.65
LM317K	3.75
LM318	1.50
LM320K-5	1.35
LM320K-12	1.35
LM320K-15	1.35
LM320T-5	.95
LM320T-8	.95
LM320T-12	.95
LM320T-15	.95
LM323K-5	5.95
LM324N	1.00
LM339N	1.00
LM340K-5	1.35
LM340K-8	1.35
LM340K-12	1.35
LM340K-15	1.35
LM340K-24	1.35
LM340T-5	.85
LM340T-8	.85
LM340T-12	.85
LM340T-15	.85
LM340T-18	.85
LM340T-24	.85
LM350	5.50
LM377	2.95
LM379	5.00
LM380N	1.00
LM381	1.60
LM382	1.60
LM709H	.59
LM723H/N	.50
LM733N	.85
LM741CH	.35
LM741N	.38
LM747H/N	.75
LM748N	.50
LM1303N	1.75
LM1304	1.10
LM1305	1.27
LM1307	2.00
LM1310	1.95
LM1458	.55
LM1812	7.50
LM1889	3.00
LM2111	1.75
LM2902	2.25
LM3900N	.60
LM3905	1.75
LM3909N	.95
MC1458V	.55
NE550N	1.35
NE555V	.39
NE556A	.85
NE565A	1.00
NE566V	1.50
NE567V	1.00
NE570B	4.75
78L05	.60
78L08	.60
78M05	.85
75108	1.75
75491CN	.50
75492CN	.55
75494CN	.89

A to D CONVERTER	
8038B	4.50
8700CJ	13.95
8701CN	22.00
8750CJ	13.95
LD130	9.95
9400CJV/F	7.40
ICL7103	9.50
ICL7107	14.25

CMOS	
CD4000	.25
CD4001	.35
CD4002	.35
CD4006	1.10
CD4007	.35
CD4008	1.20
CD4009	.45
CD4010	.45
CD4011	.35
CD4012	.28
CD4013	.47
CD4014	1.25
CD4015	1.00
CD4016	.55
CD4017	1.05
CD4018	.94
CD4019	.45
CD4020	1.02
CD4021	1.35
CD4022	1.10
CD4023	.28
CD4024	.75
CD4025	.28
CD4026	2.50
CD4027	.66
CD4028	.85
CD4029	1.35
CD4030	.45
CD4035	1.00
CD4040	1.35
CD4042	.85
CD4043	.85
CD4044	.85
CD4046	1.67
CD4049	.45
CD4050	.60
CD4051	1.13
CD4060	1.42
CD4066	.71
CD4068	.40
CD4069	.40
CD4070	.50
CD4071	.45
CD4072	.45
CD4073	.45
CD4075	.45
CD4076	1.45
CD4078	.40
CD4081	.35
CD4082	.35
CD4116	.47
CD4490	5.50
CD4507	1.00
CD4508	2.85
CD4510	1.00
CD4511	.94
CD4515	2.52
CD4516	1.10
CD4518	1.50
CD4520	1.02
CD4527	1.51
CD4528	1.60
CD4553	3.50
CD4566	2.45
CD4583	2.35
CD4585	1.10
CD40192	3.00
74C00	.35
74C04	.40
74C10	.35
74C14	.89
74C20	.35
74C30	.35
74C48	1.95
74C74	.85
74C76	1.25
74C90	1.25
74C93	1.25
74C154	3.50
74C160	2.75
74C175	1.35
74C192	1.65
74C221	1.90
74C905	6.00
74C906	.75
74C914	1.95
74C922	5.00
74C923	5.50
74C925	7.50
74C926	6.95
74C927	6.95

INTERFACE	
8095	.65
8096	.65
8097	.65
8098	.65
8T09	1.25
8T10	4.50
8T13	3.00
8T20	5.50
8T23	3.10
8T24	3.50
8T25	3.20
8T26	1.69
8T28	2.75
8T97	1.69
8T98	1.69

MOS/MEMORY RAM	
2101-1	3.85
2102-1	.95
2102AL-4	1.45
2102AN-2L	1.65
2104A-4	4.95
2107B-4	3.75
2111-1	3.75
2112-2	3.95
2114	3.75
2114L 300ns	4.25
2114L 450ns	4.00
4116 200ns	4.50
8/4116 200ns	26.95
MM5262	.40
MM5280	3.00
MM5320	9.95
MM5330	5.94
PD411D-3	4.00
PD411D-4	5.00
P5101L	8.95
4200A	9.95
82S25	2.90
91L02A	1.50
HD0165-5	6.95
MM57100	4.50
GIAY38500-1	9.95
MCM66751A	9.95
9368	3.50
410D	10.00
416	16.00

CLOCKS	
MM5311	5.50
MM5312	3.90
MM5314	3.90
MM5369	2.10
MM5841	14.45
MM5865	7.95
CT7010	8.95
CT7015	8.95
MM5375AA/N	3.90
MM5375AG/N	4.90
7205	16.50
7207	7.50
7208	15.95
7209	4.95
DS0026CN	3.75
DS0056CN	3.75
MM53104	2.50

MICROPROCESSOR	
6502	10.95
6504	9.95
6522	9.95
6800	6.95
6802	11.95
6820	4.95
6850	5.95
8080A	3.95
8085	12.95
8086	75.00
Z80	9.95
Z80A	11.95
8212	2.90
8214	3.95
8216	2.90
8224	3.45
8228	4.95
8251	6.95
8253	15.00
8255	5.75
8257	10.95
8259	14.95
1802CP plas.	13.95
1802DP plas.	17.95
1861P	9.50
CDP1802CD	28.95
CDP1802D	35.00
CDP1816P	7.95

UART/FIFO	
AY5-1013	5.50
AY5-1014	7.50
3341	6.95

PROM	
1702A	4.95
2708	6.10
2716T1	18.00
2716 5 Volt	10.50
8/2716 5 Volt	89.00
2732	29.50
2758	19.50
8741A	55.00
8748	55.00
8748-8	55.00
8755A	55.00
N82S23	2.95
N82S123	6.50
N82S126	3.75
N82S129	8.50
N82S131	8.50
N82S136	8.75
N82S137	8.75
DM8577	2.90
8223	2.90

CONNECTORS	
30 pin edge	2.50
44 pin edge	2.75
86 pin edge	4.00
100 pin edge	4.50
100 pin edge WW	5.25

IC SOCKETS

Solder Tin Low Profile			
PIN	**1 UP**	**PIN**	**1UP**
8	.15	22	.30
14	.14	24	.35
16	.16	28	.42
18	.27	36	.58
20	.29	40	.57

2 level 14 pin ww .20

WIRE WRAP LEVEL 3

PIN		PIN	
14	.46	24	.93
16	.49	28	1.00
18	.67	40	1.59

CRYSTALS	
1 MHz	4.50
2 MHz	4.50
4 MHz	4.25
5 MHz	4.25
10 MHz	4.25
18 MHz	3.90
20 MHz	3.90
32 MHz	3.90
32768 Hz	4.00
1.8432 MHz	4.50
3.5795 MHz	1.20
2.0100 MHz	1.95
2.097152 MHz	4.50
2.4576 MHz	4.50
3.2768 MHz	4.50
5.0688 MHz	4.50
5.185 MHz	4.50
5.7143 MHz	4.50
6.5536 MHz	4.50
14.31818 MHz	4.25
18.432 MHz	4.50
22.1184 MHz	4.50

KEYBOARD ENCODERS	
AY5-2376	$12.50
AY5-3600	17.95
AY5-9100	10.50
AY5-9200	16.50
74C922	5.50
74C923	5.50
HD0165-5	6.95
AY5-9400	10.50

D Connectors RS232	
DB25P	3.62
DB25S	5.20
Cover	1.67
DE9S	1.95
DA15P	2.10
DA15S	3.10
Complete Set	9.50

Hickok 3½ Digit LED multimeter	**89.95**
Stopwatch Kit	**26.95**
Auto Clock Kit	**17.95**
Digital Clock Kit	**14.95**

8K/16K Eprom Kit (less PROMS)	**$89.00**
Motherboard	**$39.00**
Extender Board	**$15.00**

RESISTORS ¼ watt 5%
10 per type .03
25 per type .025
100 per type .015
1000 per type .012
350 piece pack
5 per type 6.75

½ watt 5% per type .05

Televideo Terminal

Model 912	$785.00
Model 920	$885.00

Tiny Basic Experimentors Kit **$10.00**

KEYBOARDS	
56 key ASCII keyboard kit	$67.50
Fully assembled	77.50
53 key ASCII keyboard kit	60.00
Fully assembled	70.00
Enclosure Plastic	14.95
Metal Enclosure	29.95

LEDS	
Red T018	.15
Green, Yellow T018	.20
Jumbo Red	.20
Green, Orange, Yellow Jumbo	.25
Cliplite LED Mounting Clips	8/$1.25

(specify red, amber, green, yellow, clear)

CONTINENTAL SPECIALTIES in stock
Complete line of breadboard test equip.
MAX-100 8 digit Freq. Ctr. $149.95

OK WIRE WRAP TOOLS in stock
Portable Multimeter $18.00

Complete line of AP Products in stock.

SPECIAL PRODUCTS	
MM5865 Stopwatch Timer with 10 pg. spec.	9.00
PC board	7.50
Switches Mom. Pushbutton	.27
3 pos. slide	.25
Encoder HD0165-5	6.95
Paratronics	
Model 10 Trigger Expander Kit	$229.00
Model 150 Bus Grabber Kit	$369.00
Clock Calendar Kit	**$23.95**
2.5 MHz Frequency Counter Kit	**$37.50**
30 MHz Frequency Counter Kit	**$47.75**

TRANSFORMERS	
6V 300 ma	3.25
12 Volt 300 ma transformer	1.25
12.6V CT 600 ma	3.75
12V 250 ma wall plug	2.95
12V CT 250 ma wall plug	3.75
24V CT 100 ma	3.95
10V 1.2 amp wall plug	4.85
12V 6 amp	12.95
12V 500 ma wall plug	4.75
12V 1 amp wall plug	6.50
10/15 VAC 8/16 VA wall plug	9.75

DISPLAY LEDS			
MAN1	CA	.270	2.90
MAN3	CC	.125	.39
MAN72/74	CA/CA	.300	1.00
DL704	CC	.300	1.25
DL707/DL707R	CA	.300	1.00
DL727/728	CA/CC	.500	1.90
DL747/750	CA/CC	.600	1.95
FND359	CC	.357	.70
FND500/507	CC/CA	.500	1.35
FND503/510	CC/CA	.500	.90
FND800/807	CC/CA	.800	2.20
3 digit Bubble			.60
10 digit display			1.25
7520 Clairex photocells			.39
TIL311 Hex			9.50
MAN3640	CC	.30	1.10
MAN4610	CA	.40	1.20
MAN4640	CC	.40	1.20
MAN4710	CA	.40	.95
MAN4740	CC	.40	1.20
MAN6640	CC	.56	2.95
MAN6710	CA	.60	1.35
MAN6740	CC	.60	1.35

MA1002A, C, E	**8.95**
MA1012A	**8.95**
102P3 transformer	**2.25**
MA1012A Transformer	**2.25**

DIP Switches	
4-position	$ .95
5-position	1.00
6-position	1.00
7-position	1.00
8-position	1.05

Complete line of Hobby-Blox solderless breadboards in stock.

IC Starter Pack	**$5.95**
Discrete Component Starter Pack	**$6.57**

PROM Eraser

assembled. 25 PROM capacity **$37.50** (with timer **$69.50**). 6 PROM capacity OSHA/UL version **$69.50** (with timer **$94.50**).

Z80 Microcomputer

16 bit I/O, 2 MHz clock, 2K RAM, ROM Breadboard space. Excellent for control. Bare Board **$28.50.** Full Kit **$99.00.** Monitor **$20.00.** Power Supply Kit **$35.00. Tiny Basic $30.00**

S-100 Computer Boards

8K Static Godbout Econo IIA Kit	149.00
16K Static Godbout Econo XIV Kit	269.00
24K Static Godbout Econo XX-24 Kit	414.00
32K Static Godbout Econo XX-32 Kit	537.00
16K Dynamic RAM Kit	289.00
32K Dynamic RAM Kit	328.00
64K Dynamic RAM Kit	399.00
Video Interface Kit	**$139.00**

80 IC Update Master Manual $39.00

Comp. IC data selector, 2700 pg. master reference guide. Over 51,000 cross references. Free update service through 1980. Domestic postage $3.50.

Modem Kit $60.00

State of the art, orig., answer. No tuning necessary. 103 compatible 300 baud. Inexpensive acoustic coupler plans included. Bd. only $17.00.

LRC 7000+Printer $389.00

40/20 column dot matrix impact, std. paper. Interface all personal computers.

64/40/32/20 version **$405.00.** Optional cables available.

LRC 7000 printer interface cable for Super Elf with software $35.00

NiCad Battery Fixer/Charger Kit

Opens shorted cells that won't hold a charge and then charges them up, all in one kit w/full parts and instructions. **$7.95**

Rockwell AIM 65 Computer

6502 based single board with full ASCII keyboard and 20 column thermal printer. 20 char. alphanumeric display, ROM monitor, fully expandable. **$405.00.** 4K version **$450.00.** 4K Assembler **$85.00,** 8K Basic Interpreter **$100.00.**

Special small power supply for AIM65 assem. in frame **$54.00.** Complete AIM65 in thin briefcase with power supply **$499.00.** Molded plastic enclosure to fit both AIM65 and power supply **$47.50.** Special Package Price: 4K AIM, 8K Basic, power supply, cabinet **$625.00.**

AIM65/KIM/VIM/Super Elf 44 pin expansion board; 3 female and 1 male bus. Board plus 3 connectors **$22.95.**

60 Hz Crystal Time Base Kit $4.40

Converts digital clocks from AC line frequency to crystal time base. Outstanding accuracy.

Video Modulator Kit $9.95

Convert TV set into a high quality monitor w/o affecting usage. Comp. kit w/full instruc.

Multi-volt Computer Power Supply

8v 5 amp, ±18v .5 amp, 5v 1.5 amp, −5v .5 amp, 12v .5 amp, −12v option. ±5v, ±12v are regulated. Basic Kit **$29.95.** Kit with chassis and all hardware **$43.95.** Add $4.00 shipping. Kit of hardware **$14.00.** Woodgrain case **$10.00.** $1.50 shipping.

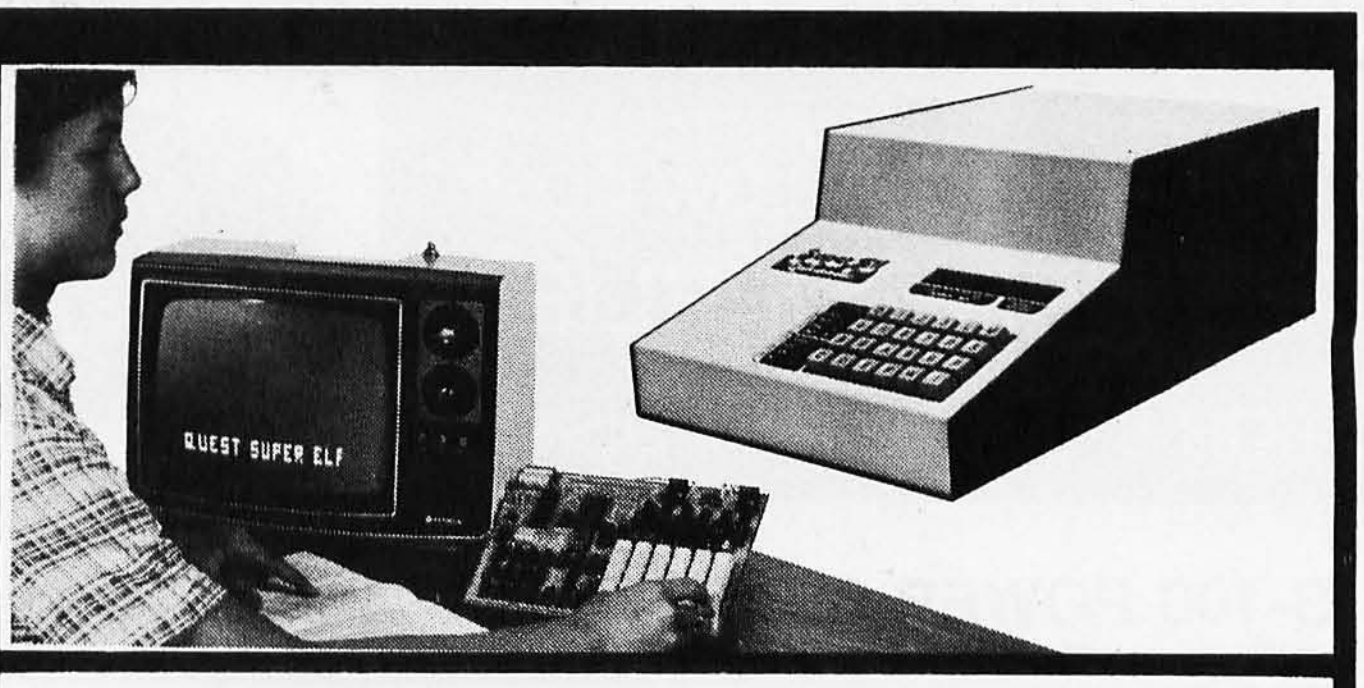

RCA Cosmac 1802 Super Elf Computer $106.95

Compare features before you decide to buy any other computer. There is no other computer on the market today that has all the desirable benefits of the **Super Elf** for so little money. The Super Elf is a small single board computer that does many **big** things. It is an excellent computer for training and for learning programming with its machine language and yet it is easily **expanded** with **additional memory, Full Basic, ASCII Keyboards, video character generation, etc.**

Before you buy another small computer, see if it includes the following features: ROM monitor; State and Mode displays; Single step; Optional address displays; Power Supply; Audio Amplifier and Speaker; Fully socketed for all IC's; Real cost of in warranty repairs; Full documentation.

The **Super Elf** includes a **ROM** monitor for program loading, editing and execution with **SINGLE STEP for program debugging** which is not included in others at the same price. With **SINGLE STEP** you can see the microprocessor chip operating with the **unique Quest** address and data bus displays **before, during** and **after** executing instructions. Also, CPU mode and instruction cycle are decoded and displayed on 8 LED indicators.

An RCA 1861 **video graphics** chip allows you to connect to your own TV with an inexpensive video modulator to do graphics and games. There is a **speaker system** included for writing your own music or using many music programs already written. The speaker amplifier may also be used to drive relays for control purposes.

A 24 key **HEX keyboard** includes 16 HEX keys plus **load, reset, run, wait, input, memory protect, monitor select** and **single step**. Large, on board displays provide output and optional **high and low address**. There is a 44 pin standard connector slot for PC cards and a 50 pin connector slot for the Quest Super Expansion Board. Power supply and sockets for **all** IC's are included in the price plus a detailed 127 pg. instruction manual which now includes over 40 pgs. of software info. including a series of lessons to help get you started and a music program and graphics target game. Many schools and universities are using the Super Elf as a course of study. OEM's use it for training and R&D.

Remember, other computers only offer Super Elf features at additional cost or not at all. **Compare before you buy. Super Elf Kit $106.95, High address option $8.95, Low address option $9.95. Custom Cabinet** with drilled and labelled plexiglass front panel **$24.95.** All metal Expansion Cabinet, painted and silk screened, with room for 5 S-100 boards and power supply **$57.00. NiCad Battery Memory Saver Kit $6.95.** All kits and options also completely assembled and tested.

Questdata, a software publication for 1802 computer users is available by subscription for $12.00 per 12 issues. Single issues $1.50. Issues 1-12 bound $16.50.

Tiny Basic Cassette **$10.00**, on ROM **$38.00**, original Elf kit board **$14.95. 1802 software;** Moews Video Graphics **$3.50.** Games and Music **$3.00,** Chip 8 Interpreter **$5.50.**

Super Expansion Board with Cassette Interface $89.95

This is truly an astounding value! This board has been designed to allow **you** to decide how you want it optioned. **The Super Expansion Board comes with 4K of low power RAM** fully addressable anywhere in 64K with built-in memory protect and a **cassette interface.** Provisions have been made for all other options on the same board and it fits neatly into the hardwood cabinet alongside the **Super Elf.** The board includes slots for up to 6K of **EPROM** (2708, 2758, 2716 or TI 2716) and is **fully socketed.** EPROM can be used for the monitor and Tiny Basic or other purposes.

A IK Super ROM Monitor $19.95 is available as an on board option in 2708 EPROM which has been preprogrammed with a program loader/editor and error checking multi file cassette read/write software, (relocatable cassette file) another exclusive from Quest. It includes register save and readout, block move capability and video graphics driver with blinking cursor. Break points can be used with the register save feature to isolate program bugs quickly, then follow with single step. If you have the **Super Expansion Board** and **Super Monitor** the monitor is up and running at the push of a button.

Other on board options include **Parallel Input and Output Ports** with **full handshake.** They allow easy connection of an ASCII keyboard to the input port. **RS 232 and 20 ma Current Loop** for teletype or other device are on board and if you need more memory there are two **S-100** slots for static RAM or video boards. Also a 1K Super Monitor version 2 with video driver for full capability display with Tiny Basic and a video interface board. **Parallel I/O Ports $9.85, RS 232 $4.50, TTY 20 ma I/F $1.95, S-100 $4.50. A 50 pin connector set** with ribbon cable is available at $15.25 for easy connection between the **Super Elf** and the **Super Expansion Board.**

Power Supply Kit for the complete system (see Multi-volt Power Supply).

Quest Super Basic V5.0

A new enhanced version of **Super Basic** now available. Quest was the first company worldwide to ship a full size Basic for 1802 Systems. A complete function **Super Basic** by **Ron Cenker** including floating point capability with scientific notation (number range ±.17E^{38}), 32 bit integer ±2 billion; multi dim arrays, string arrays; string manipulation; cassette I/O; save and load, basic, data and machine language programs; and over 75 statements, functions and operations.

New improved faster version including **renumber** and essentially **unlimited variables.**

Also, an exclusive user expandable command library.

Serial and Parallel I/O included.

Super Basic on Cassette $55.00.

Ohio Scientific Computers

CIP Series 2 **$455.00.** Like an Apple at less than half the price! CIPMF Series 2 **$1199.00.** Minifloppy version with additional RAM/ROM. Complete software and peripherals available. Send for free brochure.

Gremlin Color Video Kit $69.95

32 x 16 alpha/numerics and graphics; up to 8 colors with 6847 chip; 1K RAM at E000. Plugs into Super Elf 44 pin bus. No high res. graphics. On board RF Modulator Kit **$4.95**

1802 16K Dynamic RAM Kit $149.00

Expandable to 32K. Hidden refresh w/clocks up to 4 MHz w/no wait states. Addl. 16K RAM **$63.00**

Tiny Basic Extended on Cassette $15.00
(added commands include Stringy, Array, Cassette I/O etc.) S-100 4-Slot Expansion $ 9.95
Super Monitor VI.I Source Listing $15.00

Elf II Adapter Kit $24.95

Plugs into Elf II providing Super Elf 44 and 50 pin plus S-100 bus expansion. (With Super Expansion). High and low address displays, state and mode LED's optional **$18.00.**

Super Color S-100 Video Kit $129.95

Expandable to 256 x 192 high resolution color graphics. 6847 with all display modes computer controlled. Memory mapped. 1K RAM expandable to 6K. S-100 bus 1802, 8080, 8085, Z80 etc.

Dealers: Send for excellent pricing/margin program.

Editor Assembler $25.00
(Requires minimum of 4K for E/A plus user source)
1802 Tiny Basic Source listing $19.00
Super Monitor V2.0/2.1 Source Listing $20.00

TERMS: $5.00 min. order U.S. Funds. Calif residents add 6% tax.
$10.00 min. BankAmericard and Master Charge accepted. $1.00 insurance optional.
Postage: Add 5%. C.O.D. $10.00 min. order.

FREE: Send for your copy of our NEW 1980 QUEST CATALOG. Include 48¢ stamp.

Circle 342 on inquiry card.

SUNNY LOW LOW COST

POWER SUPPLIES

FOR S-100, FLOPPY DISKS.



KIT 1, 2 & 3 For S–100



R3 For Three 8" or 5¼" Disk Drives



S3 2 in 1 Unit for S–100 and two 8" or 5¼" Disk Drives. It fits most Disk System Mainframes.

S-100 POWER SUPPLY KITS (OPEN FRAME WITH BASE PLATE, 3 HRS. ASSY. TIME)

ITEM	USED FOR	@ + 8 Vdc	@ – 9 Vdc	@ + 16 Vdc	@ – 16 Vdc	@ + 28 Vdc	SIZE W × D × H	PRICE
KIT 1	15 CARDS SOURCE	15A	———	2.5A	2.5A	———	12" × 5" × 4⅞"	52.95
KIT 2	SYSTEM SOURCE	25A	———	3A	3A	———	12" × 5" × 4⅞"	59.95
KIT 3	DISK SYSTEM	15A	1A	2A	2A	4A	14" × 6" × 4⅞"	67.95

DISK DRIVE POWER SUPPLY "R3" REGULATED, OPEN FRAME, ASSY. & TESTED 67.95

SPECS: + 5V @ 5A OVP, –5V @ 1A + 24V@ 5A, SHORTS PROTECT. 2 SIZES AVAIL., 1.) 9" (W) × 6¼" (D) × 4⅜" (H), 2) 9" (W) × 5⅜" (D) × 5¼" (H)
OPTION: 1.) REPLACE + 24V BY + 12V, 2.) FOR SIZE 1 ONLY, ADD ± 12V @ 1A, AT AN ADDITIONAL $12.00.
IDEAL FOR THREE 8" or 5¼ FLOPPY DISK DRIVES, SUCH AS SHUGART 801/851, SIEMANS FDD 100-8/200–8 OR 100–5 ETC.

DISK SYSTEM PWR SUPPLY "S3" OPEN FRAME, ASSY. & TESTED. COMPACT SIZE: 10"(W) × 6" (D) × 5" (H) 92.95

REGULATED OUTPUTS FOR DISK DRIVES: +5V @ 4A, –5V @ 1A, +24V @ 4A (OR + 12V @ 4A). SHORTS PROTECT.
UNREGULATED OUTPUTS FOR S–100: +8V @ 14A, ± 16V @ 3A. (OPTION: ADD OVP FOR +5V, ADD $5.00)
A COMPLETE UNIT FOR DISK SYSTEM WITH THE MAINFRAME CONTAINING 12 SLOTS & TWO 8" or 5¼" DISK DRIVES.

POWER TRANSFORMERS (WITH MOUNTING BRACKETS)

ITEM	PRIMARY	SECONDARY #1	SECONDARY #2	SECONDARY #3	SIZE W × D × H	PRICE
T_1	110/120	2 × 8 Vac, 15A	28 Vac, CT, 2.5A	———	3¾" × 3⅝" × 3⅛"	21.95
T_2	110/120	2 × 8 Vac, 25A	28 Vac, CT, 3.5A	———	3¾" × 4⅜" × 3⅛"	27.95
T_3	110/120	2 × 8 Vac, 15A	28 Vac, CT, 2.5A	48 Vac, CT, 2A	3¾" × 4⅜" × 3⅛"	29.95
T_4	110/120	2 × 8 Vac, 6A	28 Vac, CT, 1.5A	48 Vac, CT, 3A	3¾" × 3⅝" × 3⅛"	22.95
T_5	110/120	2 × 8 Vac, 6A	28 Vac, CT, 2A	———	3" × 3" × 2½"	14.95

SHIPPING For each power supply $5.50 in Calif., $7.50 in other states, $14.00 in Canada. For each Transformer $5.00 in all States, $10.00 in Canada. Calif. Residents add 6% Sales Tax.

MAILING ADDRESS:
P.O. BOX 4296
TORRANCE, CA 90510

SUNNY INTERNATIONAL
(TRANSFORMERS MANUFACTURER)
(213) 328-2425 MON-SAT 9-6

SHIPPING ADDRESS:
22129½ S. VERMONT AVE
TORRANCE, CA 90502

---

apple II plus
With 48K of memory!
$1199.
With the purchase of the APPLE II select from the below SPECIAL PRICING!

Base₂ printer	$599⁰⁰
Disk II w/cont	585⁰⁰
Disk II	475⁰⁰
Ser Printer Cd.	179⁰⁰
SupR'Mod	23⁰⁰
3way I/0 Select	33⁰⁰
Video 100 12"	119⁰⁰
Firmware Card	179⁰⁰
UHF to RCA Cable	5⁰⁰

apple II/apple II plus
With 64K of memory!
$1415.

APPLE INTERFACE CARDS

CENTRONICS PRINTER	$ 219
COMMUNICATIONS w/conn.& cable	229
DISK II CONTROLLER d.o.s. 3.3	149
INTEGER BASIC FIRMWARE	195
APPLESOFT FIRMWARE	195
PASCAL LANGUAGE PACKAGE	489
PARALLEL PRINTER	175
PROTOTYPING/HOBBY	22

COLOR

$397⁰⁰ MONITOR 13"

VISICALC
FOR: APPLE & ATARI
$130.⁰⁰
5 or more $120.⁰⁰

video 100

$129 12"
Leedex Corp

EPROMS

2708	1k x 8	5.95
		8 FOR 40.00
2716	2k x 8	9.95
single p.s.		8 FOR 80.00
2732	4k x 8	24.95
2716	2k x 8	6.95
triple p.s.		

SN7400N	.20	SN7440N	.22	SN74141N	.69
SN7402N	.22	SN7442N	.57	SN74151N	.65
SN7404N	.22	SN7443N	.78	SN74153N	.65
SN7408N	.24	SN7445N	.78	SN74154N	1.25
SN7410N	.22	SN7451N	.20	SN74155N	.80
SN7412N	.28	SN7454N	.20	SN74157N	.69
SN7413N	.35	SN7474N	.32	SN74160N	.95
SN7414N	.49	SN7475N	.32	SN74161N	.65
SN7416N	.29	SN7482N	1.05	SN74163N	.85
SN7417N	.29	SN7492N	.50	SN74164N	.87
SN7423N	.28	SN7493N	.48	SN74165N	.87
SN7425N	.25	SN7495N	.60	SN74174N	.95
SN7430N	.23	SN7496N	.70	SN74175N	.69
SN7437N	.29	SN74122N	.39	SN74180N	.75
SN7438N	.24	SN74136N	.95	SN74181N	1.15

74LS00	.26	74LS155	115
74LS02	.26	74LS158	75
74LS03	.26	74LS160	95
74LS04	.26	74LS161	85
74LS08	.28	74LS162	95
74LS09	.26	74LS163	160
74LS10	.26	74LS164	65
74LS20	.26	74LS165	65
74LS21	.28	74LS170	175
74LS22	.26	74LS174	75
74LS26	.49	74LS175	75
74LS27	.26	74LS190	75
74LS30	.28	74LS193	95
74LS32	.32	74LS195	95
74LS38	.32	74LS196	85
74LS42	.65	74LS221	140
74LS48	.78	74LS240	165
74LS51	.25	74LS241	165
74LS54	.35	74LS243	145
74LS74	.38	74LS244	145
74LS75	.60	74LS245	225
74LS83	.44	74LS253	95
74LS85	.95	74LS257	95
74LS86	.95	74LS258	95
74LS90	.69	74LS259	285
74LS93	.69	74LS279	44
74LS107	.45	74LS283	100
74LS112	.38	74LS293	185
74LS113	.48	74LS298	120
74LS122	.48	74LS366	95
74LS123	.95	74LS367	55
74LS126	.69	74LS368	55
74LS138	69	74LS373	139
74LS151	.44	74LS374	139
74LS153	.44	74LS386	65

APPLE EXPANSION KIT
16K Memory Add-On
MEMORY ADD-ON KIT INCLUDES INSTRUCTIONS
$39⁰⁰

apple clock/calendar
$124⁹⁵
Seconds, minutes, hours, day-of-week month, date, & year.
On board batteries with one year life.
Uses MSM5832-crystal controlled.
California Computer Systems

MISCELLANEOUS

8038C	2.65
NE555V	.27
7905	
7908	
7915	
7918	.85
7805	
7806	
7808	
7812	
MC1330AIP	1.60
MC1350P	1.15
MC1358P	1.50
LM380N	1.75
NE565N	1.25
MC1458P	.50
IS410 SCR	.95
IT410 TRIAC	.95
2114 200ns	3.50
2114L 300ns	3.75
2114L 200ns	4.25
4116 300ns	4.95
4116 200ns	5.45

$17⁹⁵ LOGIC PROBE KIT
BUY FIVE OR MORE FOR ....$16.95 each

MSM5832 MICROPROCESSOR REAL-TIME CLOCK $7⁴⁵

The MSM5832 is a monolithic metal-gate CMOS integrated circuit that functions as a real time clock calendar for use in bus oriented microprocessor applications. The on chip 32,768 Hz crystal controlled oscillator time base is counted down to provide addressable 4 bit I/O data of SECONDS, MINUTES, HOURS, DAY OF WEEK, DATE, MONTH and YEAR. Data access is controlled by 4 bit address, chip select, read, write and hold inputs. Other functions include 12H/24H format selection, leap year identification and manual ±30 second correction.

TRS 80
16K Memory Add On
$43⁹⁵
KIT CONTAINS DIP SWITCHES AND DETAILED INSTRUCTIONS

CONCORD COMPUTER PRODUCTS

SEND $2.00 FOR "1981" CATALOG

1971 SOUTH STATE COLLEGE
ANAHEIM, CALIF. 92806

VISA MASTERCHARGE
CHECK OR M O
NO COD
CAL RES ADD 6%

(714)937-0637

MINIMUM ORDER $10.00
ADD $1.50 FOR FRT ON ORDERS UNDER $50
5% IF OVER $50

SOROC TECHNOLOGY, INC

IQ120 $689



No "Glitches", Surges Or Interference

THE MPD117 TURNS AN ORDINARY OUTLET INTO A CONTROLLED FILTERED POWER SOURCE FOR UP TO EIGHT DEVICES.
$87⁵⁰

Circle 99 on inquiry card.

1858 Evergreen Street, Duarte, California 91010 Phone 213-357-5005

page
DIGITAL INC.

INSULATION DISPLACEMENT SOCKETS

RIGHT ANGLE HEADERS



Pins	PC Mounting		Wire Wrap	
10	IDH10SR	.80	IDH10WR	1.75
20	IDH20SR	1.25	IDH20WR	2.75
26	IDH26SR	1.85	IDH26WR	3.60
34	IDS34SR	2.15	IDH34WR	4.15
40	IDH40SR	2.50	IDH40WR	4.90
50	IDH50SR	3.15	IDH50WR	6.15

EJECTOR EARS .25 EACH

CARD EDGE CONNECTORS



Pins	Part No.	
10	IDE10	3.25
20	IDE20	3.50
26	IDE26	4.05
34	IDE34	4.85
40	IDE40	5.65
50	IDE50	5.90

RIBBON CABLE

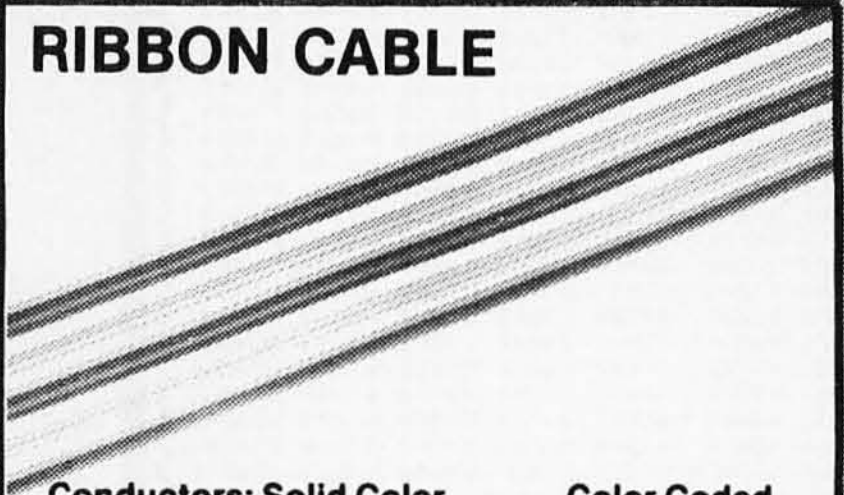

Conductors:	Solid Color		Color Coded	
	10 ft.	100 ft.	10 ft.	100 ft.
10	2.90	17.00	4.00	30.00
14	3.40	23.80	5.00	42.00
16	3.70	27.20	5.60	48.00
20	4.40	34.00	7.00	60.00
24	5.00	40.80	8.00	72.00
26	5.40	44.20	8.60	78.00
34	6.80	57.80	11.00	102.00
40	7.80	68.00	13.00	120.00
50	9.50	85.00	16.00	150.00

25 PIN "D" CONNECTORS



Style	Part #	
SOLDER STYLE		
Male	DB25P	2.25
Female	DB255	3.00
Hood	DB25C	1.10
INSULATION DISPLACEMENT		
Male	IDC25P	4.95
Female	IDC255	5.25
Hood	IDC25C	1.35

SOCKETS



Pins	Part No.		Stain Relief
10	IDS10	1.25	.25
20	IDS20	2.02	.25
26	IDS26	2.65	.25
34	IDS34	3.50	.25
40	IDS40	4.05	.25
50	IDS50	5.06	.25

CABLE PLUGS



Pins	Part No.	
14	IDP14	1.25
16	IDP16	1.40
24	IDP24	2.25
40	IDP40	3.65

WIRE WRAP WIRE

Length	100/Bag	500/Bag	1K/Bag	Length	100/Bag	500/Bag	1K/Bag
2.5"	$1.25	$3.58	$ 6.19	6.5"	$1.92	$6.44	$11.81
3.0"	1.30	3.86	6.78	7.0"	1.99	6.76	12.44
3.5"	1.37	4.15	7.37	7.5"	2.08	7.07	13.09
4.0"	1.42	4.44	7.94	8.0"	2.14	7.38	13.73
4.5"	1.48	4.74	8.54	8.5"	2.18	7.69	14.36
5.0"	1.54	5.04	9.13	9.0"	2.24	8.11	15.01
5.5"	1.58	5.38	9.72	9.5"	2.30	8.32	15.65
6.0"	1.65	5.66	10.31	10.0"	2.39	8.71	16.28

Kynar precut wire. All lengths are overall, including 1" strip on each end. Colors and lengths cannot be mixed for quantity pricing. Choose from colors Red, Blue, Black, Yellow, White, Green, Orange, and Violet.

WIRE KITS

Kit No. 1		$9.95	
250	3"	100	4½"
250	3½"	100	5"
100	4"	100	6"

Kit No. 2		$24.95	
250	2½"	250	5"
500	3"	100	5½"
500	3½"	250	6"
500	4"	100	6½"
250	4½"	100	7"

Kit No. 3		$32.95	
500	2½"	500	4½"
500	3"	500	5"
500	3½"	500	5½"
500	4"	500	6"

Kit No. 4		$59.95	
1000	2½"	1000	4½"
1000	3"	1000	5"
1000	3½"	1000	5"
1000	4"	1000	6"

ORDERING INFORMATION:

- Orders under $25 include $2 handling
- All prepaid orders shipped UPS Ppd.
- Visa, MC & COD's charged shipping.
- All prices good through cover date.
- Most orders shipped same day.
- Byte must be mentioned to get sale price.

Write or call for 1981 catalog

- IC Sockets
- Vector Board & Pins
- Bishop Drafting Aids
- OK Tools
- RN IDC Crimp Connectors

"NEW" WIRE WRAP SOCKETS

FEATURING A SELECTIVE PLATING METHOD THAT WILL SAVE YOU MONEY BY HAVING GOLD ONLY WHERE IT COUNTS.

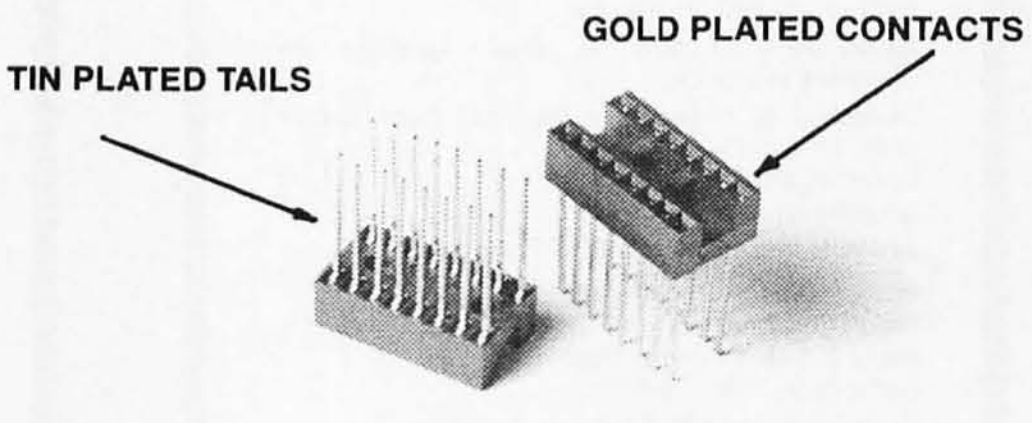

3 Level closed entry.

RN Side Wipe contact design gives twice the contact area for high reliability.

Size	Quantity/Tube	Price ea.*	Price/Tube
8	52	.41	21.32
14	30	.47	14.10
16	26	.51	13.26
18	23	.70	16.10
20	21	.87	18.27
22	19	.94	17.86
24	17	.96	16.32
28	15	1.25	18.75
40	10	1.70	17.00

*FOR REFERENCE. MUST BE ORDERED IN TUBE QUANTITIES.

Circle 314 on inquiry card.

TOLL FREE ORDERING NUMBER 1-(800)-423-7144

QUARTZ CRYSTALS

.3218-B
.5390-B
1.000-A
1.8432-A
1.8437-B
2.000-A
2.0971-A
2.4576-A
2.500-A
2.6657-B
2.9950-B
3.000-A
3.067-B
3.200-B
3.2768-A
3.500-B
3.579-B
4.000-B
4.1943-B
4.3426-B
4.4803-B
4.6103-B
4.6503-B
4.8303-B
4.9152-B
5.000-B
5.0688-B
5.1203-B
5.1850-B
5.1856-B
5.2428-B
5.610-B
5.7143-B
5.955-B
5.982-B
6.000-B
6.144-B
6.15030-B
6.29780-B
6.400-B
6.5536-B
6.72530-B
6.75840-B
6.9003-B
7.0063-B
7.0336-B
7.0916-B
7.1836-B
7.2586-B
8.000-B
8.0556-B
8.1416-B
8.1818-B
8.3303-B
8.4998-B
8.5766-B
8.6056-B
8.9608-B
8.9906-B
9.47208-B
9.9336-B
9.98408-B
9.98960-B
10.000-B
10.2458-B
10.4968-B
10.7755-B
10.8255-B
10.8386-B
11.1360-B
11.155-B
11.2186-B
11.2890-B
11.4776-B
11.6566-B
11.6816-B
12.440-B
14.3182-B
14.4308-B
15.000-B
15.4408-B
15.5066-B
16.000-B
16.3848-B
17.2248-B
17.2422-B
18.000-B
18.4320-B
19.4690-B
19.7508-B
20.000-B
20.4988-B
22.1184-B
22.6258-B
26.3556-B
26.5006-B
26.6706-B
27.000-B
27.0006-B
27.6506-B
28.4006-B
28.6276-B
28.7538-B
29.8758-B
29.9378-B
30.0648-B
30.3606-B
30.6258-B
30.8768-B
31.4378-B
31.7538-B
31.9008-B
32.000-B
33.2006-B
33.6258-B
34.5558-B
34.7538-B
34.9776-B
35.9256-B
36.000-B
36.2886-B
36.3636-B
37.9628-B
38.3768-B
38.4448-B
38.6258-B
38.9258-B
39.3128-B
39.5038-B
39.6668-B
39.7538-B
39.8768-B
39.9628-B
40.4448-B
40.5928-B
40.8128-B
40.8336-B
40.8758-B
40.8888-B
40.9258-B
41.0008-B
41.1666-B
41.3768-B
41.9378-B
42.0008-B
42.5836-B
42.6268-B
42.7006-B
42.7538-B
42.8148-B
42.8518-B
42.8768-B
42.9258-B
42.9628-B
43.0008-B
43.0378-B
43.0748-B
43.1858-B
43.2598-B
43.3338-B
43.3708-B
43.4078-B
43.4378-B
43.4448-B
43.5558-B
43.6298-B
43.6668-B
43.7778-B
43.8128-B
43.8148-B
43.8518-B
43.8888-B
43.9258-B
44.0008-B
44.0378-B
44.3768-B
44.7778-B
45.1256-B
46.3006-B
46.7006-B
46.8128-B
47.3768-B
47.8838-B
48.000-B
48.3006-B
48.6668-B
48.7006-B
48.8768-B
49.7006-B
49.7338-B
49.8128-B
50.2505-B
51.0556-B
51.3128-B
51.7778-B
51.8506-B
52.8128-B
56.7506-B
60.6006-B
60.7508-B
66.7506-B
70.4006-B
75.0005-B
90.8338-B
99.9668-B
100.6668-B
101.4668-B
103.0668-B
103.4668-B
104.9918-B

ALL 'A' — $2.99 ALL 'B' — $1.99 10 OR MORE-DEDUCT 5%

ADD $1.00 SHIPPING
CAL. RES. ADD 6% SALES TAX
FREE OSCILLATOR SCHEMATICS
WITH ANY ORDER

QUALITY COMPUTER PARTS
P.O. BOX 743 / CHATSWORTH, CA 91311

Circle 338 on inquiry card.

PROOF

IS HERE

*PROOFREADS SPELLING
*FINDS TYPOGRAPHICAL ERRORS
*CHECKS OVER 250,000 WORDS
*USER EXPANDABLE DICTIONARY
*SIMPLE TO USE
*COMPATIBLE WITH ALL:
Z80† CP/M† TEXT FILES
TRS-80† SYSTEMS
*FAST

$150

IPS

IMAGE PROCESSING SYSTEMS
6409 Appalachian Way
Madison, Wisconsin 53705
(608) 233-5033

Also available: Screen Editor – $75
†Registered Trademark

Circle 190 on inquiry card.

GREAT DEALS ON SOFTWARE

MICROPRO	
WORDSTAR™	$ 320
MAILMERGE™	$ 100
DATASTAR™	$ 230
SUPERSORT I™	$ 165
SUPERSORT II™	$ 130
SMALL BUSINESS APPLICATIONS, INC.	
MAGIC WAND™	$ 270
CPU INTERNATIONAL	
PEARL I™	$ 100
PEARL II™	$ 295
PEARL III™	$ 540
INNOVATIVE SOFTWARE APPLICATIONS	
SPELLGUARD™	$ 275

SPECIAL

DIABLO 630 PRINTER	$1995

30 DAY OFFER

LIMITED QUANTITIES AVAILABLE

DWP Inc. (703)241-2910
123 Rowell Court, Falls Church, Virginia 22046

Circle 137 on inquiry card.

NEED DISKETTES?

Call free (800)235-4137

3M
BASF
MEMOREX
Dysan

PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. (In Cal. call
(805) 543-1037.)

Circle 313 on inquiry card.

BUDGET SOFTWARE

For as little as 15% down you can have custom designed software, write BUDGET SOFTWARE, 8517 Nestle Ave., Northridge, CA., 91325 or phone (213) 701-0734 8:00 - 6:00 (pst)

Circle 50 on inquiry card.

LISP

INTERPRETER FOR THE TRS-80*

SEE THE AUGUST, '79 ISSUE OF BYTE TO FIND HOW EASY IT IS TO USE LISP.

- INCLUDES MORE THAN 30 FUNCTIONS & PREDICATES.
- CODED FOR HIGH-SPEED OPERATION.
- FULL ARITHMETIC CAPABILITY.
- USER'S MANUAL.
- SUPPLIED ON CASSETTE FOR 16K-64K LEVEL II.

SEND $50 IN CHECK OR MONEY ORDER TO:

CYBER INNOVATIONS
WORLD TRADE CENTER
P. O. BOX 58657
DALLAS, TEXAS 75258

*TRADEMARK OF TANDY CORPORATION

Circle 109 on inquiry card.

TYPRINTER 450	**$2100**
45 CHAR/SEC DAISYWHEEL PRINTER/TERMINAL. RS232; IDEAL FOR WORD PROCESSING; WILL SUPPORT DIABLO, QUME, AND NEC PROTOCOLS	
TYPRINTER 550	**$2300**
SAME AS ABOVE BUT 55 CHAR/SEC PRINT SPEED	
QUME	**$1000**
55 CHAR/SEC OEM PRINTER MECHANISM	
SHUGART 8" FLOPPY DISK DRIVES	**$360**
SA800 SOFT-SECTORED SINGLE/DOUBLE DENSITY	
MICROSWITCH KEYBOARDS	**$85**
HALL EFFECT. ASCII MOD. 74SW12	
INTERFACE	**$325**
OEM DAISYWHEEL PRINTER INTERFACE. INTERFACES DIABLO OR QUME OEM PRINTER TO RS232 OR CENTRONICS PARALLEL	
RIBBONS	**$2.50**
DIABLO HYTYPE I OR QUME. CLOTH OR MULTI/STRIKE. 1 DOZ. MINIMUM	

COMPUTER DYNAMICS, INC.
211 WHITE WATER
GREER, S.C. 29651 • (803) 244-7872

Circle 82 on inquiry card.

Apple II
FLIGHT PLANNER
Flight Plans Suitable for Jets to J-3's
YOU ENTER: Departure Point
Destination
Altitude

APPLE II selects VOR navigational stations and prepares an optimal flight plan

Works RNAV flight routings too!

Plans flights as high as FL 510 and as low as 1000 AGL. Flight plans are tailored to cruising altitude. Allows for preferred VOR departure and arrival fixes.

Contains in storage locations of all VOR navigational stations and 900 + airports

Allows entry of data for airport locations not contained in storage.

Developed by Professional Pilot and flight proven since 1978.

FLIGHT PLANNER software	$49.95
Documentation manual only	$ 5.00

Available thru your local APPLE Computer Dealer
or
Illinois Computer Mart, Inc.
Route 8, Sweet's Corner Plaza
Carbondale, Illinois 62901

Designed for the APPLE II by J.L. Kennedy
Dealer Inquiries Invited
APPLE II is a trademark of APPLE COMPUTER, Inc.

CENTRONICS 101A PRINTERS, 9×7 matrix, 165 CPS, 132 col., normal tractor feed paper, up to 5 copies, width variable from 4"-15", 6 lines/inch, 10 CPI, parallel data input, full 90 day warranty (Wt. 118 lbs.) $650.00

I.B.M. SELECTRIC KEYBOARD PRINTERS, (Model 72) with GTE interface electronics to standard RS-232 Serial 25 pin connection. 15 CPS, 15 inch carriage, 10 pitch interchangeable elements, 90 day warranty (Wt. 50 lbs.) $650.00

(Pa. residents add 6% sales tax to orders)
Make checks or money orders payable to:

American Custom Electronic Systems
Box 157A
Groveland Rd.
Pipersville, Pa 18947

(Add .50 per pound shipping/handling fee)

Circle 20 on inquiry card.

The Nanocomputer: the professional approach to microcomputers



The Nanocomputer is an integrated educational system based on a powerful microcomputer with education-oriented software and complemented by a series of training books written specially for the system.

POWERFUL — based on the Z80 microprocessor made by SGS-ATES

COMPLETE — hardware, software and peripherals backed by a series of step-by-step training books on programming, digital electronics and interfacing.

MODULAR — as the student learns, the hardware can be expanded to introduce new concepts and experiments: Z80 code programming, interfacing and high-level languages (BASIC).

NBZ80S Nano Computer Includes the Nano Computer with power supply, the NEZ80 bread board for experiments and interfacing, the card frame, K1Z80 Cable Kit, the technical manual and training books one and three $570.00

K1Z80 Extra K1Z80 Cable Kit 11.00

K2Z80 Active and experimental component kit 33.10

K3Z80 Socket kit with 3 40 pin sockets 5.70



RCZ80/P Cassette recorder for all Nano Computer Systems (requires a W10Z80 see below) 88.60

W10Z80/P Cable for connecting the RCZ80 cassette recorder 16.60

NEZ 2KB Experimental Software for the Nano Computer (available on the M2708 EPROM) 32.90

MINIATURE DOT MATRIX IMPACT PRINTER

MODEL DP-822

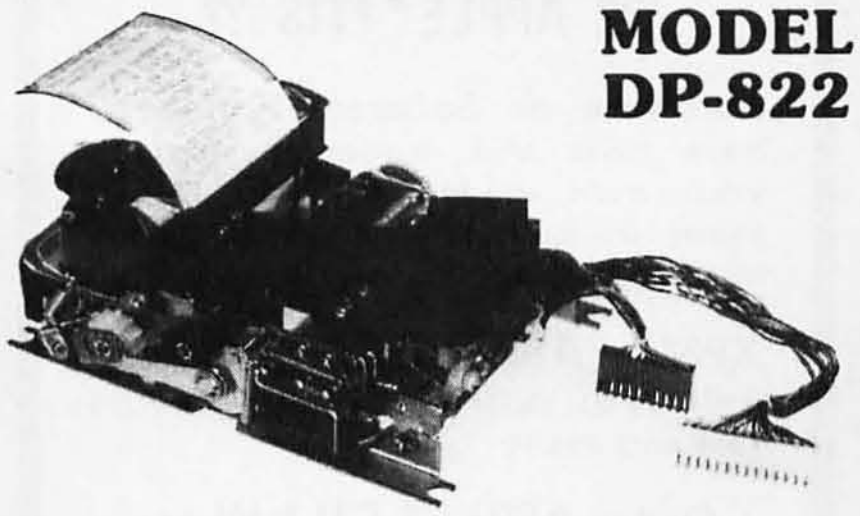

The Unique New Printer That Gives You All These Exciting Features.

- Low Cost
- Disposable printing head
- Simple interface
- Handles any type font
- Needs only one 12-volt DC power supply
- Uses standard 2¼" adding machine tape or carbonless paper
- 21-column printing at 25 lines per second
- Easy to install and maintain

Ideal Printer For . . .

- Automated banking terminals
- Desktop calculators
- Electronic cash registers
- Medical and scientific instruments
- Industrial measurement, process and control systems
- Mini-microcomputers business professional and hobby
- Point-of-sale (POS) terminals
- Security monitoring systems
- Emergency vehicle data receivers
- Fast-food kitchen printers
- Telecommunications equipment

..and many more!

Model DP-822 .... **$70.00**

NEW!

LOW PRICE
COMPUTER
from COMMODORE

VIC-20 PERSONAL COMPUTER

- 5K (Expandable to 32K)
- FULL SIZED TYPEWRITER KEYBOARD
- GRAPHICS CHARACTER SET
- 22 CHARACTER X 23 LINE SCREEN DISPLAY
- COLOR • SOUND
- EXPANSION PORTS
- RF MODULATOR
- PROGRAMMABLE FUNCTION KEYS
- PET BASIC

$299.95

HITACHI 64K DYNAMIC RAM

FACTORY PROMOTION KIT $145

KIT INCLUDES:

- 10pcs 64K Dynamic Ram p/n HM4864-3 (200ns)
- Data Sheet
- Cross Reference List

FIRST COME FIRST SERVED

★ Quantity Limited ★

FLUKE

HANDHELD and BENCH/PORTABLE DMM's

MODEL 8022A $139

MODEL 8020A $179

MODEL 8024A $219

MODEL 8050A $349

thandar PORTABLE OSCILLOSCOPE

Model SC110

Only **$369**

- LIGHT WEIGHT (2 lbs)
- AUTOMATIC CIRCUIT FOR UNUSED SECTIONS
- DC—10MHz
- 2" Diagonal CRT
- SMALL SIZE (10"x5.8"x2")
- ULTRA LOW POWER CONSUMPTION

HAMEG



10 Megahertz

HM307

SINGLE TRACE OSCILLOSCOPE

- IDEAL SERVICE INSTRUMENT
- TIME BASE 0.2 µs – 2.0 s/cm
- LPS-TRIGGER
- COMPACT
- BUILT-IN COMPONENT TESTER

Only $404.25

Synertek Systems Single Board Computer with Keyboard/Display



SYM-1 $239.

Universal Oscilloscope Probe



$36.00

SWITCHABLE X1 and X10 Attenuation Factor

KEY ADDITIONAL FEATURES: • 100MHz bandwidth • Heavy duty tip • Break resistant center conductor • Slender, flexible cable • 6ft. cable length • Wide compensation range • Fits all scopes • Ground reference can be activated at tip • Includes SPRUNG HOOK, I.C. TIP, BNC ADAPTOR, INSULATING TIP and TRIMMER TOOL ACCESSORIES.

Synertek Systems Keyboard Terminal Module



- 24 x 40 Character Screen Size

KTM-2 $349

- 24 x 80 Character Screen Size

KTM-2/80 $424

ANCRONA

STORES DO NOT ACCEPT MAIL ORDERS

MAIL ORDER

P.O. BOX 2208Y CULVER CITY, CA 90230

PHONE ORDERS (213) 641-4064

Minimum Order $10.00. Add $2.00 to cover postage and handling. Master Charge and VISA welcomed. Please include your charge card number, interbank number and expiration date. Some items are subject to prior sale. Not responsible for typos. Store pricing may vary from Mail Order pricing. We reserve the right to substitute manufacturer.

VISIT A STORE NEAR YOU TODAY - We stock a large selection of Technical Books, Discrete Components, Integrated Circuits, Test Equipment and Electronic Supplies.

ATLANTA
3330 Piedmont Rd. N.E.
Atlanta, GA 30305
(404) 261-7100

CULVER CITY
11080 Jefferson Blvd.
Culver City, CA 90230
(213) 390-3595

HOUSTON
2649 Richmond
Houston, TX 77098
(713) 529-3489

PORTLAND
1125 N.E. 82nd Ave.
Portland, OR 97220
(503) 254-5541

SANTA ANA
1300 E. Edinger Ave.
Santa Ana, CA 92705
(714) 547-8424

SUNNYVALE
1054 E. El Camino Real
Sunnyvale, CA 94087
(408) 243-4121

TUCSON
4518 E. Broadway
Tucson, AZ 85711
(602) 881-2348

Circle 24 on inquiry card.

PRINTERS

BASE 2

850	**$735**
APPLE INTF.	**$140**
OKIDATA	
μ 80	**$ CALL $**
μ 82	**$ CALL $**
EPSON	
MX-80	**$ CALL $**
MX-70	**$ CALL $**
ANACOM 150	**$ CALL $**

PLEASE ADD 3% FOR S&H TO ORDER

TECHNICAL INNOVATIONS
P.O. BOX 803
HILLSBORO, OR 97123
503-648-6423

Circle 399 on inquiry card.

?? APPLE*-ITIS ??

Hardware or Software Problems? Save time and money by having your own diagnostic disk. Determine immediately if you have a hardware problem.

XPS's **APPLE*-CILLIN** can help you cure your problems fast and easily.

Order **APPLE*-CILLIN** for $29.95**

XPS inc.

323 York Road
Carlisle, PA 17013

*trademark of Apple Computer Inc.
**PA Residents add 6% sales tax
Requires 48K and one Disk II*

Circle 448 on inquiry card.

RUN BIG CPM* PROGRAMS ON YOUR MODEL 1 TRS-80*

WITH 39 or 54K of use space.Can use Mixed Drivers 5¼ or 8" (Variable Tracks) Compatable with all **TRS*80** Operating Systems and all **TRS*80** Programs.(usable on 48K disk systems only) Boards fit into keyboard inclosure.

FREEDOM OPTION.............. $245
MEMORY EXPANSION OPTION.... $295

Send Check or Money Order to:
(MASS. RESIDENTS, PLEASE INCLUDE 5% TAX)

F.E.C. ltd.
P.O.Box 2368 • Woburn, MA. 01888
(617) 944-5329

*TRS-80 ® Tandy Corp
†CDOS ® Cromemco Inc
‡TSA OS ® TSA Software Inc
§CP/M ® Digital Research Inc

Circle 204 on inquiry card.

CP/M ▸ 68XX CROSS-SOFTWARE including source code in "C"

ASSEMBLER FEATURES:

- 2-pass absolute assembly
- Full instruction set, Motorola-compatible
- Free-format input
- Unlimited length labels
- Arithmetic expressions in operands
- Sorted symbol table output
- Intel format hex output

PACKAGE A6800	MC6800/MC6802/MC6808
PACKAGE A6801	MC6801/MC6803
PACKAGE A6809	MC6809

8" soft-sectored disk format, w/manual	$100.00
5" North Star disk format, w/manual	$100.00
Manual and listing alone	$ 85.00

(Wisconsin residents please add 4% tax)

introl corp

647 W. Virginia St.
Milwaukee, WI 53204
(414) 276-2937

Visa and Master Charge Accepted

CP/M is a trademark of Digital Research

Circle 204 on inquiry card.

COMPUTER COMPONETS SLUDER

Q.T. GODBOUT MORROW DYNABYTE SHUGART TELEVIDEO EPSON NORTHSTAR C.ITOH

ALL ITEMS ASSEMBLED & TESTED MANUFACTURE's WARRANTIES APPLY	LIST	SALE.
QT Computer Systems Inc. Mainframe• with power supply	350.	315.
QT Mainframe• DD Provision for 2 8" Drives with power supplies	575.	517.
QT Mainframe• MD Provision for 2 Mini-Drives (5¼) w/power supply	400	360
QT 12 Slot Motherboard add $112 to MF•DD & $90 to MF• or MF•MD		
Q.T. System•I Dual 8" Drives, 64K Ram 4MHZ Z80A 2 Ser. 2 Par Ports CPM	3595.	3235.
Q.T. System•II Same as above with Dual 8" Double Sided Drives CPM 2.2	4495.	4045.
Q.T. System•II Same as above with Dual 5¼ Drives & CPM 2.2	2495.	2245.
Q.T. System•II Same as above with Dual 5¼ Double Sided Drives CPM 2.2	2795.	2515.
Q.T. Systems Purchased from SLUDER come free Accounting Package (CBASIC REQUIRED)		
SHUGART SA801R 8" Disk Drive While Quantities Last	650.	395.
Q.T.DDC•8 Single Cabinet for 8" Disk Drive with power supply	195.	175.
Q.T.DC-88-3 Dual Cabinet for 8" Disk Drives with power supply	275.	250.
QT SBC 2/4MHz Z80A 1 serial 1 par. port 1K ram (Some Avail @$225.)	290.	260.
QT 2K Monitor w/CPM BIOS for CCS2422A, Versafloppy I or II & SBC 2/4	45.	40.
QT Z80• Rev I 4MHz one serial port on board	210.	189.
QT I/O• 2 Serial & 4 Parallel Ports (Some available @ $249.)	375.	337.
QT RAM• 16K Static 4MHz with 8 Bank Lines (Some Avail. @ $175.)	225.	202.
QT Expandable• Rev.II 24 address lines works with Northstar & Cromemco	675.	599.
4116's 16KX1 Dynamic Rams 200ns While supplies last 8 Pieces		22.
GODBOUT ELECTRONICS ASSEMBLED & TESTED BOARDS, FOR CSC OR KITS CALL		
BIG 16 PACKAGE CPU 8085/8088,Disk 1,64K static ram,CPM86,Pascal86, SS1	3430.	call
CPU Z 24 address lines, 4MHz will run at 6MHz with Zilog Inc.'s Z80B	295.	234.
CPU 8085/8088, 8•16 Bit Computer Board 5MHz Extended Addressing	425.	359.
RAM 20-32K Static will run with 10MHz Systems Extended Address & Bank	699.	565.
RAM 21 128K Static To 10Mhz Extended Addressing CSC only	2795.	2499.
SYSTEM SUPPORT 1 Provision for RAM ROM Math Processor Has 1 Ser. Port	395.	335.
DISK 1 Controller board with EPROM & Serial Port CPM 2.2 BIOS 5¼ or 8	495.	395.
20 Slot Godbout Motherboard	214.	179.
COMPUTER ENCLOSURE 2 Includes Cabinet, 20 slot mother, power supply Desk	825.	699.
MORROW DESIGNS 10MB Hard Disk w/controller, cabinet, ps, cables, CPM	3695.	2995.
MORROW DESIGNS Discus 2•2 2 Double sided 8" Drives with CPM	2740.	2249.
TELEVIDEO 920C Smart Terminal with extra function keys	1030.	715.
TELEVIDEO 950 Smart Terminal separate keyboard	1195.	950.
EPSON MX 80 Printer w/parallel interface	645.	495.
NORTHSTAR Horizon I Quad 64K w/ Morrow 10MB Hard Disk & CPM 2.2	7595.	5995.

CPM/CPM 2.2 are registered trademarks of Digital Research, Z,Z80 A&B T.M. of Zilog
Visa & Master Charge Accepted on selected items. ALL PRICES SUBJECT TO CHANGE
Make checks payable to SLUDER, call 10-5, M-F, P.S.T. for Info or Bank Wires
Personal Checks require 2 weeks, Postage Minimums Boards $3.00, Floppies $7.00, Mainframes $10.00, Systems $15.00, Terminals $12.00, Printers call

PO BOX 951
WESTMINSTER CA 92683
714 895 1746

Circle 369 on inquiry card.



TERMINAL DATA CORPORATION

MODEL 1200 RS-232 BI-DIRECTIONAL DATA SPLITTER

available in kit form

Model 1200K gives the terminal or microprocessor user a second interface for a printer, plotter, cassette or tape drive. It operates at any speed & isolates the two output devices from each other, while providing 2 RS-232 interfaces from the terminal or microprocessor.

The kit consists of 3 RS-232 connectors, printed circuit board, all necessary components, enclosure, mounting hardware & assembly instructions $69.00

write or call

TERMINAL DATA CORP.
11878 Coakley Cir.
Rockville, MD 20852
(301) 881-7655

Circle 403 on inquiry card.

6800 Micro Modules



FOR INTERFACING TO: sensors, transducers, analog signals, solenoids, relays, lamps, pumps, AC motors, DC motors, stepper motors, keyboards, displays,488 GPIB.

ADDITIONAL FEATURES: 6800 MPU, counter/timer,fail safe battery back up

WINTEK

Wintek Corp.
1801 South Street
Lafayette, IN 47904
317-742-8428

Circle 436 on inquiry card.

OHIO SCIENTIFIC COMPUTERS

C1P SERIES II — $479.00
OUR PRICE — $399.00
other OSI discounts available

CALL NOW TOLL FREE
1-800-558-0870

COMPUTERS PLUS, INC.
2749 S. 108th St.
MILWAUKEE, WI 53227
(414) 321-1770
IN WISCONSIN

Circle 447 on inquiry card.

DISK DRIVES

REMEX

Compatible with IBM and Shugart.
Double sided, Double Density .... 1600 K Bytes.
RFD 4000 .... $595
Double Sided, Double Density .... 800K Bytes
RFD 2000 .... $395

For fast delivery, send certified checks, money orders or call to arrange direct bank wire transfers. Personal or company checks require two weeks to clear. California Res. add 6% sales tax. Minimum shipping charge $10.00. No C.O.D.

Electronic Equipment Unlimited
3845 Birch Street
Newport Beach, CA 92660
PH: (714) 540-5231

Pricing and availability subject to change without notice.

Circle 148 on inquiry card.

NEED A LETTER QUALITY PRINTER BUT DON'T WANT TO PAY THE PRICE?

Then American Business Computers Has Just The Printer For You!

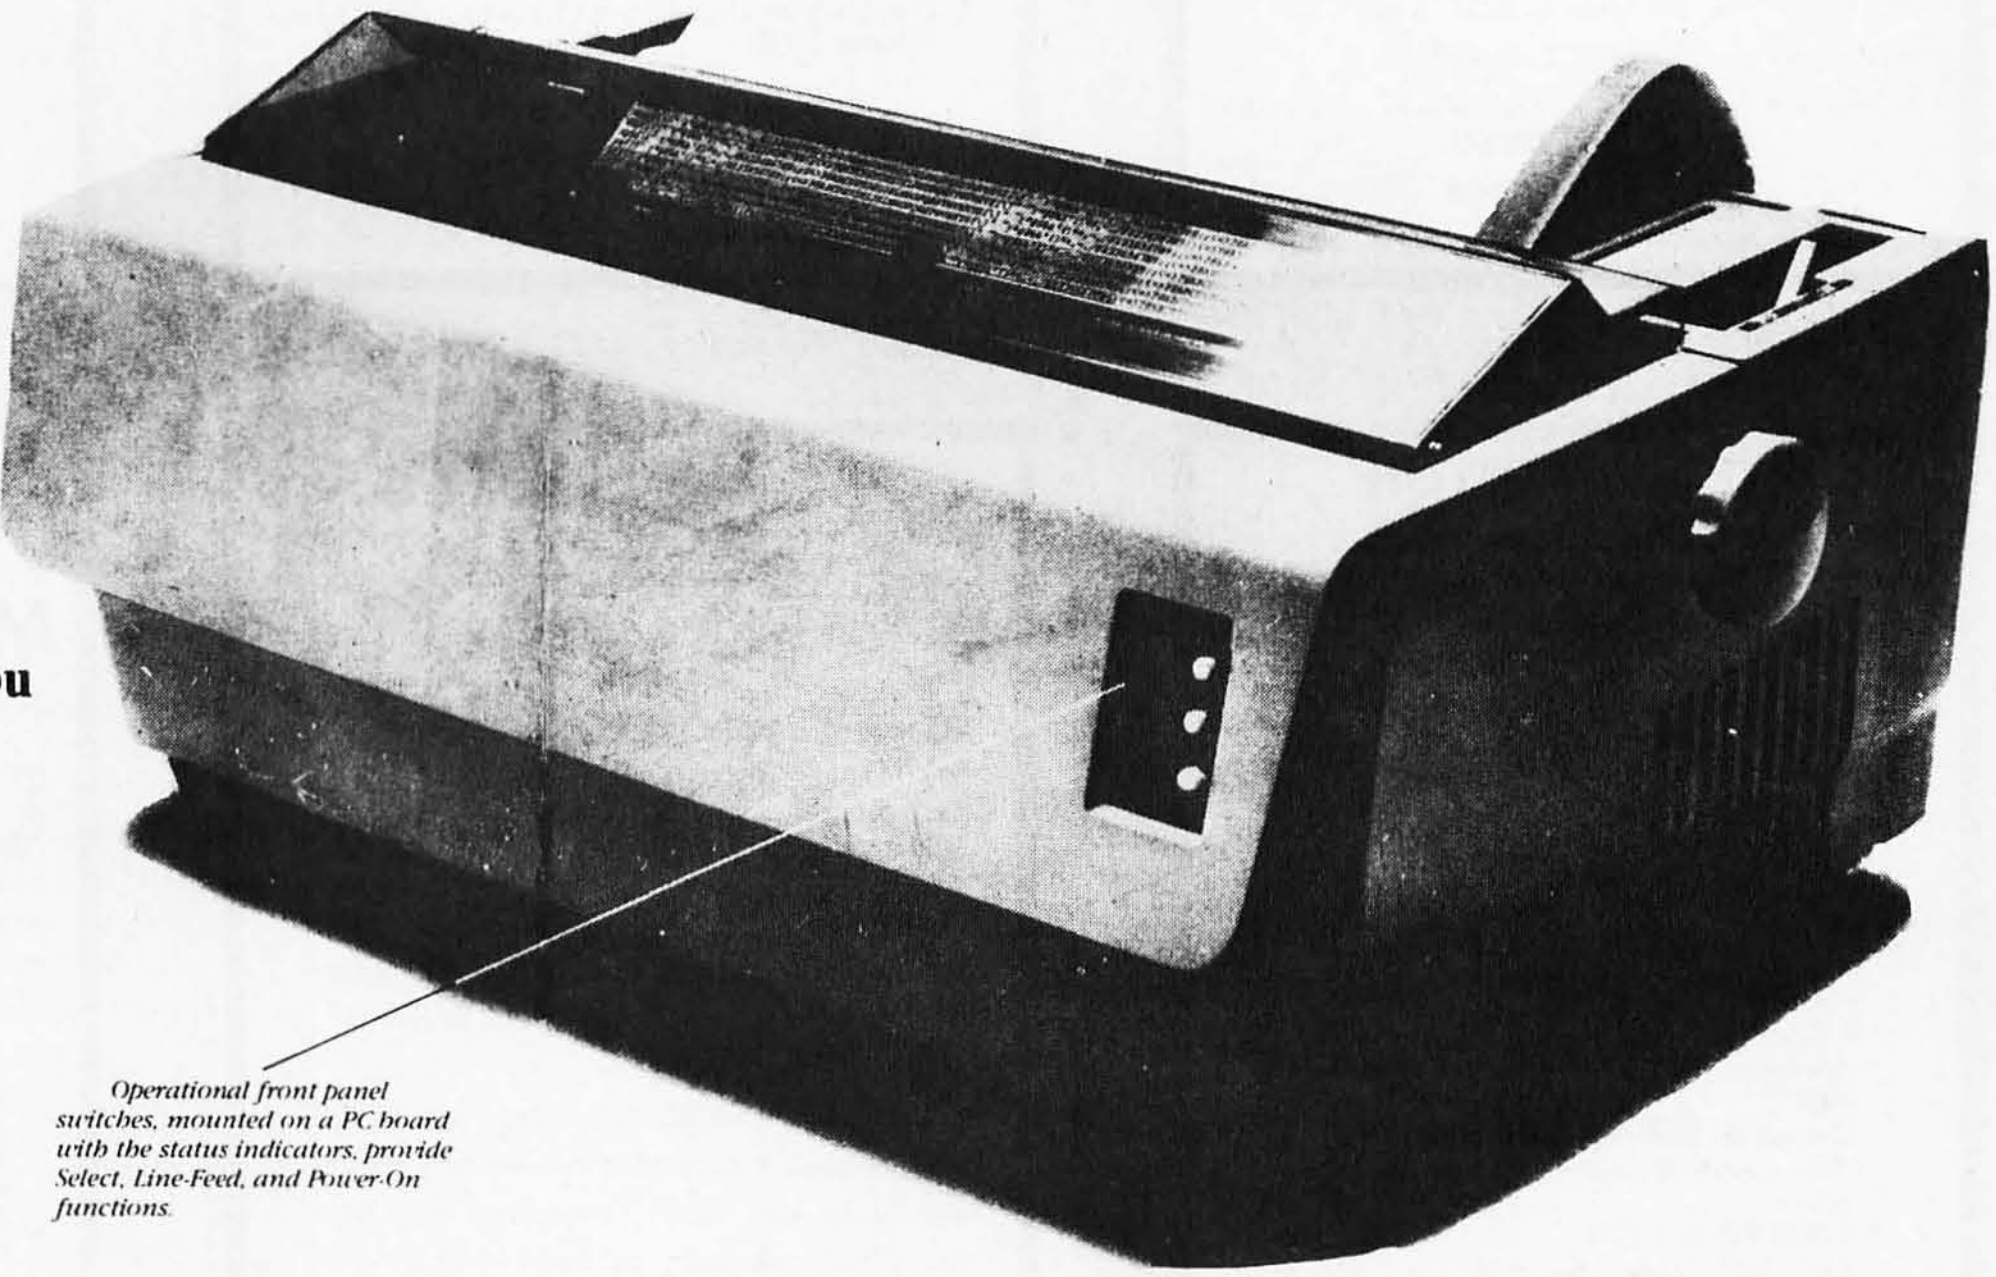

Starwriter furnishes 3 clear copies using a 96-character wheel. It produces 136 printable columns.

The Starwriter accommodates paper widths up to 381 mm (15"), friction feeding continuous forms or no-fold paper.

Operational front panel switches, mounted on a PC board with the status indicators, provide Select, Line-Feed, and Power-On functions.

Call Us For A Price
That Will Pleasantly *Surprise* You

The Starwriter Daisy Wheel Printer is designed to fill a distinct gap in the peripheral marketplace. A speed of 25 cps and its low price make it the ideal choice for today's systems designer interested in achieving superior price/performance ratios.

Incorporating the latest LSI technology, the Starwriter is built by one of the world's most respected computer peripheral manufacturers. The printer is furnished complete and ready-to-use, requiring no changes in hardware or software. Starwriter offers an industry standard parallel interface, as well as RS232-C interface. Total plug compatibility and a wide variety of interface matching capabilities help lower the system integration costs for OEMs and end-users.

Using a 96-character wheel, the Starwriter produces letter-quality printing on 3 sharp copies with up to 136 columns. Starwriter offers the highest degree of vertical and horizontal positioning, resulting in the most precise character placement in the industry. The easy-to-change character wheel also makes our printer a perfect choice for international applications. Compatible with sheet feeders, starwriter accommodates paper widths to 381 mm (15") and uses industry standard ribbon cartridges.

Along with a self-test capability and a programmable VFU (Vertical Format Unit), Starwriter furnishes the operator with all desirable status functions, commands and program selectable switches. Panel lamps indicate the current Paper, Select and Power status.

The easy plug-in compatibility of Starwriter and its outstanding print performance makes the Starwriter perfect for TRS-80*, Apple*, and S-100 users.

Starwriter is backed up by a one-year warranty (3 months on parts and labor, 9 succeeding months on parts) and is further supported by a strong, fully trained and technically proficient service organization. The Starwriter is available for immediate shipment in any quantity desired.

For more information, call American Business Computer, 118 So. Mill Street, Pryor, Oklahoma 74361; Telephone 918-825-4844.

*TM of Tandy Corp
*TM of Apple Computer Corp.

AMERICAN BUSINESS COMPUTERS

118 So. Mill Street
Pryor, Oklahoma 74361
Telephone 918-825-4844

Dealer Inquiries Invited

Circle 17 on inquiry card.



FOR

APPLE II*

Custom programs
upon request.....

-COMPUTER COOLER-

- Protect your computer from heat loads caused by stagnant air buildup within the chassis.
- Utilizes 100 CFM fan to remove heat by suction.
- Prevents air flow from directly hitting any component.
- As a separate unit, vibration will be minimized.
- Keep your system clean by removing dust.

Price.... $ 65.00

-NUMERICAL ANALYSIS PROGRAMS-

- Gauss solution of simultaneous equations (up to 80 unknowns)**
- Bessel and Spherical Bessel functions (first 30 orders)
- Determinant of matrix (up to 80th order)**
- Quadrature and Simpson Integration.
- Legendre Polynomials.... total package price: $50.00

SOFTWARE TECHNOLOGY
BOX 35
SAUNDERSTOWN, RI 02874
(401) 294-2831

-TERMS-
- Check or Money Order
- RI residents add 6%
- Allow 4-6 weeks for delivery.

* registered trademark of Apple Computer Co., ** 48K system

Circle 375 on inquiry card.

Double Side Disk Drives



Disk Drive Subsystem with Dual Double Side Drives, Power Supply and Cable. Total Capacity 2.4 M-Byte. Fully Assembled and Tested.

Only !!

1. Table Top Version $1,695.00
2. Rack Mount Version 1,695.00
3. Pair of Slides with Attachment for Rackmount 35.00
4. S100 Disk Controller (handles single & double density in 256, 512 & 1024 byte sectors, single & double side) 350.00
5. Double Side Disk Drives (1.2 mb) .... 535.00 (Qume DT/8)

Call Now (408)496-6910

OSM Computer Corporation
2364 Walsh Avenue
Santa Clara, CA 95051

Circle 306 on inquiry card.

COLOR VIDEO MONITORS RGB AND COMPOSITE VIDEO

- **TC-700 13"** color video monitor/receiver, NTSC composite video. $399.00 **TC-900, 19", $595.00.** Use with Apple II and III and other computers.
- **CM-19RGB:** 19" screen, 3 modes: RGB, Composite video, TV. $895.00.
- **Apple III RGB Interface:** Converts RGB data from Apple III to produce 16 color display on RGB monitor. $129.00.
- **Hitachi Hi-Res RGB, 13"** character display, 2000, 80×24, 5×7 dot matrix, TTL inputs. $1200.00.
- **Sony TV to video monitor conversion kit, MCK 100:** $135.00.
- **OEM 13"** and 19" RGB color monitors, immediate delivery, prices and specs, on request.

For additional information, contact:

Video Marketing, Inc.
P.O. Box 339
Warrington, Pa. 18976
(215) 343-3000

Circle 428 on inquiry card.

STEPPER MOTOR/ DRIVER BOARD

Interface your computer to the *REAL* world

Indispensable for Robotics
Many control applications
Each pulse from your computer steps the motor 7.5°

Features:
- North American Philips K82701-P2 type Stepper motor
- SAA 1027 Stepper motor control I.C.
- Optically isolated
- 12 VDC operation
- All I.C.'s socketed
- Computer controls direction of rotation, 7.5° per step

PRICE

Complete DRIVER ASSEMBLY, incl. all I.C.'s, assembled and tested (does **not** include motor) **$39.95**
STEPPER MOTOR **$28.95**
SAA 1027 Driver chip only **$16.50**

Data, schematics are included

Terms: Check or money order U.S. funds only. Add 2% for shipping and handling. (N.Y. state residents add 7% sales tax) Immediate delivery from stock. All items guaranteed.

AMSI CORP
P.O Box 56
Bellport, New York 11713
(516) 286-2144

Circle 22 on inquiry card.

AFFORDABLE

Here at KLOFOX, affordable is not a motto, it's a way of doing business. Prices start at $1695.00, for a single 8" drive system.

All systems feature a single board Z-80 CPU (NO BUSS HEADACHES), runs CP/M* 2.2 (BIOS INCLUDED), reliable SD recording, 64K bytes of RAM, four channel CTC, and either an 80 x 24 full-featured video interface or a two channel serial interface. PLUS a six month full warranty+.

OPTIONS:

2 Channel parallel interface- add $29.95
Both serial & video interface- add $95.95
Single to dual drive conversion kit with drive and necessary hardware- add $495.00
All options may be installed by customer.

KLOFOX
PO BOX 93
SAN LUIS OBISPO, CA 93406
(805) 541-0384

*CP/M is a trademark of Digital Research.
+Only 90 days on drives.

Circle 213 on inquiry card.

INDUSTRIAL CROSS-MACRO ASSEMBLERS

written in FORTRAN IV

New, two-pass macro assemblers for all popular micros can be run on any general-purpose computer with standard FORTRAN. Each assembler supports macros, conditional assembly, and relocatable object code. All the original mnemonics and addressing modes, many assembler directives, long error messages and more. Produces printed assembly listing, and object code file.

PROGRAM NO.	FOR MACHINE	PKG. PRICE
MASM68E3	MC68000	$500
MASM6809	MC6809	400
MASM6805	MC6805	400
MASM6801	MC6801	350
MASM6800	MC6800	300
MASM6502	MCS65xx	375
MASM8085	8080/8085	350
MASM1802	CDP1802	300

Packages include detailed users' manual, printed source listing (well commented), source on magnetic tape, and IDM's Software Support Service. Card decks also available. Dealer inquiries invited.

IDM intelligent devices of minnesota
p.o. box 14538 minneapolis, mn.
(612) 427-0787

Circle 199 on inquiry card.

PASCAL SOFTWARE

Business Application Programs:

Accounts Receivable	$795
Accounts Payable	$795
General Ledger	$795
Payroll/Job Costing	$795
Property Management	$995

Engineering Application Programs
Customized Installation on Request
Supplied on single-density, soft-sectored, 8" floppy disks; require 48K RAM.

HELU CORPORATION

P.O. Box 596
AIEA, HI 96701
(808) 456-1189

Circle 181 on inquiry card.

ATTENTION: Apple Users!

WANT BETTER COLOR...MORE STABILITY?

Ever question the quality of your computer display. If so, you've probably been told "That's the best you can expect from an RF modulator...buy a color monitor".

WE CHALLENGE THAT STATEMENT!

DON'T BE SATISFIED WITH EXISTING QUALITY. See for yourself what our "new concepts" modulator can do for your picture...MICRO-VERTER Model MVX-500, $35 P.P. Phone orders welcomed.

HOT LINE *DIAL: 402-987-3771*

138 BROADWAY **ATV Research** DAKOTA CITY, NE. 68731

DEALERSHIPS AVAILABLE

CATALOG UPON REQUEST

WANTED:

APPLE, PET, TRS-80, CP/M

SOFTWARE

Westico is a publisher and distributor of professional software for microcomputers. If you have a new program ready for distribution or want your existing programs to reach a larger market, contact:

Phillip Woellhof, V.P. Mktg.
Westico, Inc.
25 Van Zant Street
Norwalk, CT 06855
(203) 853-6880

To increase your profits, take advantage of Westico's worldwide promotion and distribution.

WESTICO
The Software Express Service

A-D & D-A CONVERTER



JBE A-D & D-A Converter can be used with any system having parallel ports • Interfaces with JBE Parallel I/O Card • D-A conversion time — 5 µs • A-D conversion time — 20 µs • Uses JBE 5V power supply • Parallel inputs & outputs include 8 data bits, strobe lines & latches • Analog inputs & outputs are medium impedance 0 to 5 volt range.

79-287 ASSM. **$79.95**
Bare Board **$39.95** Kit **$59.95**

6502 MICROCOMPUTER



This control computer has: • 1024 bytes RAM (two 2114s) • 2048 bytes EPROM (2716) • Uses one 6522 VIA (comp. doc. incl.) • Interfaces with JBE Solid State Switches & A-D & D-A Converter • Uses JBE 5V power supply • 2716 EPROM available separately (2716 can be programmed with an Apple II & JBE EPROM Programmer & Parallel Interface) • 50 pin connector included in kit & assm.

80-153 ASSM. **$110.95**
Bare Board **$49.95** Kit **$ 89.95**

SOLID STATE SWITCH

Your computer can control power to your printer, lights, stereo & any 120VAC appliances up to 720 watts (6 amps at 120VAC). Input 3 to 15VDC • 2-14MA TTL compatible • Isolation — 1500V • Non zero crossing • Comes in 1 or 4 channel version • Includes doc. for interfacing with Dimmer Control.

79-282-1 ASSM. **$13.95**
Bare Board **$6.95** Kit **$10.95**
79-282-4 ASSM. **$49.95**
Bare Board **$24.95** Kit **$39.95**

APPLE II DISPLAY BOARD



80-144 ASSM. **$49.95**
Bare Board **$25.95** Kit **$42.95**

• Has run-stop, single step switch • Has 16 address LEDs, 8 data LEDs & 1 RDY LED • All lines are buffered.

Z80 MICROCOMPUTER



JBE is announcing a single board dedicated computer designed for control functions. It features: • A Z80 Microprocessor software compatible with the Z80, 8080 & 8085 Microprocessors • Uses a Z80 PIO chip for I/O which has 2 independent 8 bit bidirectional peripheral interface ports with handshake & data transfer control • Uses one 2716 EPROM (2K) & two 2114 RAM memories (1K) • Single 5V power supply at 300MA req. • Clock frequency is 2MHz, RC controlled • Board comes with complete doc. • 50 pin connector is included • 2716 EPROM available separately.

80-280 ASSM. **$129.95**
Bare Board **$49.95** Kit **$119.95**

PRINTER INTERFACE



JBE Parallel Printer Interface interfaces your Apple II® to Centronics® compatible printers. This 3" x 4" board features: on board ROM compatible with Integer Basic, Applesoft® and Pascal® • Has one 8 bit parallel latched output port with selectable positive or negative strobe and one bit input selectable for Ready or $\overline{\text{Ready}}$ • Cable and Connectors available separately.

80-297 ASSM.**$79.95**
Kit **$69.95**
4 ft. Std. Dip Jumpers 16 pin **$ 4.25**
Champ Connector **$ 9.95**

POWER SUPPLIES

• Use wall transformers for safety • Protected against short circuit and thermal breakdown.

5 VOLT POWER SUPPLY

Rated at 5V 500MA • Operates JBE A-D & D-A Converter, Z80 & 6502 Microcomputers, 8085 & 8088 Microcomputers.

80-160 ASSM. **$20.95**
Bare Board **$8.95** Kit **$16.95**

± 12 VOLT POWER SUPPLY

Rated at ± 12V 120MA • Can be used as a single 24V power supply • Ideally suited to OP-AMP experiments.

80-161 ASSM. **$22.95**
Bare Board **$8.95** Kit **$18.95**

ICS

6502	**$9.95**
6522	**$9.95**
Z80	**$9.95**
Z80 PIO	**$9.95**
2716 5V	**$14.95**

6522 APPLE II INTERFACE



• Interfaces printers, synthesizers, keyboards, JBE A-D & D-A Converter & Solid State Switches • Has handshaking logic, two 6522 VIAs & a 74LS74 for timing. Inputs & outputs are TTL compatible.

79-295 ASSM. **$69.95**
Bare Board **$39.95** Kit **$59.95**

2716 EPROM PROGRAMMER



JBE 2716 EPROM Programmer was designed to program 5V 2716 EPROMS • It can also read 2716s. It interfaces to the Apple II using JBE Parallel I/O Card & four ribbon cable connectors • An LED indicates when power is being applied to the EPROM • A textool zero insertion force socket is used for the EPROM • Comes with complete doc. for writing and reading in the Apple II or Apple II+ • Cables available separately.

80-244 ASSM. **$49.95**
Bare Board **$24.95** Kit **$39.95**

BARE BOARDS

APPLE II EXTENDER BOARD

3½" x 2½". Price includes 50 pin Apple Connector.

80-143 **$12.95**

8085 3 CHIP SYSTEM

State-of-the-art system using an 8085, 8156 & either an 8355 or 8755 • Instruction set 100% upward compatible with 8080A.

Bare Board **$24.95**

8088 5 CHIP SYSTEM

An 8086 family microcomputer system using an 8088 CPU, 8284, 8155, 8755A & an 8185.

Bare Board **$29.95**

CRT CONTROLLER

This intelligent CRT Controller is based on an 8085A Microprocessor & an 8275 Integrated CRT Controller. It features: • 25 lines, 80 characters/line • 5x7 dot matrix • Upper case only • Two 2716s • Serial Interface RS232 & TTL • Baud rates of 110, 150, 300, 600, 1200, 2400, 4800 & 9600 • Keyboard scanning system • Req's. unencoded keyboard • Uses +5V & ± 12V power supplies.

Bare Board **$39.95**

50 pin connector	**$5.95**
STD. Dip Jumpers 16 Pin, 2 ft.	**$4.25**

JOHN BELL ENGINEERING

MC

ALL PRODUCTS ARE AVAILABLE FROM **JOHN BELL ENGINEERING** • P.O. BOX 338
REDWOOD CITY, CA 94064 • ADD 6% SALES TAX IN CALIFORNIA • ADD 5% SHIPPING & HANDLING
(415) 367-1137

VISA

FLOPPY DISKS
8" & 5¼"

OPUS - $26.00/Box of 10

3M - $32.00/Box of 10

MCS PO Box 5059
Milford, Ct.
06460
(203) 877-3610

We carry a full line of computer supplies

Send for free catalog.

VISA - MASTERCHARGE - CHECK

Circle 267 on inquiry card.

LOW PRICES

American Express, MasterCard & VISA accepted. Checks require time to clear. CA add 6% tax. All add 3% for shipping. We carry most all brands, micros, terminals, printers, software and accessories.

SP ELECTRONICS

P.O. Box 8265
Sacramento, CA 95818
(916) 442-2323

Circle 383 on inquiry card.

Know The Reasons Why The FORCE-80 is your "Best Buy."

FORCE-80 The computer protector
- Power dropout protection
- Suppresses transient voltages
- Suppresses RFI
- Disc protection
- Factory warranty
- Satisfaction guaranteed
- Direct from factory

FORCE-80

Only $121.50 plus $5.00 shipping & handling
Check, Mastercharge, Visa accepted
(5% discount for cash)
No C.O.D.'s please

MASTER CHARGE VISA

P&S Electronics, Inc.
P.O. Box 23014 Dept. B
Nashville, TN 37202

Allow 6-8 weeks for delivery.
Add 14 days for personal checks.

Circle 307 on inquiry card.

ONE BOARD CP/M SYSTEM!



only $750
Assm., Tested & Burned-In for one week

Features:
- 8½ by 12 inches
- 10 MHZ 8085 CPU
- 64K RAM
- 3 RS-232 channels
- 8272 Floppy Disk Controller
- Handles Single/Double Density
- One to Four Drives. 801R or 850R.

Documentation $15.
CP/M Floppy Disk Operating System $150
Check or Money Order

autocontrol
INCORPORATED
11744 Westline Industrial Drive
St. Louis, MO 63141
(314) 432-1313

Circle 37 on inquiry card.

LEARN

Having trouble learning to use your computer?

Reference manuals don't teach. Most BASIC texts don't cover specific personal computers.

TIS solves these problems with step-by-step books tailored for your machine.

For PET/CBM

Understanding Your PET/CBM $16.95
Vol 1: Basic Programming
PET Graphics .... $ 6.95

For OSI C1P/C4P

Understanding Your C1P/C4P .... $ 9.95
A Workbook of BASIC Exercises

Money Back Guarantee. VISA/MC accepted.

All prices include UPS or 1st Class postage.

TIS, Dept B
Box 921
Los Alamos, NM 87544



Circle 414 on inquiry card.

```
           ***********************
           *   APPLE II USER'S   *
           ***********************

      Written  any original,   very  good
      programs lately????

      Put your  programs to  work earning
      for you today!  We  want to market
      your best programs by offering them
      to  user's  through  our  expanding
      SOFTWARE LIBRARY....

      We  are   looking  for   marketable
      programs encompassing all  types of
      application areas. Such as:

      EDUCATIONAL,    MEDICAL,      LEGAL,
      BUSINESS, ACCOUNTING,  STATISTICAL,
      ENGINEERING,  HOME,   UTILITY,  and
      GAMES!

      Please drop us a  line with details
      of your  programs.  In  return,  we
      will send you the  specifics of our
      marketing process.

      If  you would  like  to  be on  our
      SOFTWARE  LIBRARY  CATALOG  mailing
      list then check  the reader service
      number below...   (DEALER INQUIRIES
      INVITED)...

      WRITE TO:

           HCW3 ENTERPRISES
           P.O. BOX 510
           SOUTHBURY, CT.
           ZIP CODE  06488

      APPLE II  is the  trademark of  the
      APPLE Computer Co.
```

Circle 179 on inquiry card.

MULTIPLE TERMINALS WITH CP/M®!

Irvine Computer's **NEW** Model 100 Transaction Multiplexer lets you construct CP/M®-based, multi-terminal, transaction-oriented applications without requiring additional system memory, serial interfaces, or a multi-user operating system!

The Model 100 connects to your computer in place of your existing RS-232 console terminal. Up to seven (7) RS-232 terminal devices can then be connected to the Model 100. When the computer is busy, the Model 100 buffers all terminal input data until the application program asks for it.

NO CP/M® mods, hardware mods, nor assembly-language code is required. Applications can be written in high-level languages. Loaded with features! $1495, quantity one, F.O.B. Costa Mesa, CA. Limited manufacturer's warranty. For more information, call or write:

EASTERN U.S. AND FOREIGN:
Wright Marketing Company, Ltd.
19104 Rhodes Way
Gaithersburg, MD 20760 (301) 840-1928

WESTERN U.S.:
Irvine Computer Corporation (mfgr.)
3001 Red Hill Avenue, 6-103
Costa Mesa, CA 92626 (714) 557-5292

CP/M® is a registered trademark
of Digital Research.

Circle 165 on inquiry card.

S-100 6809
controls floppy

NEW!



- **Controls 3 Mini Floppy Drives**
- **Serial RS-232C port with 14 baud rates**
- **Two parallel ports**
- **16 I/O decoded address lines**
- **24K bytes of EPROM space, or 12 Kbytes of RAM space**
- **Accept all JEDEC pin-out Byte-Wide memory ICs**
- **Multi-Vendor software adaptable**
- **Industry, Business, Home and University use**
- **Assembled and tested $395.00. 60 day delivery**
- **Checks or C.O.D. orders accepted**
- **DEALER INQUIRIES INVITED**

LOGICAL DEVICES, INC.
781 W. Oakland Park Blvd.
Ft. Lauderdale, Fla. 33311
Tel: (305) 565-8103

Circle 334 on inquiry card.

DOUBLE YOUR LA36 DECWRITER'S SPEED TO 60 CPS

The **ACCELEWRITER** converter enables you to convert the LA36 Decwriter from 10/15/30 to 10/30/60 CPS.

Utilizes Decwriter's own built-in 60 CPS speed
Plugs into logic board
Compatible with Decwriter option boards
Decwriter reconverts to "stock" in seconds
Thousands sold
In use for over 3 years
Full one-year warranty
$115 includes shipping

Brochure sent promptly at your request. Write or call us.

LARKS ELECTRONICS & DATA
P.O. Box 22, Skokie, IL 60077
(312) 677-6080

Circle 215 on inquiry card.

16K Memory 8/$19.95

4116 200ns

NEC Mostek

ALL MERCHANDISE 100% GUARANTEED!

CALL US FOR VOLUME QUOTES

LS SERIES

74LS00	.32	74LS155	1.19
74LS01	.28	74LS156	.95
74LS02	.38	74LS157	.79
74LS03	.32	74LS158	.82
74LS04	.35	74LS160	.94
74LS05	.28	74LS161	.99
74LS08	.38	74LS162	.99
74LS09	.38	74LS163	.99
74LS10	.32	74LS164	.99
74LS11	.29	74LS165	.99
74LS12	.29	74LS166	2.40
74LS13	.38	74LS168	1.79
74LS14	.99	74LS169	1.79
74LS15	.35	74LS170	1.89
74LS20	.26	74LS173	.82
74LS21	.30	74LS174	1.19
74LS22	.34	74LS175	1.09
74LS26	.40	74LS181	2.19
74LS27	.35	74LS190	1.15
74LS28	.39	74LS191	1.31
74LS30	.35	74LS192	.88
74LS32	.39	74LS193	.98
74LS33	.54	74LS194	1.80
74LS37	.78	74LS195	1.39
74LS38	.39	74LS196	.82
74LS40	.25	74LS197	.82
74LS42	.79	74LS221	1.28
74LS47	.78	74LS240	1.89
74LS48	.78	74LS241	1.89
74LS51	.35	74LS242	1.89
74LS54	.35	74LS243	1.89
74LS55	.32	74LS244	1.79
74LS73	.44	74LS245	2.89
74LS74	.48	74LS251	1.32
74LS75	.58	74LS253	.89
74LS76	.50	74LS257	.89
74LS78	.59	74LS258	.89
74LS83	.90	74LS259	2.89
74LS85	1.23	74LS260	.68
74LS86	.45	74LS266	.68
74LS90	.70	74LS273	1.69
74LS92	.82	74LS275	3.39
74LS93	.71	74LS279	.59
74LS95	1.11	74LS283	1.03
74LS96	.86	74LS290	1.25
74LS107	.43	74LS293	1.89
74LS109	.49	74LS295	1.09
74LS112	.48	74LS298	1.24
74LS113	.48	74LS352	1.59
74LS114	.55	74LS353	1.59
74LS122	.55	74LS363	1.39
74LS123	.99	74LS365	.99
74LS134	2.99	74LS366	.99
74LS125	.99	74LS367	.99
74LS126	.88	74LS368	.99
74LS132	.69	74LS373	1.85
74LS136	.58	74LS374	1.81
74LS138	.79	74LS377	1.48
74LS139	.79	74LS385	1.90
74LS145	1.19	74LS386	.65
74LS148	1.39	74LS390	1.90
74LS151	.79	74LS393	1.90
74LS153	.79	74LS395	1.69
74LS154	2.39	74LS670	2.20

SPRING MEMORY SALE

RAMS

			100pcs
2101	(450ns)	2.49	2.29
2102-1	(450ns)	.99	.95
21L02-1	(450ns)	1.29	1.15
2111	(450ns)	2.99	2.49
2112	(450ns)	2.99	2.79
2114	(450ns)	2.95	2.85
2114L-2	(200ns)	8/29.95	3.10
2114L-3	(300ns)	8/24.95	2.95
4027	(250ns)	4.95	3.95
4116-15	(150ns)	8/21.95	2.65
4116-20	(200ns)	8/19.95	2.35
4116-30	(300ns)	8/18.99	2.29

EPROMS

			100pcs
1702	(1us)	4.95	4.75
2708	(450ns)	4.95	4.75
2758(5v)	(450ns)	9.95	Call
2716(5v)	(450ns)	7.95	6.95
2716-1(5v)	(350ns)	12.95	10.95
TMS2516	(450ns)	9.95	9.50
TMS2716	(450ns)	9.95	8.95
2732	(450ns)	29.95	Call
TMS2532	(450ns)	21.95	Call
TMS25L32	(450ns)	29.95	Call
TMS2564	(500ns)	179.95	Call

NEED YOUR ORDER
SHIPPED TODAY?
THEN CALL TOLL FREE

800-538-5000

IN CALIF.

800-662-6233

**BEFORE YOU
BUY, CALL US.
WE WILL BEAT
ANYONE'S PRICES**

6800

6800	11.75
6810	4.60
6820	5.75
6821	6.40
6828	9.95
6834	19.95
6850	5.75
6852	5.75
6875	6.95

Z80

Z80	9.95
Z80A	12.95
Z80-CTC	7.65
Z80-DMA	18.00
Z80-PIO	7.60
Z80-SIO/2	27.50
Z80-SIO/9	20.50

MISC.

1771-B01	24.95
3242	9.95
AY5-1013	4.99
8T26	2.49
8T28	2.49
8T97	1.69
8T98	1.69

8080

8080A	3.95
8085A	12.95
8212	2.75
8214	5.25
8216	2.75
8224	2.95
8226	3.49
8228	4.95
8238	5.50
8251	6.95
8253	12.95
8255	6.50
8257	16.95
8259	14.95
8275	49.95
8279	15.95

T.V. CIRCUITS

MC1330	1.89
MC1350	1.29
MC1358	1.79
LM380	1.29
LM565	.99
LM741	.29
LM1310	1.90
LM1800	1.99
LM1889	2.49

7400 SERIES

7400	.19	7450	.19	74123	.59
7402	.19	7472	.29	74151	.69
7404	.24	7473	.34	74153	.59
7406	.29	7474	.35	74154	1.49
7407	.29	7475	.49	74156	.69
7408	.24	7476	.35	74157	.69
7410	.19	7483	.65	74161	.79
7420	.19	7486	.35	74163	.89
7430	.19	7490	.49	74164	.89
7432	.29	7491	.69	74173	1.39
7440	.19	7492	.59	74174	.89
7442	.49	7493	.49	74175	.89
7445	.69	7496	.74	74176	.89
7446	.69	74100	1.19	74192	.79
7447	.59	74107	.34	74193	.79
7448	.69	74121	.34	74196	.79

IC SOCKETS

8 pin ST	10/1.29	8 pin WW	.59
14 pin ST	10/1.29	14 pin WW	.69
16 pin ST	10/1.29	16 pin WW	.69
18 pin ST	10/1.29	18 pin WW	.99
20 pin ST	10/1.29	20 pin WW	1.09
22 pin ST	10/1.29	22 pin WW	1.39
24 pin ST	10/1.29	24 pin WW	1.49
28 pin ST	10/1.29	28 pin WW	1.69
40 pin ST	10/1.29	40 pin WW	1.99

ST = SOLDERTAIL   WW = WIREWRAP

VOLTAGE REG's

7805T	.89	7905T	.99
7812T	.89	7912T	.99
7815T	.99	7915T	1.19
7824T	.99	7924T	1.19
7805K	1.39	7905K	1.49
7812K	1.39	7912K	1.49
78L05	.69	79L05	.79
78L12	.69	79L12	.79
78L15	.69	79L15	.79

TRANSISTORS

2N2222	10/1.00	100/8.99
2N3904	10/1.00	100/8.99
2N3906	10/1.00	100/8.99
2N3055	.79	10/6.99

LEDS

Jumbo Red	10/1.00
Jumbo Green	6/1.00
Jumbo Yellow	6/1.00
5082-7760 .43'CC	.79
MAN74 .3'CC	.79
MAN72 .3'CA	.99

74S00 SERIES

74S00	.50	74S124	3.95	74S288	4.75
74S02	.50	74S174	1.49	74S387	5.75
74S04	.50	74S188	4.75	74S471	18.75
74S08	.50	74S195	1.95	74S472	18.75
74S37	.55	74S240	2.95	74S474	19.95
74S74	.80	74S260	1.80	74S570	7.80
74S113	.79	74S287	4.75	74S571	7.80

4K STATIC RAM SPECIAL

MOTOROLA

PART #MCM66L41C-20
REPLACEMENT FOR
TMS4044-20 4096x1

THESE ARE CERAMIC 200ns
LOW POWER RAMS IN A STANDARD
18 PIN DIP.

VERY LIMITED SUPPLY. THEY WON'T
LAST LONG AT THIS PRICE.

3^{99} ea $16/59^{95}$

LINEAR

LM301v	.34	LM556	.69	LM1488	1.39
LM308v	.98	LM565	.99	LM1489	1.39
LM309K	1.49	LM566v	1.49	LM1800	1.99
LM311v	.64	LM567v	1.29	LM1889	2.49
LM317t	2.29	LM723	.49	LM3900	.59
LM318v	1.49	LM733	.98	75451v	.39
LM323k	4.95	LM741v	.29	MC1330v	1.89
LM324	.59	LM747	.79	MC1350v	1.29
LM339	.99	LM748v	.59	MC1358	1.79
LM377	2.29	LM1310	1.90		
LM380	1.29	LM1414	1.59		
LM555v	.39	LM1458v	.69		

T = TO-220   V = 8 pin   K = TO-3

DIP SWITCHES

4 position	.99
5 position	1.02
6 position	1.06
7 position	1.09
8 position	1.14

master charge
THE INTERBANK CARD

VISA®

JDR MICRODEVICES, INC.
1101 South Winchester Blvd.
San Jose, California 95128
800-538-5000 408-247-4852

TERMS: Include $2.00 for shipping. $10.00 minimum order. Send SASE for complete catalog. Bay Area Residents add 6½% sales tax Calif. Residents add 6% sales tax. We reserve the right to limit quantities and substitute manufacturer. Prices subject to change without notice. Foreign orders add suff. postage.

Circle 209 on inquiry card.

SUPERLETTER

Is For

SuperBrain® People!

Now, owners and operators of Intertec SuperBrain computers around the world have a special newsletter to call their own!

Superletter is packed with important technical news, accessory ideas, and CP/M software designs for the SuperBrain.

Regular features include Technical Corner, Q & A Forum, Intertec Factory News, Guest Interview, and Super Classifieds.

For subscription info and ad rates, contact:

SUPERLETTER

Abrams Creative Services
P.O. Box 3121
Beverly Hills, CA 90212
(213) 277-2410

Circle 3 on inquiry card.

TWX-LINK

TWX-LINK is a complete software package which interfaces your microcomputer to the Western Union TWX network.

Using an FCC approved direct connect modem, TWX-LINK allows your computer to act as a TWX terminal for both incoming and outgoing messages.

TWX-LINK constantly monitors your TWX line. Incoming messages are automatically received, acknowledged, and written to disk storage.

TWX, TELEX, MAILGRAMS, AND TELEGRAMS can all be created, edited, and sent from your computer by using TWX-LINK.

Call, write, or TWX for more info:
CAWTHON SCIENTIFIC GROUP
24224 Michigan Avenue
Dearborn, Michigan 48124
PH: (313) 565-4000
TWX: 810-221-1265

Circle 63 on inquiry card.

THE COMPUTER OF THE FUTURE

Bigger than 8-bit, smaller than 32-bit; IEEE 696/S-100 compatibility and RS-232 I/O.

Next Year – the computer of the future with user software will be here at $20,000.

TODAY we can offer you the NUCLEUS of TOMORROW's computer for only –

$2995

A package of IEEE standard boards AND the latest 16-bit software – O.S. and PASCAL

- DUAL CPUs – 8085 for current programs
  - 8088 for 16-bit software
  - without changing hardware
- 64K byte fast, reliable RAM
- DMA Disk Controller
- Support board – clock, RS-232 port, etc.

ACT NOW – LIMITED QUANTITIES AVAILABLE AT $2,995 PRICE

CALL or WRITE NOW FOR FULL DETAILS
(213) 454-2100

SYSTEM INTERFACE CONSULTANTS, INC.
17440 Revello, Pacific Palisades, CA 90272

computer systems SIC established 1969

Circle 395 on inquiry card.

INVENTORY CONTROL SYSTEM

WITH PARTS EXPLOSION FOR FINISHED GOODS AND ASSEMBLIES

Parts requirements forecasting & Pull Sheets
Reorder Reports
Economic Order Quantities
5000 Items per 8" disk

AVAILABLE FOR CROMEMCO, CP/M®, AND OASIS OPERATING SYSTEMS

Hardware requirements: 64k RAM, 132 Column printer.

Manual and 8" floppy disk	**$250.**
Multi-level explosion version	**$499.**
Job Costing	**$350.**

Accounts Receivable, Accounts Payable, Order Entry, General Ledger, Payroll and Mailing List programs also available.

FEITH SOFTWARE, INC.
204 MARVIN RD.
ELKINS PARK, PA. 19117
(215) 782-8240

Circle 162 on inquiry card.

MAXI MICRO

Combine up to
8 Heath/Zenith 89 Computers
using Magnolia CP/M™ 2.2
with up to 80 M Bytes of
CORVUS Winchester Disks

MAGNOLIA
MICROSYSTEMS

2812 Thorndyke W. • Seattle, WA 98199
(206) 285-7266 (800) 426-2841

CP/M is a trademark of Digital Research.

Circle 226 on inquiry card.

TI 820 KSR PACKAGE

FULL OPTIONS

NEW $1737

BRAND NEW IN BOX WITH 112 PAGE MANUAL

Large OEM overstock results in a limited quantity offer of this super reliable, feature packed terminal at a below wholesale price.

FULL (TI item #101) OPTION "PACKAGE": Device forms control, compressed & expanded print, 18 key numeric pad, full ASCII. We count more than 100 user selectable options & features. This virtually assures compatibility with your application.

PARTIAL LIST OF FEATURES

PRINTER: 150 CPS; 9X7 dot matrix; 128 ASCII characters including control chars. (great for debug); forms control; double-width and normal, compressed and standard prts. (4 styles) to 218 chars./line; bidirectional; 1280 char. buffer; V & H tabs; 3"-15" tractor feed; 6 & 8 lines per inch; sgl/dbl spacing; last char. visibility; skip perf.; auto. CR-LF; programmable new-line response.

KEYBOARD: Full ASCII; 18 key num. pad; prog. CR and ENTER keys; control panel with numeric display; auto repeat; N-key rollover; pull-out operator's reference cards, deep dish keys.

GENERAL: Full blown RS-232; 110-9600 baud; EIA & DC3/DC1 busy; Bell 103, 113, 202 & 212A modes; local/standby/off-line modes; non-volatile option/forms/21 char. prog. answerback memory; parity select.; 6' EIA cable; FDX/HDX/HDX w/reverse channel.

PRICING: List price for this configuration is $2420. Our price, brand new in original box, guaranteed working to full specifications, $1737 FOB Morris Plains, NJ. COD and credit cards on approval. NJ add sales tax. Call or write for full specifications.

ELECTROVALUE INDUSTRIAL INC.
P.O. BOX 157-B
MORRIS PLAINS, NJ 07950
Formerly Electravalue Industrial

Phone reservations and questions are welcome.
201/267-1117

NEW, VERSATILE, EASY TO USE DIGI-LINK

DIGITAL RF-LINK

FOR COMPUTER HOBBYISTS
ROBOTICS
REMOTE DATA ACQUISITION
CONTROL PROJECTS
TOYS
AND MANY-MANY MORE CREATIVE APPLICATIONS

This digital RF transmitter and receiver links your computer's intelligence to robots, appliances, remote stations, peripherals and toys without any wires, cables, physical attachments.

- USABLE WITH ANY COMPUTER
- SERIAL INTERFACE (RS232)
- SMALL SIZE, LOW POWER
- SINGLE 9 VOLT BATTERY
- COMPLETELY DOCUMENTED
- EASY TO BUILD
- APPLICATION NOTES

Receiver and Transmitter	$ 34.95
Receiver (w/ UART) and Transmitter	$ 49.95
Receiver only	$ 19.95
Receiver (w/ UART) only	$ 35.95
Transmitter only	$ 18.95

MAIL YOUR ORDER NOW ! ENJOY THE DIGI-LINK !

Kits contain PCB, components, hardware, antenna, instructions and application notes.
CA residents add 6.5% tax.
Check or money-order only.

E/Z ASSOCIATES
5589 STARCREST DR.
SAN JOSE, CA 95123
(408) 578-8096

Circle 141 on inquiry card.

APPLE OWNERS!

Combine your APPLE computer with our high speed dual channel A/D and controller boards to create your own:

DIGITAL STORAGE SCOPE

- Sample rate DC to 3.5 Mhz.
- 1024 Sample Buffer Memory
- Pretrigger Viewing
- Dual or Single Channel Trace
- Trigger either channel
- Programmable Scale Select

All trace parameters are entered through keyboard to the onboard software included in PROM. High resolution graphics used to display waveforms.

Price for two board system $495.
California residents add 6% sales tax.

RC ELECTRONICS, INC.
7265 Tuolumne
Goleta, California 93117
(805) 968-6614

Circle 346 on inquiry card.

FOR **TRS-80** MODEL I & III

SPEECH & SOUND

CUSTOM SOUND: is a computer controlled, complex sound generator capable of three tone music as well as special sound effects. Three tone generators operate with a "white" noise source and programable volume control ramp generator to create a wealth of sound effects. All control functions are latched, allowing the CS board to operate while the program continues, permitting continuous sound production during program execution.

The CS board comes as a kit or as an assembled PC board. It needs only 5VDC at 200ma, a forty connector cable and a speaker. With the double cable, two units may be operated simultaneously.

KIT --$49/ two for $85
ASSEMBLED --$58/ two for $98

CUSTOM SPEECH SYNTHESISER :is a phoneme based speech synthesiser which can generate high quality, inflected human like speech of unlimited vocabulary. Forty six phonemes allow the creation of most any english word as well as many non-english words. The unit comes fully assembled and tested and needs only a forty connector cable and a speaker.

CSS --$178

CABLE : ribbon cable with PC edge connectors, plugs into exp. port of CPU or EX/INT. --$20

double cable --$25

5VDC REGULATED POWER SUPPLY : fully assembled, 1.2amp, OVP --$23

Custom Peripherals
Box 8759
Warwick, Rhode Island 02888

$2 shipping & handling
($3 for canada)
+6% for R.I. res.
Check or Money Order
4-6 weeks for delivery

• *trademark of* TANDY

Circle 108 on inquiry card.

TRS-80 SERIAL I/O

• Can input into basic • Can use LLIST and LPRINT to output, or output continuously • RS-232 compatible • Can be used with or without the expansion bus • On board switch selectable baud rates of 110, 150, 300, 600, 1200, 2400, parity or no parity odd or even, 5 to 8 data bits, and 1 or 2 stop bits. D.T.R. line • Requires +5, -12 VDC • Board only $19.95 Part No. 8010, with parts $76.69 Part No. 8010A, assembled $98.25 Part No. 8010 C. No connectors provided, see below.



EIA/RS-232 connector Part No. DB25P $6.00, with 9; 8 conductor cable $19.65 Part No. DB25P9

3' ribbon cable with attached connectors to fit TRS-80 and our serial board $37.10 Part No. 3CAB40.

VIDEO TERMINAL

16 lines, 64 columns • Upper and lower case • 5x7 dot matrix • Serial RS-232 in and out with TTL parallel keyboard input • On board baud rate generator 75, 110, 150, 300, 600, & 1200 jumper selectable • Memory 1024 characters (7-21L02) • Video processor chip SFF96364 by Neculonic • Control characters (CR, LF, →, ←, ↑, ↓, non destructive cursor, CS, home, CL • White characters on black background or vice-versa • With the addition of a keyboard, video monitor or TV set with TV interface (part no. 107A) and power supply this is a complete stand alone terminal • also S-100 compatible • requires +16, & −16 VDC at 100mA, and 8VDC at 1A. Part No. 1000A $296.45 kit.

GAME PADDLES & SOUND FOR TRS-80

Includes: 2 game paddles, interface, software, speaker, power supply, full documentation including: schematics, theory of operation, and user guide; plus 2 games on cassette, Pong and Starship War $157.29 Complete Part No. 7922C

SERIAL/ PARALLEL INTERFACE



● Converts serial to parallel and parallel to serial ● Low cost on board baud rate generator ● 110 to 19.2K ● Low power drain +5 volts and -12 volts required ● TTL compatible ● All characters contain a start bit, 5 to 8 data bits, 1 or 2 stop bits, and either odd or even parity. ● All connections go to a 44 pin gold plated edge connector ● Board only $11.95 Part No. 101, with parts $42.89 Part No. 101A, 44 pin edge connector $4.00 Part No. 44P

MODEM



● Type 103 ● Full or half duplex ● Works up to 300 baud ● Originate or Answer ● Serial TTL input and output ● connect 8 Ω speaker and crystal mic. directly to board ● Requires +5 volts ● Board only $7.60 Part No. 109, with parts $29.95 Part No. 109A.

OPTO-ISOLATED PARALLEL INPUT BOARD FOR APPLE II



There are 8 inputs that can be driven from TTL logic or any 5 volt source. The circuit board can be plugged into any of the 8 sockets of your Apple II. It has a 16 pin socket for standard dip ribbon cable connection. Board only $15.65 Part No. 120, with parts $69.95. Part No. 120A.

SUPER MODEM



Originate, RS-232 and 20 mA compatable. Full duplex, and half duplex, direct connect or acoustic coupled, on board power supply, carrier detect light, DB25 plug, 300 BAUD, Type 103 compatable frequencies. Bare board Part No. 2000 $21.89, Kit Part No. 2000A $133.80

8K EPROM SAVER



● Programs 2708's address relocation of each 4K of memory to any 4K boundary ● Power on jump and reset jump option for "turnkey" systems and computers without a front panel ● Program saver software in 1 2708 EPROM $25. Bare board $45.59 including custom coil, board with parts but no EPROMS $164.69.

APPLE II SERIAL I/O INTERFACE



Baud rate is continuously adjustable from 0 to 30,000 • Plugs into any peripheral connector • Low current drain. RS-232 input and output • On board switch selectable 5 to 8 data bits, 1 or 2 stop bits, and parity or no parity either odd or even • Jumper selectable address • SOFTWARE • Input and Output routine from monitor or BASIC to teletype or other serial printer • Program for using an Apple II for a video or an intelligent terminal. Also can output in correspondence code to interface with some selectrics. • Also watches DTR • Board only $14.95 Part No. 2, with parts $51.25 Part No. 2A, assembled $62.95 Part No. 2C

PARALLEL TRIAC OUTPUT BOARD FOR APPLE II



This board has 8 triacs capable of switching 110 volt 6 amp loads (660 watts per channel) or a total of 5280 watts. Board only $15.65 Part No. 210, with parts $119.95 Part No. 210A

APPLE II PROTOTYPING HOBBY/CARD

Part No. 7907
$21.95

RS-232/20mA INTERFACE

This board has two passive, opto-isolated circuits. One converts RS-232 to 20mA, the other converts 20mA to RS-232. All connections go to a 10 pin edge connector. Requires +12 and -12 volts. Board only $9.95, part no. 7901, with parts $14.95 Part No. 7901A.

T.V. INTERFACE



● Converts video to AM modulated RF, Channels 2 or 3. So powerful almost no tuning is required. On board regulated power supply makes this extremely stable. Rated very highly in Doctor Dobbs' Journal. Recommended by Apple ● Power required is 12 volts AC C.T., or +5 volts DC ● Board only $8.19 part No. 107, with parts $18.85 Part No. 107A

TAPE INTERFACE



• Converts a low cost tape recorder to a digital recorder • Works up to 1200 baud • Digital in and out are TTL-serial • Output of board connects to mic. in of recorder • Earphone of recorder connects to input on board • No coils • Requires +5 volts, low power drain • Board only $7.60 Part No. 111, with parts $29.95 Part No. 111A

RS-232/TTL INTERFACE



● Converts TTL to RS-232, and converts RS-232 to TTL ● Two separate circuits ● Requires -12 and +12 volts ● All connections go to a 10 pin edge connector, kit $9.95 Part No. 232A 10 Pin edge connector $3.00 part No. 10P.

S-100 BUS ACTIVE TERMINATOR

Board only $18.15 Part No. 900, with parts $29.89 Part No. 900A.

SERIAL I/O

Four Serial I/O RS-232 ports. S-100 Bus, Software or jumper selectable baud rate (110, 300, 600, 1200, 2400, 4800, 9600, 19.2K), on board Xtal baud rate generator, Addressing, switch selectable, Parity or no parity (odd or even) switch selectable, 1 or 2 stop bits, 5 to 8 bits/character. Board only $35.19 Part No. 7908. With parts (kit) $199.95, Part No. 7908A.

RS-232/TTY INTERFACE



This board has two active circuits, one converts RS-232 to 20 mA, the other converts 20 mA to RS-232. Requires +12 and -12 volts. $9.95 Part No. 600A Kit.

Send for FREE Catalog...a big self addressed envelope with 80¢ postage gets it fastest!

To Order: Mention part no., description, and price. In USA shipping paid by us for orders accompanied by check or money order. We accept C.O.D. orders (U.S. only) or a VISA or Master Charge no., expiration date, signature and phone no., shipping charges will be added. CA residents add 6.5% for tax. Outside USA add 15% for air mail postage and handling. Payment must be in U.S. dollars. Dealer inquiries invited. Prices subject to change without notice.

ORDER LINE: (408) 226-4064

ELECTRONIC SYSTEMS

Dept.B, P.O. BOX 21638, San Jose, CA USA 95151

16K UPGRADE
ONLY
$39.95
SPECIFY
COMPUTER

ADVANCED COMPUTER PRODUCTS

7400

SN7400N	.19	SN74123N	.59
SN7401N	.22	SN74125N	.39
SN7402N	.22	SN74126N	.44
SN7403N	.22	SN74128N	.59
SN7404N	.22	SN74132N	.69
SN7405N	.23	SN74136N	.95
SN7406N	.23	SN74139N	.95
SN7407N	.23	SN74141N	.69
SN7408N	.26	SN74142N	2.95
SN7409N	.23	SN74143N	2.95
SN7410N	.22	SN74144N	2.95
SN7411N	.29	SN74145N	.62
SN7412N	.29	SN74147N	1.95
SN7413N	.39	SN74148N	1.20
SN7414N	.59	SN74150N	.99
SN7416N	.29	SN74151N	.67
SN7417N	.29	SN74152N	.67
SN7420N	.22	SN74153N	.67
SN7421N	.35	SN74154N	1.19
SN7422N	.29	SN74155N	.82
SN7423N	.29	SN74156N	.89
SN7425N	.29	SN74157N	.69
SN7426N	.29	SN74158N	1.65
SN7427N	.29	SN74160N	.95
SN7429N	.45	SN74161N	.95
SN7430N	.23	SN74162N	.89
SN7432N	.29	SN74163N	.87
SN7437N	.29	SN74164N	.97
SN7438N	.29	SN74165N	.97
SN7439N	.29	SN74166N	1.20
SN7440N	.24	SN74167N	1.95
SN7441N	.79	SN74170N	1.69
SN7442N	.57	SN74172N	5.95
SN7443N	.79	SN74173N	.79
SN7444N	.79	SN74174N	.89
SN7445N	.79	SN74175N	.89
SN7446N	.79	SN74176N	.85
SN7447N	.59	SN74177N	.85
SN7448N	.79	SN74179N	1.80
SN7450N	.23	SN74180N	.75
SN7451N	.23	SN74181N	1.75
SN7453N	.23	SN74182N	.75
SN7454N	.23	SN74184N	1.95
SN7459N	.29	SN74185N	1.95
SN7460N	.23	SN74186N	9.95
SN7470N	.39	SN74188N	3.90
SN7472N	.34	SN74190N	1.15
SN7473N	.38	SN74191N	1.15
SN7474N	.36	SN74192N	.85
SN7475N	.38	SN74193N	.85
SN7476N	.36	SN74194N	.85
SN7479N	4.60	SN74195N	.85
SN7480N	.59	SN74196N	.85
SN7481N	1.10	SN74197N	.85
SN7482N	1.10	SN74198N	1.39
SN7483N	.55	SN74199N	1.39
SN7485N	.65	SN74221N	1.39
SN7486N	.39	SN74251N	.95
SN7489N	1.75	SN74273N	1.05
SN7490N	.39	SN74279N	.89
SN7491N	.65	SN74283N	2.15
SN7492N	.52	SN74284N	3.90
SN7493N	.49	SN74285N	3.90
SN7494N	.72	SN74290N	1.25
SN7495N	.65	SN74298N	.95
SN7496N	.72	SN74365N	.68
SN7497N	3.10	SN74366N	.68
SN74100N	.99	SN74367N	.79
SN74107N	.32	SN74368N	.79
SN74109N	.53	SN74390N	1.90
SN74116N	1.95	SN74393N	1.90
SN74121N	.29	SN74490N	1.90
SN74122N	.39		

CMOS

CD4000	.35	CD4093	.99
CD4001	.35	CD4094	2.95
CD4002	.35	CD4098	2.49
CD4006	1.39	CD4099	2.25
CD4007	.29	MC14408	12.95
CD4008	1.39	MC14409	12.95
CD4009	.49	MC14410	12.95
CD4010	.49	MC14412	12.95
CD4011	.35	MC14415	8.95
CD4012	.29	MC14419	4.95
CD4013	.49	CD4501	.39
CD4014	1.39	CD4502	1.65
CD4015	1.15	CD4503	.69
CD4016	.59	CD4505	8.95
CD4017	1.19	CD4506	.75
CD4018	.99	CD4507	.95
CD4019	.49	CD4508	3.95
CD4020	1.19	CD4510	1.39
CD4021	1.19	CD4511	1.39
CD4022	1.15	CD4512	1.39
CD4023	.38	CD4515	3.95
CD4024	.79	CD4516	1.69
CD4025	.38	CD4518	1.39
CD4027	.65	CD4520	1.39
CD4028	.85	CD4555	4.95
CD4029	1.29	CD4556	.99
CD4030	.45	CD4566	2.25
CD4031	3.25	74C00	.39
CD4032	2.15	74C02	.39
CD4034	3.25	74C04	.39
CD4035	.95	74C08	.49
CD4037	1.95	74C10	.49
CD4040	1.29	74C14	1.65
CD4041	1.25	74C20	.39
CD4042	.95	74C30	.39
CD4043	.85	74C32	.99
CD4044	.85	74C42	1.85
CD4046	1.75	74C48	2.39
CD4047	1.25	74C73	.85
CD4048	.99	74C74	.85
CD4049	.69	74C85	2.49
CD4050	.69	74C89	4.95
CD4051	1.10	74C90	1.85
CD4052	1.10	74C93	1.85
CD4053	1.10	74C95	1.85
CD4055	3.95	74C107	1.19
CD4056	2.95	74C151	2.49
CD4059	9.95	74C154	3.50
CD4060	1.39	74C157	2.10
CD4066	.75	74C160	2.39
CD4069	.35	74C161	2.30
CD4070	.49	74C163	2.39
CD4071	.35	74C164	2.39
CD4072	.35	74C173	2.59
CD4073	.35	74C174	2.75
CD4075	.35	74C175	2.75
CD4076	1.29	74C192	2.39
CD4077	.35	74C193	2.39
CD4078	.35	74C195	2.39
CD4081	.35	74C922	7.95
CD4082	.35	74C923	6.95
CD4085	1.95	MM80C95	1.50
CD4089	2.95	MM80C97	1.25

74LS00

74LS00N	.35	74LS164N	1.19
74LS01N	.28	74LS165N	.89
74LS02N	.28	74LS166N	2.48
74LS03N	.28	74LS168N	1.89
74LS04N	.39	74LS169N	1.89
74LS05N	.28	74LS170N	1.99
74LS08N	.39	74LS173N	.89
74LS09N	.39	74LS174N	.99
74LS10N	.2'	74LS175N	.99
74LS11N	.39	74LS181N	2.20
74LS12N	.39	74LS190N	1.15
74LS13N	.47	74LS191N	1.15
74LS14N	1.25	74LS192N	.98
74LS15N	.39	74LS193N	.98
74LS20N	.26	74LS194N	1.15
74LS21N	.38	74LS195N	.95
74LS22N	.38	74LS196N	.89
74LS26N	.39	74LS197N	.89
74LS27N	.39	74LS221N	1.49
74LS28N	.39	74LS240N	1.95
74LS30N	.26	74LS241N	1.90
74LS32N	.39	74LS242N	1.95
74LS37N	.79	74LS243N	1.95
74LS38N	.39	74LS244N	1.95
74LS40N	.26	74LS245N	4.95
74LS42N	.79	74LS247N	1.10
74LS47N	.79	74LS248N	1.10
74LS48N	.79	74LS249N	1.69
74LS51N	.26	74LS251N	1.79
74LS54N	.35	74LS253N	.98
74LS55N	.35	74LS257N	.98
74LS73N	.45	74LS258N	.98
74LS74N	.59	74LS259N	2.95
74LS75N	.68	74LS260N	.69
74LS76N	.45	74LS261N	2.49
74LS78N	.65	74LS266N	.59
74LS83AN	.99	74LS273N	1.75
74LS85N	1.19	74LS275N	4.40
74LS86N	.45	74LS279N	.59
74LS90N	.75	74LS283N	1.10
74LS92N	.75	74LS290N	1.29
74LS93N	.75	74LS293N	1.95
74LS95N	.88	74LS295N	1.10
74LS96N	.98	74LS298N	1.29
74LS107N	.45	74LS324N	1.75
74LS109N	.45	74LS347N	1.95
74LS112N	.49	74LS348N	1.95
74LS113N	.49	74LS352N	1.65
74LS114N	.55	74LS353N	1.65
74LS122N	.55	74LS363N	1.49
74LS123N	1.19	74LS365N	.99
74LS124N	1.35	74LS366N	.99
74LS125N	.89	74LS367N	.73
74LS126N	.89	74LS368N	.73
74LS132N	.79	74LS373N	2.75
74LS136N	.59	74LS374N	2.75
74LS138N	.89	74LS375N	.69
74LS139N	.89	74LS377N	1.95
74LS145N	1.25	74LS385N	1.95
74LS148N	1.49	74LS386N	.65
74LS151N	.79	74LS390N	1.95
74LS153N	.79	74LS393N	1.95
74LS154N	2.49	74LS395N	1.70
74LS155N	1.19	74LS399N	2.95
74LS156N	.99	74LS424N	2.95
74LS157N	.99	74LS668N	1.75
74LS158N	.75	74LS670N	2.29
74LS160N	.98	81LS95N	1.99
74LS161N	1.15	81LS96N	1.99
74LS162N	.98	81LS97N	1.99
74LS163N	.98	81LS98N	1.99

LINEAR

78H05	5.95	LM1414N	1.90
78M06	1.49	LM1458CN/N	.49
78M.G.	1.49	MC1488N	1.49
LM105H	.99	MC1489N	1.49
LM108AH	2.95	LM1496N	.89
LM300H	.79	LM1556N	1.50
LM301CN/H	.35	LM1800N	.79
LM304H	.98	LM1820N	.95
LM305H	.89	LM1850N	.95
LM306H	3.25	LM1889N	3.95
LM307CN/H	.29	LM2111N	1.75
LM308CN/H	.98	LM2900N	.99
LM309K	1.49	LM2901N	2.50
LM310CN	1.25	LM2917N	2.95
LM311D/CN/H	.98	CA3013T	2.29
LM312H	1.75	CA3018T	1.99
LM317T	2.75	CA3021T	3.49
LM318CN/H	1.49	CA3023T	2.99
LM319N/H	1.25	CA3035T	2.75
LM320K-XX*	1.49	CA3039T	1.49
LM320T-XX*	1.25	CA3046T	1.29
LM320H-XX*	1.25	LM3053N	1.49
LM323K	4.95	CA3059N	3.25
LM324N	1.25	CA3060N	3.25
LM339N	.95	CA3062N	4.95
LM340K-XX*	1.49	LM3065N	1.49
LM340T-XX*	1.25	CA3080N	1.29
LM340H-XX*	1.25	CA3081N	1.69
LM344H	1.95	CA3082N	1.69
LM348N	1.85	CA3083N	1.99
LM358CN	.98	CA3086N	1.29
LM360N	1.49	CA3089N	2.75
LM372N	1.95	CA3096N	2.49
LM376N	3.75	CA3097N	1.99
LM377N	3.75	CA3130T	2.49
LM380CN/N	1.25	CA3140T	2.49
LM381N	1.79	CA3146N	2.49
LM383T	1.95	CA3160T	1.49
LM386N	1.49	CA3190N	1.95
LM387N	1.49	CA3401N	.69
LM390N	1.95	MC3423N	1.49
NE531V/T	3.75	MC3460N	3.95
NE555V	.39	SG3524N	3.95
NE556N	.98	CA3600N	3.50
NE561T	19.95	LM3900N	.59
NE562B	7.95	LM3905N	1.49
NE565N/H	1.25	LM3909N	.98
NE566H/V	1.75	RC4131N	2.95
NE567V/H	1.50	RC4136N	1.10
NE592N	2.75	RC4151N	4.50
LM702H	2.99	RC4194	4.95
LM709N/H	.29	RC4195	4.40
LM710N/H	.98	ULN2001	1.25
LM711N/H	.39	ULN2003	1.50
LM715N	1.95	SN75450N	.59
LM723N/H	.75	SN75451N	.49
LM733N/H	.98	SN75452N	.49
LM739N	1.15	SN75453N	.49
LM741CN/H	.33	SN75454N	.49
LM741CN-14	.19	SN75491N	.89
LM747N/H	.79	SN75492N	.89
LM748N/H	.39	SN75493N	.89
LM760CN	2.95	SN75494N	.89
LM1310N	1.90		

NON-LINEAR SYSTEMS, INC. NLS

TOUCH-TEST 20

DIGITAL MULTIMETER

The NLS Model Touch/Test 20 is a 3½ digit digital multimeter with capability of measuring 10 parameters including 20 functions and 44 ranges. Features touch selection and annunciator lamp indication of control settings which include function, range and on-off power.

$319.95

BECKMAN

Digital Multimeters

MODELS TECH 300 AND TECH 310

AS LOW AS $100

Choice of Models – The TECH 310 has all above features. 7 functions. 29 ranges. plus 0.25% Vdc accuracy

The TECH 300 has a 0.5% Vdc accuracy and all the above features, but without Insta-Ohms™ continuity function or the 10 amp current ranges.

TECH 300 Digital Multimeter	$110
TECH 310 Digital Multimeter	$140
TECH 330 Digital Multimeter	$189
VC-201 Vinyl Carrying Case	$10
DC-202 Deluxe Carrying Case	$24
HV-211 High Voltage Probe	$35
RP-221 RP Probe	$35
Ct-231 AC Current Clamp	$42
DL-241 Deluxe Test Lead Kit	$10
TL-242 Spare Test Leads	$6

Vista VISTA COMPUTER COMPANY

APPLE™ 40 CHARACTER TYPE-AHEAD BUFFER

MODEL 150



$49.95

CSC CONTINENTAL SPECIALTIES

Model LM-3 40-channel Logic Monitor	585.00
Model LM-1 Logic Monitor	60.00
Model LM-2 Logic Monitor	147.00
MAX-100 100 MHz Portable Frequency Counter	149.00
Model LP-1 Digital Logic Probe	50.00
Model LP-2 Economy Logic Probe	28.00
Model LP-3 High Speed Logic Probe	77.00
Model LPK-1 Logic Probe Kit	21.95
Model LTC-1, LTC-2 Logical Analysis Kits	220/250

Proto Clips

14-Pin Clip	PC-14	$ 4.25
16-Pin Clip	PC-16	$ 4.50
24-Pin Clip	PC-24	$ 9.50
40-Pin Clip	PC-40	$14.95

Proto Boards

PB-6	16.95	PB-104	54.00
PB-100	18.00	PB-203	97.00
PB-101	21.00	PB-203A	149.00
PB-102	25.00	PB-203A-Kit	129.00
PB-103	43.00		

SEMICONDUCTORS SPEAK☆☆☆☆☆☆☆

DIGITALKER™

Speech Synthesis System

The DIGITALKER is a speech synthesis system consisting of multiple N-channel MOS integrated circuits. It contains a speech processor chip (SPC) and speech ROM and when used with external filter, amplifier, and speaker, produces a system which generates high quality speech including the natural inflection and emphasis of the original speech. Male, female, and children's voices can be synthesized.

- Completely independent system, not requiring a processor controller
- Designed to be easily interfaced to most popular microprocessors
- 256 possible addressable expressions
- Male, female, and children's voices
- Natural inflection and emphasis of original speech
- Addresses 128k of ROM directly
- Communicates with static or clocked dynamic ROMs
- TTL compatible
- MICROBUS™ compatible

DIGITALKER™ DT1000. Self contained board that – with just a speaker and a power supply – can rattle off any desired combination of 144 words. **$485.00**

DIGITALKER™ DT1050. Chip set for building Digitalker into your own evaluation design. **$95.00**

National Semiconductor

Apple® II 48K Apple® II Plus $1250

DISK SYSTEM SPECIAL

Apple II Plus w/48K Supermod Video Modulator
Disk II w/Controller Integer Based ROM Card.

ACP PRICE $1995.00

Hi-Speed Serial I/O	$189.00	DS65 Digi-Sector	$349.00	Integer ROM Card	$189.00
Centronics Printer I/O	180.00	Apple Graphics Tablet	675.00	Proto Card	21.95
Applesoft II Firmware	189.00	D.C. Hayes Modem II	349.95	M & R Modulator	29.95
Apple Clock	269.00	Disk II w/Controller & Dos 3.3	595.00	Cassette	54.95
Introl X-10 System	179.95	Disk II	459.00	16K Upgrade Kit	54.95
Introl X-10 Controller	269.95	Pascal Lang. System	450.00	Desktop Plan	98.00
Alf Music Synthesizer	259.95	Parallel Printer Card	165.00	8" Floppy Controller	350.00
16 Ch. Analog Input	249.95	Communications Card	189.00	Heuristics Speechlab	179.00
2 Ch. Analog Output	164.95	Business Software Pkg.	625.00	Romplus +	169.00
13-Key Keypad	119.95	Corvus 10 Megabyte Drive	4625.00	Supertalker	279.00
Visi-Calc	125.00			Cashier	250.00

apple /// $3995

- Apple III Option A: Apple II 96K, Information Analyst Package, 12" B/W Monitor.................$3995.00
- Apple III Option B: Same as Option A Plus: Disk II for Apple III.........................$4395.00
- Apple III Option C: Same as Option A Plus: Disk II for Apple III, Silentype Thermal Printer........$4785.00
- To substitute 128K Apple III for 96K Apple III.................Add $450.00

NEW APPLE PRODUCTS

- "APPLE FAN" – Cures thermal problems from overcrowded machines designed specifically for Apple $49.95
- "BIT 3" – New 80 x 24 Video Board for Apple. Completely compatible with Pascal $329.95
- "BAR WAND" Hewlett Packard HEDS-3000 Bar Code interfaced to Apple $199.00
- "SEC APPLE A/D" – 8 Channel A/D Interface completely assembled and tested $99.50
- "APPLE FORTRAN" $175.00
- "APPLE CRYPTEXT" for data encryption and security $449.00
- "B2/A2" Graphics Interface Card by Base 2 $159.95
- 8" Disk Drives for Apple. Controller, DOS, Two 8" drives cabinet and cable $1450.00
- "MICROMODEM" – D.C. Hayes $319.95
- "DIGISECTOR" Converts video input to Hi-Res graphics $349.95
- California Microproducts VisiCalc Keypads Numberic keypad with space, space ESC - and - keys for VisiCalc compatibility..................................$169.00
- DOS 3.3 Upgrade Kits. 23% more storage in 16-sector format $65.00
- Mountain Hardware Music Board, best yet – 16 channels $550.00
- Controller 1.1 Revision Kit. 20% overall processing speed increase and supports standard printers. Reduced disk handling. Additional error checking. Improved manual. Vendor file expanded $145.00
- Pascal Revision Kit. Adds executive and chaining capabilities to Pascal environment $65.00
- Mountain Hardware Expansion chassis. 8 more slots for Apple. Hardware or software selectable. Includes power supply Avail. Soon
- Smart Term Apple 80 x 24 Video Card $619.00
- Symtex X-10 $349.00
- Apple Silentype. With Apple Intelligent Interface Card $549.00
- NEW! California Computer Systems APPLE Clock Only $124.95
- NEW! Z-80 Softcard for APPLE CPM 2.2 & M BASIC 5.0 $325.00
- SEC ECHO II Speech Synthesizer $249.95

NEW APPLE SOFTWARE

1. **CYBERSTRIKE** – Apple II version of Star Raiders from Atari on disk $34.95
2. **RTR Stock Market Analysis** – Hi-Res, Trend Lines, etc. $109.95
3. **ASTEROIDS**.................................$29.95
4. **"Both Barrels"** – Hi-Res simulation of Western Gunfight and Skeet Shooting. Same author as Nasir $29.95
5. **"Apple Tax Panner Package"** $89.95
6. **"New-DOS Tool Kit"** $64.95
7. **NEW!** Apple Z-80 CP/M Software Call for Price

MICROSOFT

16K ON A $175 PLUG-IN CARD.

Microsoft's new RAMCard simply plugs into your Apple II™ and adds 16K bytes of dependable, buffered read/write storage.

Until now, the only way to get this much memory was to have an Apple Language Card installed. VisiCalc™ and other Apple software packages can take advantage of RAMCard. Even with the RAMCard in place, you can still access your ROM BASIC and monitor routines.

EXPANSION CHASSIS

By popular demand! Eight more slots for your Apple. Attractive sturdy enclosure. Its own heavy duty power supply. Easy to use. Address cards in Expansion Chassis the same way as in your Apply. Only one additional command to specify in Apple or in Expansion Chassis.

$649.00

ATARI® 800 & 400

Personal Computer System

ATARI 800 $825.00
ATARI 400 $449.00

ATARI 800 Includes: Computer Console, BASIC Lang. Cartridge, BASIC Language Programming Manual. 800 Operator's Manual w/Notebook, 16K RAM Module, Power Supply, TV Switch Box.

Peripherals		**Education System Cassette Programs**		Spelling	35.00
Disc Drive	599.00	U.S. History	35.00	Basic Electricity	35.00
Printer	499.00	U.S. Government	35.00	Basic Algebra	35.00
Program Recorder	69.00	Supervisory Skills	35.00	**Basic Game and Program Cassettes**	
Software – ROM Cartridges		World History (Western)	35.00	Guide to BASIC Programming	18.00
Education System Master Cartridge	28.00	Basic Sociology	35.00	BASIC Game Programs	19.00
Atari BASIC	55.00	Counseling Procedures	35.00	**Add-On Memory**	
Assembler Debug	55.00	Principles of Accounting	35.00	8K RAM Memory Module	110.00
Basketball	42.00	Physics	35.00	16K RAM Memory Module	225.00
Life	42.00	Great Classics (English)	35.00	**Diskettes**	
Super Breakout™	42.00	Business Communications	35.00	Blank Diskettes	
Music Composer	55.00	Basic Psychology	35.00	Disk File Manager	5.00
Super Bug™	42.00	Effective Writing	35.00	**Accessory Controllers**	
Computer Chess	55.00	Auto Mechanics	35.00	Driving Controller Pair	18.00
Home Finance	55.00	Principles of Economics	35.00	Paddle Controller Pair	18.00
				Joystick Controller Pair	18.00

SINGLE BOARD COMPUTER SELECTION GUIDE

BOARD	PROCESSOR	ACP PRICE	ENCLOSURE	BOARD	PROCESSOR	ACP PRICE	ENCLOSURE
DIG. RSCH. BIG BOARD	Z-80 64K	649.00	N/A	SC-SBC100	Z80	239.00	N/A
SYM-1	6502	239.00	Add 39.95	AIM 65	6502	375.00	Add 49.95
Cromemco	Z80	409.00	N/A	Cosmac Vip	1802	199.00	Inc.

TEXAS INSTRUMENTS
INCORPORATED

99/4 PERSONAL COMPUTER

Superior Color, Music, Sound & Graphics – & a Powerful Extended Basic – All Built-In.

Now! Special T.V. Adapter lets you use your existing T.V. set as a computer display.

$499.00
Console only.

MATTEL ELECTRONICS®

INTELLIVISION

ACP LOW PRICE

$259.95

GAME CARTRIDGES $26.95

BASEBALL
FOOTBALL
AUTO RACE
TENNIS
GOLF
SOCCER
SKIING
BOXING
BOWLING
HOCKEY
BASKETBALL
MOTOCROSS
ADVENTURE
CHECKERS
CHESS
MATH FUN
BACKGAMMON
WORD FUN
POKER/BLACKJACK
ROULETTE
HORSE RACING
SUB BATTLE
ARMOR BATTLE
SPACE BATTLE
SEA BATTLE
ARCADE

RETAIL STORES OPEN MON-SAT

STORE #1: 1310 "B" E. Edinger, Santa Ana CA 92705 Showrooms, Retail, Warehouse
STORE #2: 674 El Camino Real, Tustin, CA 92660 Specializing in Systems
STORE #3: 542 W. Trimble Road, San Jose, CA 95131 • (408) 946-7010

P.O. Box 17329 Irvine, Calif. 92713
Direct Order Lines: (714) 558-8813
(800) 854-8230 or (800) 854-8241

DRIVER'S LICENSE # OR MAJOR CREDIT CARD # IS REQUIRED ON ALL CHECKS. MONEY ORDER OR CASHIER CHECK WILL FACILITATE THE SHIPMENT OF YOUR PURCHASE.

ADVANCED COMPUTER PRODUCTS

FIRST TO OFFER PRIME PRODUCTS TO THE HOBBYIST AT FAIR PRICES!

1. Proven Quality Factory tested products only.

2. Guaranteed Satisfaction

Call For Special School Discounts

1981 CATALOG NOW AVAILABLE

Send $2.00 for your copy of the most complete catalog of computer products. A must for the serious computer user.



Vista "V-DRIVE"

THE LAST WORD IN 8" FLOPPY-DISK ENCLOSURES

THE VISTA V-1000 FLOPPY DISK DRIVE SUBSYSTEM
● Deluxe chassis with internal slide easy access for drive positioning and mounting ● Built to mechanically and electrically accomodate single sided drives—including, the most popular 8-inch Winchester and Shugart floppy disk drives, and 8-inch streaming tape units ● Storage capacity from 0.5 to 40 megabytes ● Industrial quality cabinet with die cast front bezel ● Meets all UL and OSHA standards ● Additional Savings! Front and rear retma rail mounts provided at no extra charge (no external slides) ● Desk or rack mountable ● Features modular construction with removeable sub-assembly that allows easy cabinet positioning and mounting ● Drives pull out for easy service and maintenance

CABINET	$ 395
CABINET with (2) single sided drives (Including power supply & cable)	$1595
CABINET with (2) double sided drives (including power supply & cable)	$2295

Vista V-80

5¼" DISK

NOW SAVE ON TRS 80 ADD-ON

ONLY $299.00

2 DRIVE CABLE...... 29.95 **2 FOR 279.00 ea.**
4 DRIVE CABLE...... 39.95

MINIATURE COMPUTER

MicroAce A COMPLETE COMPUTER

Z-80 BASED

1K KIT	149.00
2K KIT	169.00
Manual	10.00

ATTENTION VIDEO HOBBYISTS!!!

- ★ BOX BUILDERS
- ★ USE AS REMOTE TUNER/TIMER
- ★ FULL SCHEMATICS AVAILABLE
- ★ FOR ONLY $5.90! – FREE W/PURCHASE

A Recent Special Purchase Allows Us To Present The Following

NEW. UNUSED COMPONENTS

From The Magnavox Video Cassette Recorder

1. UHF/VHF Tuner Subassembly with all knobs and Video Demodulator
2. RF Modulator with Audio & Video inputs Channel 3 or 4 Output
3. Digital Clock Module AM/PM Fluorescent Readout (Green)
4. 300 Ohm to 75 Ohm Matching

ALL FOR 74.95

Call For Volume Discounts

LOW COST FLOPPY DISK SUBSYSTEM

Siemens FDD 120-8 (2) VISTA Floppy Controller (S-100). Case, Power Supply & Cable. CP/M Disk Operating System Assembled & Tested Walnut Wood Sides **$1499.00**

★ CHECK OUR FLOPPY DISK PRICING ON THIS PAGE ★

SAVE $300.00 ($1799.00 VALUE)

WATANABE MIPLOT

Max pen speed 50 mm/sec. resolution .10 mm typically .05 mm. built-in character generator sizes and 4 degrees of rotation. absolute draw. relative draw. alpha printing done with simple commands. **$1195.00**

RAM BOARDS SPECIAL

16K Altair Mits Dynamic RAM Boards
Assem. & Tested $119.95 Untested $95.00 16K

FLOPPY DISK DRIVES

Tandom TM100-1 5¼" Disk Drive	249.95
MPI B51-5¼", 40 tracks	239.95
Shugart SA400-5¼" 35 tracks	295.00
Shugart 800/801R 8"	449.00
Siemens Shugart Compatible Model FDD-120-8D	429.00
PERSCI Model 277 Dual	1195.00
WANGO/SIEMENS 5¼" Drive	290.00
MPI B52 5¼" Dual	348.00
WANGO/SIEMENS 282 Dual 5¼"	395.00
WANGO/SIEMENS 82	290.00
MPI 91 Double Track Density Single Side, 80 Tracks	375.00
MPI 92 Double Track Density Double Side, 160 Track	475.00

6800 MICROMODULE™ PRICE LIST

MODEL NO	DESCRIPTION	PRICE
9600A	Single Board Microcomputer	$495.00
9609	Advanced Single Bd. Comp. (6809)	595.00
9601	16 Slot Mother Board	175.00
9602	Card Cage	75.00
9603	8 Slot Mother Board	100.00
9604	Power Supply	275.00
9605	DC Input Power Supply	325.00
9610	Utility Proto Board	39.00
9611	Arith. Proc/Memory Module	495.00
9612	Buffered Utility Proto Board	49.00
9616	32K EPROM/RAM Module	250.00
9617	EPROM Programming Head	250.00
9620	16 Channel Parallel I/O Module	295.00
9622	Serial-Parallel I/O Module	325.00
9627	16K Static RAM Module 470ns	395.00
9629	32K Static RAM 450ns	695.00
9629A	32K Static RAM 200ns	895.00
9630	Card Extender	68.00
9640	Multiple Programmable Timer	395.00
9650	8 Channel Duplex Serial I/O Mod.	395.00
9655	Intelligent Tape Controller	550.00
96103	32/32 I/O Module	275.00
96702	Contact Closure Module	350.00

UNPOPULATED BOARDS (Also Available)

The Vista V300 Printer



- 25 CPS printspeed
- Static print impact
- 136 printable columns
- 1/120 inch min. char. spacing
- 1/48 inch min. line spacing
- 1000 msec. return time
- 40 msec. line feed time
- 381mm (15") max. paper width
- Multistrike fabric black ribbon
- 96 print characters
- Standard 96 character wheel
- Standard parallel or RS232-C compatible
- 115V ± 10% 50/60 Hz 70 W power requirements

$1895.00

THE VISTA V-200 FOR EXIDY

Price: Starting as low as **$1199.00**

Item	Storage Capacity	Drive Configuration	Shipping Weight	Price
V200 E-20	400	2 Drive Single Head	25 lbs	1199.00
V200 E-22	800	2 Drive Double Head	25 lbs	1549.00
V200 E-30	600	3 Drive Single Head	32 lbs	1524.00
V200 E-32	1.2 MEG	3 Drive Double Head	32 lbs	1999.00

EXPANDORAM II MEMORY KITS

★ Bank Selectable ★ Uses 4116 200 ns.
★ Write Protect ★ Power 8VDC. ±16VDC
★ Phantom ★ Up to 4 MHz
NEW LOW PRICES

Expando 64 Kit (4116) Assem. & Tested Add $50.

16K	$249.00	48K	$435.00
32K	$289.00	64K	$505.00

$39.95 TRS-80/APPLE $39.95

MEMORY EXPANSION KITS.
4116's, 16K (200/250 ns.)
16K 8 pcs for **$39.95** w/instructions & jumpers **RAM**
Call For Volume Pricing

★ Special: TRS80 Schematic	$ 4.95
★ Expansion Interface Schematic	$ 4.95
★ Expansion Interface Connector	7.95

CENTRONICS PRINTER

Model 737

- Centronics complete printer
- The 737 has everything. Check and compare the features.
- New low price **$835.00**

32K STATIC RAM BOARD

S-100



16K 4MHz KIT	159.95
16K 4MHz A&T	217.95
32K 4MHz KIT	289.95
32K 4MHz A&T	348.95
Bare Board	39.95
Bare Board w/all parts less mem.	99.95

BASE II PRINTER

80 Column Impact Printer

- 60 Lines Per Minute
- 115/230 VAC. 50 or 60 Hz
- 72. 80. 96. 120 or 132 Char/Line
- Self-Test Switch

REG. $799.00

WITH ALL OPTIONS ACP PRICE **$699.00**

Option "M" Terminal Screen Buffer (1920 Char.)	$50.00
Option "S" High Speed Paper Advance & Graphics	50.00
Option "T" Tractor Feed	50.00

UV "Eprom" Eraser

Model UVs-11E $69.95
Holds 4 Eprom's at a time
Backed by 45 years experience
Model S-52T... $325.00
Professional Industrial Model

S-100 MOTHERBOARD SPECIAL

8 slot expandable w/9 conn.
reg $69.95 .... NOW $52.95

SHUGART DRIVE

SA801R

449.00

- Special buy while supply lasts
- 8" Drive with Double-Density
- 90 Day Warranty

★CHECK OUR FLOPPY DISK PRICING! ON THIS PAGE

ALSO 8" SIEMENS FD 120-8 **419.00**

ACOUSTIC MODEM

NOVATION CAT™ 0-300 Baud
Bell 103 Answer, Originate

'D' CAT MODEM NOW AVAILABLE $199.00

MONITORS

Sanyo 5112CX Green Phosphor	$279.00	Sanyo VM 4509 9" B/W	169.00
Sanyo 5012 CX B/W	279.00	Sanyo VM 4212 15" B/W	249.00
		Sanyo 6013 13" Color	429.00
		Leedex 12"	149.00

DATA BOOKS • COMPUTER BOOKS

1980 IC Master	$59.95
INTEL Data Book	7.50
INTEL MCS 85 Manual	7.50
SALE • OSBORNE BOOKS • SALE	**Sale**
Intro to Micros Vol. 0	12.50
Intro to Micros Vol. I	12.50
8080A Programming	12.50
6800 Programming	12.50
Z80 Programming	16.00
Vol. II Some Real Microprocessors w/Binder	27.50
Vol. III Some Real Support Devices w/Binder	27.50
Intro to Micros Vol. III	18.50
8086 Programming	14.95
Z8000 Programming	14.95
Intro. to Pascal	14.95

SALE • SYBEX COMPUTER BOOKS • SALE

6502 Games	$12.95
Intro. to Personal & Business Computing	12.95
Mircoprocessors From Chips to Systems	12.95
Microprocessor Interfacing Techniques	12.95
Programming the Z80	12.95
Programming the Z8000	12.95
Programming the 6502	12.95
6502 Applications Book	12.95
CPM Handbook	12.95

MICROPROCESSORS

Z8001 16 bit to 8Mb	$189.00
Z8002 16 bit to 64K	149.00
Z80	**10.75**
Z80A	14.50
F-8 (3850)	16.95
2650	18.95
CD1802	13.95
8080A	8.50
8080A-4MHz	19.95
SALE 8085	14.95
8008-1	14.95
2901	9.90
2901A	14.95
2903 4-bit Superslice	29.95
TMS 9900JL	49.95
CP1600	39.95
6502	11.50
6502A	16.95
IM6100	29.95
6800	**11.75**
6800B 2.0 MHz	19.95
6802P	17.95
8035	19.95
8039	**19.95**
8755	49.95
8748	69.95
6809	37.95
8086	69.95

ADVANCED SUPPORT

AM9511 Arith. Processor	175.00
9512 Arith Processor	175.00
9513 Univ. Timing	79.95
AM9517 DMA Controller	18.95
AM9519 Universal Interrupt	18.95

Z-80 SUPPORT CHIPS

Z80-PIO	2.5 MHz	8.75
Z80A-PIO	4.0 MHz	12.95
Z80-CTC	2.5 MHz	8.75
Z80A-CTC	4.0 MHz	12.95
Z80-DMA	2.5 MHz	29.95
Z80A-DMA	4.0 MHz	36.95
Z80-SIO/0	2.5 MHz	35.95
Z80A-SIO/0	4.0 MHZ	39.40
Z80-SIO/1	2.5 MHz	35.95
Z80A-SIO/1	4.0 MHz	39.40
Z80-SIO/2	2.5 MHz	35.95
Z80-SIO/2	4.0 MHz	39.40

8080/8085 SUPPORT

8155/8156 I/O	24.95
8755 I/O with Eprom	64.95
8202 Dyn. Ram Cont.	34.95
8205/74S 138 Decoder	3.95
8212 8 bit I/o	2.75
8214 Priority Int.	5.25
8216 Bus Driver	2.75
8224 Clock Gen	2.95
8224-4 (4MHz)	9.75
8226 Bus Driver	3.95
8T26 Bus Driver	2.95
8228 Sys. Control.	5.50
8238 Sys. Cont.	5.50
8251 Prog. I/O	6.95
8253 Int. Timer	12.95
8255 Prog. I/O	6.50
8257 Prog. DMA	16.95
8259 Prog. Int.	17.95
8275 CRT Controller	49.95
8279 Prog. Keyboard	15.95

6800 SUPPORT CHIPS

6810 128 x 8 Ram	4.75
6820 PIA	5.95
6821 PIA	6.50
6828 Priority Int.	19.95
6834-1 512 x 8 Eprom	16.95
6845/HD46505 CRT Cont.	39.95
6847 Color CRT	49.95
6850 ACIA	5.95
6852 Serial Adapter	5.95
6860 Modem	10.95
6862 Modulator	11.95
6871A 1.0MHz OSC.	25.95
6875	6.95
6880 Bus Driver	2.95
MC68488	19.95
68047	24.95

SHIFT REGISTER SALE

2504V	1.49	2525	1.49
2507V	1.49	2527	1.49
2517V	1.49	2528	1.49
2524V	1.49	2529	1.49
		2533	1.49

6502 SUPPORT CHIPS

6520 PIA	7.50
6522 Mult	11.95
6530-002,003,004,005	21.95
6532	19.95
6551	19.95

PROMS

2708 450 ns	8.25
2708-6 650 ns	7.50
1702A	4.95
2732	**44.95**
2716-5V	14.95
2716-5V, 12V	19.95
2758-5V	19.95
5203AQ	13.95
5204AQ	14.95
IM 5610	3.90
82S115 512 x 8 (TS)	16.95
82S123 32 x 8	4.90
82S126 256 x 4	4.90
82S129 256 x 4 (TS)	4.90
82S130 512 x 4 (OC)	6.50
82S23	6.95
82S131	14.95
82S137	14.95
74S387	8.50
74S471	12.95
74S472	12.95
74S570	14.95
74S571	14.95

NOTE: WE PROGRAM PROMS

CHARACTER GEN.

2513-001 (5V) Upper	9.50
2513-005 (5V) Lower	10.95
2513-ADM3 (5V) Lower	14.95
MCM6571	11.75
MCM6571A	11.75
MCM6574	14.50
MCM6575	14.50
MCM 6674	14.95

UARTS/BAUD RATE

TR1602B (5V. 12V)	3.95
AY51013 (5V. 12V)	4.95
AY51014A/1612 (5-14V)	6.95
AY51015A/1863 (5V)	6.95
TMS 6011 (5V. 12V)	5.50
IM6402	7.95
IM6403	8.95
2350 USRT	9.95
1671B Astros	24.95
SALE TR1472B	**9.95**
MC14411	11.95
4702	14.95
WD1941	9.95
COM 5016	16.95
AMI1883	7.95
INS 8250	15.95

KEYBOARD ENCODERS

AY5-2376	13.75
AY5-3600	13.75
HD0165	9.95
74C922	9.95
74C923	9.95

STATIC RAMS

SALE 2102 .89

	1-24	25-99	100
21L02 450ns	1.30	1.25	.99
21L02 250ns	1.59	1.55	1.15
2111	3.75	3.65	3.55
2112-1	2.95	2.85	2.65
2101-1	2.90	2.70	2.55
2114L-250ns. (4045)	6.50	5.95	5.50
2114L-450ns. (4045)	5.50	5.25	**4.75**
4044 250 ns.	8.95	7.50	6.90
4044 450ns.	5.95	5.95	**4.75**
EMM4200A	9.75	8.75	7.95
EMM4402	7.95	7.25	6.25
AMD9140/41	10.95	10.25	9.25
AMD9130/31	12.95	11.95	10.25
1101	1.95	1.75	1.25
P2125/93425 (45ns.)	9.95	8.35	8.25
6518 1K x 1 CMOS	7.95	7.95	7.25
2147 Low Power 4K Static	19.95	18.95	16.95
93415	9.95	8.95	8.50
TMS4046	11.95	10.95	10.50

DYNAMIC RAMS

416/4116 16K (16 Pin)	8.75
Set of 8 416's	49.95
4115 8K (16 Pin)	6.95
4050 4K x 1 (18 Pin)	4.95
4060 4K x 1 (22 Pin)	4.95
4096 4K x 1 (16 Pin)	3.95
2104 4K x 1 (16 Pin)	4.75
4027 4K x 1 (16 Pin)	4.95

5261	1.95	1103	1.95
5262	1.95	4008L	4.95
5270	4.95	6605	7.95
5280	4.95	6604	4.95
5290	12.45	6002	1.50

64K RAMS $159.95

SOCKETS

# Pins	Lo-Pro Soldertail	Wire Wrap 3 Level Tin	Wire Wrap 3 Level Gold
8	15	32	45
14	19	36	59
16	20	38	62
18	24	59	84
20	29	69	99
22	24	79	1.10
24	38	85	1.20
28	43	1.10	1.49
36	58	1.25	1.69
40	60	1.40	1.89

ZERO INSERTION FORCE

16 Pin $5.50 24 Pin $7.50 40 Pin $10.25

LED READOUTS

Part No	Size	Color	Description	Price
DL704	300	Red	Comm. Cathode	99
DL707	300	Red	Comm. Anode	99
FND357	357	Red	Comm. Cathode	99
FND501	500	Red	Comm. Cathode (+1)	99
FND503 (500)	500	Red	Comm. Cathode	99
FND507 (510)	500	Red	Comm. Anode	99
FND508	500	Red	Comm. Anode (+1)	99
FND530	500	Green	Comm. Cathode	1.49
FND550	500	Orange	Comm. Cathode	1.49
FND803 (800)	800	Red	Comm. Cathode	1.75
FND807 (810)	800	Red	Comm. Anode	1.75
HP5082-7340	600	Red	4 x 7 Hexdecimal	20.95
HP5082-7300	600	Red	4 x 7 Sgl. Digit RHD	18.95
HP5082-7731	300	Red	Comm. Anode	.75
TIL305	-	Red	Array 5 x 7	7.95
TIL308	270	Red	Numerical Display	10.95
TIL309	270	Red	Numerical Display	9.95
TIL311	270	Red	4 x 7 Hexdecimal	10.95
MAN2A	320	Red	Array	5.95
MAN10A	270	Red	Alpha Numeric	8.95
XAN3061	300	Red	Comm. Anode Right DP	1.25
XAN3062	300	Red	Comm. Anode Left DP	1.25
XAN3063	300	Red	Overflow CA Left DP	1.25
XAN3064	300	Red	Comm. Cathode Right DP	1.25
XAN3051	300	Green	Comm. Anode Right DP	1.99
XAN3052	300	Green	Comm. Anode Left DP	1.99
XAN3053	300	Green	Overflow CA Left DP	1.99
XAN3054	300	Green	Comm. Cathode Right DP	1.99
XAN3081	300	Yellow	Comm. Anode Right DP	2.10
XAN3082	300	Yellow	Comm. Anode Left DP	2.10
XAN3083	300	Yellow	Overflow CA Left DP	2.10
XAN3084	300	Yellow	Comm. Cathode Right DP	2.10

IC SPECIAL PURCHASE

LF 13508 JFET Analog Multi 8 bit	8.95
ICM 7045 Precision StopWatch	23.95
CMOS LED Stopwatch/Timer	19.95
ICM 7207 Oscillator Controller	7.50
Seven Decade Counter	18.95
ICM 7209 Clock Generator	6.95
ICL 7107 3½ Digit A/D (LED)	14.95
MC14433P 3½ Digit A/D Converter	13.95
ICL 8211 Voltage Reference	1.95
LM 1850N Ground Fault IC	3/1.00
LM 2900N Quad Amplifier	2/1.00
LM 2917N Freq. to Volt Conv.	2/1.99
AY-3-3550 4¾ digit DMM	24.95
AY-5-3507 40MHz DVM	9.95
MEM 4963 Mosfet Smoke Detector	11.95
27S08 32 x 8 Prom (IM 5600)	2.95
G115M 6 channel Mosfet	1.49
ULN 2003A 7 channel Driver	.99
2101AL-4	1.95
MCM 14505 64 bit Static Ram	6.95
MOC 1003 (4N28) Opto Coupler	3/1.00
SPX33 Opto Coupler	3/1.00
IH 5045 CMOS Switch DBST	4.50
VA 3045 Trans. Array	1.25
TR 1402A UART	1.95
MR 1007 Dyn. Mem. Shift Reg.	3.95
5736 Calc. Con. Circuit	2/1.99
5763 Calc. Con. Circuit	1.95
5318 TV Ch. Disp. Circuit	4.50
8080A 8 Bit CPU	4.95
82S21 32 x 2 Static RAM	2/1.99
8700 CJ 8 Bit A/D	9.95
2758 5V-2708 EPROM	12.95
MM5280/VPD 411/C2 107/TMS 4060/ 4Kx1 Dynamic 22 Pin RAM	1.75
6604/VPD 414/4027/2660/MK 4096/ 4Kx1 Dynamic 16 Pin	1.95
New National Clock Tip MM 58167 Real Time	19.95

7520/25	.50	LM 387	1.2[illegible]
1488/1489	2/1.99	LM 3302	3/1.99
MK5014 Calc	3/1.99	LM 4558	3/1.99
LM323K	4.95	RC 4136	2/1.99
MC1372	8.95	RC 4131	2/1.99
MM5298-4A/B	2.95	COM 5027	39.95
LM 377	1.25	COM 5037	49.95
LM380	1.25	DAC100	15.95

VERBATIM DISKETTES

100% CERTIFIED ERROR-FREE!

TYPE	DESCRIPTION	PRICE/BOX 10
• 35 TRACKS. DOUBLE DENSITY SINGLE-SIDED 5¼		
525-01	Soft Sectored TRS 80 etc	**$29.95**
525-10	10 Hole Hard NS Apple etc	**$29.95**
525-16	16 Hole Hard Micropolis	**$29.95**
• 40 & 77 TRACK DOUBLE DENSITY – SINGLE SIDED 5¼" W/HUB REINFORCEMENT RING		
577-01	Soft Sectored TRS 80 etc	$32.25
577-10	10 Hole Hard NS Apple etc	32.25
577-16	16 Hole Hard Micropolis	32.25
• 40 TRACKS. DOUBLE SIDED. DOUBLE DENSITY 5¼		
550-01	Soft Sectored SA 450 MPI 52	**$39.95**
550-10	10 Hole Hard BASF WANGCO	**$39.95**
550-16	16 Hole Hard Micro?	**$39.95**
• 8" 100% CERTIFIED DISKETTES		
FD800-01	Soft Single Density 3740	$33.50
FD800-32	32 Hard Single Density Shug	33.50
FD802-01	Soft Double Density 3740	44.80
FD850-01	Soft Double Sided Double Density 3740	49.80

VOLUME DEALER PRICING AVAILABLE
WE ALSO STOCK DYSAN-CALL

FLOPPY DISK I/O

1771-01 8" & Minifloppy	24.95
uPd372 Nec Floppy	49.95
1781 Dual Floppy	29.95
1791-01 Dual Floppy	36.95
uPd 765 Floppy	49.95

A/D CONVERTERS

8700 8 bit Binary	13.50
8701 10 bit Binary	22.00
8703 8 bit TS	13.50
9400 Volt to Freq. Conv.	7.25
8750 3½ Digit BCD	13.95
1408L6 6 bit	3.95
1408L8 8 bit	5.95
DACOI D to A	5.95
DAC08	9.95
DAC 100	15.95

TV CHIPS/SOUND

AY38500-1 6 Games B/W	4.95
AY38515 Color Converter	2.95
AY38603-1 Roadrace Game	8.95
AY38606-1 Wipeout Game	9.50
AY38607-1 Shooting Gallery	8.95
AY38910 Sound Generator	12.95
SN76477 TI Sound Generator	3.95
MM5320/21 TV Synch Gen	9.95
MM5369 Prescaler	3.95
LM1889 RF Modulator	3.95
MM57100 NSC Color TV	6.95
MM57104 Clock Gen	3.75
RF Modulator w/Audio	8.95
M&R Modulator	29.95

WAVEFORM GEN.

8038 Function Gen	3.95
MC4024VCO	2.95
LM566 VCO	1.95
XR2206 Function Generator	5.25

SHIFT REGISTERS

MM500H Dual25	.50
MM5056N Dual 256	2.95
MM5060N Dual 128	2.95
2510A Dual 100	1.95
2847 Quad 80	4.95
3341 Dual 80	[illegible]95
3351 40 x 9 FIFO	17.95
3357 Quad 80	6.95
9403 16 x 4 FIFO	24.95
9408 10 Bit Sequencer	9.95
3347	5.95

CTS DIPSWITCHES

CTS206-2	1.75	CTS206-7	1.75
CTS206-4	1.75	CTS206-8	1.95
CTS206-5	1.75	CTS206-9	1.95
CTS206-6	1.75	CTS206-10	1.95

CONNECTORS (GOLD)

DB25P (RS232)	3.25
DB25S Female	3.75
Hood	1.25
Set w/Hood, Sale	$7.50
22/44 W/W. S/T. KIM	2.95
43/86 W/W. S/T. MOT	6.50
50/100 S-100 Connector w/w	4.95
50/100 S-100 Connector s/t	3.95

NAKED PC

S-100 Sound Board	$34.95
Z-80 CPU/(Ithaca)	34.95
8080A CPU	34.95
16K Static RAM (2114)	29.95
32K Static RAM (2114)	39.95
8K Eprom (2708)	24.95
1702 Eprom Board	30.00
2708/2716 Eprom	34.95
Realtime Clock	34.95
ACP Proto Bd. (3M Conn.)	27.95
Vector 8800 Proto	22.20
Vector 8803 11 slot MB	29.95
ACP Extender w/Conn.	18.95
13 Slot MotherBoard (WMC)	32.95
9 Slot MotherBoard (WMC)	29.95
8 Slot Mother (Expandable)	34.95
Proc-Tech Bare Boards	CALL
WMC Floppy PCB	34.95
Floppy PCB (8" SHUGART)	39.95
S100 (AY5-8910) Sound Bd.	34.95
Apple Sound Bd.	24.95

COMPUTER SPECIALS

DISCOUNTS!

	LIST	SALE
Apple II Plus w/16K		1150.
PET 2001-16N	995.	795.
Exidy Sorcerer w/16K		1099.
Cromemco Sys III	6990	6290.
Horizon I w/32K		CALL
Pascal Microengine	1995.	1595.
IPSI 1620 Diablo RO	3295.	2695.
Anadex DP 8000	995.	875.
Centronics Micro S-1	595.	525.
Soroc IQ 120	995.	795.
Teletype Model 43	1349.	1150.
HiPlot Plotter	1085.	899.
HiPlot Digitizer	795.	735.
Intertube II	895.	784.
Atari 800	999.	825.
Atari 400	549.	449.
TI 99/4	1150.	1025.
Leedex 12" Monitor	169.	149.
Centronics 737	995.	899.
Trencom T-100	375.	349.
Trencom T-200	595.	525.
Sanyo 9" Monitor	220.	169.
Sanyo 15" Monitor	295.	249.
Sanyo 13" Monitor		395.

SOCKET SPECIALS

14 Pin w/w-2L	$ .35
20 Pin w/w-2L	.75
18 Pin s/t	.15
22 Pin s/t	.15
14 Pin s/t	100/12.00
16 Pin s/t	100/13.00

Call for volume pricing.

TERMS: Use check, M/C, VISA, AMEX, CB, or COD. COD requires 25% deposit. Charge Orders please include expiration date. Foreign pay U.S. Funds. Order by phone, mail or TWX. MINIMUM $10.00. Please include magazine issue and phone no. SHIPPING: U.S.A. add $2.00 for first 2 lbs. For surface add 30¢ for additional lbs. For air add 70¢ for additional lbs. FOREIGN: Add 10% shipping and handling. COD's $1.85 extra. Not responsible for typos. Some items subject to prior sale. We reserve right to limit quantities, some items subject to precious metal adder. Retail pricing may vary from Mail Order. We reserve the right to substitute manufacturer.

RETAIL STORES OPEN MON-SAT

STORE #1: 1310 "B" E. Edinger, Santa Ana, CA 92705 Showrooms, Retail, Warehouse
STORE #2: 674 El Camino Real, Tustin, CA 92660 Specializing in Systems
STORE #3: 542 W. Trimble Road, San Jose, CA 95131 • (408) 946-7010

P.O. Box 17329 Irvine, Calif. 92713
Direct Order Lines: (714) 558-8813
(800) 854-8230 or (800) 854-8241

FOR INTERNATIONAL ORDERS:
1310 E. Edinger (714) 953-0604
Santa Ana, CA92705 TWX: 910-595-1565

Circle 7 on inquiry card.

7400

SN7400N	.25
SN7401N	.20
SN7402N	.25
SN7403N	.25
SN7404N	.25
SN7405N	.29
SN7406N	.35
SN7407N	.35
SN7408N	.29
SN7409N	.29
SN7410N	.25
SN7411N	.29
SN7412N	.35
SN7413N	.40
SN7414N	.69
SN7416N	.29
SN7417N	.29
SN7420N	.25
SN7421N	.29
SN7422N	.45
SN7423N	.29
SN7425N	.29
SN7426N	.29
SN7427N	.25
SN7428N	.49
SN7430N	.25
SN7432N	.29
SN7437N	.25
SN7438N	.40
SN7439N	.25
SN7440N	.20
SN7441N	.89
SN7442N	.59
SN7443N	1.10
SN7444N	1.10
SN7445N	.89
SN7446N	.79
SN7447N	.69
SN7448N	.79
SN7450N	.20
SN7451N	.20
SN7453N	.20
SN7454N	.20
SN7459A	.25
SN7460N	.20
SN7470N	.29
SN7472N	.29
SN7473N	.35
SN7474N	.35
SN7475N	.49
SN7476N	.35
SN7479N	5.00
SN7480N	.50
SN7482N	.99
SN7483N	.69
SN7485N	.89
SN7486N	.35
SN7489N	1.75
SN7490N	.49
SN7491N	.59
SN7492N	.45
SN7493N	.45
SN7494N	.69
SN7495N	.69
SN7496N	.69
SN7497N	3.00
SN74100N	1.49
SN74107N	.35
SN74109N	.39
SN74116N	1.95
SN74121N	.39
SN74122N	.55
SN74123N	.59
SN74125N	.49
SN74126N	.49
SN74132N	.75
SN74136N	.75
SN74141N	.99
SN74142N	3.25
SN74143N	3.49
SN74144N	3.49
SN74145N	.79
SN74147N	1.95
SN74148N	1.29
SN74150N	1.25
SN74151N	.69
SN74152N	.69
SN74153N	.79
SN74154N	1.25
SN74155N	.79
SN74156N	.79
SN74157N	.69
SN74160N	.89
SN74161N	.89
SN74162N	.89
SN74163N	.89
SN74164N	.89
SN74165N	.89
SN74166N	1.25
SN74167N	2.79
SN74170N	1.95
SN74172N	4.95
SN74173N	1.39
SN74174N	.99
SN74175N	.89
SN74176N	.79
SN74177N	.79
SN74179N	1.49
SN74180N	.79
SN74181N	2.25
SN74182N	.79
SN74184N	2.49
SN74185N	2.49
SN74190N	1.25
SN74191N	1.25
SN74192N	.89
SN74193N	.89
SN74194N	.89
SN74195N	.69
SN74196N	.89
SN74197N	.89
SN74198N	1.49
SN74199N	1.49
SN74221N	1.25
SN74251N	.99
SN74276N	1.95
SN74279N	.79
SN74283N	1.49
SN74284N	3.95
SN74285N	3.95
SN74365N	.69
SN74366N	.69
SN74367N	.69
SN74368N	.69
SN74390N	1.49
SN74393N	1.49

74LS

74LS00	.29
74LS01	.29
74LS02	.29
74LS03	.29
74LS04	.35
74LS05	.35
74LS08	.29
74LS09	.35
74LS10	.29
74LS11	.75
74LS12	.35
74LS13	.59
74LS14	.99
74LS15	.35
74LS20	.29
74LS21	.35
74LS22	.35
74LS26	.35
74LS27	.35
74LS28	.35
74LS30	.29
74LS32	.35
74LS33	.59
74LS37	.45
74LS38	.49
74LS40	.35
74LS42	.89
74LS47	.89
74LS48	1.15
74LS49	1.15
74LS51	.29
74LS54	.29
74LS55	.29
74LS73	.45
74LS74	.45
74LS75	.59
74LS76	.45
74LS78	.49
74LS83	.89
74LS85	1.25
74LS86	.45
74LS90	.59
74LS92	.75
74LS93	.75
74LS95	.99
74LS96	1.15
74LS107	.45
74LS109	.45
74LS112	.45
74LS113	.49
74LS114	.49
74LS122	.89
74LS123	1.25
74LS125	.89
74LS126	.55
74LS132	.99
74LS133	.89
74LS136	.49
74LS138	.89
74LS139	.89
74LS151	.89
74LS153	.89
74LS154	1.75
74LS155	1.19
74LS156	1.19
74LS157	.89
74LS158	.99
74LS160	1.15
74LS161	1.15
74LS162	1.15
74LS163	1.15
74LS164	1.25
74LS165	1.25
74LS168	1.19
74LS169	1.19
74LS170	2.49
74LS173	1.39
74LS174	.99
74LS175	.99
74LS181	2.95
74LS190	1.25
74LS191	1.25
74LS192	1.15
74LS193	1.15
74LS194	1.15
74LS195	1.15
74LS197	1.19
74LS221	1.19
74LS240	1.95
74LS241	1.95
74LS242	1.95
74LS243	1.95
74LS244	1.95
74LS245	2.95
74LS247	1.19
74LS248	1.19
74LS249	1.19
74LS251	1.49
74LS253	.99
74LS257	.89
74LS258	.99
74LS260	.69
74LS266	.69
74LS273	1.95
74LS279	.75
74LS283	1.09
74LS290	.99
74LS293	.99
74LS298	1.25
74LS352	1.29
74LS353	1.29
74LS365	.75
74LS366	.75
74LS367	.75
74LS368	.75
74LS373	1.95
74LS374	1.95
74LS375	.89
74LS386	.69
74LS393	2.49
74LS399	2.49
74LS670	2.49
81LS95	1.95
81LS97	1.95

74S

74S00	.50
74S02	.50
74S03	.50
74S04	.55
74S05	.55
74S08	.50
74S09	.50
74S10	.50
74S11	.50
74S15	.50
74S20	.50
74S22	.50
74S30	.50
74S32	.55
74S40	.55
74S51	.50
74S64	.50
74S65	.50
74S74	.79
74S86	.79
74S112	.79
74S113	.79
74S114	.79
74S133	.55
74S134	.69
74S135	1.19
74S136	1.75
74S138	1.35
74S139	1.35
74S140	1.15
74S151	1.35
74S153	1.35
74S157	1.35
74S158	1.35
74S174	1.59
74S175	1.59
74S188	4.95
74S194	1.95
74S195	1.95
74S196	3.95
74S240	2.95
74S241	2.95
74S242	3.25
74S243	3.25
74S244	3.25
74S251	1.45
74S253	1.45
74S257	1.35
74S258	1.35
74S260	.79
74S280	2.95
74S287*	4.95
74S288*	4.95
74S373	3.49
74S374	3.49
74S387*	5.95
74S471*	19.95
74S472*	19.95
74S473*	19.95
74S474*	21.95
74S475*	21.95
74S570*	7.95
74S571*	7.95
74S572*	19.95
74S573*	19.95
74S940	3.15
74S941	3.15

* LIMITED AVAILABILITY ON THESE PROMS

CA–LINEAR

CA3013H	2.15
CA3023H	3.25
CA3039H	1.35
CA3046N	1.30
CA3059N	3.25
CA3060N	3.25
CA3080H	1.25
CA3081N	2.00
CA3082N	2.00
CA3083N	1.60
CA3086N	.85
CA3089N	3.75
CA3096N	3.95
CA3130H	1.39
CA3140H	1.25
CA3160H	1.25
CA3401N	.59
CA3600N	3.50

CD–CMOS

CD4000	.39
CD4001	.39
CD4002	.39
CD4006	1.19
CD4007	.25
CD4009	.49
CD4010	.49
CD4011	.39
CD4012	.25
CD4013	.49
CD4014	1.39
CD4015	1.19
CD4016	.59
CD4017	1.19
CD4018	.99
CD4019	.49
CD4020	1.19
CD4021	1.39
CD4022	1.19
CD4023	.29
CD4024	.79
CD4025	.23
CD4026	2.95
CD4027	.69
CD4028	.89
CD4029	1.49
CD4030	.49
CD4035	.99
CD4040	1.49
CD4041	1.49
CD4042	.99
CD4043	.89
CD4044	.89
CD4046	1.79
CD4047	2.50
CD4048	1.35
CD4049	.49
CD4050	.69
CD4051	1.19
CD4052	1.19
CD4053	1.19
CD4056	2.95
CD4059	9.95
CD4060	1.49
CD4066	.79
CD4068	.39
CD4069	.45
CD4070	.55
CD4071	.49
CD4072	.49
CD4073	.39
CD4075	.39
CD4076	1.39
CD4078	.55
CD4081	.39
CD4082	.39
CD4093	.99
CD4098	2.49
CD4506	.75
CD4507	.99
CD4508	3.95
CD4510	1.39
CD4511	1.29
CD4514	3.95
CD4515	2.95
CD4516	1.49
CD4518	1.79
CD4519	.89
CD4520	1.29
CD4526	1.79
CD4528	1.79
CD4529	1.95
CD4543	2.79
CD4562	11.95
CD4566	2.79
CD4583	2.49
CD4723	1.95
CD4724	1.95
MC14409	14.95
MC14410	14.95
MC14411	14.95
MC14412	11.95
MC14419	4.95
MC14433	13.95

LIMITED OFFER!!

LITRONIX DISPLAY SALE

WHILE THEY LAST!!

DL-4500
DL-4507
DL-4520A
DL-4120A

DL-2300
DLG-2535

DL-4509

DL-6500
DL-6530

DL-3130

MULTI-DIGIT REFLECTOR ARRAYS FOR CLOCKS

PART NUMBER	CHAR. HT. (IN.)	POLARITY	DESCRIPTION	LIGHT OUTPUT (MCD)			FORWARD VOLTAGE SEGMENT (V) I_F = 20mA		CONTINOUUS FORWARD CURRENT PER SEGMENT (mA) MAX	PRICE
				TYP	MIN	@mA	TYP	MAX		
DL-4500 (Red) DL-4507 (Red)	.50	C.C. MPX	4 Digit 7 Segment With Colon And Auxilliary Indicators	.8 --	.5 1.0	10	1.7	2.0	30	2.49 2.49
DLO-4507 (orng) DLG-4507 (grn) DL-4520A (red)		C.C. non MPX		.8	.5					4.95 4.95 2.49
DL-4120A (red)	1.0	C.C. non MPX		1.5	.9		3.4	4.0		4.95

MULTI-DIGIT REFLECTOR ARRAYS

DL-2300 (Red)	.30	C.C. MPX	7 Seg. 2 Digit D.P. Right	2.5	1.1	20	1.7	2.0	30	.99
DLG-2535 (green)	.50	C.A. MPX	9 Seg. 2 Digit		2.5	20		3.5	25	1.49
DL-4509 (Red)	.50	C.C. MPX	9 Seg. 4 Digit D.P. Right	.8	.5	10	1.7	2.0	30	2.49
DL-6500 (Red)	.50	C.C. MPX	7 Seg. 6 Digit D.P. Right	.8	.5	10	1.7	2.0	30	2.95
DL-6530 (Red)	.50	C.A. MPX	7 Seg. 6 Digit D.P. Right	.8	.5	10	1.7	2.0	30	2.95
DL-3130 (Red)	1.0	C.A. MPX	7 Seg. 3 Digit D.P. Right	1.5	1.0	10	3.4	4.0	30	3.95

DISCRETE LEDS

XC556R	.200''	red	5/$1
XC556G	.200''	green	4/$1
XC556Y	.200''	yellow	4/$1
XC556C	.200''	clear	4/$1
XC22R	.200''	red	5/$1
XC22G	.200''	green	4/$1
XC22Y	.200''	yellow	4/$1
MV10B	.170''	red	4/$1
MV50	.085''	red	6/$1
XC209R	.125''	red	5/$1
XC209G	.125''	green	4/$1
XC209Y	.125''	yellow	4/$1
XC526R	.185''	red	5/$1
XC526G	.185''	green	4/$1
XC526Y	.185''	yellow	4/$1
XC526C	.185''	clear	4/$1
XC111R	.190''	red	5/$1
XC111G	.190''	green	4/$1
XC111Y	.190''	yellow	4/$1
XC111C	.190''	clear	4/$1

XC556 RED LED, METAL MTG. HDW. 2-6'' LEADS.

RL-2 . . $.39 ea. or 3/$1.00

DISPLAY LEDS

C.A. — Common Anode C.C. — Common Cathode

Type	Polarity	Ht	Price
MAN 1	C.A.—red	.270	2.95
MAN 2	5x7 D.M.—red	.300	4.95
MAN 3	C.C.—red	.125	.25
MAN 52	C.A.—green	.300	1.25
MAN 54	C.C.—green	.300	1.25
MAN 71	C.A.—red	.300	.75
MAN 72	C.A.—red	.300	.75
MAN 74	C.C.—red	.300	1.25
MAN 82	C.A.—yellow	.300	.49
MAN 84	C.C.—yellow	.300	.99
MAN 3620	C.A.—orange	.300	.49
MAN 3630	C.A.—orange ± 1	.300	.99
MAN 3640	C.C.—orange	.300	.99
MAN 4610	C.A.—orange	.400	.99
MAN 6610	C.A.—orange—DD	.560	.99
MAN 6630	C.A.—orange ± 1	.560	.99
MAN 6640	C.C.—orange—DD	.560	.99
MAN 6650	C.C.—orange ± 1	.560	.99
MAN 6660	C.A.—orange	.560	.99
MAN 6710	C.A.—red—DD	.560	.99
MAN 6750	C.C.—red ± 1	.560	.99
MAN 6780	C.C.—red	.560	.99
DLO304	C.C.—orange	.300	1.25
DLO307	C.A.—orange	.300	1.25
DLG500	C.C.—green	.500	1.25
DLG507	C.A.—green	.500	1.25
DL704	C.C.—red	.300	1.25
DL707	C.A.—red	.300	1.25
DL728	C.C.—red	.500	1.49
DL741	C.A.—red	.600	1.25
DL746	C.A.—red ± 1	.630	1.49
DL747	C.A.—red	.600	1.49
DL750	C.C.—red	.600	1.49
DLO847	C.A.—orange	.800	1.49
DLO850	C.C.—orange	.800	1.49
DL33B	C.C.—red	.110	.35
FND358	C.C. ± 1	.357	.99
FND359	C.C.	.357	.75
FND503	C.C. (FND500)	.500	.99
FND507	C.A. (FND510)	.500	.99
HDSP-3401	C.A.—red	.800	1.50
HDSP-3403	C.C.—red	.800	1.50
5082-7751	C.A., R.H.D.—red	.430	1.25
5082-7760	C.C., R.H.D.—red	.430	1.75
5082-7300	4x7 sgl. dig. RHD	.600	22.00
5082-7302	4x7 sgl. dig. LHD	.600	22.00
5082-7304	Overnge. char. (±1)	.600	19.95
4N28	Photo Xsistor Opto-Isol.		.99
LIT-1	Photo Xsistor Opto-Isol.		.69
MOC3010	Optically Isol. Triac Driver		1.25

SOCKETS — Test TEXTOOL Sockets — RECEPTACLES

ZERO INSERTION FORCE

- ★ Nickel Boron Plating
- ★ G.F. PSF Plastic Body
- ★ For testing IC's

Part No.	Pins	Price
214-3339	14 pin	5.95
216-3340	16 pin	6.49
218-3341	18 pin	7.95
220-3342	20 pin	8.95
222-3343	22 pin	9.95
224-3344	24 pin	9.75
228-3345	28 pin	11.95
240-3346	40 pin	12.95

- ★ Nickel Boron Plating
- ★ G.F. PSF Plastic Body
- ★ Wire Wrap Contacts

Part No.	Pins	Price
214-3592	14 pin	9.75
216-3593	16 pin	9.95
218-3594	18 pin	10.95
220-3595	20 pin	11.95
222-3596	22 pin	12.95
224-3597	24 pin	12.75
228-3598	28 pin	13.95
240-3599	40 pin	15.95

LOW PROFILE (TIN) SOCKETS

	1-24	25-49	50-100
8 pin LP	.17	.16	.15
14 pin LP	.20	.19	.18
16 pin LP	.22	.21	.20
18 pin LP	.29	.28	.27
20 pin LP	.34	.32	.30
22 pin LP	.37	.36	.35
24 pin LP	.38	.37	.36
28 pin LP	.45	.44	.43
36 pin LP	.60	.59	.58
40 pin LP	.63	.62	.61

SOLDERTAIL STANDARD (TIN)

	1-24	25-49	50-100
14 pin ST	.27	.25	.24
16 pin ST	.30	.27	.25
18 pin ST	.35	.32	.30
24 pin ST	.49	.45	.42
28 pin ST	.99	.90	.81
36 pin ST	1.39	1.26	1.15
40 pin ST	1.59	1.45	1.30

SOLDERTAIL (GOLD) STANDARD

	1-24	25-49	50-100
8 pin SG	.39	.35	.31
14 pin SG	.49	.45	.41
16 pin SG	.54	.49	.44
18 pin SG	.59	.53	.48
24 pin SG	.79	.75	.69
28 pin SG	1.10	1.00	.90
36 pin SG	1.65	1.40	1.26
40 pin SG	1.75	1.59	1.45

WIRE WRAP SOCKETS (GOLD) LEVEL #3

	1-24	25-49	50-100
8 pin WW	.59	.54	.49
10 pin WW	.69	.63	.58
14 pin WW	.79	.73	.67
16 pin WW	.85	.77	.70
18 pin WW	.99	.90	.81
20 pin WW	1.19	1.08	.99
22 pin WW	1.49	1.35	1.23
24 pin WW	1.39	1.26	1.14
28 pin WW	1.69	1.53	1.38
36 pin WW	2.19	1.99	1.79
40 pin WW	2.29	2.09	1.89

1/4 WATT RESISTOR ASSORTMENTS – 5%

ASST. 1	5ea.	10 Ohm 12 Ohm 15 Ohm 18 Ohm 22 Ohm 27 Ohm 33 Ohm 39 Ohm 47 Ohm 56 Ohm	50pcs.	$1.95
ASST. 2	5ea.	68 Ohm 82 Ohm 100 Ohm 120 Ohm 150 Ohm 180 Ohm 220 Ohm 270 Ohm 330 Ohm 390 Ohm	50pcs.	$1.95
ASST. 3	5ea.	470 Ohm 560 Ohm 680 Ohm 820 Ohm 1K 1.2K 1.5K 1.8K 2.2K 2.7K	50pcs.	$1.95
ASST. 4	5ea.	3.3K 3.9K 4.7K 5.6K 6.8K 8.2K 10K 12K 15K 18K	50pcs.	$1.95
ASST. 5	5ea.	22K 27K 33K 39K 47K 56K 68K 82K 100K 120K	50pcs.	$1.95
ASST. 6	5ea.	150K 180K 220K 270K 330K 390K 470K 560K 680K 820K	50pcs.	$1.95
ASST. 7	5ea.	1M 1.2M 1.5M 1.8M 2.2M 2.7M 3.3M 3.9M 4.7M 5.6M	50pcs.	$1.95
ASST. 8R		Includes Resistor Assts. 1-7 (350 pcs.)		$10.95 ea.

$10.00 Min. Order — U.S. Funds Only
Calif. Residents Add 6% Sales Tax
Postage — Add 5% plus $1 Insurance

Spec Sheets — 25¢
Send 41¢ Postage for your
FREE 1981 JAMECO CATALOG

NEW 1981 CATALOG

Jameco ELECTRONICS

PHONE
ORDERS
WELCOME
(415) 592-8097

MAIL ORDER ELECTRONICS — WORLDWIDE
1355 SHOREWAY ROAD, BELMONT, CA 94002
PRICES SUBJECT TO CHANGE

5/81

INTERSIL

Part No.	Function		Price
7045IPI	CMOS Precision Timer		14.95
7045EV/Kit*	Stopwatch Chip, XTL		22.95
7106CPL	3½ Digit A/D (LCD Drive)		16.95
7106EV/Kit*	IC, Circuit Board, Display		34.95
7107CPL	3½ Digit A/D (LED Drive)		15.95
7107EV/Kit*	IC, Circuit Board, Display		28.95
7116CPL	3½ Digit A/D LCD Dis. HLD.		18.95
7117CPL	3½ Digit A/D LED Dis. HLD.		17.95
7201IDR	Low Battery Volt Indicator		2.25
7205IPG	CMOS LED Stopwatch/Timer		12.95
7205EV/Kit*	Stopwatch Chip, XTL		19.95
7206CJPE	Tone Generator		5.15
7206CEV/Kit*	Tone Generator Chip, XTL		9.95
7207AIPD	Oscillator Controller		6.50
7207AEV/Kit*	Freq. Counter Chip, XTL		11.10
7208IPI	Seven Decade Counter		17.95
7209IPA	Clock Generator		3.95
7215IPG	4 Func. CMOS Stopwatch CKT		13.95
7215EV/Kit*	4 Func. Stopwatch Chip, XTL		19.95
7216AIJI	8-Digit Univ. Counter C.A.		32.00
7216CIJI	8-Digit Freq. Counter C.A.		26.95
7216DIPI	8-Digit Freq. Counter C.C.		21.95
7217IJI	4-Digit LED Up/Down Counter		12.95
7218CIJI	8-Digit Univ. LED Drive		10.95
7224IPL	LCD 4½ Digit Up Counter DRI		11.25
7226AIJL	8-Digit Univ. Counter		31.95
7226AEV/Kit*	5 Function Counter Chip, XTL		74.95
7240IJE	CMOS Bin Prog. Timer/Counter		4.95
7242IJA	CMOS Divide-by-256 RC Timer		2.05
7250IJE	CMOS BCD Prog. Timer/Counter		6.00
7260IJE	CMOS BCD Prog. Timer/Counter		5.25
7555IPA	CMOS 555 Timer (8 pin)		1.45
7556IPD	CMOS 556 Timer (14 pin)		2.20
7611BCPA	CMOS Op Amp Comparator	5MV	2.25
7612BCPA	CMOS Op Amp Ext. Cmvr.	5MV	2.95
7621BCPA	CMOS Dual Op Amp Comp.	5MV	3.95
7631CCPE	CMOS Tri Op Amp Comp.	10MV	5.35
7641CCPD	CMOS Quad Op Amp Comp.	10MV	7.50
7642CCPD	CMOS Quad Op Amp Comp.	10MV	7.50
7660CPA	Voltage Converter		2.95
8069CCQ	50ppm Band—GAP Volt Ref. Diode		2.50
8211CPA	Volt Ref/Indicator		2.50
8212CPA	Volt Ref/Indicator		2.50

* INTERSIL'S EVALUATION KITS

74C

74C00	.39
74C02	.39
74C04	.39
74C08	.39
74C10	.39
74C14	.75
74C20	.39
74C30	.39
74C42	1.39
74C48	1.95
74C73	.79
74C74	.79
74C85	1.95
74C86	.99
74C89	6.95
74C90	1.29
74C93	1.29
74C95	1.59
74C106	.75
74C107	1.89
74C151	2.95
74C154	3.95
74C157	2.25
74C160	1.69
74C161	1.60
74C162	1.49
74C163	1.69
74C164	1.59
74C173	1.39
74C174	1.39
74C175	1.39
74C192	1.69
74C193	1.69
74C195	1.59
74C221	1.95
74C240	2.25
74C244	2.25
74C373	2.49
74C374	2.59
74C901	.89
74C903	1.15
74C911	10.95
74C912	10.95
74C915	1.69
74C917	10.95
74C922	5.49
74C923	5.75
74C925	7.50
74C926	7.50
80C95	.79
80C97	.79

LINEAR

LH0002CN	6.85
LM10CLH	4.50
LM11CLH	4.75
LH0070-OH	6.05
TL071CP	.79
TL072CP	1.39
TL074CN	2.49
LH0082CD	35.80
TL082CP	1.19
TL084CN	2.19
LH0094CD	36.80
LM300H	.99
LM301CN	.35
LM302H	1.95
LM304H	1.95
LM305H	.99
LM307CN	.45
LM308CN	1.00
LM309H	1.95
LM309K	1.25
LM310CN	1.75
LM311H	.90
LM312H	2.49
LM317MP	1.15
LM317T	1.75
LM317K	3.95
LM318CN	1.95
LM319N	1.95
LM320K-5	1.35
LM320K-12	1.35
LM320K-15	1.35
LM320T-5	1.25
LM320T-12	1.25
LM320T-15	1.25
LM323K-5	5.95
LM324N	.99
LM329DZ	.65
LM331N	3.95
LM334Z	1.30
LM335Z	1.40
LM336Z	1.75
LM337T	1.95
LM337MP	1.15
LM338K	6.95
LM339N	.99
LM340K-5	1.35
LM340K-12	1.35
LM340K-15	1.35
LM340T-5	1.25
LM340T-12	1.25
LM340T-15	1.25
LM341P-5	.75
LM341P-12	.75
LM341P-15	.75
LM342P-5	.69
LM342P-12	.69
LM342P-15	.69
LM348N	1.25
LM350K	5.75
LF351N	.60
LF353N	1.00
LF355N	1.10
LF356N	1.10
LM358N	1.00
LM359N	1.79
LM370N	4.49
LM373N	3.25
LM377N	2.95
LM380N	1.25
LM381N	1.95
LM382N	1.79
LM384N	1.95
LM386N-3	1.29
LM387N	1.45
LM389N	1.35
LM392N	.69
LF398N	4.00
LM399H	5.00
TL494CN	4.49
TL496CP	1.75
NE510A	6.00
NE529A	4.95
NE531H	3.95
NE536H	6.00
NE540H	6.00
NE544N	4.95
NE550A	1.30
NE555V	.39
LM556N	.99
NE564N	3.95
LM565N	1.25
LM566CN	1.95
LM567V	1.25
NE570N	4.95
LM702H	.79
LM703CN	.89
LM709N	.49
LM710N	.79
LM711N	.79
LM723N	.69
LM733N	1.00
LM739N	1.19
LM741CN	.35
MC1741SCG	3.00
LM747N	.79
LM748N	.59
LM1014N	2.75
LM1310N	1.95
LM1458CN	.59
LM1488N	1.25
LM1489N	1.25
LM1496N	1.95
LM1556V	1.75
LM1800N	2.95
LM1877N-9	3.25
LM1889N	3.20
LM1896N	1.75
LM2002T	1.49
LM2877P	2.05
LM2878P	2.25
LM2896P-1	2.25
LM3189N	2.95
LM3900N	.69
LM3905CN	1.25
LM3909N	1.15
LM3914N	3.95
LM3915N	3.95
LM3916N	3.95
RC4136N	1.25
RC4151NB	3.95
RC4194TK	5.95
RC4195TK	5.49
KB4428	4.25
KB4429	5.95
LM4500A	3.25
ICL8038B	4.95
LM13080N	1.29
LM13600N	1.49
75138N	1.95
75450N	.89
75451CN	.39

CAPACITOR CORNER

50 VOLT CERAMIC DISC CAPACITORS

Value	1-9	10-99	100+
10 pf	.08	.06	.05
22 pf	.08	.06	.05
47 pf	.08	.06	.05
100 pf	.08	.06	.05
220 pf	.08	.06	.05
470 pf	.08	.06	.05
.001µF	.08	.06	.05
.0047µF	.08	.06	.05
.01µF	.08	.06	.05
.022µF	.09	.07	.06
.047µF	.09	.07	.06
.1µF	.15	.12	.10

100 VOLT MYLAR FILM CAPACITORS

.001mf	.12	.10	.07
.0022mf	.12	.10	.07
.0047mf	.12	.10	.07
,01mf	.12	.10	.07
.022mf	.13	.11	.08
.047mf	.21	.17	.13
.1mf	.27	.23	.17
.22mf	.33	.27	.22

+20% DIPPED TANTALUMS (Solid) CAPACITORS

.1/35V	.39	.34	.29
.15/35V	.39	.34	.29
.22/35V	.39	.34	.29
.33/35V	.39	.34	.29
.47/35V	.39	.34	.29
.68/35V	.39	.34	.29
1.0/35V	.39	.34	.29
1.5/35V	.41	.37	.29
2.2/35V	.51	.45	.34
3.3/25V	.53	.47	.37
4.7/25V	.63	.56	.45
6.8/25V	.79	.69	.55
15/25V	1.39	1.25	.95
22/6V	.79	.69	.55

MINI. ALUMINUM ELECTROLYTIC CAPACITORS

Axial	1-99	100-499	500+
.47/50V	.16	.14	.10
1.0/50V	.19	.16	.12
3.3/50V	.17	.15	.11
4.7/25V	.18	.15	.11
10/25V	.18	.15	.11
10/50V	.19	.16	.12
22/25V	.19	.16	.12
22/50V	.24	.20	.18
47/25V	.25	.21	.19
47/50V	.29	.25	.23
100/25V	.28	.24	.22
100/50V	.41	.37	.34
220/25V	.39	.34	.33
220/50V	.49	.45	.41
470/25V	.54	.49	.45
1000/16V	.79	.69	.61
2200/16V	.89	.79	.69

Radial	1-99	100-499	500+
.47/25V	.15	.13	.12
.47/50V	.16	.14	.13
1.0/16V	.15	.13	.12
1.0/25V	.16	.14	.13
1.0/50V	.17	.15	.14
4.7/16V	.15	.13	.12
4.7/25V	.16	.14	.13
4.7/50V	.17	.15	.14
10/16V	.15	.13	.12
10/25V	.16	.14	.13
10/50V	.17	.15	.14
47/50V	.25	.21	.19
100/16V	.21	.17	.14
100/25V	.25	.23	.21
100/50V	.37	.34	.31
220/16V	.25	.21	.19
470/25V	.35	.31	.27

National Semiconductor Clock Modules



12VDC
AUTOMOTIVE/
INSTRUMENT
CLOCK

APPLICATIONS:
- In-dash autoclocks
- After-market auto/ RV clocks
- Aircraft-marine clks.
- 12VDC oper. instru.
- Portable/battery powered instrumnts.

Features: Bright 0.3" green display. Internal crystal timebase. ± 0.5 sec./day accur. Auto. display brightness control logic. Display color filterable to blue, blue-green, green & yellow. Complete—just add switches and lens.

MA1003 Module $16.95

MA1023	.7" Low Cost Digital LED Clock Module	8.95
MA1026	.7" Dig. LED Alarm Clock/Thermometer	18.95
MA5036	.3" Low Cost Digital LED Clock/Timer	6.95
MA1002	.5" LED Display Dig. Clock & Xformer	9.95

National Semiconductor

RAM SALE

MM5290N-4 (MK4116/UPD416) . . **$3.95 each**
16K DYNAMIC RAM (250NS)
(8 EACH $29.95) (100 EACH $350.00/lot)

MM5290J-2 (MK4116/UPD416) . . **$5.25 each**
16K DYNAMIC RAM (150NS)
(8 EACH $39.95) (100 EACH $475.00/lot)

MM5298J-3A . . . . **$3.25 each**
8K DYNAMIC RAM (LOW HALF OF MM5290J) 200NS
(8 EACH $23.95) (100 EACH $250.00/lot)

MM2114-3 . . . . **$5.95 each**
4K STATIC RAM (300NS)
(8 EACH $43.95) (100 EACH $450.00/lot)

MM2114L-3 . . . . **$6.25 each**
4K STATIC RAM (LOW POWER 300NS)
(8 EACH $44.95) (100 EACH $475.00/lot)

EPROM Erasing Lamp



- Erases 2708, 2716, 1702A, 5203Q, 5204Q, etc.
- Erases up to 4 chips within 20 minutes.
- Maintains constant exposure distance of one inch.
- Special conductive foam liner eliminates static build-up.
- Built-in safety lock to prevent UV exposure.
- Compact — only 7-5/8" x 2-7/8" x 2"
- Complete with holding tray for 4 chips.

UVS-11E $79.95

JOYSTICKS

JS-5K





JVC-40

JS-5K	5K Linear Taper Pots	$5.25
JS-100K	100K Linear Taper Pots	$4.95
JVC-40	40K (2) Video Controller in case . . .	$5.95

6-Digit Clock Kit

- Bright .300 ht. comm. cathode display
- Uses MM5314 clock chip
- Switches for hours, minutes and hold modes
- Hrs. easily viewable to 20 ft.
- Simulated walnut case
- 115 VAC operation
- 12 or 24 hr. operation
- Incl. all components, case & wall transformer
- Size: 6¾" x 3-1/8" x 1¾"

JE701................ $19.95

NEW! JE215 Adjustable Dual Power Supply

General Description: The JE215 is a Dual Power Supply with independent adjustable positive and negative output voltages. A separate adjustment for each of the supplies provides the user unlimited applications for IC current voltage requirements. The supply can also be used as a general all-purpose variable power supply.



FEATURES:
- Adjustable regulated power supplies, pos. and neg. 1.2VDC to 15VDC.
- Power Output (each supply): 5VDC @ 500mA, 10VDC @ 750mA, 12VDC @ 500mA, and 15VDC @ 175mA.
- Two, 3-terminal adj. IC regulators with thermal overload protection.
- Heat sink regulator cooling
- LED "on" indicator
- Printed Board Construction
- 120VAC input
- Size: 3-1/2"w x 5-1/16"L x 2"H

JE215 Adj. Dual Power Supply Kit (as shown) . . $24.95

(Picture not shown but similar in construction to above)

JE200 Reg. Power Supply Kit (5VDC, 1 amp) . .	$14.95
JE205 Adapter Brd. (to JE200) ±5, ±9 & ±12V.	$12.95
JE210 Var. Pwr. Sply. Kit, 5-15VDC, to 1.5amp.	$19.95

MICROPROCESSOR COMPONENTS

8080A/8080A SUPPORT DEVICES

INS8080A	CPU	4.95
DP8212	8-Bit Input/Output	3.25
DP8214	Priority Interrupt Control	5.95
DP8216	Bi-Directional Bus Driver	3.49
DP8224	Clock Generator/Driver	3.95
DP8226	Bus Driver	3.49
DP8228	System Controller/Bus Driver	4.95
DP8238	System Controller	5.95
INS8243	I/O Expander for 48 Series	9.95
INS8250	Asynchronous Comm. Element	16.95
DP8251	Prog. Comm. I/O (USART)	7.95
DP8253	Prog. Interval Timer	14.95
DP8255	Prog. Peripheral I/O (PPI)	9.95
DP8257	Prog. DMA Control	19.95
DP8259	Prog. Interrupt Control	14.95
DP8275	Prog. CRT Controller	49.95
DP8279	Prog. Keyboard/Display Interface	19.95
DP8300	Octal Bus Receiver	6.95
DP8303	System Timing Element	6.95
DP8304	8-Bit Bi-Directional Receiver	3.95
DP8307	8-Bit Bi-Directional Receiver	3.95
DP8308	8-Bit Bi-Directional Receiver	3.95

6800/6800 SUPPORT DEVICES

MC6800	MPU	14.95
MC6802CP	MPU with Clock and RAM	19.95
MC6810API	128x8 Static RAM	4.95
MC6821	Peripheral Inter. Adapt (MC6820)	7.49
MC6828	Priority Interrupt Controller	10.95
MC6830L8	1024x8-Bit ROM (MC68A30-8)	14.95
MC6850	Asynchronous Comm. Adapter	6.95
MC6852	Synchronous Serial Data Adapter	6.95
MC6860	0-600bps Digital MODEM	10.95
MC6862	2400bps Modulator	12.95
MC6880A	Quad 3-State Bus. Trans. (MC8T26)	2.25

MICROPROCESSOR CHIPS

Z80 (780C)	CPU (MK3880N) (2MHz)	13.95
Z80A (780-1)	CPU (MK3880N-4) (4MHz)	15.95
CDP1802	CPU	19.95
2650	MPU	16.95
IDM2901ADC	CPU—4-Bit Slice (Com. Temp. Grade)	19.95
MCS6502	MPU w/Clock (65K Bytes Memory)	11.95
INS8035N-6	MPU—8-Bit (6MHz)	16.95
INS8039N-6	CPU—Sgl. Chip 8-Bit (128bytes RAM)	19.95
INS8040N-6	CPU (256 Bytes RAM)	24.95
INS8070N	CPU—64 Bytes RAM	24.95
INS8073N	CPU w/Basic Micro Interpreter	29.95
P8085	CPU	19.95
INS8900	CPU—16-Bit	29.95
TMS9900JL	MPU—16-Bit	49.95

SHIFT REGISTERS

MM500H	Dual 25-Bit Dynamic	.50
MM503H	Dual 50-Bit Dynamic	.50
MM506H	Dual 100-Bit Static	.50
MM510H	Dual 64-Bit Accumulator	.50
MM1402	256-Bit Dynamic	3.95
MM5013	1024-Bit Dynamic/Accumulator	1.95
MM5016H	500/512-Bit Dynamic	.89
MM5034N	Octal 80-Bit	9.95
MM5035N	Octal 80-Bit	9.95
2504V (1404A)	1024-Bit Dynamic	3.95
2518N	Hex 32-Bit Static	4.95
2522V	Dual 132-Bit Static	2.95
2524V	512-Bit Dynamic	.99
2525V	1024-Bit Dynamic	2.95
2527V	Dual 256-Bit Static	2.95
2528V	Dual 250-Bit Static	4.00
2529V	Dual 240-Bit Static	4.00
2532N	Quad 80-Bit Static	2.95
3341PC	Fifo (Dual 80)	6.95

DATA ACQUISITION

AF100-1CN	Universal Active Filter 2.5%	5.95
AF121-1CJ	Touch Tone Low Pass Filter	19.95
AF122-1CJ	Touch Tone Low Pass Filter	19.95
LM308AH	Super Gain Op Amp	1.00
LM334Z	Constant Current Source	1.30
LM335Z	Temperature Transducer	1.40
LF356N	JFET Input Op Amp	1.10
LF398N	Sample & Hold Amplifiers	3.95
LM399H	Temp. Comp. Prec. Ref. (.5ppm/C°)	4.95
ADC0804LCN	8-Bit A/D Converter (1 LSB)	4.95
DAC0806LCN	8-Bit D/A Converter (0.78% Lin.)	2.25

DATA ACQUISITION (CONTINUED)

ADC0809CCN	8-Bit A/D Converter (8-Ch. Multi.)	5.25
ADC0817CCN	8-Bit A/D Converter (16-Ch. Multi.)	10.95
DAC1000LCN	10-Bit D/A Conv. Micro. Comp. (0.05%)	13.95
DAC1008LCN	10-Bit D/A Conv. Micro. Comp. (0.20%)	8.95
DAC1020LCN	10-Bit D/A Converter (0.05% Lin.)	8.49
DAC1022LCN	10-Bit D/A Converter (0.20% Lin.)	5.95
DAC1222LCN	12-Bit D/A Converter (0.20% Lin.)	9.95
CD4051N	8-Channel Multiplexer	1.19
AY-5-1013	30K BAUD UART	5.95

RAM'S

1101	256x1 Static	1.49
1103	1024x1 Dynamic	.99
2101 (8101)	256x4 Static	3.95
2102	1024x1 Static	1.75
21L02	1024x1 Static	1.95
2111 (8111)	256x4 Static	3.95
2112	256x4 Static MOS	4.95
2114	1024x4 Static 450ns	3.95
2114L	1024x4 Static 450ns Low Power	4.95
2114-3	1024x4 Static 300ns	4.95
2114L-3	1024x4 Static 300ns Low Power	5.95
2117	16,384x1 Dynamic 550ns (house marked)	4.95
4116 (UPD416)	16K Dynamic 250ns	3.95
4164	64K Dynamic 250ns	49.95
MM2147J	4096x1 Fast 70ns	19.95
5101	256x4 Static	7.95
MM5261	1024x1 Dynamic Fully Decoded	.99
MM5262	2Kx1 Dynamic	.25
MM5280/2107	4096x1 Dynamic	4.95
MM5290J-2(4116)	16K Dynamic 150ns	5.25
MM5298J-3A	8K Dyn. 200ns (lower ½ of MM5290J)	4.95
UPD414/MK4027	4K Dynamic 16-pin	4.95
TMS4044-45NL	4K Static	14.95
TMS4045	1024x4 Static	14.95

PROMS/EPROMS

1702A	2K UV Erasable PROM	5.95
2708	8K EPROM	5.95
TMS2716	16K EPROM (-5V, +5V, +12V)	19.95
2716 Intel (2516) TI	16K EPROM (Single +5V)	10.95
2732 Intel (2532) TI	32K EPROM	19.95
2758	8K EPROM (450ns) (Single +5V)	7.95
5203	2048 PROM	14.95
82S23(74S188)	32x8 PROM (Open Collector)	4.95
82S115	4096 Bipolar PROM	19.95
82S123(74S288)	32x8 Tri-State Bipolar PROM	4.95
82S185	8K PROM	29.95

ROM'S

2513(2140)	Character Generator (Upper Case)	9.95
2513(3021)	Character Generator (Lower Case)	9.95
2516N	Character Generator	10.95
MM5230N	2048-Bit Read Only Memory	1.95

NMOS READ ONLY MEMORIES

MCM66710P	128x9x7 ASCII Shifted w/Greek	13.50
MCM66740P	128x9x7 Math Symbol & Pictures	13.50
MCM66750P	128x9x7 Alpha. Control Char. Gen.	13.50

MICROPROCESSOR MANUALS

M-Z80	User Manual	7.50
M-CDP1802	User Manual	7.50
M-2650	User Manual	5.00

SPECIAL FUNCTION

DS0025CN	Dual MOS Clock Driver (5MZ)	3.50
DS0026CN	Dual MOS Clock Driver (5MZ)	1.95
INS1771N-1	Floppy Disc Controller	24.95
INS2651N	Communication Chip	19.95
MM58167N	Microprocessor Real Time Clock	8.95
MM58174N	Microprocessor Compatible Clock	11.95
COP402N	Microcontroller with 64-Digit RAM and Direct LED Drive	6.95
COP402MN	Microcontroller with 64-Digit RAM & Direct LED Drive w/N Buss Int.	7.49
COP470N	32-Seg. VAC Fluor. Driver (20-pin pkg.)	3.25

TELEPHONE/KEYBOARD CHIPS

AY-5-9100	Push Button Telephone Dialer	14.95
AY-5-9200	Repertory Dialer	14.95
AY-5-9500	CMOS Clock Generator	4.95
AY-5-2376	Keyboard Encoder (88 keys)	11.95
HD0165-5	Keyboard Encoder (16 keys)	7.95
74C922	Keyboard Encoder (16 keys)	5.49
74C923	Keyboard Encoder (20 keys)	5.75
MM53190N	Push Button Pulse Dialer	7.95
MM57499N	96/144-Key Serial Keyboard Encoder	8.95

DESIGNERS' SERIES
Blank Desk-Top Electronic Enclosures



- High strength epoxy molded end pieces in mocha brown finish.
- Sliding rear/bottom panel for service and component accessibility.
- Top / bottom panels .080 thk alum. Alodine type 1200 finish (gold tint color) for best paint adhesion after modification.
- Vented top and bottom panels for cooling efficiency.
- Rigid construction provides unlimited applications.

CONSTRUCTION:

The "DTE" Blank Desk Top Electronic Enclosures are designed to blend and complement today's modern computer equipment and can be used in both industrial and home. The end pieces are precision molded with an internal slot (all around) to accept both top and bottom panels. The panels are then fastened to ¼" thick tabs inside the end pieces to provide maximum rigidity to the enclosure. For ease of equipment servicing, the rear/ bottom panel slides back on slotted tracks while the rest of the enclosure remains intact. Different panel widths may be used while maintaining a common profile outline. The molded end pieces can also be painted to match any panel color scheme.



Enclosure Model No.	Panel Width	PRICE
DTE-8	8.00"	$29.95
DTE-11	10.65"	$32.95
DTE-14	14.00"	$34.95

$10.00 Min. Order — U.S. Funds Only
Calif. Residents Add 6% Sales Tax
Postage—Add 5% plus $1 Insurance

Spec Sheets — 25¢
Send 41¢ Postage for your
FREE 1981 JAMECO CATALOG

NEW 1981 CATALOG

Jameco ELECTRONICS

PHONE
ORDERS
WELCOME
(415) 592-8097

MAIL ORDER ELECTRONICS — WORLDWIDE
1355 SHOREWAY ROAD, BELMONT, CA 94002
PRICES SUBJECT TO CHANGE

5/81

Bourns Potentiometer



3/4 Watt Single Turn
(TOP ADJUSTMENT)

Values: 500Ω 1K 2.5K 5K 10K 25K 50K 100K 250K 500K 5Meg

INDIVIDUAL PRICING:

1-49	50-99	100-999	1K-up
.19	.17	.15	.12

GB174 ...... $1.95/lot
(25 pieces all 11 asst. values)

To order: Specify Bourns 3355 — (Value desired)

AC and DC Wall Transformers

Ideal for use with clocks, games, power supplies or any other type of AC or DC application.

Part No.	Input	Output	Price
AC 250	117V/60Hz	12 VAC 250mA	$3.95
AC 500	117V/60Hz	12 VAC 500mA	$4.95
AC1000	117V/60Hz	12 VAC 1 amp	$5.95
AC1700	117V/60Hz	9 VAC 1.7 amp	$6.95
DV 9200	117V/60Hz	9 VDC 200mA	$3.25
DC 900	120V/60Hz	9 VDC 500mA	$3.95

CONNECTORS

DB25P	D-Subminiature Plug	$2.95
DB25S	D-Subminiature Socket	$3.50
DB51226	Cover for DB25P/S	$1.75
22/44SE	P.C. Edge (22/44 Pin)	$2.95
UG88/U	BNC Plug	$1.79
UG89/U	BNC Jack	$3.79
UG175/U	UHF Adapter	$ .49
SO239	UHF Panel Recp.	$1.29
PL258	UHF Adapter	$1.60
PL259	UHF Plug	$1.60
UG260/U	BNC Plug	$1.79
UG1094/U	BNC Bulkhead Recp.	$1.29

TRS-80
16K Conversion Kit

Expand your 4K TRS-80 System to 16K.
Kit comes complete with:
★ 8 ea. MM5290 (UPD416/4116) 16K Dyn. Rams (*NS)
★ Documentation for Conversion

TRS-16K2 *150NS **$39.95**
TRS-16K4 *250NS **$29.95**

JE610 ASCII
Encoded Keyboard Kit



The JE610 ASCII Keyboard Kit can be interfaced into most any computer system. The kit comes complete with an industrial grade keyboard switch assembly (62-keys), IC's, sockets, connector, electronic components and a double-sided printed wiring board. The keyboard assembly requires +5V @ 150mA and −12V @ 10 mA for operation. Features: 60 keys generate the 126 characters, upper and lower case ASCII set. Fully buffered. Two user-define keys provided for custom applications. Caps lock for upper-case-only alpha characters. Utilizes a 2376 (40-pin) encoder read-only memory chip. Outputs directly compatible with TTL/DTL or MOS logic arrays. Easy interfacing with a 16-pin dip or 18-pin edge connector. Size: 3½"H x 14½"W x 8¾"D

JE610/DTE-AK (as pictured above) . . . **$124.95**

JE610 Kit 62-Key Keyboard, PC Board, & Components (no case). . . . . **$ 79.95**

K62 62-Key Keyboard (Keyboard only) . . . **$ 34.95**

DTE-AK (case only — 3¼"Hx11"Wx8¾"D) **$ 49.95**

JE600
Hexadecimal Encoder Kit

FULL 8-BIT
LATCHED OUTPUT
19-KEY KEYBOARD



The JE600 Encoder Keyboard Kit provides two separate hexadecimal digits produced from sequential key entries to allow direct programming for 8-bit microprocessor or 8-bit memory circuits. Three additional keys are provided for user operations with one having a bistable output available. The outputs are latched and monitored with 9 LED readouts. Also included is a key entry strobe. Features: Full 8-bit latched output for microprocessor use. Three user-define keys with one being bistable operation. Debounce circuit provided for all 19 keys. 9 LED readouts to verify entries. Easy interfacing with standard 16-pin IC connector. Only +5VDC required for operation. Size: 3½"H x 8¼"W x 8¾"D

JE600/DTE-HK (as pictured above) **$99.95**

JE600 Kit 19-Key Hexadec. Keyboard, PC Board & Cmpnts. (no case) . . **$59.95**

K19 19-Key Keyboard (Keyboard only) **$14.95**

DTE-HK (case only — 3½"Hx8¼"Wx8¾"D) **$44.95**

Circle 208 on inquiry card.

U.S. MICRO SALES

DEALS ☐ DEALS ☐ DEALS

SHOP HERE AND

SAVE!

(MINIMUM ORDER $10.00)

This is ABSOLUTELY the LOWEST PRICE EVER for a Hi Speed (300 NS) LO-LO Power 32K RAM. 4K by 1 Chips are organized in Selectable Banks.

- ★ *Extended Address Lines A16 - A17*
- ★ *Phantom Line*
- ★ *9 Regulators*

$299

(KIT)

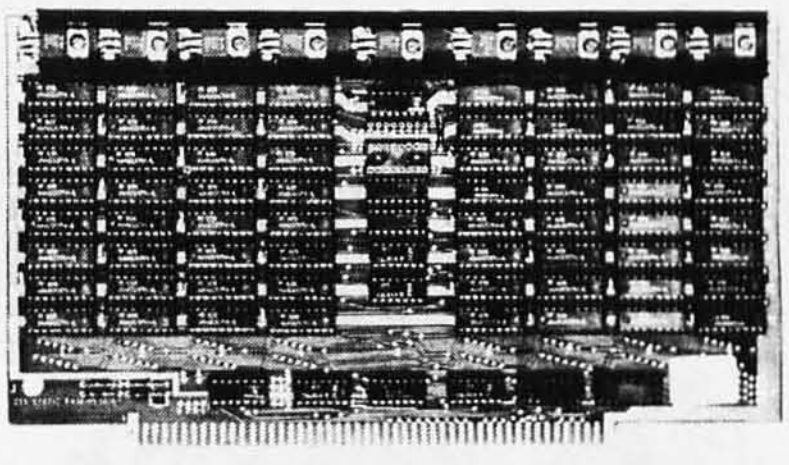

SCHOOLS

DIP SWITCHES

POS.	PRC.
4	.88
5	.92
6	.95
7	.99
8	1.05
9	1.15
10	1.19

PINS	PC	WW
8	.10	.26
14	.13	.29
16	.16	.32
18	.18	.34
20	.22	.38
24	.32	.48
28	.34	.50
40	.45	.61

AMP - Need we say more? There is a difference in sockets! These aren't the lowest prices you can find. But, if you've been "burned" before by bad connections in your computer, a few pennies for the best is worth it!

RESISTORS .02 ea!

(100 PACK) ¼W

1.0
4.7
6.8
10
15
22
27
33
47
68
75
100
150
220
330
470
680
1K
1.5K
2.2K
2.7K
3.3K
3.9K
4.7K
6.8K
10K
12K
15K
18K
20K
22K
24K
27K
33K
39K
47K
68K
100K
150K
220K
330K
470K
680K
1M
1.5M
2.2M
4.7M
10M

WIRE WRAP WIRE

Packed in 500 Lot Bundles
(Length includes 2" x 1" Strip)
Color — R, Bu, G, Y, Bk, W

50 ft. $1.65 - 100 ft. $3.00 - 500 ft. $9.50

2.5–3.25
3.0–3.35
3.5–3.50
4.0–3.75
4.5–4.00
5.0–4.50
6.0–4.75
7.0–5.00
8.0–5.50
10.0–6.50

OK WIRE WRAP TOOL $5.95

6 Amps 125 VAC
7 Amps 30 VDC

$1.25 ea.

DPDT STANDARD TOGGLE

ST21 (ON-NONE-ON)
ST22 (ON-OFF-ON)
ST23 (MOM ON-OFF-MOM ON)
ST24 (ON-OFF-MOM ON)
ST25 (ON-NONE-MOM-ON)
ST26 (ON-ON-ON)

HOBBIEST

LM323K

5V. 3A.

REGULATOR

$5.50

TAB MOUNT

7805 +5V 1A
7905 –5V 1A
7812 +12V 1A
7912 –12V 1A

HEAT SINKS 49¢

$1.25

♦ GOLD ♦

S-100-CONNECTOR

TI or Better

SOLDER TAIL	WIRE WRAP
$2.50	$3.25

DIP PLUGS

PART#	PINS	PRICE
08DP	8	.40
14DP	14	.55
16DP	16	.58
24DP	24	.95
40DP	40	1.50

Socket and Dip Plug priced based on gold not exceeding $700 per ounce.

CONNECTORS

DUAL ROW .100 PINS	DUAL ROW .100 PRICE	CARD EDGE PINS	CARD EDGE PRICE
20	2.35	20	3.35
26	3.00	26	3.80
34	3.85	34	4.65
40	4.50	40	5.50
50	5.50	50	5.90

RIBBON — 20 to 34 @ 1.00 ft.
40 & 50 @ 1.30 ft.

CRIMPING 2.00 / CONNECTOR

OEM'S

Z-80-A

$6.95

4MHZ Beastie with extra instructions!

Z-80 SUPPORT

CTC – $6.55
SIO – $25.50
PIO – $6.50
DMA – $18.75

All 4MHZ (who wants 2MHZ?)

74LSXX

74LS00	.33	74LS107	.59	74LS221	2.95
74LS01	.33	74LS109	.59	74LS240	2.95
74LS02	.33	74LS112	.59	74LS241	2.49
74LS03	.33	74LS113	.59	74LS242	1.95
74LS04	.59	74LS114	.49	74LS243	1.95
74LS05	.39	74LS122	.59	74LS244	2.95
74LS06	.39	74LS123	1.19	74LS245	8.95
74LS07	.39	74LS124	1.49	74LS247	1.19
74LS08	.59	74LS125	.89	74LS248	1.19
74LS09	.39	74LS126	.89	74LS249	1.69
74LS10	.29	74LS132	.79	74LS251	1.79
74LS11	.39	74LS133	1.19	74LS253	.95
74LS12	.39	74LS136	.69	74LS257	1.95
74LS13	.69	74LS138	.99	74LS258	1.95
74LS14	1.25	74LS139	.99	74LS259	2.95
74LS15	.49	74LS145	1.25	74LS260	.75
74LS20	1.95	74LS148	1.49	74LS266	1.15
74LS21	3.7	74LS151	.79	74LS273	1.75
74LS22	.29	74LS154	2.49	74LS275	4.39
74LS26	.39	74LS155	1.49	74LS279	.79
74LS27	.49	74LS156	1.49	74LS283	1.49
74LS28	.39	74LS157	1.49	74LS289	5.75
74LS30	.49	74LS158	1.49	74LS290	1.29
74LS32	.95	74LS160	.75	74LS293	1.95
74LS33	1.95	74LS161	1.99	74LS295	1.95
74LS37	.75	74LS162	1.25	74LS298	1.29
74LS38	.39	74LS163	1.25	74LS324	1.75
74LS40	.25	74LS164	2.15	74LS352	1.65
74LS42	1.39	74LS165	1.49	74LS353	1.65
74LS47	.79	74LS166	2.49	74LS365	.95
74LS48	.79	74LS168	2.95	74LS366	.79
74LS35	.25	74LS169	1.95	74LS367	.99
74LS54	.25	74LS170	1.95	74LS368	.99
74LS55	.70	74LS173	1.25	74LS373	2.95
74LS73	.79	74LS174	1.49	74LS374	3.95
74LS74	.59	74LS175	1.49	74LS377	1.95
74LS75	.79	74LS181	2.15	74LS378	1.95
74LS76	.79	74LS189	6.95	74LS379	1.95
74LS78	.49	74LS190	.99	74LS386	.59
74LS83	.95	74LS191	1.95	74LS390	1.95
74LS85	1.49	74LS192	1.95	74LS393	1.95
74LS86	.95	74LS193	1.95	74LS395	1.95
74LS90	.75	74LS194	1.49	74LS490	4.95
74LS92	.75	74LS195	.95	74LS668	1.69
74LS93	.95	74LS196	.95	74LS669	1.89
74LS95	1.29	74LS197	1.95	74LS670	3.55
74LS96	1.29				

Circle 418 on inquiry card.

DEALS ☐ DEALS ☐ DEALS

OUR BUYERS ARE IN
CONTACT WITH EVERY MAJOR
SUPPLIER AND O.E.M.
BUY HERE AT 1000 PIECE

QUANTITY PRICES

ALL MERCHANDISE 100%
GUARANTEED! 15 DAY FULL
CASH REFUND!

U.S. MICRO SALES

664 N. MICHIGAN AVE. ★ SUITE 1010 ★ CHICAGO, ILLINOIS 60611
CALL TOLL FREE: 1-800-435-9357 ★ MONDAY thru SATURDAY
(ILLINOIS RESIDENTS CALL: 815-485-4002) ★ 8:00 a.m. to 6:30 p.m.

TERMS: Prepayment – C.O.D. up to $100.00 – M/C Visa
$5.00 Processing and Handling added to each order PLUS
Shipping Charges. Please allow personal check
to clear before shipment.

JUST HOT STUFF

POWER SUPPLIES



If you can beat these prices we will be truly amazed. OEM's at 500 lot pay more than this. Call or write for full spec. sheets.

DISK POWER SUPPLIES				
PRIAM–SHUGART–CENTURY–MICROPOLIS				
+5V @ 9A	–5V @ .8A	+24V @ 7A	US-384	89.00
SHUGART – SIEMANS – MPI 5¼"				
+5V @ .5A	+12V @ .9A		US-340	33.50
+5V @ 2A	+12V @ 4A		US-323	56.25
SHUGART – SIEMANS – CDC 8"				
+5V @ 1A	–5V @ .5A	+24V @ 1.5A	US-205	52.50
+5V @ 2A	–5V @ .5A	+24V @ 3A	US-206	69.00
+5V @ 3A	–5V @ .6A	+24V @ 5A	US-162	89.00
+5V @ 1.7A	–5V @ 1.5A	+24V @ 2A	US-272	69.00
+5V @ 2A	+12V @ .4A	–12V @ .4A	US-HTAA	37.50

TELEVIDEO 912C

SOROC IQ120– $675.00
Televideo 912C– 665.00
Televideo 920C– 720.00
ADDS R-25 – 710.00



Also have 920C, SOROC, HAZELTINE, etc. What we don't have is room on this page. Call Toll Free 800 number for prices.

C-ITOH PRINTER

$499.00

Look closely at the photo and see other adds in this rag at $995.00. Perfect units, warranteed. Only 500 pcs. Same story, manufacturerer had too many.

S-100 CARD EXTENDER

$12.50

(Gold Contacts)



As long as there is a price war, we will fight your battle. Compare at your local Dept. store and buy U$ MICRO.

MEMOREX – VERBATUM – WABASH

BASF FLOPPIES

BOX OF 10 ONLY:

5¼"	SOFT	$2.65 ea.
5¼"	HARD 10	2.65 ea.
5¼"	HARD 16	2.65 ea.
8"	SOFT 1D	3.25 ea.
8"	SOFT 2D	3.85 ea.
8"	SOFT 2DDS	5.00 ea.

SPECIAL OF THE QUARTER

S1-MOD (KIT)

$189.00 MADE IN USA



Complete S-100 12 Slot Computer. Ample system power with regulated power for drives. Excellent for Subsystem or Hobby use. 4 hours to build. (6 conn. incl., less fans)

DUAL DRIVE SUBSYSTEM

$995.00

$195.00 w/no Drives



2 SHUGART 801R POWER SUPPLY

If this looks like a Lobo Drive System, don't be fooled. Just because it looks like one, works like one, smells like one, and tastes like one (?) doesn't mean it has to cost like one!

TWIN VERTICAL DRIVE$

5" $550.00 – 8" $980.00



Attractive, convenient and compact Two Drive Mass Storage includes Power Supply, Drives, Cabinets and Cables. Double Sided, Double Track available too!

Z-80 CPU (KIT)



The first time this world popular CPU offered in Kit. 2 serial, 3 parallel, CTC, EProm Z-80 at 4 mhz. Software buad rate, etc. (less Prom & cable) **$212.00**

EXPANDABLE RAM

★SPECIAL★SPECIAL★SPECIAL★



This is the best all around 64K board you can buy. If after you see it, you don't agree return for full refund. Bank Select by extended address lines or I.O. 40H.

★$389.00 A&T★

U$ – D$K $255.00



Double Density 8" and 5" Disk Controller disigned for S-100 IEEE standards. Uses Western Digital 1795, 1691 2143 Chip Set.

FANS $14.95

These are brand new, in the box fans. Not noisey bearing pullouts. Never again at these low prices!

3-1/8"

4-5/8"

SPECIALS OF THE MONTH

4116s

$2.95

Expansion 16K Dynamic RAMs for Apple, TRS-80 S-100 systems. T.I., Mostek Intel, Call for manufacturer.

200 NS

DIP-80 $399.00



Don't be mislead by this LOW price. This is a rugged 100% Duty Cycle 7 by 7 Dot Matrix Printer. Brand new, factory warr.

- **RS-232 ADD $65.00**
- **TRACTOR FEED ADD $70.00**

2114s

$3.45

One of the world's two most popular STATIC RAMs. Factory prime tested units. Sold in lots of 8 only. FUJITSU, HITACHI, etc.

200 NS

TMS-4044
MM-5257
INTEL 2147

$4.25

250 NS

The other of the world's most popular STATIC RAMs. This one is 4K by 1 organization. Don't buy Gold, buy these, the price won't last!

2716s $9.50 (450 NS)
2708s $6.95 (450 NS)

Remember when 2716s were $50.00 and hard to get? These units are so beautiful it's hard to part with them. But we will, for a small price. Guaranteed!

SHUGART DRIVE

8" 801R
$395.00

Manufacturer had too many, buys at 1000 piece rate, **8" 851R $585.00** sales dropped, so we got'em. Fantastic buy, get them while they last! Full warranty.

SIEMANS DRIVE

8" 120-8

$375.00

Very Special Price on these BRAND NEW current production units Add $10.00 for Extended 1 Year Warrantee!

Circle 418 on inquiry card.

MIDWEST COMPUTER PERIPHERALS

INVENTORY CLEARANCE SALE PRICES SLASHED!!

COMPUTER SYSTEMS

ALTOS MODEL ACS-8000-2 64k, 2 drive, single user	$3769
MODEL ACS-8000-5MU2 112k, 2 drive, two user	$5809
APF IMAGINATION MACHINE Complete System	$1015
APPLE II plus 16k	$1096
ATARI 400	$492
ATARI 800	$877
COMPUCOLOR 3 8k complete package	$1478
RADIO SHACK MODEL III 16k	$899
EXPANSION INTERFACE OK	$274
MODEL II 64k w/ one drive	$3499
We carry the complete **RADIO SHACK** line at a discount	
SD SALES SDS-100	*6299
SDS-200	*$6699
ZENITH Z-89 (48k)	$2447

PRINTERS

ANACOM 150 150 cps, bi-directional, 9 x 9 matrix	$1319
ANADEX DP-9500	$1529
CENTRONICS MODEL 779 TRACTOR PRINTER	$999
737 "Letter Quality" w/ cable	$815
We Carry the complete **CENTRONICS line!**	
DIABLO MODEL 630 RO w/Tractors	*$2579
EPSON MX-70	$399
MX-80 Tractor feed, bi-directional, 80 cps	$550
INTEGRAL DATA IDS 445G w/2K Buffer & Graphics w/Cable	$752
IDS-460 w/Cable	$1209
MPI MT-88 TRACTOR PRINTER w/cable	$659
MT-88G Graphics printer w/ cable	$699
OKIDATA 82 Bi-directional w/ tractor cable	$862
83 15" Carrage/Bi-directional	$1099
NEC SPINWRITER 5510 RO Serial	*$2579
5520 KSR Serial	*$2879
5530 RO Parallel	*$2579
OKIDATA MICROLINE 80 PRINTER 80 cps, 9 x 7 matrix	$554
w/Tractors and cable	$679
TEXAS INSTRUMENTS 810 Basic	*$1499
TRS-232 PRINTER INTERFACE	$59

Allows you to use any serial printer with the **TRS-80**.

WE NOW TAKE AMERICAN EXPRESS

AMERICAN EXPRESS Card

TERMINALS

HAZELTINE MODEL 1510	*$1099
1520	*$1360
PERKIN-ELMER BANTAM	*$799
SOROC IQ 120	*$759
IQ 140	*$1199
TELEVIDEO 912C	*$799
920C	*$859
ZENITH Z-19	*$899

CALIFORNIA COMPUTER SYSTEMS

MODEL 2016C 16k Static RAM board, A & T	$242
2200 MAINFRAME A & T	$352
MOTHERBOARD 12 slots, A & T	$101

APPLE PRODUCTS

Model 7440 PROGRAMMABLE TIMER BOARD A & T	$99
7470 3¾ DIGIT BCD A to D Converter A & T	$102
7490 GPIB (IEEE 488-1978) INTERFACE A & T	$202
7710 ASYNCHRONOUS SERIAL INTERFACE A & T	$132
7712 SYNCHRONOUS SERIAL INTERFACE A & T	$142
7720 PARALLEL INTERFACE A & T	$99
7811 ARITHMETIC PROCESSOR A & T	$356
7114 12k ROM/PROM Module A & T	$69

We carry the complete line of **CCS** products

SD SALES S-100 BOARDS

MODEL Expandoram (NO RAM)	KIT	$192
VDP-8024	KIT	$302
VDB-8024	A & T	$402
VDB-8024	A & T	$402
Z-80 STARTER KIT		$302
Z-80 STARTER SYSTEM	A & T	$382
SBC-100	KIT	$252
SBC-100	A & T	$305
SBC-200	KIT	$274
Versafloppy	Kit	$223
Versafloppy	A & T	$295
Versafloppy II Double Density	KIT	$305
Versafloppy II Double Density	A & T	$376

master charge THE INTERBANK CARD

Midwest Computer Peripherals

1467 S. Michigan Ave.
Chicago, IL 60605

VISA

WE PAY UPS CHARGES ON MOST ORDERS IN THE CONTINENTAL U.S.

FLOPPY DISK STORAGE

CORVUS 11T 10 MEGABYTE HARD DISK *$4029
Fully compatible with **TRS-80, APPLE II,** and **S-100**

MPI MODEL B51 $321
TRS-80 plug-in compatible 5.25" single headed 40 track drive. Comes complete with case and power supply. **90 DAY WARRANTY.**

BARE DRIVES
(No Case or Power Supply)

5" MODELS

MPI MODEL 51	40 tracks, 5 ms.	$254
MPI MODEL 52	Double headed, 80 tracks	$299
MPI MODEL 91	80 tracks	$299
MPI MODEL 92	160 Tracks, Double headed	$399

5.25" POWER SUPPLIES WITH CASE

STANDARD MINI DISK POWER SUPPLY WITH CASE	$80
DELUXE MINI DISK POWER SUPPLY w/CASE & extender card	$131
DUAL MINI DISK POWER SUPPLY w/CASE	$121
DISK DRIVE EXTENDER CABLE	$16

DRIVE CABLES

1 DRIVE TRS-80 CABLE	$24
2 DRIVE TRS-80 CABLE	$29
3 DRIVE TRS-80 CABLE	$35
4 DRIVE TRS-80 CABLE	$40

We'll make any cable! Call us with specs.

THE DOUBLER by PERCOM DATA $203
Double density controller for **TRS-80 Model I.** With data separator. (Use your **PERCOM DISCOUNT** coupon)
DATA SEPARATOR by Percom Data $29
Stops read errors on inner tracks.

SOFTWARE

NEWDOS (40 Track)	$49
NEWDOS + (40 Track)	$99
NEWDOS 80	$139
MICROSOFT FORTRAN	$85
Z80 Softcard	$305
Super Utility	$49
Make 80	$14
Electric Pencil (disk)	$130

10% off all **RADIO SHACK** software

We carry SBSG, Microsoft, personal software, Apparatt and many other brands. All at a discount.

30181

DISKETTES
(Prices per box of 10)

		VERBATIM	NEW SYNCOM	MEMOREX
5 1/4"	Single sided, single density	$31	$35	$28
	Single sided, double density	$40	$39	$32
	Double sided, single density	$48	N/A	N/A
	Double sided, double density	$48	$52	$40
8"	Single sided, single density	$41	$31	$33
	Single sided, double density	$51	$40	$41
	Double sided, single density	$61	$49	$55
	Double sided, double density	$61	$49	$50

When ordering diskettes, please give us your make and model number of computer or disk drive, or give us the brand and part number of the diskettes you are currently using.

5 1/4"	**LIBRARY CASE** holds 10 disks	$3.95
	BINDER HOLDER holds 2 disks	10 for $7.95
8"	**LIBRARY CASE** holds 10 disks	$4.95
	BINDER HOLDER holds 2 disks	10 for $19.95
FLOPPY SAVER		5 1/4" $14.95
		8" $16.95

Refills also available!

16k **MEMORY KITS** 200 ns $39.00
NEC UPD416C-2 prime dynamic RAM. Compatible with TRS-80, APPLE, or any computer specifying 4116 dynamic RAM.

HOW TO ORDER:
PHONE ORDERS: HOURS 10AM - 5PM CST MON - FRI
BY CHECK: Call in your order then send us a cashiers check or money order. This way we can have your order waiting for you when your check arrives. Personal checks require 10-14 days to clear.
BY CREDIT CARD: Just have your **MASTER CHARGE** or **VISA** or **AMERICAN EXPRESS** handy, we'll do the rest.
MAIL ORDERS: **NEW ADDRESS** 1467 South Michigan Ave., Chicago, IL 60605.
ALL MAIL ORDERS: Send your **NAME** and **STREET ADDRESS** (we ship UPS), **CITY, STATE, ZIP CODE AND TELEPHONE NUMBER** along with your order.
BY CHECK: Include a cashiers check or money order with your order. Personal checks require 10-14 days to clear. For your safety, mail your order via insured mail. **BETTER SAFE THAN SORRY.**
BY CREDIT CARD: Neatly type or print your **MASTER CHARGE** or **VISA** account number along with the expiration date and 4 digit interbank number (MC only).
IL. RES. ADD 6% SALES TAX

SHIPPING INFORMATION: We pay all UPS ground service charges (USA only, BLUE LABEL EXTRA) on all items except those denoted with an asterisk (*). (*) items must go airfreight or truck and can be sent freight collect.
FOREIGN ORDERS WELCOME, CALL OR WRITE.
ALL orders F.O.B. Chicago, Il.

WARRANTY INFORMATION: All Equipment carries a 90 day parts and labor warranty, unless otherwise noted. Warranty repair or replacement will be provided at no charge, excluding shipping costs. **10 DAY MONEY BACK GUARANTEE:** If within ten days you return merchandise in new and re-saleable condition we will refund your original purchase price. All refunds, exchanges or repairs include original cartons, packaging, and manuals and be in new and re-saleable condition and accompanied by your original invoice. A 10% re-stocking fee may be charged on returns at our discretion.
Not responsible for typographical errors
Prices subject to change without notice
Dealer Inquiries welcome
TRS-80™ TANDYCORP.

SAVE TIME...ORDER BY PHONE
TOLL FREE: 800-621-3229
IN ILLINOIS: 312-987-1024

MIDWEST
COMPUTER
PERIPHERALS

1467 South Michigan Av.
Chicago, IL. 60605

We pay UPS charges on most orders in continental U.S.

Circle 264 on inquiry card.

What is Jade doing in San Diego ?

We've opened a new retail store. To celebrate this latest addition to our family we've reduced our prices on products from SSM, SD Systems, CCS, our own line, as well as our best selling printers, disk drives, and modems. Help us celebrate and we'll help you save money.

PROMS	
2708 *450ns*	6.25
10 for $4.90 ea	
2716 *12.5v*	9.95
2716 *5v*	9.95
10 for $7.95 ea	
2532 *5v*	25.00
2732 *5v*	25.00
2758 *5v*	9.95

RAMS	
21L02 *2 MHz*	1.25
21L02A *4 MHz*	1.50
2114L *2 MHz*	3.50
2114LA *4 MHz*	3.75
4116	3.50
4164 *64K x1*	39.95
5257 *2 MHz*	6.75
5257A *4 MHz*	7.25
MK4118	17.95

UARTS	
AY5-1013A	5.25
AY3-1014A	8.25
TR1602B	5.25
TMS6011	5.95
IM6402	9.00

SUPPORT DEVICES	
8212	3.25
8214	4.65
8216	2.95
8224	3.25
8224-4	5.75
8226	3.85
8228	4.95
8238	4.95
8243	8.00
8250	14.95
8251	6.50
8253	17.95
8255	6.50
8257	19.95
8259	17.95
8275	49.95
8279	15.95

6800 SUPPORT	
6821P	4.95
6828P	15.95
6840P	15.75
6850P	4.80
6852P	5.95
6875P	5.95
68488P	27.95

MICRO PROCESSORS	
Z-80	10.95
Z-80A	12.95
6502	11.50
6800	11.95
6802	17.95
6809	39.95
8035	24.00
8080A	6.59
8085	15.95
8748	59.95

Z-80 SUPPORT		
3881	*PIO*	8.75
3881-4	*PIO-4 MHz*	12.95
3882	*CTC*	8.75
3882-4	*CTC-4 MHz*	12.95
3883	*DMA*	29.50
3883-4	*DMA-4 MHz*	36.95
3884	*SIO*	35.95
3884-4	*SIO-4 MHz*	39.95

BAUD RATE GENERATORS	
MC14411	10.00
1.843 MHz xtal	4.95

Special Purchase - Save $50.00

Novation Cat Modem

300 baud, answer and originate

(We have only 700 availible at this special price)

IOM-5200A	*List price $189.95*	**$139.95**

D-CAT *300 baud, direct connect modem*

IOM-5201A	*Special sale price*	**$189.00**

AUTO-CAT *Auto answer/origiate, direct connect*

IOM-5230A	*Special sale price*	**$239.95**

MICROMODEM - D.C. Hayes

Auto answer/dial modem card for Apple or S-100

IOM-2010A	*Apple modem*	**$349.95**
IOM-1100A	*S-100 modem*	**$375.00**

Disk Drives



JADE's new dual disk sub-assemblies include: ***Handsome*** *metal cabinet with* ***proportionally balanced*** *air flow system,* ***assembled & tested*** *dual drive power supply,* ***quiet whisper type*** *cooling fan, power-cable kit, lighted power switch, approved fuse assembly, line cord,* ***Never-Mar*** *rubber feet, and all necessary hardware to mount 2-8" disk drives - it's* ***all American made, guaranteed for six months****, and it's in stock!*

Dual 8" Sub-Assembly Cabinet

END-000421	*Cabinet kit*	**$225.00**
END-000420	*Bare cabinet*	**$59.95**

Single sided, double density disk drive sub-system

END-000423	*Kit w/2 8" drives*	**$975.00**
END-000424	*A & T w/2 8" drives*	**$1195.00**

Double sided, double density disk drive sub-system

END-000426	*kit w/2 8" drives*	**$1495.00**
END-000427	*A & T w/2 8" drives*	**$1695.00**

8" DISK DRIVES

Highly reliable double density floppy disk drives

Shugart 801R single sided, double density

MSF-10801R	*SA-801R*	**$425.00**
Special Sale Price		***2 for $790.00***

Shugart 851R double sided, double density

MSF-10851R	*SA-851R*	**$595.00**
Special Sale Price		***2 for $1150.00***

Siemens FDD100-8D2 single sided, double density

MSF-201120	*6 mo warranty*	**$385.00**
Special sale price		***2 for $750.00***

Qume Datatrak 8 double sided, double density

MSF-750080	*SA-851R compatible*	**$599.95**
Special sale price		***2 for $1160.00***

JADE DISK PACKAGE

Double density controller, two 8" double density floppy disk drives, CP/M 2.2 (configured for controller), hardware and software manuals, boot PROM, cabinet, power supply, fan, & cables

Special package price	**$1395.00**

Accessories-Apple/TRS-80

16K MEMORY UPGRADE

Add 16K of RAM to your TRS-80, Apple, or Exidy in just minutes. We've sold thousands of these 16K RAM upgrades which include the appropriate memory chips (as specified by the manufacturer), all necessary jumper blocks, fool-proof instructions, and our 1 year guarantee.

MEX-16100K	*TRS-80 kit*	**$29.00**
MEX-16101K	*Apple kit*	**$29.00**
MEX-16102K	*Exidy kit*	**$29.00**

16K RAM Card - Microsoft

(There is life after 48K)

MEX-16300A	*A & T*	**$174.95**

Z-80* CARD for APPLE

Two computers in one, Z-80 & 6502, more than doubles the power & potential of your Apple, includes Z-80 CPU card, CP/M 2.2, & BASIC-80*

CPX-30800A	*A & T*	**$279.95**

APPLE CLOCK - Cal Comp Sys

Real time clock w/battery back-up

IOK-2030A	*A & T*	**$109.95**

DISK DRIVES for TRS-80

23% more storage, 8 times faster, 40 track with free patch, 120 day warranty, includes case, power supply, and cable

MSM-12410C	*Save $125.00 !!!*	**$299.95**

8" DRIVES for APPLE

Controller, DOS, two 8" double densisty drives, cabinet, power supply, & cables

Special package price	**$1475.00**

APPLE STICK - Micromate

Joy stick with pots for Apple II

SYA-1510A	*A & T*	**$49.95**

VISICALC - Personal Sftwr

The ultimate program for your Apple II

SFA-24101005M	*Complete package*	**$139.95**

PRINTER INTERFACE - C.C.S.

Centronics type I/O card w/ firmware

IOI-2041A	*A & T*	**$99.95**

AIO, ASIO, APIO - S.S.M.

Parallel & serial interface for your Apple (see Byte pg 11)

IOI-2050K	*Par & Ser kit*	**$129.95**
IOI-2050A	*Par & Ser A & T*	**$159.95**
IOI-2052K	*Serial kit*	**$89.95**
IOI-2052A	*Serial A & T*	**$99.95**
IOI-2054K	*Parallel kit*	**$69.95**
IOI-2054A	*Parallel A & T*	**$89.95**

A488 - S.S.M.

IEEE 488 controller, uses simple basic commands, includes firmware and cable, 1 year guarantee, (see April Byte pg 11)

IOX-7488A	*A & T*	**$399.95**

S-100 CPU

2810 Z-80* CPU - Cal Comp Sys

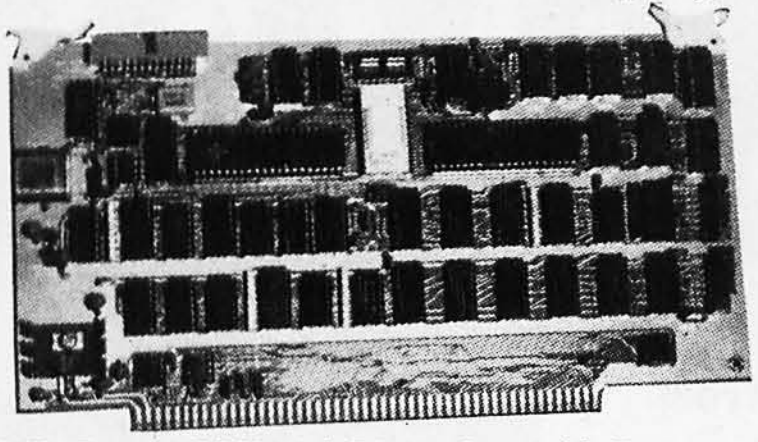

2/4 MHz Z-80A CPU with RS-232C serial I/O port and on-board MOSS 2.2 monitor PROM, front panel compatible.*

CPU-30400A	*A & T*	$269.95

THE BIG Z* - Jade

2 or 4 MHz switchable Z-80 CPU with serial I/O, accomodates 2708, 2716, or 2732 EPROM, baud rates from 75 to 9600*

CPU-30201K	*Kit*	$145.00
CPU-30201A	*A & T*	$199.00
CPU-30200B	*Bare board*	$35.00

CB-2 Z-80 CPU - S.S.M.

2 or 4 MHz Z-80 CPU board with provision for up to 8K of ROM or 4K of RAM on board, extended addressing, IEEE S-100, front panel compatible.

CPU-30300K	*Kit*	$199.95
CPU-30300A	*A & T*	$239.95

SBC-200 - SD Systems

4 MHz Z-80 CPU with serial & parallel I/O ports, up to 8K of on-board PROM, software programmable baud rate generator, 1K of on-board RAM, Z-80 CTC.*

CPC-30200K	*Kit*	$339.95
CPC-30200A	*Jade A & T*	$399.95

S-100 Disk Controller

DOUBLE-D - Jade

Double density controller with the inside track, on-board Z-80A, printer port, IEEE S-100, can function on an interrupt driven buss*

IOD-1200K	*Kit*	$299.95
IOD-1200A	*8" A & T*	$389.95
IOD-1205A	*5¼" A & T*	$389.95
IOD-1200B	*Bare board*	$65.00

DOUBLE DENSITY - Cal Comp Sys

5¼" and 8" disk controller, single or double density, with on-board boot loader ROM, and free CP/M 2.2 and manual set.*

IOD-1300A	*A & T*	$369.95

VERSAFLOPPY II - SD Systems

New double density controller for both 8" & 5¼"

IOD-1160K	*Kit*	$379.95
IOD-1160A	*Jade A & T*	$439.95

S-100 Video

VB-3 - S.S.M.

80 characters x 24 lines expandable to 80 x 48 for a full page of text, upper & lower case, 256 user defined symbols, 160 x 192 graphics matrix, memory mapped, has key board input.

IOV-1095K	*4 MHz kit*	$345.00
IOV-1095A	*4 MHz A & T*	$395.95
IOV-1096K	*80 x 48 upgrade*	$39.95

VDB-8024 - SD Systems

80 x 24 I/O mapped video board with keyboard I/O, and on-board Z-80A.*

IOV-1020K	*Kit*	$399.95
IOV-1020A	*Jade A & T*	$459.95

VIDEO BOARD - Jade

64 characters x 16 lines, 7 x 9 dot matrix, full upper/lower case ASCII character set, numbers, symbols, and greek letters, normal/reverse/blinking video, S-100.

IOV-1050K	*Kit*	$99.95
IOV-1050A	*A & T*	$125.00
IOV-1050B	*Bare board*	$19.95

MAINFRAME - Cal Comp Sys

12 slot S-100 mainframe with 20 amp power supply

ENC-112106	*A & T*	$429.95

ASCII KEYBOARDS - Microswitch

58 key plus numeric pad and control keys

KBA-99058	*A & T*	$39.95

Circle 207 on inquiry card.

S-100 Memory

MEMORY BANK - Jade



4 MHz, IEEE S-100, bank selectable, 8 or 16 bit, expandable from 16K to 256K

MEM-99730B	*Bare board*	$55.00
MEM-99730K	*Kit, no RAM*	$219.95
MEM-16730K	*16K kit*	$249.95
MEM-32731K	*32K kit*	$289.95
MEM-48732K	*48K kit*	$324.95
MEM-64733K	*64K kit*	$359.95
Assembled & tested		add $50.00

64K RAM - Calif Computer Sys

4 MHz bank port / bank byte selectable, extended addressing, 16K bank selectable, PHANTOM line allows memory overlay, 8080 / Z-80 / front panel compatible.

MEM-64565A	*A & T*	$575.00

EXPANDORAM II - S D Systems

4 MHz RAM board expandable from 16K to 64K

MEM-16630K	*16K kit*	$275.95
MEM-32631K	*32K kit*	$295.95
MEM-48632K	*48K kit*	$315.95
MEM-64633K	*64K kit*	$335.95
Assembled & tested		add $50.00

32K STATIC RAM - Jade

2 or 4 MHz expandable static RAM board uses 2114L's

MEM-16151K	*16K 4 MHz kit*	$169.95
MEM-32151K	*32K 4 MHz kit*	$299.95
Assembled & tested		add $50.00

16K STATIC RAM - Cal Comp Sys

2 or 4 MHz 16K static RAM board, IEEE S-100, bank selectable, Phantom capability, addressable in 4K blocks

MEM-16160A	*16K 2 MHz A & T*	$286.95
MEM-16162A	*16K 4 MHz A & T*	$289.95
MEM-16160B	*Bare board*	$50.00

PB-1 - S.S.M.

2708, 2716 EPROM board with built-in programmer

MEM-99510K	*Kit*	$139.95
MEM-99510A	*A & T*	$199.95

PROM-100 - SD Systems

2708, 2716, 2732, 2758, & 2516 EPROM programmer

MEM-99520K	*Kit*	$219.95
MEM-99520A	*Jade A & T*	$269.95

S-100 I/O

I/O-4 - S.S.M.

2 serial I/O ports plus 2 parallel I/O ports

IOI-1010K	*Kit*	$159.95
IOI-1010A	*A & T*	$219.95
IOI-1010B	*Bare board*	$35.00

S.P.I.C. - Jade

Our new I/O card with 2 SIO's, 4 CTC's, and 1 PIO

IOI-1045K	*2 CTC's, 1 SIO, 1 PIO*	$199.00
IOI-1045A	*A & T*	$259.00
IOI-1046K	*4 CTC's, 2 SIO's, 1 PIO*	$259.00
IOI-1046A	*A & T*	$319.00
IOI-1045B	*Bare board w/ manual*	$59.95
IOI-1045D	*Manual only*	$20.00

Software

CP/M 2.2 - Digital Research

Latest & most powerful release of CP/M

SFC-52506000D	*Manual set*	$24.95
SFC-52506000M	*5¼" disk & manual*	$149.95
SFC-52506000F	*8" disk & manual*	$149.95

SDOS - SD Systems

DOS, CBASIC-2, Z-80 assembler/editor/linker*

SFX-55001000D	*Manual set*	$24.95
SFX-55001002M	*5¼" disks & man*	$199.95
SFX-55001006F	*8" disk & manual*	$199.95

Printers

SPINWRITER - NEC

65 cps, bi-directional, letter quality printer with deluxe tractor mechanism, both parallel and serial interfaces on-board, 16K buffer, ribbon, print thimble, graphics, micro-space justification, data cable, and self test/diagnostic ROM.

PRD-55511	*without 16K buffer*	$2795.00
PRD-55512	*with 16K buffer*	$2895.00

MX-80 - Epson

132 column, 9 x 9 dot matrix, multiple fonts

PRM-27080	*Save $100.00*	Call

MX-70

PRM-27070	*With Graftrax II*	Call
Interface for Apple		$110.00

CENTRONICS 737-1

9 x N dot matrix, letter quality, proportional spacing

PRM-15737	*Parallel*	$725.00
With interface for Apple		$825.00

Single Board Computers

Z-80* STARTER KIT - SD Systems

Complete Z-80 computer with RAM, ROM, I/O, display, keyboard, manual, and kluge area.*

CPS-30010K	*Kit*	$369.95
CPS-30010A	*Jade A & T*	$459.95

AIM-65 - Rockwell

6502 computer with alphanumeric display, printer, & keyboard, and complete instructional manuals

CPK-50165	*1K AIM*	$449.95
CPK-50465	*4K AIM*	$499.95
SFK-74600008E	*8K BASIC ROM*	$99.95
SFK-64600004E	*4K assembler ROM*	$84.95
PSX-030A	*Power supply*	$64.95
ENX-000002	*Enclosure*	$54.95

4K AIM, 8K BASIC, power supply, & enclosure

Special package price	$675.00

DISKETTES - Jade

Bargain prices on magnificent magnetic media

5¼" single sided, single density, box of 10

MMD-5110103	*Soft sector*	$27.95
MMD-5111003	*10 sector*	$27.95
MMD-5111603	*16 sector*	$27.95

5¼" double sided, double density, box of 10

MMD-5220103	*Soft sector*	$39.95

8" single sided, single density, box of 10

MMD-8110103	*Soft sector*	$33.95

8" single sided, double density, box of 10

MMD-8120103	*Soft sector*	$39.95

8" double sided, double density, box of 10

MMD-8220103	*Soft sector*	$49.95

S-100 CARD CAGE - Vector

19" rack mountable, adjustable, holds 21 cards

VCT-CCK100	*Anodized Al*	$47.95

Metal cage with card guides & fan mounting

ENX-106601	*Six slot*	$29.95

PLACE ORDERS TOLL FREE

Continental U.S. 800-421-5500

Inside California 800-262-1710

For Technical Inquiries or Customer Service call

213-973-7707

JADE

Computer Products

4901 W. Rosecrans, Hawthorne, Ca 90250

TERMS OF SALE: Cash, checks, credit cards, or Purchase Orders from qualified firms and institutions. Minimum order $15.00. California residents add 6% tax. Minimum shipping and handling charge $3.00. **Pricing and availability subject to change without notice.**

California Digital

Post Office Box 3097 B • Torrance, California 90503



DISKETTES

FREE PLASTIC LIBRARY CASE INCLUDED WITH THE PURCHASE OF EVERY BOX OF DISKETTES

Private labeled for California Digital by one of the most respected producers of magnetic media. Each diskette is certified double density at 40 tracks. To insure extended media life each diskette is manufactured with a reinforced hub-hole. And of course, a plastic library case is included with every box of diskettes. MMD-CD5(01)(10) Please specify computer or required sectors.

$24.95 BOX

Ten boxes $22.75 One hundred boxes $21.50

MINIDISKETTES	Box	10 boxes		Box	10 boxes
Memorex 3401	$27.00	$25.00	Scotch 744(0)(10)(16)	$31.00	$29.00
Verbatim 525(01)(10)	29.00	27.00	Dysan	45.00	43.00

EIGHT INCH	Scotch	box	10 bx.	Dysan	box	10 bx.	MRX	box	10 bx.
Single side/single den.	740-0	$35.	$33.	3740/1	$49.	$47.	3060	$[illegible]5.	$[illegible]3.
Single side/double den.	741-0	45.	43.	3740/1d	75.	73.	3090	37.	35.
Single side/32 sector	740-32	35.	33.	na.			na.		
Double side/ double D.	743-0	65.	59.	na.			3115	49.	45.

SCOTCH brand head cleaning kit. $24.95 MMA-CK(5)(8) please specify 5 1/4 8"

Prices available on request for: tape, cartridges, diskpacks, volumn diskettes.

MEMORY

TRS-80 APPLE II $25

16k memory (8) 4116's

Factory prime. Unconditionally guarenteed for one full year. Add $3.00 for TRS-80 jumpers and instructions.

DYNAMIC

	ea.	32+	100+	1K+
4116- 200ns	3.25	3.00	2.75	2.50
4116 150ns	3.75	3.50	3.25	3.00
4164 64K	49.50	45.00		

STATIC

21L02 450ns.	1.19	1.05	.99	
21L02 250ns	1.49	1.45	1.39	
2114L4 450ns	3.95	2.95	2.75	2.50
2114L3 300ns	4.25	3.75	3.00	2.75
4044-4 450ns	4.95	4.50	4.25	4.00
4044-2 250ns	5.50	4.95	4.50	4.35
5257-3 300ns	4.47	4.25	4.05	3.75

EPROM

2708 450ns	4.95	4.50	3.75	3.25
2716 5V.	7.95	6.50	5.00	4.50
2716 tri-volt	9.95	9.00	8.25	7.50
2732 Intel	19.00	17.50	16.00	
2532 TI	21.50	19.00		
2764	*			

direct connect MODEM

Your Choice $169

Direct connect modems eliminate loss of information due to the carbon compression associated with acoustic modems. Choose either of these two great units.

The Universal Data Systems 103LP is switch selectable between answer and originate modes. Fully Bell 103 compatable. Directly connects to the new modular telephone jack. 100% powered from the telephone line. No need to locate modem in proximity to A.C. power recepticle. MOD-103LP 2 pounds.

Novation "D" Cat connects to most of the new "Bell" modular handsets. Ideal for multiple line office telephones. Requires external A.C. power. MOD-DCAT 2 Lb.

UDS 103J/LP AUTO ANSWER $219



26 Megabyte Hard Disk Drive from GEORGE MORROW'S Thinker Toys

$3950

Other Morrow Products.			
Additional hard disk	$3650	Disc Jockey 2D controller	$345
Discus 2D 1 drive	950	Disk Joc'[illegible] 1 Controller	195
Discus 2D 2 drives	1627	M26 hard disk Controller	625
Discus 2+2 1 drive	1250	Switchboard interface	219
Discus 2+2 2 drives	2237	"New" Multiboard	275
		M-10 Ten Megabyte hard	2550

HEWLETT PACKARD

$2650

HP 85

The Hewlett Packard HP-85 is a complete, low cost portable computer system. This self contained package includes CPU, keyboard, printer, CRT display and cassette tape drive. SYS-HP85 30 lbs.



BSR SYSTEM X·10

The new BSR timer runs your home just like clockwork. Turns on lamps and appliances while your away from home. Completely compatible with your existing System X-10 devices.

BSR Timer eight channel	$65.00	Appliance Module 500 W.	$13.95
Master control console	34.95	Lamp Module 300 Watts	13.95
Ultrasonic Controller	19.95	NEW full control wall switch	14.50

S-100 Mother Board $35

Quiet Buss™

8803-18
18 slot
IMSAI



The Quiet Buss from California Digital is quality engineered. No short cuts have been taken to produce this mother board. Active termination circuitry prevents noise and crosstalk. manufactured from extra heavy epoxy glass.

SWITCHES

DIP SWITCHES

pos.	ea.	100+	1K+
4	.88	.75	.69
7	.99	.83	.79
8	1.05	.91	.87
12	1.19	.99	.91

TOGGLE

		ea.	100+
7101	on/on	1.19	.98
7103	on/off/on	1.39	1.19
7107	mnt. on	1.39	1.19
7108	mnt. on	1.39	1.19
7205	dpdt mnt	1.85	1.65

CONNECTORS



GOLD EDGE CONNECTORS

S-100 .125" centers	each	10+
Imsai solder .250" row	$2.95	$2.50
Imsai wire wrap (TI)	3.95	3.50
Sullins Hi-Rel. .250"	4.50	4.00
Sullins Hi-Rel. W/W	5.35	4.90
Sullins / Altair .140"	4.95	4.50
.156" Centers (standard)		
22/44 Kim Eyelet	2.50	2.15
36/72 Digital Group S/T	5.95	5.50
36/72 Digital Group W/W	6.60	6.15
43/86 Motorola 6800 S/T	6.60	6.15
43/86 Moto. 6800 W/W	7.00	6.85

INTEGRATED CIRCUIT SOCKETS

	Low Profile		Wire Wrap	
	each	100+	each	100+
8 pin	$.10	$.09	$.46	$.41
14 pin	.10	.09	.45	.41
16 pin	.12	.11	.50	.45
18 pin	.15	.13	.68	.61
24 pin	.26	.24	.94	.87
40 pin	.42	.40	1.60	1.47

"D" Type	each	10-24	25+
DE9P male	$1.60	$1.40	$1.30
DE9S female	2.25	2.00	1.90
DE hood	1.50	1.35	1.20
DA15P male	2.35	2.15	2.00
DA15S female	3.25	3.10	2.90
DA hood 2/P	1.60	1.35	1.30
DB25P male	2.50	2.35	2.25
DB25S female	3.35	3.15	3.05
DB hood 2/P	1.35	1.15	1.05
DC37P male	4.20	4.00	3.70
DC37S female	6.00	5.75	5.50
DC hood 2/P	2.25	2.00	1.75
DD50P male	5.50	5.10	4.75
DD50S female	9.40	8.60	8.00
DD50 hood 2/P	2.60	2.40	2.10
CENTRONICS			
57-30360	7.95	6.75	5.75
RIBBON CABLE CONNECTORS			
17/34 5" disk	4.85	4.15	3.95
20/40 TRS-80	5.65	5.05	4.70
25/50 8" disk	5.90	5.15	4.90

NEW from Shugart Technology 5 Megabyte Hard Disk Drive

Packaged in the same physical size as the industry standard 5 1/4" minifloppy disk drive. The micro-Winchester stores thirty times as much data (6.38 megabytes unformatted), accesses data twice as fast (170 milliseconds) and transfers data twenty times faster (5.0 megabits per second.)

The ST506 is factory sealed to protect the media from environmental contaminates. Requires only DC voltage.

Dual California Digital 5 1/4" enclosure, ST506 drive and power supply. **$1500**

Shugart Associates SA400 removable media disk drive for above package. add: **$300**

S-100 & Apple controller scheduled for spring release.

Shugart Associates



$395

801/ R Disk Drive 15 lbs.

Shugart 801/R with CP 206 power supply, muffin exhaust fan, complete in dual enclosure with all the necessary harnessing cables. Documentation included. 36 pounds. MSD-1801 **$795**

Same as above but with two Shugart 801R disk drives. 50 pounds. MSD-2801 **$1195**

Disk drive cable. 6 feet 50 conductor with edge card connector at both ends. WCA-650S $25.00

Export Disk drives. 220V. 50MHz add $50.00 per disk drive.

SURPLUS

DATA INPUT TERMINAL

This Keystation terminal was recently acquired from the CMC division of the Pertec Corporation. The unit was originally designed for inputing data directly onto magnetic tape.

The system is comprised of a premium cast aluminium and fiberglass enclosure, along with a Honeywell / Microswitch hall effect keyboard. Thirty display lamps advise the operator of the systems status. Four inch loud speaker acknowledges acceptance of data and alerts the operator of pending problems.

But most of all this "USED" terminal, with a little imagination, can be engineered to make the perfect home for an S-100 computer and video display; or with slight modification will accept the Rockwell AIM-65 micro/computer.

Five volt regulated power supply is available for an additional $20. (see June Byte) All units are in excellent condition. Original acquisition over $700. 22 lbs.



$59 Sankyo Magnetic Card Transport

This Sankyo card transport is capable of storing and retrieving over 400 characters of data from a single 2 x 4" HP style magnetic data card. Motorized mechanism pulls the magnetic card across the four channel read/write head in under two seconds. Ideal for any data processing application where small amounts of information must be randomly retrieved. Original cost over $200.00 Documentation and sample card included. New surplus. SPC-SCR

$139.50

PORTABLE DATA ENTRY SYSTEM

These used data terminals were originally designed for retail store order entry systems. The operator enters the inventory control number, merchandise on hand and the unit price. After all pertinent data has been entered, the main warehouse is telephoned, the handset is placed in the acoustic coupler an all the recorded information is transmitted back the master computer.

Each system includes: Cassette drive unit; Removable hex keyboard with LED display; Five Gould "D" NiCads with charger; Acoustical coupler and DB25 cable. All units removed from service in working condition. Original cost over $2,500.

Regulated Power Supply 5 VOLT 5 AMP

$11.95



This USED surplus power supply was removed from working equipment. Pass transistor regulation outputs five volts at a conservative five amps. Suitable for TTL hobby applications. SPC-PS1 8 pounds.

VISA
master charge

All merchandise sold by California Digital is premium grade.
Shipping: First five pounds $2.00; each additional add $.40
Foreign orders 10% shipping. Excess will be refunded.
California residents add 6% sales tax. COD's discouraged.
Open accounts extended to state supported educational institutions and companies with a "Strong Dun & Bradstreet."
Warehouse: 15608 Inglewood Blvd. Visitors by appointment.

TOLL FREE ORDER LINE
(800) 421-5041
TECHNICAL & CALIFORNIA
(213) 679-9001

California Digital

Post Office Box 3097 B • Torrance, California 90503

MEMOREX 8"DISKETTES

$25 WITH FREE LIBRARY CASE

Recently the Memorex Corporation had a cancellation on a contract for a truck load of eight inch diskettes. California Digital was fortunate to be offered this load of prime magnetic media.

These diskettes are "UNBRANDED" but are guaranteed first quality Memorex Brand. (#3060 single den.)

Like all diskettes sold by California Digital, a library case is supplied free with the purchase of every box.

This offer is subject to remaining inventory on hand.

SUPER BUY

World's Best Selling Printer

EPSON MX80

Immediate Delivery

Only **$475**

Correspondence quality printing.
A lot of printers costing a lot more can't touch the MX-80's performance. It gives you a choice of 40, 80, 66 or 132 columns of printing in as many as four distinct printing density modes, a total of twelve different combinations which can accommodate nearly any printing requirement.

Bidirectional printing. Logical seeking of shortest lines. 80 CPS. 64 graphics characters. Forms handling. The list of standard features goes on and on. The fact is that there are few printers that can compete with the MX-80 at ANY price. And none—ZERO—in its extraordinarily affordable price range.

ABCDEFGHIJKLMNOPQRSTUVWXYZABCDEFGHIJ



NEW

from INTEGRAL DATA

460 Paper Tiger

with GRAPHICS **$1150**

The 460 Paper Tiger uses a dot matrix character formation technique in which the placement of the dots overlap both horizontally and vertically to achieve a correspondence quality printing.
The printer's nine-wire print head uses staggered needle rows to create the vertically overlapping dots. The head is driven bi-directionally under microprocessor control by a stepper motor driven mechanism.
"Two K" buffer allows the printer to accept the entire content of a 1,920 character CRT screen. With graphics suggested retail price $1,395 27 lbs. PRG-460G

NEC Spinwriter 5510P/S

$2795



The word processing quality Spinwriter prints at speeds upto 55 characters per second. The Model 5510 P/S is supplied with both parallel and RS-232 serial interfacing. Also included is the tractor feed mechanism, along with print thimble and ribbon. PRN-5510PS 70 lbs. Keyboard (KSR) Model 5520 P/S available $2995. PRN-5520PS 75 lbs.



TEC V-300 Word Processing

Daisy Wheel Printer

$1595

Finally a reasonably priced letter quality printer... Bi-directional printing at 25 characters per second. Full 136 print positions wide. Proportional spacing 1/120" horizontal, 1/48" vertical.
Uses standard Diablo brand interchangable daisy print wheels.
Intel 8085 CPU microprocessor controlled. Interfaces via Centronics parallel connector. Shipping 58 lbs. PRV-300.

TELETYPE® MODEL 43

4320 KEYBOARD MODELS

TTL serial output	AAA	$ 995
RS232 serial	AAK	1050
Friction 80 column	AAE	1100
Friction 80 RS232	AAL	1195
Bell 103 Modem	AAB	1495

ULTRA-VIOLET PRODUCTS UVS 11-E UV EPROM ERASER

$65

CENTRONICS

730 $595
737 $750



Both the Centronics 730 and the 737 are capable of accepting standard office letterhead or pin feed continuous forms. For higher resolution the 737 implements a nine wire dot matrix print head. Parallel interfacing. Add $65 for RS232. PRC-730P (S). PRC-737P (S) 17 lbs.

IBM 3101 Display Terminal



IBM Direct Price $1295

***California Digital discount price* $1195**

AMPEX DIALOGUE 80 CRT TERMINAL

$995

New from the Ampex Corporation. The Dialogue 80 features removable keyboard, displayable two pages (four optional) dual program keys, half intensity protected fields and status line. Transmits data either block, line or character mode. Excellent value. VDT-D80 shipping 47 lbs.

VIDEO TERMINALS

ADDS Regent 25 numeric cluster	VDT-R25	$850
ADDS Regent 30 25th status line	VDT-R30	950
ADDS Regent 40 limited graphics	VDT-R40	1195
ADDS Regent 60 Block mode	VDT-R60	1495
Ampex Dialouge 80 two page, detatch	VDT-D80	995
Digital Equipment VT-100	VDT-V100	1595
Digital Equipment VT-132	VDT-V132	1895
Direct VP-800A emulator	VDT-P800	call
Hazeltine 1410	VDT-H1410	750
Hazeltine 1420	VDT-H1420	795
Hazeltine 1500	VDT-H1500	850
Hazeltine 1510	VDT-H1510	1025
Hazeltine 1520	VDT-H1520	1225
Hewlett Packard 2621A	VDT-HP21A	
Hewlett Packard 2621P	VDT-HP21P	
IBM 3101-10 character mode green	VDT-3101	1195
IBM 3101-20 block mode	VDT-31012	1395
Lear Seigler 3A upper case only	VDT-L3A	850
Lear Seigler ADM5	VDT-L5	945
Lear Seigler ADM31	VDT-L31	1385
Lear Seigler ADM42	VDT-L42	1995
Soroc IQ 120	VDT-Q120	675
Soroc IQ 135 NEW	VDT-Q135	850
Soroc IQ 140 detatchable keyboard	VDT-Q140	1150
Televideo 912C	VDT-T912	665
Televideo 920C	VDT-T920	745
Televideo 950C detatchable keybd.	VDT-T950	985
Zenith Z-19	VDT-Z-19	735

VIDEO MONITORS

BMC KG12C 18MHz P-31 grn phosphor	$259
Leedex/Amdek 12"100	129
Leedex 100 green	169
Leedex 100-80	197
Hitachi color 13"	389
Zenith color 13"	379
NEC green phosphor	219
Panasonic color 10"	
Sanyo 9" BW	149
Sanyo 12" green phos.	235
Sanyo 15" BW	259
Sanyo 13" color	419

ACCESSORIES FOR THE APPLE COMPUTER



CALIFORNIA COMPUTER SYSTEMS	
Arithmetic Processor 7811 B/C	$319
Asynchronous serial interface 7710	129
Centronics Interface card 7728	95
12K PROM Module 7114	69
Calender/Clock, Bat. back-up 7424	99
Parallel Interface 7720A	99
Programable Timer 7740A	99
Analog/Digital converter 7470A	99
MICROSOFT PRODUCTS	
Apple to Z-80 CPU card	379
D. C. HAYES PRODUCTS	
Micromodem for Apple	319
COMPUTER STOP PRODUCTS	
Double Vision / 80 Column Video	250
INTERACTIVE STRUCTURES	
16 Channel A/D card AIO/2	275

MOUNTAIN COMPUTER PRODUCTS	
Intro X-10 system for BSR	$239
Intro X-10 card only	165
16 channel AD/DA 8 bit	319
Apple Clock battery back-up	225
Supertalker SD200	245
ROM Plus with filter	165
ROM Writer/Programmer	149
APPLE BRAND PRODUCTS	
Apple Language card	450
Floppy disk with controller	560
Floppy disk without controller	495
Apple parallel interface	175
SSM MICROCOMPUTER	
Dual serial parallel interface AIO	
SORRENTO VALLEY ASSOCIATES	
8" floppy controller (Pascal)	360

S-100 BOARDS

Assembled • Tested • Burned-in





CPU BOARDS		
Calif. Computer 2810A Z-80 DMA, 4MHz	BDC-C2810	$250
Godbout Z-80 24 bit, 4MHz	BDC-GZ80	239
Godbout 8085/8088 dual 16 bit processor	BDC-G88	375
Measurement Systems Z-80 4 serial 2 parallel real time clock, 8 vector	BDC-MZ80	395
SD Systems SBC-200 Z-80 with serial & parallel I/O ports	BDC-SBC2	385
Teletek FDC-1 single board CPU & floppy disk controller plus I/O	BDC-FDC1	695
MAINFRAMES		
Calif. Computer 2200A 12 slot & power supply	ENM-C2200	349
TEI 12 slot table	ENM-T12	495
TEI 22 slot table	ENM-T22	650
Godbout mainfrm.	ENM-GMF	
MEMORY BOARDS		
Calif. Computer 2065A 64K dyamic memory	BDM-C2065	$429
Calif. Computer 2016 16K static memory	BDM-C2016	259
Calif. Computer 2032 32K static memory	BDM-C2032	585
Godbout Ram 17 64K static memory 16 bit	BDM-G17	1025
SD Systems Expandoram II 16K dynamic	BDM-EX16	295
64K dynamic	BDM-EX64	375
Measurement Systems DMB6400 for Alpha Micro	BDM-M6400	685
EPROM BOARDS		
Digital Research 32K, 2716 proms extra	BDM-DP32	89
SD Systems Prom-100 programmer	BDM-P100	250

FLOPPY DISK CONTROLLER		
Calif. Computer 2422A with 2.2 CPM	BDF-C2422	329
Godbout "Disk One" features the NEC 765 controller. DMA arbitration	BDF-GD1	395
Measurement Systems 765 chip. single & double density. Error recovery	BDF-MF	419
SD Systems Versafloppy II double density	BDF-VF2	419
Tarbell D/D	BDF-TF2	419
Morrow Design Disk Jockey I single density	BDF-DJ1	195
Morrow Design Disk Jockey II double density	BDF-DJ2	345
INTERFACE BOARDS		
Calif. Computer 2718 I/O 2 serial/2 par'l	BDT-C2718	
Morrow Designs Switchboard 2 serial/4 par'l	BDT-MSB	219
Morrow Designs Multiboard 3 serial/3P. +++	BDT-MMB	275
Godbout Interfacer One 2 serial/2 par'l	BDS-GB1	199
Godbout Interfacer Two 1 serial/3 par'l	BDS-GB2	199
SPECIALITY BOARDS		
QT Computer real time clock/calendar	BDS-QCK	135
Artec Elec. Wire wrap prototype board	BDS-AWW	25
Artec Elec. General Purpose proto board	BDS-AGP	25
Godbout Spectrum color board	BDS-GSC	295
D. C. Hayes S-100 Micromodem	BDS-HM1	350
Mullen Products extender board & logic probe kt	BDS-MTB1	49
Mullen Products Opto-contro board kit	BDS-MOC	139

Rotron Wisper Fan

$14.77 $12.00 @ 100
10.50 @ 1000

115 VAC. 7 Watts WR2A1
Factory fresh Muffin fans
NOT pull-outs. EMF-4M



VISA

master charge

All merchandise sold by California Digital is premium grade.
Shipping: First five pounds $2.00; each additional add $.40
Foreign orders 10% shipping. Excess will be refunded.
California residents add 6% sales tax. COD's discouraged.
Open accounts extended to state supported educational institutions and companies with a "Strong Dun & Bradstreet."
Warehouse: 15608 Inglewood Blvd. Visitors by appointment.

TOLL FREE ORDER LINE
(800) 421-5041
TECHNICAL & CALIFORNIA
(213) 679-9001

Circle 57 on inquiry card.

ANOTHER FAMOUS *PRIORITY 1 ELECTRONICS* TRUCK LOAD PURCHASE 10 MHZ 16K A&T STATIC S-100 RAM FROM

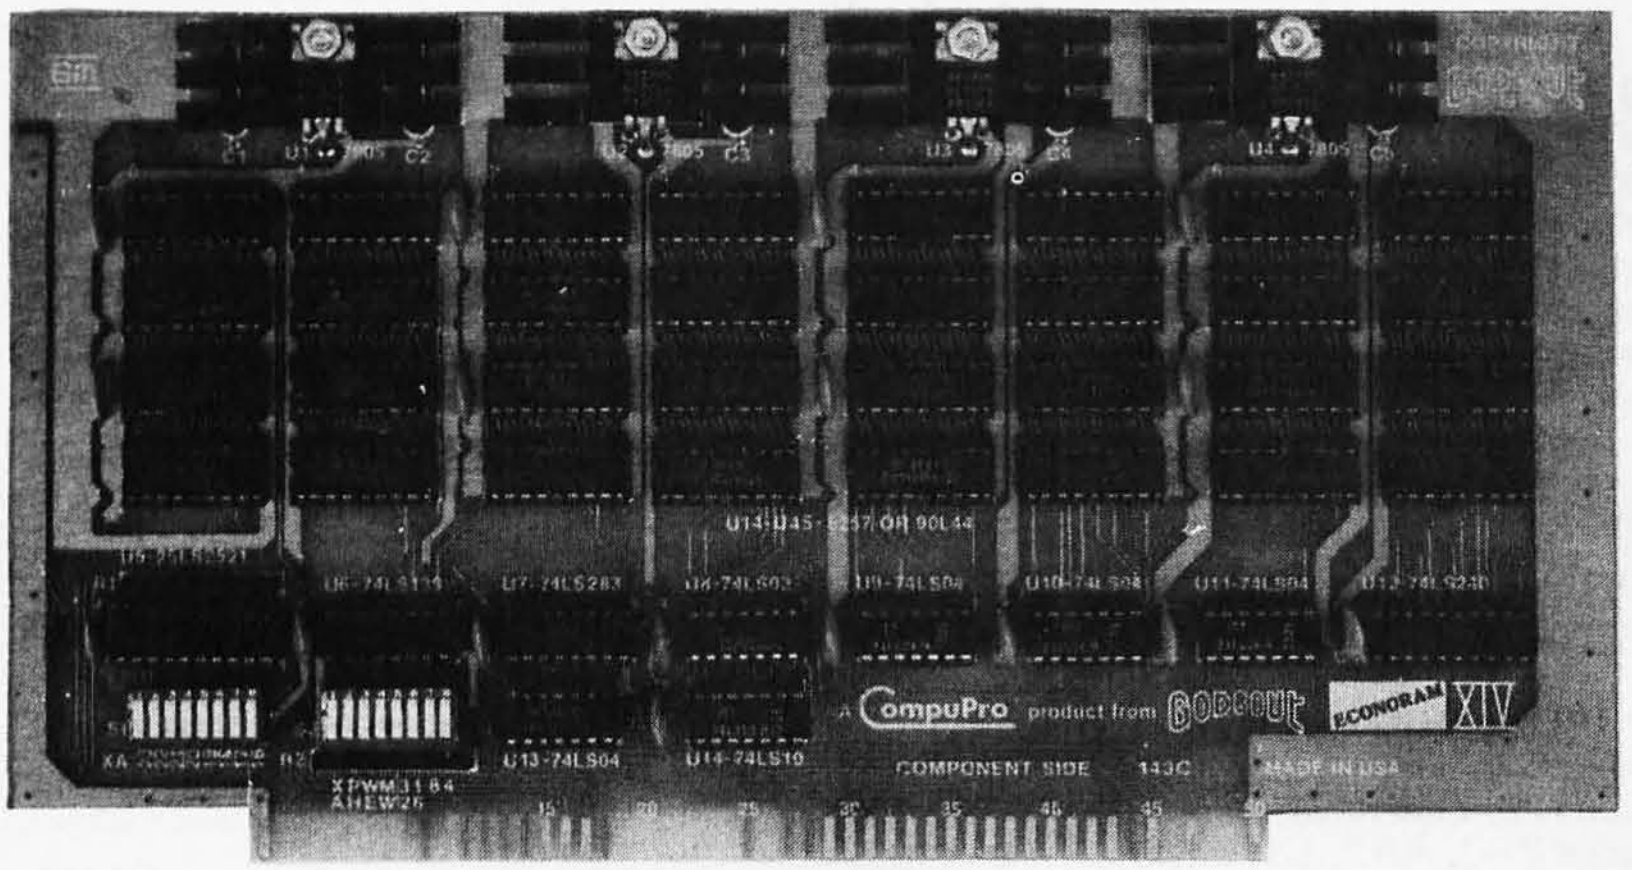

GBT-143A
List
$349.00

SAVE $150.00

$199.00

The **RAM 14** provides 16K X 8 of reliable, totally static RAM storage. Conforming fully to the IEEE 696/S-100 bus standard, **RAM 14** not only provides 24 address lines for 16 megabyte extended addressing capability, but also includes a number of features you would only expect to find in memory boards costing considerably more. Here's a partial listing of what makes **RAM 14** your best choice!

- Operates up to 10 MHZ (70 ns RAM Chips)
- Assembled & Tested
- Meets or exceeds all IEEE 696/S-100 specifications (including timing).
- Fully static design eliminates the timing problems associated with dynamic memories.
- Switch selectable choice of 24 address lines conforming to the IEEE 696/S-100 extended addressing specifications, or 16 address lines as used in older S-100 systems.
- Ideal for multi-user installations.
- Board is addressable as one 16K x 8 block on any 4K boundary.
- Switch selectable PHANTOM disable and write protect.
- +5 Volt operation (requires no other supply voltages).
- Low power operation (900 mA typical, 1200 mA maximum).
- 1 year Factory Warranty.

CompuPro™ division of **GODBOUT ELECTRONICS**

ORDER TOLL FREE
1-800-423-5922
except CA., AK., HI., CALL
(213) 709-5464

Circle 332 on inquiry card.

PRIORITY ONE ELECTRONICS

9161-B DEERING AVE. • CHATSWORTH, CA 91311

Terms: U.S.; VISA, MC, BAC Check, Money Order, U.S. Funds Only. CA. residents add 6% Sales Tax. MINIMUM PREPAID ORDER $15.00. Include MINIMUM SHIPPING & HANDLING of $2.50 for the first 3 lbs., plus 25¢ for each additional pound. Orders over 50 lbs. sent freight collect. Just in case...please include your phone no. Prices subject to change without notice. We will do our best to maintain prices thru MAY, 1981. SOCKET and CONNECTOR prices based on GOLD, not exceeding $700.00 per oz.

Sales Prices are for prepaid orders only. Credit Card orders will be charged appropriate freight.

Best Prices and Delivery!

SUPERBRAIN by Intertec

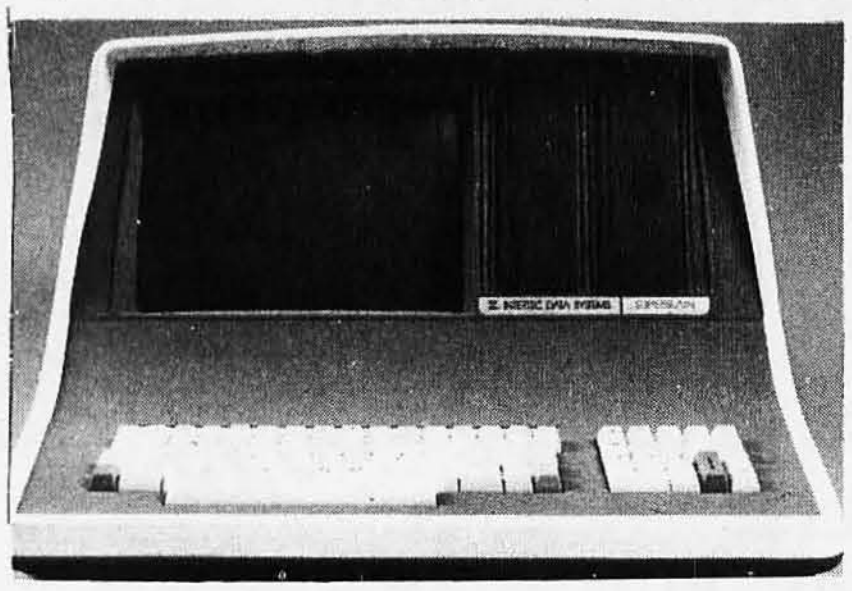

Self-contained computer with dual disks and two RS232C ports. Complete with CP/M* 2.2 and BASIC.

32K Double Density, List $2995	$2685
64K Double Density, List $3345	$2883
64K Upgraded to Quad Density w/Special MiniMicroMart Warranty	***SPECIAL $3395***

VIDEO TERMINALS

NEW **EMULATOR (Intertec)**, List $895	$ 749
NEW INTERTUBE III List $895	ONLY $ 749
SOROC 120, List $995	***SPECIAL $ 729***
1Q140, List $1495	***SPECIAL $1149***
PERKIN-ELMER 550, List $997	$ 799
with anti-glare screen, $1027	$ 829
HAZELTINE 1410, List $900	$ 749
1420	$ 849
1500, List $1225	$ 879
1510, List $1395	$1089
1520, List $1650	$1389
LEAR SIEGLER ADM3A, Assembled	$ 849
TELEVIDEO 912C, List $950	$ 789
920C. List $1030	$ 849
950C, List $1195	**NEW** $1039

PRINTERS

ANADEX DP-8000	$ 849
DP-9500, List $1650	$1399
DP-9501, List $1650	$1399
PAPER TIGER IDS-445, List $995	$ 695
w/graphics op., incl. buffer, $1195	$ 789
PAPER TIGER IDS-460, List	1149
PAPER TIGER IDS-460G List	1199
NEW IDS PAPERTIGER 460 . List 1295	$1149
NEW IDS PAPERTIGER 460G List $1394	$1199
NEC Spinwriters	Call for Price
TELETYPE 43 KSR	$1087
CENTRONICS	
730-1 parallel interface .. **NEW LOW**	$ 649
737 parallel interface . **SUPER VALUE**	$ 829
779 w/Tractor, List $1350	$1049
703 w/Tractor, VFU, List $2975	$1695
704 w/Tractor, VFU, List $2350	$1595
TI 810 Basic, List $1895	$1695
810/serial & Centronics-style parallel interface, List $1940	$1735
810 w/full ASCII (U/LC), Vertical Forms Control, Compressed Print	$1895
TI 820 KSR, List $2165	$1895
TI 745 w/full ASCII, List $1695	$1399
COMPRINT 912 w/parallel interface	$ 559
912 w/serial interface, List $699	$ 589
AXIOM IMP I	$ 699
MICROTEK, List $750	$ 675
OKIDATA Microline 80, List $949	$ 599
Tractor Feed Option	$109
RS232 Serial Interface	$ 99

NORTH STAR HORIZON*

HORIZON 1 ASSEMBLED & TESTED

32K, Double Density, List $2695	$2279
32K, Quad Density, List $2995	$2539

HORIZON 2 ASSEMBLED & TESTED

32K, Double Density, List $3095	$2619
32K, Quad Density, List $3595	$3049
48K, Double Density, List $3590	$3039
48K, Quad Density, List $4090	$3469
64K, Double Density, List $3830	$3239
64K, Quad Density, List $4330	$3669

FLOPPY DISK SYSTEMS

NORTH STAR MDS-A	
Assembled, List $899	***SPECIAL $ 719***
MORROW THINKER TOYS* Discus 2D,	
List $1199	**OUR PRICE $ 998***
Discus 2D, dual-drive, List $1994	$1694*
Discus 2 + 2, A&T, List $1549	$1319*
Dual Discus 2 + 2, A&T, List $2748	$2335*

Now includes CP/M 2.2

Prom Programers

SSM PB1 Kit List $125	$106
SSM PB1 A&T List $190	$161
SD Computer Prom 100 Kit $236	$201
SD Computer Prom 100 A&T List $311	$264

FLOPPY DISK CONTROLLER BOARDS

NORTH STAR, DD,	
Assembled, List $499	$399
MORROW Disk Jockey 1, A&T ($213)	$189
Disk Jockey 2D, A&T, List $479	$429
SD Versafloppy 1, Kit, List $284	$239
Versafloppy II, DD Kit, List $413	$349
Versafloppy II, DD, A&T, List $507	$429
DELTA double density A&T ($385)	$345
CONDUCTOR, double density A&T	$269
INTERSYSTEMS FDC-2, A&T, $495	$439
MICROMATION Doubler, DD, A&T	$429
TARBELL Floppy Disk Interface Kit	$199
double density, A&T, List $495	$444

ESCON CONVERSION FOR IBM SELECTRIC

Complete w/microprocessor controller and power supply. Factory built. User installs solenoid assembly or it can be done at Escon factory at nominal cost.

Parallel (TRS-80, Sorcerer, etc.), $575	$514
RS232 Standard Serial, List $599	534
IEEE-488 (for PET), List $660	584
TRS-80 Cable	25

CALIFORNIA COMPUTER SYSTEMS

Z80 CPU BOARDS List $299	$269
DISK CONTROLLER 2422 List $399	$359
16K Static, A&T, List $349.95	$259
32K STATIC List $710	$599
64K DYNAMIC BOARD List $699	$589

CPU BOARDS

(assembled unless noted)

NORTH STAR Z80A (ZPB-A/A), $299	$254
CROMEMCO 4 MHz (ZPU-W), List $395	$335
4 MHz (SCC-W), List $450	$382
INTERSYSTEMS (formerly Ithaca Audio)	
new Series II Z-80, 4 MHz. List $395	$349
SSM CB1 8080 A&T List $252	$214
CB1A Kit, List $183	$156
CB2 Z-80, A&T, List $344	$289
CB2 Kit, List $60	$221
DELTA Z-80, with I/O	$289
SD SBC-100, List 413	$349
SBC-100 Kit, List $341	$289
SBC-200, List $471	$399
SBC-200 Kit, List $373	$317

MEMORY BOARDS

32K SD ExpandoRAM Kit

CALL FOR PRICES

NORTH STAR 16K Dynamic RAM Board,	
A&T (RAM-16-A/A), List $499	$420
32K A&T (RAM-32/A), List $739	$620
CROMEMCO 16KZ-W, List $495	$419
64KZ-W, List $1795	$1269
MEASUREMENT SYSTEMS & CONTROLS	
(Guaranteed performance, incl. labor/parts 1 yr)	
DM6400 64K Board w/all 64K, $795	$659
DM4800 with 48K, List $695	$650
DM3200 with 32K, List $595	$509
DMB6400 64K Board w/all 64K	$859
DMB4800 with 48K	$789
MORROW SuperRAM — all static, all A&T	
16K, 4 MHz or 2 MHz, List $349	$299
32K, 4 MHz, List $699	$629
16K Memory Master, List $399	$339
24K Memory Master, List $549	$465
INTERSYSTEMS (formerly Ithaca Audio)	
8K Static 2 MHz, A&T, List $165	$149
8K Static 4 MHz, A&T, List $195	$176
16K Static 2 MHz, A&T, List $475	$427
16K Static 4 MHz, A&T, List $495	$445
64K Dynamic, List $995	$895
CALIFORNIA COMPUTER	
16K Static, A&T, List $349.95	$259

VIDEO BOARDS

I/O Mapped

SD COMPUTER VDB-8024, kit, List $437	.369
Assembled, List $556	$469
XITEX SCT-100K, Kit	**ONLY $169.95**
SCT-100A Assembled	$189.95
SSM VB2 I/O, Kit, List $199	$169
Assembled & Tested, List $269	$229

Memory Mapped

SSM VB1C, 16x64, Kit, List $179	$152
Assembled & Tested, List $242	$206
SSM VB3, 80-Char.,4MHz,Kit, List$425	$359
4 MHz, A&T, List $499	$424
INTERSYSTEMS, 16x64, A&T, List $165	$149

*Subject to change.

NEW CROMEMCO 16FDC DOUBLE DENSITY DISK CONTROLLER

List $595 ...... **OUR PRICE $505**

SHIPPING AND INSURANCE: Add $2.50 for boards, $6 for Selectric Converter or Floppy Disk Drives, $7.50 for Floppy Disk Systems, $15 for Horizon. SHIPPED FREIGHT COLLECT: SuperBrain, Centronic and T.I. printers. Contact us for shipping information on other terminals and printers.

Above prices reflect a 2% cash discount (order prepaid prior to shipment). Add 2% to prices for credit card orders, C.O.D.'s, etc. Prices are subject to change and offers subject to withdrawal without notice

MiniMicroMart, Inc.

1618 James Street, Syracuse NY 13203 (315) 422-4467 TWX 710-541-0431

If North Star or Cromemco offer it . .

WE HAVE IT!!

Immediate Delivery at Discount Prices

NORTH STAR Horizon® 2

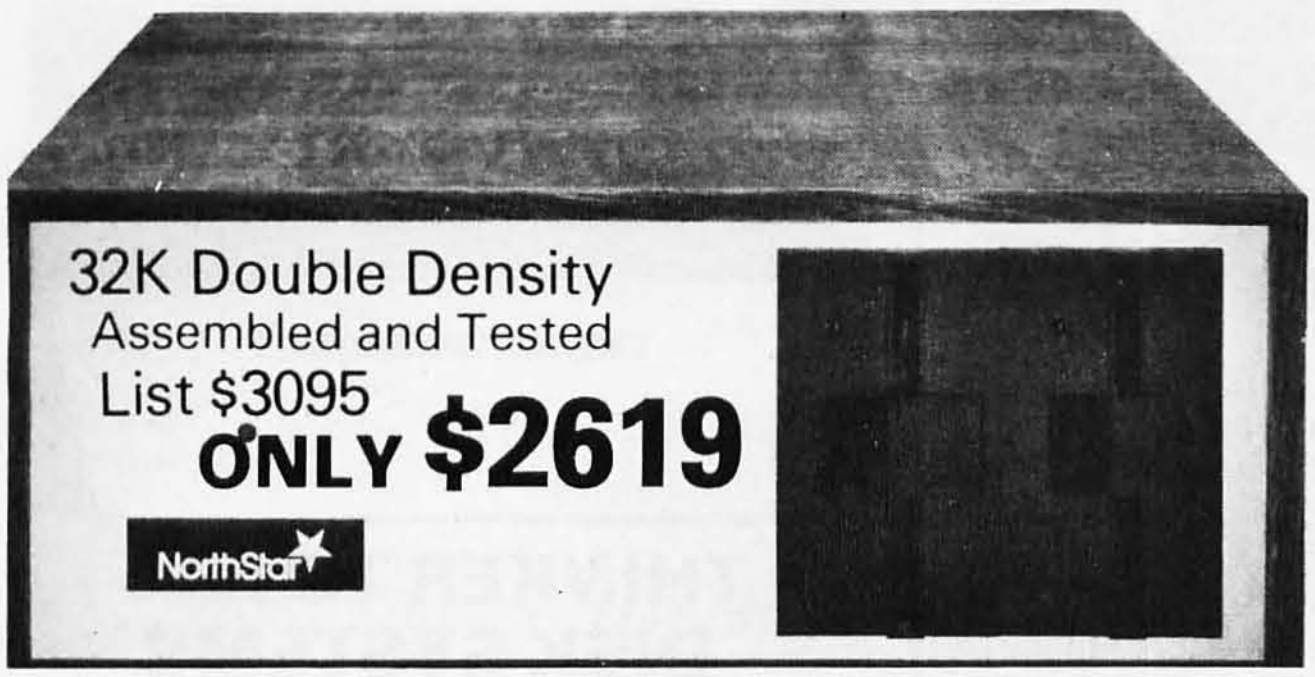

32K Double Density
Assembled and Tested
List $3095
ONLY **$2619**

ASSEMBLED

Model	Price
HORIZON 1, DD	$2279
32K, QD, List $2995	2539
HORIZON 2, 32K, DD	$2619
32K, QD, List $3595	3049
48K, DD, List $3590	3039
48K, QD, List $4090	3469
64K, DD, List $3830	3239
64K, QD, List $4330	3669

NORTH STAR APPLICATIONS SOFTWARE

(Exclusive for use with North Star Disk Systems — specify Double or Quad Density)

Software	Price
NORTHWORD, List $399	$339
MAILMANAGER, List $299	249
INFOMANAGER, List $499	419
GENERALLEDGER, List $999	799
ACCOUNTSRECEIVABLE, List $599	499
ACCOUNTSPAYABLE, List $599	499

NORTH STAR HARD DISK HD-18

18 megabytes, plugs into parallel port of North Star Horizon. Utilizes tried-and-proven 14" Century Data Marksman. List $4999. OUR PRICE **$4199**

NORTH STAR MDS-A — Double (or Quad) Density Disk System, Kit, List $799 . **OUR PRICE $669**
Assembled and Tested, List $899 **SPECIAL $719**

NORTH STAR MEMORY BOARDS

Board	Price
16K Dynamic RAM (RAM-16-A/A), Assembled, List $499	$420
32K (RAM-32/A), Assembled, List $739	$620

INTRODUCTORY SPECIALS ON ...

PREMIUM QUALITY BASF DISKS
CERTIFIED FOR QUAD SYSTEMS

	List	(Box of ten)
5¼" DOUBLE DENSITY DOUBLE SIDED	List$57.50	$38.95
8" DOUBLE DENSITY DOUBLE SIDED	List$75.00	$47.49

Shipping $2.50 — Free Shipping In Multiple Of Two Box's

NEW System 3

by CROMEMCO



Now with Dual
Double Sided
Double Density
(over 2 megabytes
of Storage)
64K of RAM
List $7995

LIMITED TIME **$6395**

CROMEMCO SYSTEM 2 — Now double Density with Double Sided Drives, Quad Capacity mini floppy disc drives. List $4695 .... **Only $3899**

CROMEMCO Z-2H

Full 11-megabyte Hard Disk system. Fast Z-80A 4 MHz processor, two floppy disk drives, 64K RAM memory, RS232 special interface, printer interface, and extensive software available.
List $9995

OUR PRICE **$8489**

NEW DOUBLE DENSITY CONTROLLER BOARD
From Cromemco

With built-in diagnostics — 16 FDC Controller
List $595 .... **OUR PRICE $505**

Product	Price
Z-2 COMPUTER SYSTEM List $995	**$845**
SINGLE CARD COMPUTER — SCC-W 4 MHz. List $450	**$382**
NEW COLOR GRAPHICS INTERFACE — SDI List $595	**OUR PRICE $505**

CROMEMCO HDD — 11/22-megabyte Hard Disk for use with existing systems. DMA controller. Transfer rate of 5.6 megabytes/second.

Product	Price
HDD-11, List $6995	**OUR PRICE ONLY $5939**
HDD-22, List $11,995	**$10,189**

SHIPPING AND INSURANCE: Add $15 or Horizons, $2.50 for Boards and Software. Hard Disk Systems and Cromemco systems shipped freight collect. Advertised prices are for prepaid orders. Credit card and C.O.D. 2% higher. Deposit may be required on C.O.D. All prices subject to change and offers subject to withdrawal without notice.

— WRITE FOR FREE CATALOG —

MiniMicroMart, Inc.

1618 James Street, Syracuse, NY 13203 (315) 422-4467 TWX 710-541-0431

master charge THE INTERBANK CARD
VISA

Circle 270 on inquiry card.

Computers, Disk Systems

ZENITH | data systems

Z89-FA
List $2895

OUR PRICE $2395

Z-89GA
List $2595 .... **$2149**

A-87 Two Drive
Minifloppy System List $1195 .... **$989**

Z-47DA **$3695**
8" Two Megabyte List $3695 .... **$3059**

INTERSYSTEMS

formerly ITHACA AUDIO

The new Series II CPU Board features a 4 MHz Z-80A CPU and a full-feature front panel. 20-slot actively terminated motherboard, with 25 amp power supply (50/60 Hz operation, incl. 68 cfm fan).

DPS-1, List $1795

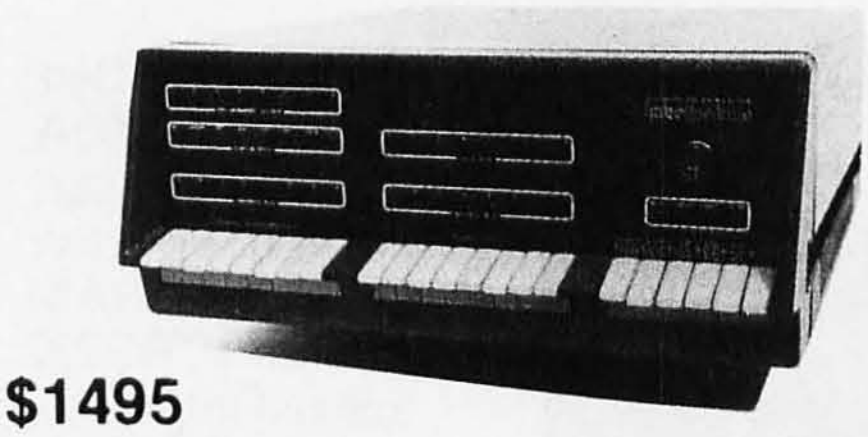

$1495

COMPLETE SYSTEM with InterSystem 64K RAM, I/O Board w/priority interrupt and double density disk controller board. Full 1-year warranty, List $3595

$2995



NEW! CROMEMCO SYSTEM ZERO

List $995 .... **OUR PRICE $849**

NEW! CROMEMCO SYSTEM ZERO/D

A complete 64K Computer with Double Density Disk Controller ...... List **$2995**

OUR PRICE $2545

Companion Disk drive for above — **Quad Density** — Total of 780 Kilobytes of storage on the two drives. ..... **List $1295**

OUR PRICE $1099

Only **$3644** for a complete 64K Disk System

SUPERBRAIN

By INTERTEC

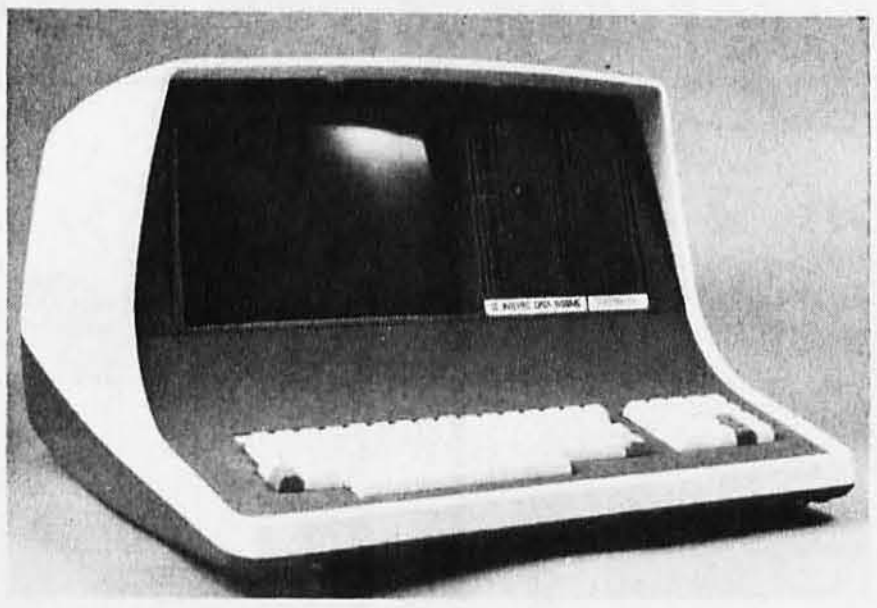

64K Double or Quad Density units available. Uses two Z-80 CPU's. Commercial-type terminal with 12" monitor. Dual double density minifloppies. Over 350 kilobytes of storage (twice that with quad density drives). Two serial RS232 ports, I/O ports standard. Expandable with optional S-100 S-100 interface. Comes with CP/MTM 2.2 operating system. MiniMicroMart can supply a wide range of CP/M development and application software.

w/64K Double Density, List $3495 .. **$2869**
w/64K Quad Density, List $3995 ..... **$3395**

HEWLETT PACKARD HP-41CV

HP-41 System I— $399.
(The HP-41CV and HP 82104A Card Reader) List $495.

HP-41 System II— $679.
(The HP-41CV and HP 82104A Card Reader, HP 82143A Printer/Plotter) List $840.

HEWLETT-PACKARD HP-85A

Desk-Top Computer

List $3250

$2749

MORROW THINKER TOYS® DISCUS M26™

26 megabytes of formatted storage
List $4,995

$4,199



THINKER TOYS® DISK SYSTEMS

Now includes CP/M® 2.2

Discus 2D, List $1199 ...... **$1019**

Discus 2D, dual-drive, List $1994 ...... **$1694**
Discus 2 + 2, Assem., List $1549 .... **$1319**
Dual Discus 2 + 2, Assem., $2748 ...... **$2335**

All Morrow systems now include CP/M® 2.2

MORROW
Discus 2D's
IN STOCK

NEW! CROMIX FROM CROMEMCO

A New UNIX Like Disk Operating System.

With true multi-user, multi-tasking capabilities

List $295 .... **OUR PRICE $249**

NEW! DOUBLE DENSITY CONTROLLER BOARD

FROM CROMEMCO

With built-in diagnostics

16 FDC Controller, List $595 **OUR PRICE $505**

RADIO SHACK TRS-80™

10% OFF!

Terminals and Printers

Intertec

EMULATOR

Software compatible with a Soroc IQ-120, Hazeltine 1500, ADM-3A or DEC VT-52. Features block mode transmission and printer port; 12" anti-glare screen; 18-key numeric keypad; full cursor control. List $895

OUR PRICE $749

NEW INTERTUBE III

List $995 **ONLY $749**

12" display, 24 x 80 format, 18-key numeric keypad, 128 upper/lower case ASCII characters. Reverse video, blinking, complete cursor addressing and control. Special user-defined control function keys, protected and unprotected fields. Line insert/delete and character insert/delete editing, eleven special line drawing symbols.

TELEVIDEO TVI-912C

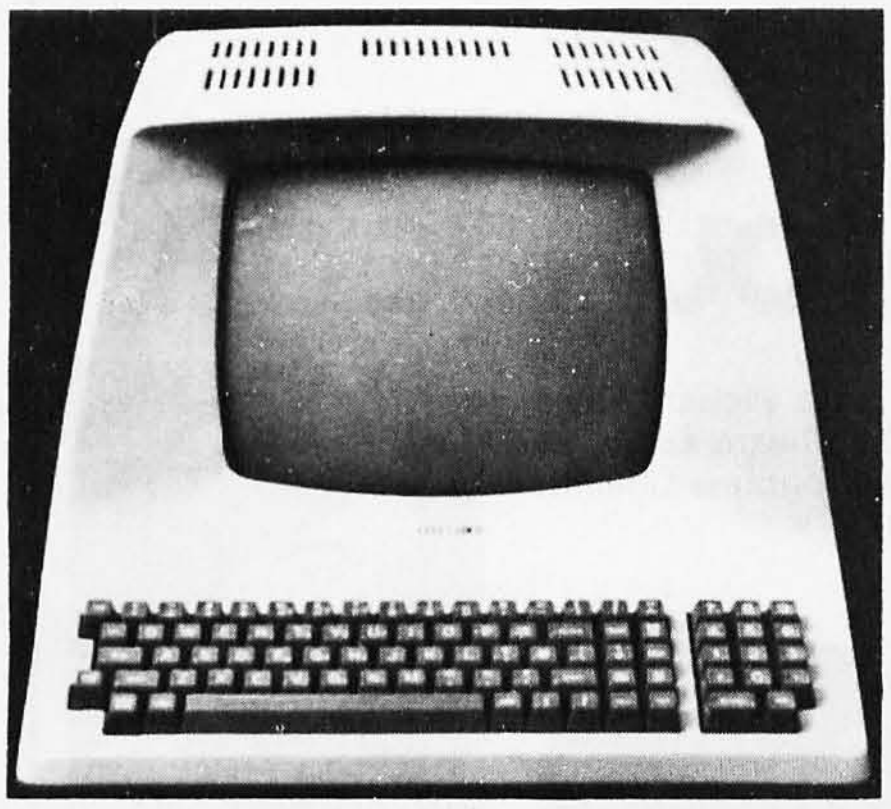

Upper and lower case, 15 baud rates: 75 to 19,000 baud, dual intensity, 24 x 80 character display, 12 x 10 resolution. Numeric pad. Programmable reversible video, auxiliary port, self-test mode, protect mode, block mode, tabbing, addressable cursor. Microprocessor controlled, programmable underline, line and character insert/delete. "C" version features typewriter-style keyboard. List $950

OUR PRICE $789

920C (with 11 function keys, 6 edit keys and 2 transmission mode keys, List $1030 **ONLY $849**

HAZELTINE

1500

ONLY
$879

1410 w/numeric keypad, List $900	$749
1420 w/lower case and numeric pad	849
1510, List $1395	1089
1520, List $1650	1389

SOROC

IQ-120

List $995

SPECIAL
$729

IQ-140 List $1495
SPECIAL $1149

CENTRONICS
PRINTERS

NEW 730, parallel, friction, tractor	**$679**
NEW 737 parallel, friction, tractor	**$849**
779-2 w/tractor (same as TRS-80 Line Printer I), List $1350	1049
702 120 cps, bi-direct., tractor, VFU	1995
703 185 cps, bi-direct., tractor, VFU	2395
704 RS232 serial version of 703, $2350	$1995

NEC SPINWRITER™

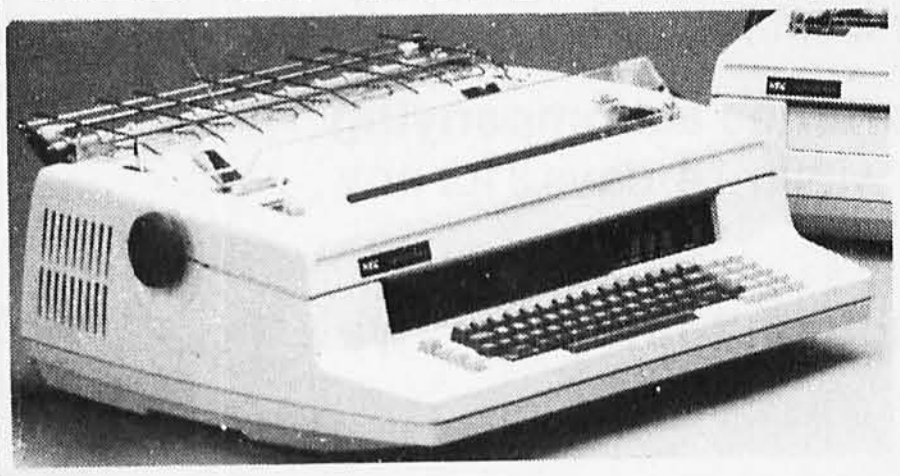

Terminal/Keyboard as well as
RO Printer Only models available.
CALL FOR PRICES!

PAPER TIGER®

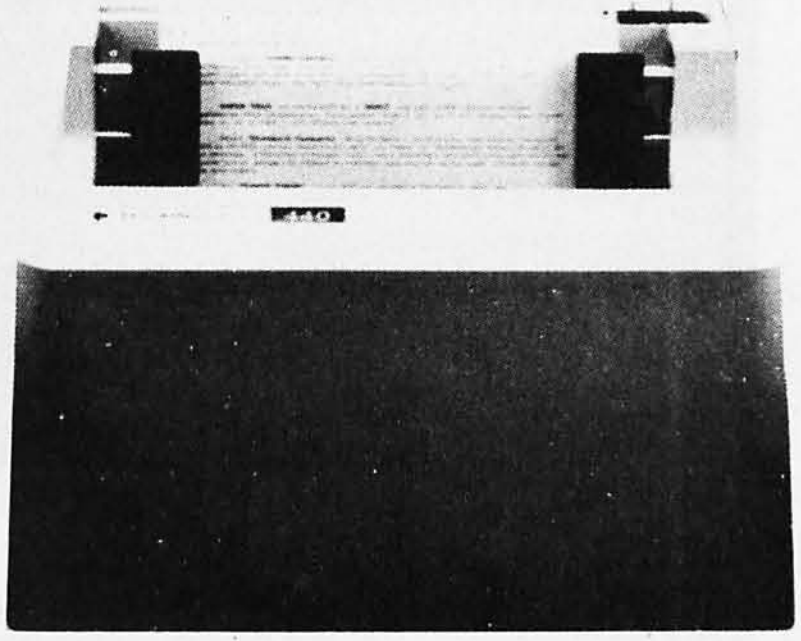

IDS 455 Paper Tiger, List $995	**$895**
w/graphics option, incl. buffer, $1194	**$989**
TRS-80 cable	**45**

NEW IDS 460
QUALITY PRINTING AT MATRIX
SPEED—LOGIC SEEKING
PROPORTIONAL SPACING
w/auto text justification

NEW IDS PAPERTIGER 460 List $1295	**$1099**
NEW IDS PAPERTIGER 460G List $1394	**$1149**

TI-810



TI-810 Basic Unit, $1895 . **ONLY**	**$1595**
TI-810 w/full ASCII (Lower case), vertical forms control, and compressed print	**$1795**
TI-745 Complete printing terminal with acoustic coupler, List $1695	**$1399**

ANADEX
DP9500/DP9501 PRINTERS

DP-9500, List $1650	**$1349**
DP-9501, List $1650	**$1349**
ANADEX 80-Col. Dot Matrix	**$849**

OKIDATA
Microline 80 **ONLY $599**

Tractor Feed Option	**$109**
Serial interface	**$ 99**
AXIOM IMP I	**$699**
COMPRINT 912 w/parallel interf.	**$559**
912 w/serial interface, List $699	**$589**
MICROTEK, List $750	**$675**

Above prices reflect a 2% cash discount (order prepaid prior to shipment). Add 2% to prices for credit card orders, C.O.D.'s, etc. Prices are f.o.b. shipping point. Prices are subject to change and offers subject to withdrawal without notice. **WRITE FOR FREE CATALOG.**

MiniMicroMart, Inc.

VISA
master charge

1618 James Street, Syracuse NY 13203 (315) 422-4467 TWX 710-541-0431

Circle 271 on inquiry card.

Unclassified Ads

UNCLASSIFIED POLICY: Readers who are soliciting or giving advice, or who have equipment to buy, sell or swap should send in a clearly typed notice to that effect. To be considered for publication, an advertisement must be clearly noncommercial, typed double spaced on plain white paper, contain 75 words or less, and include complete name and address information.

These notices are free of charge and will be printed one time only on a space available basis. Notices can be accepted from individuals or bona fide computer users clubs only. We can engage in no correspondence on these and your confirmation of placement is appearance in an issue of BYTE.

Please note that it may take three or four months for an ad to appear in the magazine.

FOR SALE: Pascal microengine, Western Digital WD90 (includes factory power supply and cabinet). High-speed UCSD Pascal computer with 64 K memory, single- and dual-density 8-inch floppy software, and all documentation. $1200 plus shipping. Dave Werner, (212) 998-3929.

FOR SALE: GE Terminet 300 ASCII terminal with digital cassette, adjustable tractors, 10-15-30 cps, paper out, etc. Letter-like quality, not dot-matrix. Also, GE acoustic coupled modem (Bell 103). All in excellent condition. Execute commands from disk file with Command Processor software. Includes RTC, printer formatting, dynamic I/O reconfiguration, plus fifteen more commands for North Star Disk (Horizon). Please send SASE. Rich Adamson, 7310 Adams, Lincoln NE 68507, (402) 464-0718.

FOR SALE: Hazeltine 1500 CRT; $700, Hazeltine 1520 CRT; $1100, DEC LA-36; $1250, Omnitech acoustic coupler; $150, Novation CAT acoustic coupler; $150. Above items less than three years old and working. 200 new vacuum tubes; $300, 55 new Calectro & Lafayette panel meters; $165. Buyer pays shipping. Charles B Wall, Rte 3 Wingate, Clarksville TN 37040, (615) 552-2199.

FOR SALE: Twenty-four conductor (shielded coax) computer grade cable, ½-inch O/D vinyl clad bundle. Ideal for low-noise interfaces. Conductors appear to be silver plated and dielectric is teflon. SASE brings conductor sample. $0.95/foot plus postage and handling. Maximum of thirty foot lengths. Also, wanted: rack-mount multidrive 8-inch floppy-disk system. Jim Beistle, POB 501, Gilbert AR 72636, (501) 439-2305.

FOR SALE: SwTPC Model MP-68. All working with documentation, PIA, and 4 K programmable memory; $200. Two 4 K programmable memory boards; $75 each. 8 K programmable memory board with boundary switch; $150. Two MPS serial interfaces; $35 each. MP-LA parallel interface; $35. AC-30 dual cassette interface; $75. $600 takes it all. Herbert Friedman, POB 153, Malverne NY 11565, (516) 481-2717.

FOR SALE: Digital Group TVC-F 512-character video programmable memory/1.1 Kbaud audio-cassette board with all documentation. Assembled and in perfect working order. Also, listings for Z80 operating system, and documentation and listing for EDFORM1 text editor. All for $95 including UPS shipping, or make offer. Martin Tobias, POB 3766, Nashua NH 03061, (603) 889-0901.

FOR SALE: Texas Instruments TI-59 and PC-100 print cradle with all documentation and manuals. In mint condition; $150 or trade for HP-97. Also, HP-67/97 Stat Pac 1, ME1, EE1, CE1, Surveying, Navigation, and Business Decisions Pac; all for $50. Charlie Truax, 2862 King Edward Dr, El Dorado Hills CA 95630, (916) 933-3478 evenings.

FOR SALE: Extra paper, 14- and 8½-inch widths. $15 a box or trade for a TRS-80 disk drive. Van, (616) 429-6788.

FOR SALE: Perkin-Elmer letter-quality printer. KSR, 110 to 300 bps, good condition, switch-selectable U/C or full ASCII, half or full duplex, RS-232C. Bill Touchstone, (216) 333-3114 9:30 AM to 5 PM weekdays.

FOR SALE: 150 lpm Centronics P1 printer (same as Radio Shack Quick Print) with cable to a TRS-80. Excellent condition. $265 (50% of list). D E Johnson, RD 2, Box 197, Corning NY 14830, (607) 524-6740.

FOR SALE: IBM Selectric remote I/O terminal, with ASCII conversion, RS-232, as sold by Worldwide for $645. Fully checked out with manual. Best offer over $400. Steven Mather-Lees, 6 Holly Ln, Hudson NH 03051.

FOR SALE: Antique computer system. 1954 Royal McBee LGP-30, 800 lbs, desk size. 6.5- by 7-inch magnetic drum memory holds 4096 words, 32 bits per word. 113 electron tubes, 1450 diodes, and 34 plug-in cards. Two Friden Flexowriters, paper-tape punch, and plotter. Internal CRT for display in registers. Best offer over $5000. Richard Petras, (215) 356-6637.

FOR SALE: Kilobaud Microcomputing issue #6 (June 1977) through issue #18 (June 1978) in very good condition. Complete, some marks. Best offer. Daniel Q Dye Jr, 4861 Gray St, Denver CO 80212.

FOR SALE: IBM 3767 communications terminal. Excellent condition, with forms feeder and cables. Make offer, will sacrifice. Barney Lejeune, POB 3935, Lafayette LA 70502.

FOR SALE: SD Systems VDB-8024 video board; $275. Selectric typewriter, Model 73, with Micromation S-100 interface; $500. Sanyo 15-inch video monitor; $150. Cromemco 8 K Bytesaver with 2708 programmer for S-100; $75. Processor Technology 3P+S parallel/serial I/O board, S-100; $50. Keytronics keyboard with numeric keypad and enclosure; $175. SwTPC KBD-5 keyboard with enclosure; $30. George East, 38 Edwin St, Randolph MA 02368, (617) 963-2265.

FOR SALE: Centronics 730 7 by 7 matrix printer, same as RS Line Printer II. Almost new, in perfect working condition. $560. Also, adapter port when no EI for $20. G Kish, 227 W Meadow Rd, Rockaway NJ 07866, (201) 627-0052 evenings.

FOR SALE: Heathkit H-19, smart video terminal, assembled and tested; $700. Heathkit H-14, microprocessor-based printer, assembled; $700. SD Systems Expandoram 48 K, assembled and tested; $300. Jade Double-D, double-density, 5-inch or 8-inch floppy-disk controller with cable for 8-inch drive, assembled; $350. Everything includes documentation, manuals, schematics, etc. James Gerber, 12850 Kern Rd, Mishawaka IN 46544, (219) 259-9929.

FOR SALE: One almost new CAT/Novation modem, works very well; $100. One almost new Apple II disk drive with DOS 3.3 controller; $425 or best offer. Jon Taute, 2314 S 40th St, Omaha NE 68105, (402) 556-6695 evenings only.

FOR SALE: Z80 computer: 4 K programmable memory, monitor, keyboard, readout-cassette interface. EPROM programmer with sixteen I/O ports S-100; $325. State logic analyzer: 16-bit input, 5 MHz, 16 LED, 4 hexadecimal readout edge clocking, forward and backward stepping; $390. 6809 computer: monitor, Editor/Assembler, RS-232, sixteen I/O ports, timer, cassette interface; $400. Mitra Gopaul, 3 Weymouth Ave, Toronto Ontario, M4C 1R6 Canada, (416) 698-4405.

FOR SALE: Three Godbout memory boards with 8 K. Fully assembled and tested. All for $280 or $95 each. TI SR-52 calculator with PC-100 printer. $260. SSM VB1 video board. Fully assembled and tested. $100. I pay shipping. Chuck Terra, 8415 Bird Run, Missouri City TX 77489, (713) 437-1242 after 4 PM.

FOR SALE: Execuport 300 portable terminal. Hard copy, built-in acoustic coupler, carrying case. Can also be used as printer. $600 plus shipping. M A Graziano, (203) 563-5750 after 9 PM.

FOR SALE: Teletype Model ASR33 in mint condition. Used as a system console, upgraded to a CRT. Will sell for best offer. David Wong, 1916 Grand Conc, New York NY 10457, (212) 294-8087 evenings.

FOR SALE: North Star 48 K double-density, two serial ports, one parallel output and one parallel input port, two 5-inch DD disks; $3100. Intertube II, reverse video, dual intensity, extra RS-232 port, absolute addressing, protected data mode, line drawing graphics, 25 by 80, keypad; $650. L A Ludden, 30 Blanchard Rd, Marlton NJ 08053.

FOR SALE: 64 K Digital Group (Bytemaster) complete system, with Oasis 5.4, in perfect condition. Only $2500. S E Rudlin, 4600 Grove Ave, Richmond VA 232[illegible]9, (804) 353-1000.

FOR SALE: S-100 boards: Biotech CGS-808 color graphics with 6847 and 4 MHz 8085 processor on board; $275, Bytesaver I; $75, Polly (VTI) video-display board, 16 by 64 characters with graphics symbols; $60, Cromemco JS-1 joystick; $50. Edward March Jr, 2093 Fox Ln, Des Plaines IL 60018, (312) 635-7625 home, (312) 541-7300 work.

FOR SALE: NCR Model 761 cassette deck (Phillips-type). Computer controllable play, record, fast forward, reversed. $250. E J Haas, 3448 S Marcella Ave, Stow OH 44224.

FOR SALE: 8800B 18-slot mainframe; $400. MITS 3203 dual-disk drive; $800. MITS 16MCS 16 K static-memory card; $200. MITS 32-sector disk controller; $600. Pertec FD-410 drives; $300. 88-2SIO serial interface card; $200. QUME Sprint Micro 3 interface card; $200. 88-Prom 1702 prom programmer for 8800B; $150. LA-36 DECwriter II; $800. Gene Friesen, 6435 Colby, Lincoln NE 68505, (402) 467-1903.

FOR SALE: Netronics ELF II boards. Two 4 K programmable memories. Each $72, both $135. Giant Mon and I/O board; $30. Full BASIC (EPROM) board; $120. All for $260. All boards are wired and tested. Robert Foltz, 1911 Mulford Ave, Bronx NY 10461, (212) 863-0964 after 6 PM ET.

FOR SALE: These items by Percom: Data Separator; $15, Microdos (OS-80 version 1.14); $15, Patchpak; $4.50. All complete with manuals. Add $1 for shipping and handling. Albert Nijenhuis, 4310 Osage, Philadelphia PA 19104, (215) 222-1279.

FOR SALE: Altair 8800b computer with 32 K memory, one serial I/O port, ACR cassette-interface board, 2 K PROM board, MBL and DBL bootstrap PROMs, 3202 dual 8-inch disk drive and controller, Lear-Siegler ADM3A video-display terminal, Altair (Microsoft) cassette 8 K BASIC, cassette Extended BASIC, Disk Extended BASIC, and Altair disk operating system. All in perfect condition. Original value over $7300. Asking $4380 or reasonable offer. B Verner, 11404 Woodland Dr, Lutherville MD 21093, (301) 828-8422 evenings.

FOR SALE: Houston Instrument 11- by 11-inch bitpad. James Kientz, RR #1, Wamego KS 66547, (913) 532-3722.

WANTED: Tax-deductible donations are urgently needed. We are engaged in many building and maintenance projects and need CB radios, antennas, lighting apparatus, microscope attachments, and video equipment. Paul Oravis c/o Queen Anne School, 14111 Oak Grove Rd, Upper Marlboro MD 20870.

FOR SALE: Manuals, schematics, and spare boards for Sanders Associates Model 720 Data Display System. Jeff Weger, 614 Willowood Dr, Apt 209, Carol Stream IL 60187.

FOR SALE: IMSAI multiple I/O (MIO) board. Two parallel ports, one serial port, one control port, and a Tarbell tape-cassette interface plus two cables and documentation. Best offer. Eric Aronson, N64 W26611 Hillcrest Cir, Sussex WI 53089, (414) 246-3518 evenings.

BOMB

BYTE's Ongoing Monitor Box

Article #	Page	Article	Author(s)
1	22	The Epson MX-80 and MX-70 Printers	Cohan
2	36	Extended Color BASIC for the TRS-80 Color Computer	Miastkowski
3	46	The Commodore VIC 20 Microcomputer: A Low-Cost, High-Performance Consumer Computer	Williams
4	66	DC Motor Controls: Build a Motorized Platform	Ciarcia
5	106	BYTE's Arcade	Williams, Liddil, Moore, and Holt
6	128	Washington Tackles the Software Problem	Kern
7	140	Legal Protection for Computer Hardware and Software	Becker
8	148	Dancing Demon from Radio Shack	Kolya
9	152	Wire-Wrapping and Proto-System Techniques	Mangieri
10	171	Speeding Up TRS-80 Graphics	Bobo and Knoderer
11	204	An Integer Math Package for the 8080	Carbrey
12	248	Super STEP	Robbins
13	254	Wordsmith	Dahmke
14	280	Using Interrupts on the Apple II System	White
15	296	Digital Plotting with the Apple II Computer	Hallgren
16	316	Recursion and Side Effects in Pascal	Morris
17	326	DEMONS: A Symbolic Debugging Monitor	Halsema
18	360	Build a Super Simple Floppy-Disk Interface, Part 1	Nicholson and Camp
19	408	A File Catalog System for UCSD Pascal	Heyman
20	436	Numerical Methods in Data Analysis	Nguyen

February BOMB Falls on Tank

Steve Ciarcia captured first place in the voting with "A Computer-Controlled Tank" (page 44), a description of his effort at wireless remote control. He will receive the $100 prize.

James C Anderson took second place with "An Extremely Low-Cost Computer Voice Response System" (page 36), the lead article in our issue theme of "The Computer and Voice Synthesis." He wins the $50 second-place prize.

Third place was shared by Mark Zimmermann, who wrote "A Beginner's Guide to Spectral Analysis, Part 1" (page 68), and Roger Mikel, who contributed "A/D and D/A Conversion—An Inexpensive Approach" (page 312).

Reader Service

*Correspond directly with company.

Inquiry No. Page No.

To get further information on the products advertised in BYTE, fill out the reader service card with your name and address. Add a 18-cent stamp to the card, then mail. The index is provided as an additional service by the publisher, who assumes no liability for errors or omissions.

The Dynabyte Difference: Unequalled price/performance with total expandability.

Buying the powerful Dynabyte 5615 isn't only smart, it's cost efficient.

The 5615 is the sure way to get the system you need. With more power for the price. You can select memory to 400 KB on our S-100 bus architecture. Choose from 3 sizes of Winchesters to 45 MB and have diskette back-up to your system also. If it's tape back-up you need, then choose our 5700. If you need less storage, our 5¼″ floppy 5200, our 8″ floppy 5300 or our 5400 system using both floppies, with up to 3.6 MB capacity, can be yours.

The 5615 system is available with either single user CP/M or our enhanced MP/M for multi-user applications. Our MP/M operating system supports up to eight terminals, with a separate or shared spooler, and up to sixteen printers with no required partition space. Add to this multi-tasking, bank switching, record lockout, type-ahead and DMA and you have an MP/M operating system that supports a host of existing languages and meets minicomputer standards.

No multi-user applications library is so responsive to your needs. The 5615 features Business Manager,™ the fully integrated, menu-driven, well documented, easy to install accounting system that gives you file/record protection, HELP commands, multi-level security, keyed data access, internal disk management, available source code and more.

System expandability, power and price/performance are further enhanced by on-hand availability, quantity discounts, 180-day warranty and a national WATS line for support.

Whether you use or sell computer systems, you should ask about the microcomputer that puts minicomputer capability in your hands. That's the 5615. That's the Dynabyte Difference. Call Mike Seashols, V. P. Marketing (800) 227-8300. In California (415) 329-8021. Dynabyte, 115 Independence Drive, Menlo Park, California 94025.

DYNABYTE
Business Computers

Business Manager is a registered trademark of Dynabyte. CP/M and MP/M are registered trademarks of Digital Research Corp.

Circle 139 on inquiry card.

A cost effective 10 megabyte system from the leader in Winchester based microcomputers.

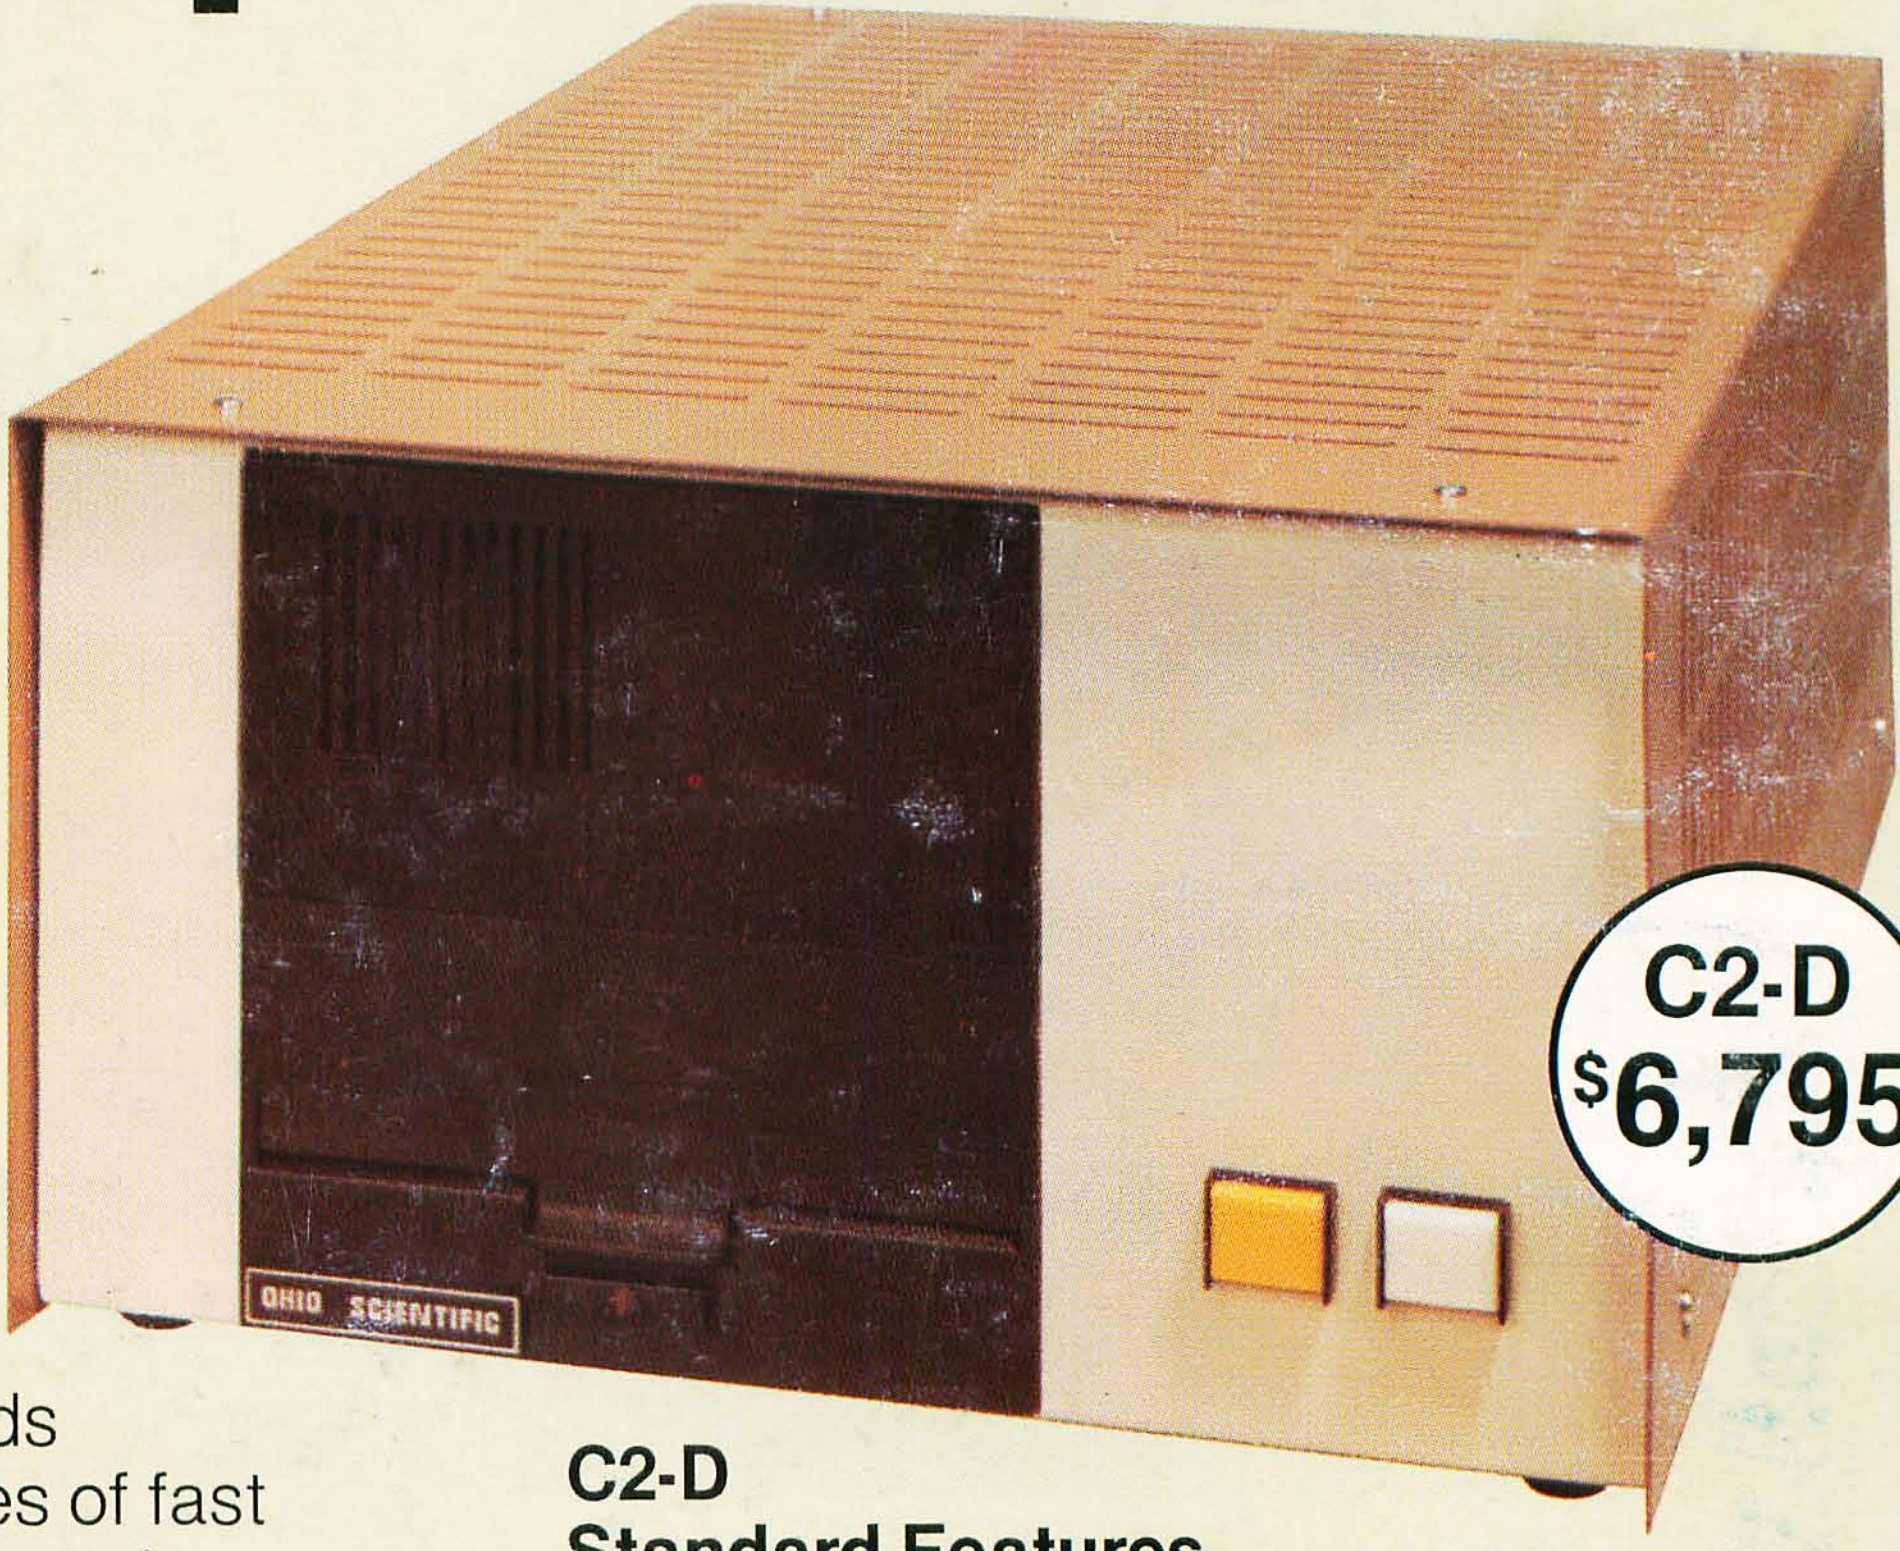

C2-D
$6,795

Ohio Scientific has put a low-cost, high-performance 8″ non-removable hard disk together with its popular desk-top microcomputer system. This yields approximately 10 megabytes of fast hard disk capability at a tremendous cost/performance benefit over floppy based microcomputer systems.

C3-D

The 10 megabyte system is also available with the added advantage of triple microprocessors — the 6502A, 68BOO and Z-80A. This allows you to make maximum use of Ohio Scientific's extensive software library as well as programs offered by independent suppliers and publishers. $7,600.

C2-D
Standard Features

- 52K RAM
- 8″ floppy disk drive for program transport and backup.
- OS-65U small business operating system
- 9-digit precision BASIC by Microsoft.
- Available in OEM quantities at attractive discounts.

For literature and the name of your local dealer, CALL 1-800-321-6850 TOLL FREE.

OHIO SCIENTIFIC
a M/A-COM Company
1333 SOUTH CHILLICOTHE ROAD, AURORA, OH 44202 • [216] 831-560

Circle 291 on inquiry card.